

# [MS-XLSB]: Excel (.xlsb) Binary File Format

---

## Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

## Revision Summary

| Date       | Revision History | Revision Class | Comments   |
|------------|------------------|----------------|--|
| 06/27/2008 | 1.0              |                | First release  |
| 10/06/2008 | 1.02             |                | Revised and edited the technical content                                     |
| 12/12/2008 | 1.03             |                | Revised and edited the technical content                                     |
| 01/16/2009 | 1.04             |                | Updated the Intellectual Property Rights Notice                              |
| 07/13/2009 | 1.05             | Major          | Revised and edited the technical content                                     |
| 08/28/2009 | 1.06             | Editorial      | Revised and edited the technical content                                     |
| 11/06/2009 | 1.07             | Editorial      | Revised and edited the technical content                                     |
| 02/19/2010 | 2.0              | Major          | Updated and revised the technical content                                    |
| 03/31/2010 | 2.01             | Editorial      | Revised and edited the technical content                                     |
| 04/30/2010 | 2.02             | Editorial      | Revised and edited the technical content                                     |
| 06/07/2010 | 2.03             | Editorial      | Revised and edited the technical content                                     |
| 06/29/2010 | 2.04             | Editorial      | Changed language and formatting in the technical content.                    |
| 07/23/2010 | 2.04             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 09/27/2010 | 2.05             | Minor          | Clarified the meaning of the technical content.                              |
| 11/15/2010 | 2.05             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 12/17/2010 | 2.05             | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 03/18/2011 | 2.6              | Minor          | Clarified the meaning of the technical content.                              |
| 06/10/2011 | 2.6              | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 01/20/2012 | 3.0              | Major          | Significantly changed the technical content.                                 |
| 04/11/2012 | 3.0              | No change      | No changes to the meaning, language, or formatting of the technical content. |
| 07/16/2012 | 4.0              | Major          | Significantly changed the technical content.                                 |
| 10/08/2012 | 5.0              | Major          | Significantly changed the technical content.                                 |
| 02/11/2013 | 5.1              | Minor          | Clarified the meaning of the technical content.                              |



# Table of Contents

|  |           |
|--|-----------|
| <b>1 Introduction</b> .....                              | <b>34</b> |
| 1.1 Glossary .....                                       | 34        |
| 1.2 References .....                                     | 41        |
| 1.2.1 Normative References .....                         | 41        |
| 1.2.2 Informative References .....                       | 43        |
| 1.3 Structure Overview (Synopsis) .....                  | 43        |
| 1.4 Relationship to Protocols and Other Structures ..... | 44        |
| 1.5 Applicability Statement .....                        | 44        |
| 1.6 Versioning and Localization .....                    | 44        |
| 1.7 Vendor-Extensible Fields .....                       | 45        |
| <b>2 Structures</b> .....                                | <b>46</b> |
| 2.1 File Structure .....                                 | 46        |
| 2.1.1 Package .....                                      | 46        |
| 2.1.2 Part .....   | 46        |
| 2.1.3 Relationship .....                                 | 46        |
| 2.1.4 Record .....                                       | 47        |
| 2.1.5 Collection of Records .....                        | 48        |
| 2.1.6 Future Record .....                                | 48        |
| 2.1.6.1 Future Record Mechanism .....                    | 48        |
| 2.1.6.2 Alternate Content Mechanism .....                | 49        |
| 2.1.7 Part Enumeration .....                             | 49        |
| 2.1.7.1 ActiveX .....                                    | 52        |
| 2.1.7.1.1 Elements .....                                 | 53        |
| 2.1.7.1.1.1 font .....                                   | 53        |
| 2.1.7.1.1.2 ocx .....                                    | 54        |
| 2.1.7.1.1.3 ocxPr .....                                  | 55        |
| 2.1.7.1.1.4 picture .....                                | 55        |
| 2.1.7.1.2 Simple Types .....                             | 55        |
| 2.1.7.1.2.1 ST_Persistence .....                         | 55        |
| 2.1.7.1.2.2 ST_String .....                              | 56        |
| 2.1.7.2 ActiveX Binary .....                             | 56        |
| 2.1.7.3 Attached Toolbars .....                          | 57        |
| 2.1.7.4 Calculation Chain .....                          | 57        |
| 2.1.7.5 Chart .....                                      | 57        |
| 2.1.7.6 Chart Drawing .....                              | 57        |
| 2.1.7.7 Chart Sheet .....                                | 58        |
| 2.1.7.8 Comments .....                                   | 58        |
| 2.1.7.9 Control Properties .....                         | 59        |
| 2.1.7.10 Custom Data .....                               | 59        |
| 2.1.7.11 Custom Data Properties .....                    | 59        |
| 2.1.7.12 Custom Property .....                           | 59        |
| 2.1.7.13 Custom XML Data Storage .....                   | 59        |
| 2.1.7.14 Custom XML Data Storage Properties .....        | 59        |
| 2.1.7.15 Custom XML Maps .....                           | 59        |
| 2.1.7.16 Diagram Colors .....                            | 60        |
| 2.1.7.17 Diagram Data .....                              | 60        |
| 2.1.7.18 Diagram Layout Definition .....                 | 60        |
| 2.1.7.19 Diagram Styles .....                            | 60        |
| 2.1.7.20 Dialog Sheet .....                              | 60        |

|            |  |    |
|------------|--|----|
| 2.1.7.21   | Digital Signature Origin .....   | 61 |
| 2.1.7.22   | Digital Signature XML Signature .....                                    | 61 |
| 2.1.7.23   | Drawings .....   | 61 |
| 2.1.7.23.1 | compatSp.....  | 61 |
| 2.1.7.23.2 | CT_CompatShape.....  | 62 |
| 2.1.7.24   | External Data Connections .....  | 62 |
| 2.1.7.25   | External Link .....  | 63 |
| 2.1.7.26   | File Properties, Core.....   | 64 |
| 2.1.7.27   | File Properties, Custom.....   | 64 |
| 2.1.7.28   | File Properties, Extended .....  | 64 |
| 2.1.7.29   | File Properties, Thumbnail.....  | 65 |
| 2.1.7.30   | Images.....  | 65 |
| 2.1.7.31   | International Macro Sheet.....   | 65 |
| 2.1.7.32   | Macro Sheet.....   | 65 |
| 2.1.7.33   | Macro Sheet Binary Index .....   | 66 |
| 2.1.7.34   | Metadata .....   | 66 |
| 2.1.7.35   | Model .....  | 67 |
| 2.1.7.36   | OLE Object.....  | 67 |
| 2.1.7.37   | OLE Package .....  | 68 |
| 2.1.7.38   | PivotCache Definition.....   | 68 |
| 2.1.7.39   | PivotCache Records.....  | 71 |
| 2.1.7.40   | PivotTable.....  | 71 |
| 2.1.7.41   | Printer Settings .....   | 74 |
| 2.1.7.42   | Query Table .....  | 74 |
| 2.1.7.43   | Revision Headers .....   | 75 |
| 2.1.7.44   | Revision Log.....  | 75 |
| 2.1.7.45   | Shared Strings .....   | 76 |
| 2.1.7.46   | Single Cell Tables.....  | 77 |
| 2.1.7.47   | Slicer Cache .....   | 77 |
| 2.1.7.48   | Slicers .....  | 78 |
| 2.1.7.49   | Sort Map.....  | 79 |
| 2.1.7.50   | Styles.....  | 79 |
| 2.1.7.51   | Table.....   | 80 |
| 2.1.7.52   | Theme.....   | 81 |
| 2.1.7.53   | Timeline Cache .....   | 81 |
| 2.1.7.54   | Timelines .....  | 81 |
| 2.1.7.55   | User Names .....   | 82 |
| 2.1.7.56   | VBA Project.....   | 82 |
| 2.1.7.57   | VBA Project Signature .....  | 82 |
| 2.1.7.58   | VML Drawings .....   | 83 |
| 2.1.7.59   | Volatile Dependencies .....  | 83 |
| 2.1.7.60   | Workbook .....   | 84 |
| 2.1.7.61   | Worksheet .....  | 86 |
| 2.1.7.62   | Worksheet Binary Index .....   | 88 |
| 2.1.8      | Common Productions .....   | 89 |
| 2.1.9      | Hyperlinks .....   | 91 |
| 2.1.10     | External Workbooks.....  | 91 |
| 2.1.10.1   | External Workbook Base Paths .....                                       | 91 |
| 2.2        | Conceptual Overview.....   | 92 |
| 2.2.1      | Cell Table .....   | 92 |
| 2.2.1.1    | Retrieval of Last-Calculated Cell Values Without Loading Cell Table..... | 93 |
| 2.2.2      | Formulas.....  | 94 |
| 2.2.2.1    | Operator Tokens.....   | 94 |

|             |                                     |     |
|-------------|-------------------------------------|-----|
| 2.2.2.2     | Operand Tokens .....                | 95  |
| 2.2.2.2.1   | Value Class.....                    | 95  |
| 2.2.2.2.2   | Reference Class .....               | 95  |
| 2.2.2.3     | Control Tokens .....                | 95  |
| 2.2.2.4     | Display Tokens .....                | 95  |
| 2.2.2.5     | Mem Tokens .....                    | 95  |
| 2.2.2.6     | Formula Elements.....               | 95  |
| 2.2.3       | Charts.....                         | 96  |
| 2.2.3.1     | Chart Part.....                     | 96  |
| 2.2.3.2     | Pivot Chart .....                   | 96  |
| 2.2.4       | Metadata.....                       | 96  |
| 2.2.4.1     | Metadata Types.....                 | 97  |
| 2.2.4.2     | Cell Metadata .....                 | 98  |
| 2.2.4.3     | Value Metadata .....                | 98  |
| 2.2.4.4     | Metadata Stores .....               | 98  |
| 2.2.4.5     | Metadata Block.....                 | 98  |
| 2.2.4.6     | Metadata Block Stores.....          | 98  |
| 2.2.4.7     | Metadata String Store .....         | 98  |
| 2.2.4.8     | MDX Metadata.....                   | 99  |
| 2.2.4.8.1   | MDX Tuple Metadata.....             | 100 |
| 2.2.4.8.2   | MDX Set Metadata.....               | 100 |
| 2.2.4.8.3   | MDX Member Property Metadata .....  | 100 |
| 2.2.4.8.4   | MDX KPI Metadata .....              | 101 |
| 2.2.4.9     | Future Metadata .....               | 101 |
| 2.2.5       | PivotTables.....                    | 101 |
| 2.2.5.1     | Data Functionality Level .....      | 102 |
| 2.2.5.2     | PivotCache.....                     | 102 |
| 2.2.5.2.1   | Source Data .....                   | 103 |
| 2.2.5.2.1.1 | Multiple Consolidation Ranges ..... | 103 |
| 2.2.5.2.2   | Cache Fields .....                  | 107 |
| 2.2.5.2.2.1 | Member Properties .....             | 108 |
| 2.2.5.2.3   | Cache Items .....                   | 109 |
| 2.2.5.2.4   | Grouping .....                      | 112 |
| 2.2.5.2.5   | Calculated Fields .....             | 119 |
| 2.2.5.2.6   | Calculated Items .....              | 119 |
| 2.2.5.2.7   | Cache Hierarchies .....             | 120 |
| 2.2.5.2.7.1 | Measures.....                       | 121 |
| 2.2.5.2.7.2 | KPIs.....                           | 121 |
| 2.2.5.2.7.3 | Named Sets .....                    | 121 |
| 2.2.5.2.8   | OLAP Grouping .....                 | 122 |
| 2.2.5.2.9   | OLAP Calculated Members .....       | 122 |
| 2.2.5.2.10  | Cache Records .....                 | 123 |
| 2.2.5.2.11  | Tuple Cache.....                    | 123 |
| 2.2.5.3     | PivotTable View .....               | 124 |
| 2.2.5.3.1   | Relationship to PivotCache .....    | 125 |
| 2.2.5.3.2   | Pivot Fields.....                   | 125 |
| 2.2.5.3.2.1 | Pivot Field Sorting .....           | 126 |
| 2.2.5.3.3   | Pivot Items.....                    | 127 |
| 2.2.5.3.4   | Pivot Hierarchies .....             | 127 |
| 2.2.5.3.5   | Manual Filters .....                | 128 |
| 2.2.5.3.5.1 | Non-OLAP Manual Filters .....       | 128 |
| 2.2.5.3.5.2 | OLAP Manual Filters .....           | 128 |
| 2.2.5.3.6   | Filtering by Criteria.....          | 129 |

|               |                                      |     |
|---------------|--------------------------------------|-----|
| 2.2.5.3.6.1   | Advanced Filters .....               | 129 |
| 2.2.5.3.6.1.1 | Label Filters.....                   | 130 |
| 2.2.5.3.6.1.2 | Date Filters .....                   | 130 |
| 2.2.5.3.6.1.3 | Value Filters .....                  | 130 |
| 2.2.5.3.6.2   | Simple Filters.....                  | 131 |
| 2.2.5.3.7     | PivotTable Axes .....                | 131 |
| 2.2.5.3.7.1   | Page Axis .....                      | 131 |
| 2.2.5.3.7.1.1 | Non-OLAP Page Filtering .....        | 131 |
| 2.2.5.3.7.1.2 | OLAP Page Filtering .....            | 132 |
| 2.2.5.3.7.2   | Row Axis .....                       | 133 |
| 2.2.5.3.7.3   | Column Axis .....                    | 133 |
| 2.2.5.3.7.4   | Nesting .....                        | 134 |
| 2.2.5.3.7.4.1 | Collapsing .....                     | 135 |
| 2.2.5.3.7.4.2 | Subtotaling .....                    | 136 |
| 2.2.5.3.7.5   | Data Axis.....                       | 137 |
| 2.2.5.3.7.5.1 | Data Items.....                      | 137 |
| 2.2.5.3.7.5.2 | Data Field .....                     | 138 |
| 2.2.5.3.8     | PivotTable Layout.....               | 138 |
| 2.2.5.3.8.1   | Location and Body .....              | 138 |
| 2.2.5.3.8.1.1 | Row Area .....                       | 140 |
| 2.2.5.3.8.1.2 | Column Area .....                    | 141 |
| 2.2.5.3.8.1.3 | Page Area .....                      | 141 |
| 2.2.5.3.8.1.4 | Data Area .....                      | 142 |
| 2.2.5.3.8.2   | Truncation .....                     | 142 |
| 2.2.5.3.8.3   | Pivot Lines.....                     | 142 |
| 2.2.5.3.8.4   | Pivot Line Entries.....              | 143 |
| 2.2.5.3.9     | PivotTable Rules.....                | 144 |
| 2.2.5.3.10    | PivotTable What-if Analysis.....     | 145 |
| 2.2.5.4       | OLAP Data Model .....                | 146 |
| 2.2.5.5       | Non-Worksheet PivotTables .....      | 146 |
| 2.2.5.6       | PivotValues.....                     | 147 |
| 2.2.5.6.1     | PivotValueCell.....                  | 147 |
| 2.2.5.6.1.1   | Value .....                          | 147 |
| 2.2.5.6.1.2   | Server Formatting .....              | 148 |
| 2.2.6         | Styles .....                         | 148 |
| 2.2.6.1       | XF's.....                            | 148 |
| 2.2.6.1.1     | Cell XF's .....                      | 148 |
| 2.2.6.1.2     | Cell Styles.....                     | 148 |
| 2.2.6.1.2.1   | Cell Style XF's.....                 | 149 |
| 2.2.6.1.2.2   | Normal Style.....                    | 149 |
| 2.2.6.2       | Differential Formatting (DXF's)..... | 149 |
| 2.2.6.2.1     | Conditional Formatting.....          | 149 |
| 2.2.6.2.2     | Table Style Elements .....           | 149 |
| 2.2.6.2.3     | Table Block-Level Formatting.....    | 150 |
| 2.2.6.2.4     | PivotTable Areas .....               | 150 |
| 2.2.6.2.5     | Sorting and Filtering .....          | 150 |
| 2.2.6.3       | Table Styles.....                    | 150 |
| 2.2.6.3.1     | Slicer Styles .....                  | 151 |
| 2.2.6.3.2     | Timeline Styles .....                | 151 |
| 2.2.6.4       | Format Conflicts .....               | 151 |
| 2.2.7         | External References.....             | 151 |
| 2.2.7.1       | External Reference Consumers .....   | 152 |
| 2.2.7.2       | Supporting Link .....                | 153 |

|               |   |     |
|---------------|---|-----|
| 2.2.7.3       | Supporting Link Record .....                          | 153 |
| 2.2.7.4       | External Link.....                                    | 153 |
| 2.2.7.4.1     | External Workbook Links.....                          | 154 |
| 2.2.7.4.1.1   | External Defined Name.....                            | 154 |
| 2.2.7.4.1.2   | External Cell Cache.....                              | 154 |
| 2.2.7.4.1.2.1 | External Cells .....                                  | 154 |
| 2.2.7.4.2     | DDE Data Source .....                                 | 154 |
| 2.2.7.4.2.1   | DDE Data Item.....                                    | 155 |
| 2.2.7.4.3     | OLE Data Source.....                                  | 155 |
| 2.2.7.4.3.1   | OLE Data Item .....                                   | 155 |
| 2.2.8         | External Connections .....                            | 155 |
| 2.2.8.1       | Connection Name .....                                 | 156 |
| 2.2.8.2       | External Connection Files.....                        | 156 |
| 2.2.8.3       | OLE DB Connections .....                              | 156 |
| 2.2.8.3.1     | OLAP Connections .....                                | 156 |
| 2.2.8.4       | ODBC Connections.....                                 | 156 |
| 2.2.8.5       | Web Connections.....                                  | 156 |
| 2.2.8.6       | Text Import Connections .....                         | 156 |
| 2.2.8.7       | ADO Recordset Connections.....                        | 157 |
| 2.2.8.8       | DAO Recordset Connections.....                        | 157 |
| 2.2.8.9       | Model Data Source Connections.....                    | 157 |
| 2.2.8.9.1     | Model Data Source OLE DB Connections.....             | 157 |
| 2.2.8.9.2     | Model Data Source Data Feed Connections .....         | 157 |
| 2.2.8.9.3     | Model Data Source Worksheet Connections .....         | 158 |
| 2.2.8.9.4     | Model Data Source Text import Connections .....       | 158 |
| 2.2.9         | Password Verifier Algorithm .....                     | 158 |
| 2.2.10        | Strong Password Verifier Algorithm.....               | 158 |
| 2.2.11        | Encryption (Password to Open) .....                   | 159 |
| 2.2.12        | Shared Workbooks.....                                 | 159 |
| 2.2.12.1      | User Log .....  | 160 |
| 2.2.12.2      | Revision Headers Log .....                            | 161 |
| 2.2.12.3      | Revision Logs .....                                   | 161 |
| 2.2.12.4      | Revision Records .....                                | 161 |
| 2.2.12.5      | Format Revision.....                                  | 162 |
| 2.2.12.6      | Insertion / Deletion of Rows / Columns Revision ..... | 162 |
| 2.2.12.7      | Move Cells Revision.....                              | 162 |
| 2.2.12.8      | Change Cells Revision .....                           | 162 |
| 2.2.12.9      | Undo Chain .....                                      | 163 |
| 2.2.12.10     | Sort Map.....   | 163 |
| 2.2.13        | Volatile Dependencies .....                           | 163 |
| 2.2.13.1      | Types .....   | 163 |
| 2.2.13.2      | Main Topic .....                                      | 163 |
| 2.2.13.3      | Subtopic Sequences .....                              | 163 |
| 2.2.13.4      | Cached returned values .....                          | 164 |
| 2.2.14        | Slicers.....  | 164 |
| 2.2.14.1      | Slicer Cache .....                                    | 164 |
| 2.2.14.1.1    | Slicer Source Data.....                               | 165 |
| 2.2.14.1.2    | Slicer Cache Relationship to PivotCache.....          | 165 |
| 2.2.14.1.3    | Slicer Cache Relationship to PivotTable View .....    | 165 |
| 2.2.14.1.4    | Slicer Items .....                                    | 166 |
| 2.2.14.1.4.1  | Non-OLAP Slicer Items .....                           | 166 |
| 2.2.14.1.4.2  | OLAP Slicer Items .....                               | 167 |
| 2.2.14.1.5    | Slicer Cross Filtering .....                          | 167 |

|            |  |     |
|------------|--|-----|
| 2.2.14.2   | Slicer View .....                                    | 168 |
| 2.2.14.2.1 | Slicer View Relationship to Slicer Cache .....       | 168 |
| 2.2.14.3   | Slicers and Cube Functions .....                     | 168 |
| 2.2.15     | Timelines .....                                      | 168 |
| 2.2.15.1   | Timeline Cache .....                                 | 169 |
| 2.2.15.1.1 | Timeline Source Data .....                           | 169 |
| 2.2.15.1.2 | Timeline Cache Relationship to PivotCache .....      | 169 |
| 2.2.15.1.3 | Timeline Cache Relationship to PivotTable View ..... | 170 |
| 2.2.15.1.4 | Timeline State .....                                 | 170 |
| 2.2.15.2   | Timeline View .....                                  | 170 |
| 2.2.15.2.1 | Timeline View Relationship to Timeline Cache .....   | 170 |
| 2.2.15.3   | Timelines and Cube Functions .....                   | 171 |
| 2.3        | Record Enumeration .....                             | 171 |
| 2.3.1      | By Name .....  | 171 |
| 2.3.2      | By Number .....                                      | 198 |
| 2.4        | Records .....  | 225 |
| 2.4.1      | BrtAbsPath15 .....                                   | 225 |
| 2.4.2      | BrtACBegin .....                                     | 226 |
| 2.4.3      | BrtACEnd .....                                       | 226 |
| 2.4.4      | BrtActiveX .....                                     | 226 |
| 2.4.5      | BrtAFilterDateGroupItem .....                        | 227 |
| 2.4.6      | BrtArrFmla .....                                     | 228 |
| 2.4.7      | BrtBeginActiveXControls .....                        | 229 |
| 2.4.8      | BrtBeginAFilter .....                                | 229 |
| 2.4.9      | BrtBeginAutoSortScope .....                          | 229 |
| 2.4.10     | BrtBeginBook .....                                   | 230 |
| 2.4.11     | BrtBeginBookViews .....                              | 230 |
| 2.4.12     | BrtBeginBorders .....                                | 230 |
| 2.4.13     | BrtBeginBundleShs .....                              | 230 |
| 2.4.14     | BrtBeginCellIgnoreECs .....                          | 231 |
| 2.4.15     | BrtBeginCellIgnoreECs14 .....                        | 231 |
| 2.4.16     | BrtBeginCellSmartTag .....                           | 231 |
| 2.4.17     | BrtBeginCellSmartTags .....                          | 231 |
| 2.4.18     | BrtBeginCellStyleXFs .....                           | 232 |
| 2.4.19     | BrtBeginCellWatches .....                            | 232 |
| 2.4.20     | BrtBeginCellXFs .....                                | 232 |
| 2.4.21     | BrtBeginCFRule .....                                 | 232 |
| 2.4.22     | BrtBeginCFRule14 .....                               | 238 |
| 2.4.23     | BrtBeginColBrk .....                                 | 246 |
| 2.4.24     | BrtBeginColInfos .....                               | 246 |
| 2.4.25     | BrtBeginColorPalette .....                           | 246 |
| 2.4.26     | BrtBeginColorScale .....                             | 246 |
| 2.4.27     | BrtBeginColorScale14 .....                           | 247 |
| 2.4.28     | BrtBeginComment .....                                | 247 |
| 2.4.29     | BrtBeginCommentAuthors .....                         | 248 |
| 2.4.30     | BrtBeginCommentList .....                            | 248 |
| 2.4.31     | BrtBeginComments .....                               | 248 |
| 2.4.32     | BrtBeginConditionalFormatting .....                  | 248 |
| 2.4.33     | BrtBeginConditionalFormatting14 .....                | 249 |
| 2.4.34     | BrtBeginConditionalFormattings .....                 | 250 |
| 2.4.35     | BrtBeginCERrs .....                                  | 250 |
| 2.4.36     | BrtBeginCsView .....                                 | 251 |
| 2.4.37     | BrtBeginCsViews .....                                | 251 |

|        |                               |     |
|--------|-------------------------------|-----|
| 2.4.38 | BrBeginCustomFilters          | 252 |
| 2.4.39 | BrBeginCustomFilters14        | 252 |
| 2.4.40 | BrBeginDatabar                | 252 |
| 2.4.41 | BrBeginDatabar14              | 253 |
| 2.4.42 | BrBeginDataFeedPr15           | 255 |
| 2.4.43 | BrBeginDataModel              | 256 |
| 2.4.44 | BrBeginDbTables15             | 256 |
| 2.4.45 | BrBeginDCon                   | 256 |
| 2.4.46 | BrBeginDecoupledPivotCacheIDs | 257 |
| 2.4.47 | BrBeginDeletedName            | 258 |
| 2.4.48 | BrBeginDeletedNames           | 258 |
| 2.4.49 | BrBeginDim                    | 258 |
| 2.4.50 | BrBeginDims                   | 259 |
| 2.4.51 | BrBeginDRefs                  | 259 |
| 2.4.52 | BrBeginDVals                  | 260 |
| 2.4.53 | BrBeginDVals14                | 260 |
| 2.4.54 | BrBeginDXF14s                 | 260 |
| 2.4.55 | BrBeginDXFs                   | 261 |
| 2.4.56 | BrBeginDXFs15                 | 261 |
| 2.4.57 | BrBeginECdbProps              | 262 |
| 2.4.58 | BrBeginECOlapprops            | 263 |
| 2.4.59 | BrBeginECPParam               | 264 |
| 2.4.60 | BrBeginECPParams              | 267 |
| 2.4.61 | BrBeginECTwFldInfo            | 267 |
| 2.4.62 | BrBeginECTwFldInfo15          | 267 |
| 2.4.63 | BrBeginECTWFldInfoLst         | 268 |
| 2.4.64 | BrBeginECTWFldInfoLst15       | 268 |
| 2.4.65 | BrBeginECTxtWiz               | 268 |
| 2.4.66 | BrBeginECTxtWiz15             | 269 |
| 2.4.67 | BrBeginECWebProps             | 269 |
| 2.4.68 | BrBeginEcWpTables             | 272 |
| 2.4.69 | BrBeginEsfmd                  | 272 |
| 2.4.70 | BrBeginEsmdb                  | 273 |
| 2.4.71 | BrBeginEsmdtinfo              | 273 |
| 2.4.72 | BrBeginEsmdx                  | 274 |
| 2.4.73 | BrBeginEsstr                  | 274 |
| 2.4.74 | BrBeginExtConn14              | 274 |
| 2.4.75 | BrBeginExtConn15              | 275 |
| 2.4.76 | BrBeginExtConnection          | 276 |
| 2.4.77 | BrBeginExtConnections         | 280 |
| 2.4.78 | BrBeginExternals              | 280 |
| 2.4.79 | BrBeginFills                  | 280 |
| 2.4.80 | BrBeginFilterColumn           | 280 |
| 2.4.81 | BrBeginFilters                | 281 |
| 2.4.82 | BrBeginFmd                    | 281 |
| 2.4.83 | BrBeginFmts                   | 281 |
| 2.4.84 | BrBeginFnGroup                | 282 |
| 2.4.85 | BrBeginFonts                  | 282 |
| 2.4.86 | BrBeginHeaderFooter           | 282 |
| 2.4.87 | BrBeginIconSet                | 284 |
| 2.4.88 | BrBeginIconSet14              | 285 |
| 2.4.89 | BrBeginIndexedColors          | 286 |
| 2.4.90 | BrBeginISXTHCols              | 286 |

|         |                                 |     |
|---------|---------------------------------|-----|
| 2.4.91  | BrtBeginISXTHRws .....          | 287 |
| 2.4.92  | BrtBeginISXVDCols .....         | 287 |
| 2.4.93  | BrtBeginISXVDRws .....          | 288 |
| 2.4.94  | BrtBeginISXVIs .....            | 288 |
| 2.4.95  | BrtBeginItemUniqueNames .....   | 289 |
| 2.4.96  | BrtBeginList .....              | 289 |
| 2.4.97  | BrtBeginListCol.....            | 292 |
| 2.4.98  | BrtBeginListCols .....          | 294 |
| 2.4.99  | BrtBeginListParts .....         | 294 |
| 2.4.100 | BrtBeginListXmlCPr .....        | 295 |
| 2.4.101 | BrtBeginMap .....               | 296 |
| 2.4.102 | BrtBeginMdx .....               | 296 |
| 2.4.103 | BrtBeginMdxKPI.....             | 296 |
| 2.4.104 | BrtBeginMdxMbrProp .....        | 297 |
| 2.4.105 | BrtBeginMdxSet.....             | 297 |
| 2.4.106 | BrtBeginMdxTuple.....           | 298 |
| 2.4.107 | BrtBeginMergeCells .....        | 299 |
| 2.4.108 | BrtBeginMetadata .....          | 299 |
| 2.4.109 | BrtBeginMG.....                 | 299 |
| 2.4.110 | BrtBeginMGMaps .....            | 299 |
| 2.4.111 | BrtBeginMgs.....                | 300 |
| 2.4.112 | brtBeginModelRelationships..... | 300 |
| 2.4.113 | BrtBeginModelTables .....       | 300 |
| 2.4.114 | BrtBeginMRUColors .....         | 300 |
| 2.4.115 | BrtBeginOledbPr15.....          | 300 |
| 2.4.116 | BrtBeginOleObjects .....        | 301 |
| 2.4.117 | BrtBeginPCD14.....              | 301 |
| 2.4.118 | BrtBeginPCDCalcItem .....       | 302 |
| 2.4.119 | BrtBeginPCDCalcItems .....      | 302 |
| 2.4.120 | BrtBeginPCDCalcMem .....        | 303 |
| 2.4.121 | BrtBeginPCDCalcMem14 .....      | 303 |
| 2.4.122 | BrtBeginPCDCalcMemExt .....     | 304 |
| 2.4.123 | BrtBeginPCDCalcMems .....       | 305 |
| 2.4.124 | BrtBeginPCDCalcMemsExt .....    | 305 |
| 2.4.125 | BrtBeginPCDFAtbl .....          | 306 |
| 2.4.126 | BrtBeginPCDFGDiscrete .....     | 308 |
| 2.4.127 | BrtBeginPCDFGItems .....        | 308 |
| 2.4.128 | BrtBeginPCDFGRange .....        | 309 |
| 2.4.129 | BrtBeginPCDFGroup .....         | 310 |
| 2.4.130 | BrtBeginPCDFField .....         | 312 |
| 2.4.131 | BrtBeginPCDFFields .....        | 315 |
| 2.4.132 | BrtBeginPCDHFieldsUsage.....    | 315 |
| 2.4.133 | BrtBeginPCDHGLevel.....         | 316 |
| 2.4.134 | BrtBeginPCDHGLevels .....       | 317 |
| 2.4.135 | BrtBeginPCDHGLGMember .....     | 317 |
| 2.4.136 | BrtBeginPCDHGLGMembers.....     | 318 |
| 2.4.137 | BrtBeginPCDHGLGroup .....       | 318 |
| 2.4.138 | BrtBeginPCDHGLGroups.....       | 319 |
| 2.4.139 | BrtBeginPCDHierarchies.....     | 320 |
| 2.4.140 | BrtBeginPCDHierarchy .....      | 320 |
| 2.4.141 | BrtBeginPCDIRun.....            | 324 |
| 2.4.142 | BrtBeginPCDKPI.....             | 325 |
| 2.4.143 | BrtBeginPCDKPIs .....           | 328 |



|         |                             |     |
|---------|-----------------------------|-----|
| 2.4.144 | BrBeginPCDSConsole          | 329 |
| 2.4.145 | BrBeginPCDSCPage            | 329 |
| 2.4.146 | BrBeginPCDSCPages           | 330 |
| 2.4.147 | BrBeginPCDSCPIItem          | 330 |
| 2.4.148 | BrBeginPCDSCSet             | 330 |
| 2.4.149 | BrBeginPCDSCSets            | 332 |
| 2.4.150 | BrBeginPCSDTCEMember        | 333 |
| 2.4.151 | BrBeginPCSDTCEMembers       | 334 |
| 2.4.152 | BrBeginPCSDTCEMembersSortBy | 334 |
| 2.4.153 | BrBeginPCSDTCEEntries       | 335 |
| 2.4.154 | BrBeginPCSDTCEQueries       | 335 |
| 2.4.155 | BrBeginPCSDTCEQuery         | 335 |
| 2.4.156 | BrBeginPCSDTCESet           | 336 |
| 2.4.157 | BrBeginPCSDTCESets          | 337 |
| 2.4.158 | BrBeginPCSDTCTupleCache     | 337 |
| 2.4.159 | BrBeginPcdSFCIEntries       | 337 |
| 2.4.160 | BrBeginPCDSources           | 337 |
| 2.4.161 | BrBeginPCDSRange            | 338 |
| 2.4.162 | BrBeginPivotCacheDef        | 339 |
| 2.4.163 | BrBeginPivotCacheID         | 341 |
| 2.4.164 | BrBeginPivotCacheIDs        | 342 |
| 2.4.165 | BrBeginPivotCacheRecords    | 342 |
| 2.4.166 | BrBeginPivotTableRefs       | 342 |
| 2.4.167 | BrBeginPivotTableUISettings | 342 |
| 2.4.168 | BrBeginPName                | 343 |
| 2.4.169 | BrBeginPNames               | 344 |
| 2.4.170 | BrBeginPNPair               | 344 |
| 2.4.171 | BrBeginPNPairs              | 346 |
| 2.4.172 | BrBeginPRFilter             | 346 |
| 2.4.173 | BrBeginPRFilter14           | 347 |
| 2.4.174 | BrBeginPRFilters            | 347 |
| 2.4.175 | BrBeginPRFilters14          | 348 |
| 2.4.176 | BrBeginPRFItem              | 348 |
| 2.4.177 | BrBeginPRFItem14            | 348 |
| 2.4.178 | BrBeginPRRule               | 349 |
| 2.4.179 | BrBeginPRRule14             | 349 |
| 2.4.180 | BrBeginQSI                  | 350 |
| 2.4.181 | BrBeginQSIF                 | 352 |
| 2.4.182 | BrBeginQSIFs                | 353 |
| 2.4.183 | BrBeginQSIR                 | 354 |
| 2.4.184 | BrBeginRRSort               | 355 |
| 2.4.185 | BrBeginRwBrk                | 355 |
| 2.4.186 | BrBeginScenMan              | 356 |
| 2.4.187 | BrBeginSct                  | 356 |
| 2.4.188 | BrBeginSheet                | 358 |
| 2.4.189 | BrBeginSheetData            | 358 |
| 2.4.190 | BrBeginSingleCells          | 358 |
| 2.4.191 | BrBeginSlicer               | 358 |
| 2.4.192 | BrBeginSlicerCache          | 360 |
| 2.4.193 | BrBeginSlicerCacheDef       | 360 |
| 2.4.194 | BrBeginSlicerCacheID        | 361 |
| 2.4.195 | BrBeginSlicerCacheIDs       | 361 |
| 2.4.196 | BrBeginSlicerCacheLevelData | 362 |

|         |  |     |
|---------|--|-----|
| 2.4.197 | BrBeginSlicerCacheLevelsData.....      | 363 |
| 2.4.198 | BrBeginSlicerCacheNative .....         | 363 |
| 2.4.199 | BrBeginSlicerCacheOlapImpl .....       | 364 |
| 2.4.200 | BrBeginSlicerCacheSelections.....      | 365 |
| 2.4.201 | BrBeginSlicerCacheSiRange .....        | 365 |
| 2.4.202 | BrBeginSlicerCacheSiRanges .....       | 365 |
| 2.4.203 | BrBeginSlicerCachesPivotCacheID .....  | 366 |
| 2.4.204 | BrBeginSlicerCachesPivotCacheIDs ..... | 366 |
| 2.4.205 | BrBeginSlicerEx .....                  | 366 |
| 2.4.206 | BrBeginSlicers .....                   | 367 |
| 2.4.207 | BrBeginSlicersEx.....                  | 367 |
| 2.4.208 | BrBeginSlicerStyle .....               | 367 |
| 2.4.209 | BrBeginSlicerStyleElements .....       | 368 |
| 2.4.210 | BrBeginSlicerStyles .....              | 368 |
| 2.4.211 | BrBeginSmartTags .....                 | 368 |
| 2.4.212 | BrBeginSmartTagTypes .....             | 368 |
| 2.4.213 | BrBeginSortCond .....                  | 369 |
| 2.4.214 | BrBeginSortCond14.....                 | 370 |
| 2.4.215 | BrBeginSortState .....                 | 372 |
| 2.4.216 | BrBeginSparklineGroup .....            | 373 |
| 2.4.217 | BrBeginSparklineGroups .....           | 377 |
| 2.4.218 | BrBeginSparklines.....                 | 377 |
| 2.4.219 | BrBeginSst.....                        | 377 |
| 2.4.220 | BrBeginStyles.....                     | 377 |
| 2.4.221 | BrBeginStyleSheet .....                | 378 |
| 2.4.222 | BrBeginStyleSheetExt14 .....           | 378 |
| 2.4.223 | BrBeginSupBook .....                   | 378 |
| 2.4.224 | BrBeginSXChange .....                  | 379 |
| 2.4.225 | BrBeginSXChanges .....                 | 380 |
| 2.4.226 | BrBeginSXCondFmt.....                  | 380 |
| 2.4.227 | BrBeginSXCondFmt14 .....               | 381 |
| 2.4.228 | BrBeginSXCondFmts .....                | 382 |
| 2.4.229 | BrBeginSXCondFmts14.....               | 383 |
| 2.4.230 | BrBeginSXCrtFormat .....               | 383 |
| 2.4.231 | BrBeginSXCrtFormats.....               | 384 |
| 2.4.232 | BrBeginSXDI .....                      | 384 |
| 2.4.233 | BrBeginSXDIIs.....                     | 386 |
| 2.4.234 | BrBeginSXEdit .....                    | 386 |
| 2.4.235 | BrBeginSXEdits .....                   | 388 |
| 2.4.236 | BrBeginSXFILTER.....                   | 388 |
| 2.4.237 | BrBeginSXFilters .....                 | 390 |
| 2.4.238 | BrBeginSXFormat .....                  | 390 |
| 2.4.239 | BrBeginSXFormats .....                 | 390 |
| 2.4.240 | BrBeginSXLi.....                       | 391 |
| 2.4.241 | BrBeginSXLiCols.....                   | 391 |
| 2.4.242 | BrBeginSXLiRws .....                   | 392 |
| 2.4.243 | BrBeginSXLocation.....                 | 392 |
| 2.4.244 | BrBeginSXPI .....                      | 393 |
| 2.4.245 | BrBeginSXPIs .....                     | 395 |
| 2.4.246 | BrBeginSxRow.....                      | 395 |
| 2.4.247 | BrBeginSXRules.....                    | 396 |
| 2.4.248 | BrBeginSXRules14 .....                 | 396 |
| 2.4.249 | BrBeginSxSelect .....                  | 396 |

|         |  |     |
|---------|--|-----|
| 2.4.250 | BrBeginSXTDMP .....                    | 399 |
| 2.4.251 | BrBeginSXTDMPS.....                    | 400 |
| 2.4.252 | BrBeginSXTH .....                      | 401 |
| 2.4.253 | BrBeginSXTHItem .....                  | 403 |
| 2.4.254 | BrBeginSXTHItems .....                 | 403 |
| 2.4.255 | BrBeginSXTHs .....                     | 404 |
| 2.4.256 | BrBeginSXTupleSet .....                | 404 |
| 2.4.257 | BrBeginSXTupleSetData .....            | 405 |
| 2.4.258 | BrBeginSXTupleSetHeader .....          | 405 |
| 2.4.259 | BrBeginSXTupleSetRow .....             | 405 |
| 2.4.260 | BrBeginSxvcells.....                   | 405 |
| 2.4.261 | BrBeginSXVD .....                      | 406 |
| 2.4.262 | BrBeginSXVDs.....                      | 413 |
| 2.4.263 | BrBeginSXVI .....                      | 414 |
| 2.4.264 | BrBeginSXView.....                     | 416 |
| 2.4.265 | BrBeginSXView14 .....                  | 424 |
| 2.4.266 | BrBeginSXVIs.....                      | 425 |
| 2.4.267 | BrBeginTableSlicerCache .....          | 425 |
| 2.4.268 | BrBeginTableStyle .....                | 427 |
| 2.4.269 | BrBeginTableStyles .....               | 427 |
| 2.4.270 | BrBeginTimelineCacheID.....            | 428 |
| 2.4.271 | BrBeginTimelineCacheIDs .....          | 428 |
| 2.4.272 | BrBeginTimelineCachePivotCacheIDs..... | 428 |
| 2.4.273 | BrBeginTimelineEx .....                | 429 |
| 2.4.274 | BrBeginTimelinesEx .....               | 429 |
| 2.4.275 | BrBeginTimelineStyle .....             | 429 |
| 2.4.276 | BrBeginTimelineStyleElements .....     | 430 |
| 2.4.277 | BrBeginTimelineStyles.....             | 430 |
| 2.4.278 | BrBeginTimelineStylesheetExt15.....    | 430 |
| 2.4.279 | BrBeginUserCsView.....                 | 431 |
| 2.4.280 | BrBeginUserCsViews .....               | 431 |
| 2.4.281 | BrBeginUsers .....                     | 431 |
| 2.4.282 | BrBeginUserShView .....                | 432 |
| 2.4.283 | BrBeginUserShViews .....               | 435 |
| 2.4.284 | BrBeginVolDeps.....                    | 435 |
| 2.4.285 | BrBeginVolMain .....                   | 435 |
| 2.4.286 | BrBeginVolTopic .....                  | 436 |
| 2.4.287 | BrBeginVolType .....                   | 436 |
| 2.4.288 | BrBeginWebExtensions .....             | 436 |
| 2.4.289 | BrBeginWebPubItem .....                | 436 |
| 2.4.290 | BrBeginWebPubItems.....                | 438 |
| 2.4.291 | BrBeginWsSortMap .....                 | 439 |
| 2.4.292 | BrBeginWsView .....                    | 439 |
| 2.4.293 | BrBeginWsViews .....                   | 441 |
| 2.4.294 | BrBigName .....                        | 441 |
| 2.4.295 | BrBkHim.....                           | 441 |
| 2.4.296 | BrBookProtection .....                 | 442 |
| 2.4.297 | BrBookProtectionIso.....               | 442 |
| 2.4.298 | BrBookView .....                       | 444 |
| 2.4.299 | BrBorder.....                          | 445 |
| 2.4.300 | BrBrk .....                            | 446 |
| 2.4.301 | BrBundleSh.....                        | 447 |
| 2.4.302 | BrCalcProp.....                        | 448 |

|         |                         |     |
|---------|-------------------------|-----|
| 2.4.303 | BrCellBlank             | 450 |
| 2.4.304 | BrCellBool              | 451 |
| 2.4.305 | BrCellError             | 451 |
| 2.4.306 | BrCellIgnoreEC          | 452 |
| 2.4.307 | BrCellIgnoreEC14        | 452 |
| 2.4.308 | BrCellIsst              | 454 |
| 2.4.309 | BrCellMeta              | 454 |
| 2.4.310 | BrCellReal              | 455 |
| 2.4.311 | BrCellRk                | 455 |
| 2.4.312 | BrCellRString           | 455 |
| 2.4.313 | BrCellSmartTagProperty  | 456 |
| 2.4.314 | BrCellSt                | 456 |
| 2.4.315 | BrCellWatch             | 457 |
| 2.4.316 | BrCFIcon                | 457 |
| 2.4.317 | BrCFRuleExt             | 458 |
| 2.4.318 | BrCFVO                  | 458 |
| 2.4.319 | BrCFVO14                | 460 |
| 2.4.320 | BrColInfo               | 462 |
| 2.4.321 | BrColor                 | 463 |
| 2.4.322 | BrColor14               | 464 |
| 2.4.323 | BrColorFilter           | 465 |
| 2.4.324 | BrCommentAuthor         | 465 |
| 2.4.325 | BrCommentText           | 466 |
| 2.4.326 | BrCrashRecErr           | 466 |
| 2.4.327 | BrCsPageSetup           | 466 |
| 2.4.328 | BrCsProp                | 472 |
| 2.4.329 | BrCsProtection          | 472 |
| 2.4.330 | BrCsProtectionIso       | 473 |
| 2.4.331 | BrCUsr                  | 474 |
| 2.4.332 | BrCustomFilter          | 475 |
| 2.4.333 | BrCustomFilter14        | 476 |
| 2.4.334 | BrDbCommand15           | 477 |
| 2.4.335 | BrDbTable15             | 478 |
| 2.4.336 | BrDecoupledPivotCacheID | 478 |
| 2.4.337 | BrDrawing               | 479 |
| 2.4.338 | BrDRef                  | 479 |
| 2.4.339 | BrDVal                  | 481 |
| 2.4.340 | BrDVal14                | 484 |
| 2.4.341 | BrDValList              | 487 |
| 2.4.342 | BrDXF                   | 488 |
| 2.4.343 | BrDXF14                 | 488 |
| 2.4.344 | BrDXF15                 | 489 |
| 2.4.345 | BrDynamicFilter         | 490 |
| 2.4.346 | BrEndActiveXControls    | 492 |
| 2.4.347 | BrEndAFilter            | 492 |
| 2.4.348 | BrEndAutoSortScope      | 492 |
| 2.4.349 | BrEndBook               | 492 |
| 2.4.350 | BrEndBookViews          | 492 |
| 2.4.351 | BrEndBorders            | 493 |
| 2.4.352 | BrEndBundleShs          | 493 |
| 2.4.353 | BrEndCellIgnoreECs      | 493 |
| 2.4.354 | BrEndCellIgnoreECs14    | 493 |
| 2.4.355 | BrEndCellSmartTag       | 493 |

|         |                                     |     |
|---------|-------------------------------------|-----|
| 2.4.356 | BrtEndCellSmartTags .....           | 493 |
| 2.4.357 | BrtEndCellStyleXFs.....             | 493 |
| 2.4.358 | BrtEndCellWatches.....              | 493 |
| 2.4.359 | BrtEndCellXFs.....                  | 494 |
| 2.4.360 | BrtEndCFRule .....                  | 494 |
| 2.4.361 | BrtEndCFRule14 .....                | 494 |
| 2.4.362 | BrtEndColBrk.....                   | 494 |
| 2.4.363 | BrtEndColInfos .....                | 494 |
| 2.4.364 | BrtEndColorPalette.....             | 494 |
| 2.4.365 | BrtEndColorScale .....              | 494 |
| 2.4.366 | BrtEndColorScale14 .....            | 494 |
| 2.4.367 | BrtEndComment .....                 | 495 |
| 2.4.368 | BrtEndCommentAuthors .....          | 495 |
| 2.4.369 | BrtEndCommentList .....             | 495 |
| 2.4.370 | BrtEndComments.....                 | 495 |
| 2.4.371 | BrtEndConditionalFormatting.....    | 495 |
| 2.4.372 | BrtEndConditionalFormatting14 ..... | 495 |
| 2.4.373 | BrtEndConditionalFormattings .....  | 495 |
| 2.4.374 | BrtEndCERerrs .....                 | 495 |
| 2.4.375 | BrtEndCsView.....                   | 495 |
| 2.4.376 | BrtEndCsViews .....                 | 496 |
| 2.4.377 | BrtEndCustomFilters.....            | 496 |
| 2.4.378 | BrtEndDatabar .....                 | 496 |
| 2.4.379 | BrtEndDatabar14 .....               | 496 |
| 2.4.380 | BrtEndDataFeedPr15 .....            | 496 |
| 2.4.381 | BrtEndDataModel .....               | 496 |
| 2.4.382 | BrtEndDbTables15 .....              | 496 |
| 2.4.383 | BrtEndDCon .....                    | 496 |
| 2.4.384 | BrtEndDecoupledPivotCacheIDs .....  | 497 |
| 2.4.385 | BrtEndDeletedName .....             | 497 |
| 2.4.386 | BrtEndDeletedNames .....            | 497 |
| 2.4.387 | BrtEndDim .....                     | 497 |
| 2.4.388 | BrtEndDims.....                     | 497 |
| 2.4.389 | BrtEndDRefs .....                   | 497 |
| 2.4.390 | BrtEndDVals.....                    | 497 |
| 2.4.391 | BrtEndDVals14 .....                 | 497 |
| 2.4.392 | BrtEndDXF14s .....                  | 497 |
| 2.4.393 | BrtEndDXFs.....                     | 498 |
| 2.4.394 | BrtEndDXFs15 .....                  | 498 |
| 2.4.395 | BrtEndECDBProps .....               | 498 |
| 2.4.396 | BrtEndECOLapProps .....             | 498 |
| 2.4.397 | BrtEndECPParam .....                | 498 |
| 2.4.398 | BrtEndECPParams.....                | 498 |
| 2.4.399 | BrtEndECTWFldInfoLst.....           | 498 |
| 2.4.400 | BrtEndECTWFldInfoLst15 .....        | 498 |
| 2.4.401 | BrtEndECTxtWiz.....                 | 498 |
| 2.4.402 | BrtEndECTxtWiz15 .....              | 499 |
| 2.4.403 | BrtEndECWebProps .....              | 499 |
| 2.4.404 | BrtEndECWPTables.....               | 499 |
| 2.4.405 | BrtEndEsfmd .....                   | 499 |
| 2.4.406 | BrtEndEsmdb .....                   | 499 |
| 2.4.407 | BrtEndEsmdtinfo.....                | 499 |
| 2.4.408 | BrtEndEsmdx .....                   | 499 |

|         |                          |     |
|---------|--------------------------|-----|
| 2.4.409 | BrtEndEsstr              | 499 |
| 2.4.410 | BrtEndExtConn14          | 499 |
| 2.4.411 | BrtEndExtConn15          | 500 |
| 2.4.412 | BrtEndExtConnection      | 500 |
| 2.4.413 | BrtEndExtConnections     | 500 |
| 2.4.414 | BrtEndExternals          | 500 |
| 2.4.415 | BrtEndFills              | 500 |
| 2.4.416 | BrtEndFilterColumn       | 500 |
| 2.4.417 | BrtEndFilters            | 500 |
| 2.4.418 | BrtEndFmd                | 500 |
| 2.4.419 | BrtEndFmts               | 500 |
| 2.4.420 | BrtEndFnGroup            | 501 |
| 2.4.421 | BrtEndFonts              | 501 |
| 2.4.422 | BrtEndHeaderFooter       | 501 |
| 2.4.423 | BrtEndIconSet            | 501 |
| 2.4.424 | BrtEndIconSet14          | 501 |
| 2.4.425 | BrtEndIndexedColors      | 501 |
| 2.4.426 | BrtEndISXTHCols          | 501 |
| 2.4.427 | BrtEndISXTHRws           | 501 |
| 2.4.428 | BrtEndISXVDCols          | 502 |
| 2.4.429 | BrtEndISXVDRws           | 502 |
| 2.4.430 | BrtEndISXVIs             | 502 |
| 2.4.431 | BrtEndItemUniqueNames    | 502 |
| 2.4.432 | BrtEndList               | 502 |
| 2.4.433 | BrtEndListCol            | 502 |
| 2.4.434 | BrtEndListCols           | 502 |
| 2.4.435 | BrtEndListParts          | 502 |
| 2.4.436 | BrtEndListXmlCPr         | 502 |
| 2.4.437 | BrtEndMap                | 503 |
| 2.4.438 | BrtEndMdx                | 503 |
| 2.4.439 | BrtEndMdxKPI             | 503 |
| 2.4.440 | BrtEndMdxMbrProp         | 503 |
| 2.4.441 | BrtEndMdxSet             | 503 |
| 2.4.442 | BrtEndMdxTuple           | 503 |
| 2.4.443 | BrtEndMergeCells         | 503 |
| 2.4.444 | BrtEndMetadata           | 503 |
| 2.4.445 | BrtEndMG                 | 503 |
| 2.4.446 | BrtEndMGMaps             | 504 |
| 2.4.447 | BrtEndMGs                | 504 |
| 2.4.448 | brtEndModelRelationships | 504 |
| 2.4.449 | BrtEndModelTables        | 504 |
| 2.4.450 | BrtEndMRUColors          | 504 |
| 2.4.451 | BrtEndOleDbPr15          | 504 |
| 2.4.452 | BrtEndOleObjects         | 504 |
| 2.4.453 | BrtEndPCD14              | 504 |
| 2.4.454 | BrtEndPCDCalcItem        | 504 |
| 2.4.455 | BrtEndPCDCalcItems       | 505 |
| 2.4.456 | BrtEndPCDCalcMem         | 505 |
| 2.4.457 | BrtEndPCDCalcMem14       | 505 |
| 2.4.458 | BrtEndPCDCalcMemExt      | 505 |
| 2.4.459 | BrtEndPCDCalcMems        | 505 |
| 2.4.460 | BrtEndPCDCalcMemsExt     | 505 |
| 2.4.461 | BrtEndPCDFAtbl           | 505 |

|         |                                |     |
|---------|--------------------------------|-----|
| 2.4.462 | BrEndPCDFGDiscrete.....        | 505 |
| 2.4.463 | BrEndPCDFGItems .....          | 506 |
| 2.4.464 | BrEndPCDFGRange .....          | 506 |
| 2.4.465 | BrEndPCDFGroup .....           | 506 |
| 2.4.466 | BrEndPCDFField .....           | 506 |
| 2.4.467 | BrEndPCDFFields .....          | 506 |
| 2.4.468 | BrEndPCDHFieldsUsage .....     | 506 |
| 2.4.469 | BrEndPCDHGLevel .....          | 506 |
| 2.4.470 | BrEndPCDHGLLevels .....        | 506 |
| 2.4.471 | BrEndPCDHGLGMember.....        | 507 |
| 2.4.472 | BrEndPCDHGLGMembers .....      | 507 |
| 2.4.473 | BrEndPCDHGLGroup.....          | 507 |
| 2.4.474 | BrEndPCDHGLGroups .....        | 507 |
| 2.4.475 | BrEndPCDHierarchies .....      | 507 |
| 2.4.476 | BrEndPCDHierarchy .....        | 507 |
| 2.4.477 | BrEndPCDIRun .....             | 507 |
| 2.4.478 | BrEndPCDKPI .....              | 507 |
| 2.4.479 | BrEndPCDKPIs.....              | 507 |
| 2.4.480 | BrEndPCDSConsole.....          | 508 |
| 2.4.481 | BrEndPCDSCPage .....           | 508 |
| 2.4.482 | BrEndPCDSCPages .....          | 508 |
| 2.4.483 | BrEndPCDSCPIItem .....         | 508 |
| 2.4.484 | BrEndPCDSCSet .....            | 508 |
| 2.4.485 | BrEndPCDSCSets .....           | 508 |
| 2.4.486 | BrEndPCSDTCEMember .....       | 508 |
| 2.4.487 | BrEndPCSDTCEMembers.....       | 508 |
| 2.4.488 | BrEndPCSDTCEntries.....        | 509 |
| 2.4.489 | BrEndPCSDTDCQueries.....       | 509 |
| 2.4.490 | BrEndPCSDTDCQuery .....        | 509 |
| 2.4.491 | BrEndPCSDTDCSet.....           | 509 |
| 2.4.492 | BrEndPCSDTDCSets .....         | 509 |
| 2.4.493 | BrEndPCSDTupleCache.....       | 509 |
| 2.4.494 | BrEndPCDSFCIEntries.....       | 509 |
| 2.4.495 | BrEndPCDSsource .....          | 509 |
| 2.4.496 | BrEndPCDSRange .....           | 509 |
| 2.4.497 | BrEndPivotCacheDef.....        | 510 |
| 2.4.498 | BrEndPivotCacheID .....        | 510 |
| 2.4.499 | BrEndPivotCacheIDs.....        | 510 |
| 2.4.500 | BrEndPivotCacheRecords .....   | 510 |
| 2.4.501 | BrEndPivotTableRefs .....      | 510 |
| 2.4.502 | BrEndPivotTableUISettings..... | 510 |
| 2.4.503 | BrEndPName .....               | 510 |
| 2.4.504 | BrEndPNames .....              | 510 |
| 2.4.505 | BrEndPNPair.....               | 511 |
| 2.4.506 | BrEndPNPairs .....             | 511 |
| 2.4.507 | BrEndPRFilter .....            | 511 |
| 2.4.508 | BrEndPRFilter14 .....          | 511 |
| 2.4.509 | BrEndPRFilters.....            | 511 |
| 2.4.510 | BrEndPRFilters14 .....         | 511 |
| 2.4.511 | BrEndPRFItem .....             | 511 |
| 2.4.512 | BrEndPRFItem14 .....           | 512 |
| 2.4.513 | BrEndPRRule .....              | 512 |
| 2.4.514 | BrEndPRRule14 .....            | 512 |

|         |                                       |     |
|---------|---------------------------------------|-----|
| 2.4.515 | BrtEndQSI .....                       | 512 |
| 2.4.516 | BrtEndQSIF .....                      | 512 |
| 2.4.517 | BrtEndQSIFs .....                     | 512 |
| 2.4.518 | BrtEndQSIR .....                      | 512 |
| 2.4.519 | BrtEndRRSort .....                    | 512 |
| 2.4.520 | BrtEndRwBrk .....                     | 512 |
| 2.4.521 | BrtEndScenMan .....                   | 513 |
| 2.4.522 | BrtEndSct .....                       | 513 |
| 2.4.523 | BrtEndSheet.....                      | 513 |
| 2.4.524 | BrtEndSheetData .....                 | 513 |
| 2.4.525 | BrtEndSingleCells.....                | 513 |
| 2.4.526 | BrtEndSlicer .....                    | 513 |
| 2.4.527 | BrtEndSlicerCache .....               | 513 |
| 2.4.528 | BrtEndSlicerCacheDef.....             | 513 |
| 2.4.529 | BrtEndSlicerCacheID .....             | 513 |
| 2.4.530 | BrtEndSlicerCacheIDs.....             | 514 |
| 2.4.531 | BrtEndSlicerCacheLevelData.....       | 514 |
| 2.4.532 | BrtEndSlicerCacheLevelsData .....     | 514 |
| 2.4.533 | BrtEndSlicerCacheNative.....          | 514 |
| 2.4.534 | BrtEndSlicerCacheOlapImpl.....        | 514 |
| 2.4.535 | BrtEndSlicerCacheSelections .....     | 514 |
| 2.4.536 | BrtEndSlicerCacheSiRange .....        | 514 |
| 2.4.537 | BrtEndSlicerCacheSiRanges.....        | 514 |
| 2.4.538 | BrtEndSlicerCachesPivotCacheID .....  | 515 |
| 2.4.539 | BrtEndSlicerCachesPivotCacheIDs ..... | 515 |
| 2.4.540 | BrtEndSlicerEx.....                   | 515 |
| 2.4.541 | BrtEndSlicers .....                   | 515 |
| 2.4.542 | BrtEndSlicersEx .....                 | 515 |
| 2.4.543 | BrtEndSlicerStyle .....               | 515 |
| 2.4.544 | BrtEndSlicerStyleElements .....       | 515 |
| 2.4.545 | BrtEndSlicerStyles .....              | 515 |
| 2.4.546 | BrtEndSmartTags.....                  | 516 |
| 2.4.547 | BrtEndSmartTagTypes.....              | 516 |
| 2.4.548 | BrtEndSortCond .....                  | 516 |
| 2.4.549 | BrtEndSortCond14 .....                | 516 |
| 2.4.550 | BrtEndSortState .....                 | 516 |
| 2.4.551 | BrtEndSparklineGroup .....            | 516 |
| 2.4.552 | BrtEndSparklineGroups.....            | 516 |
| 2.4.553 | BrtEndSparklines .....                | 516 |
| 2.4.554 | BrtEndSst .....                       | 517 |
| 2.4.555 | BrtEndStyles .....                    | 517 |
| 2.4.556 | BrtEndStyleSheet.....                 | 517 |
| 2.4.557 | BrtEndStyleSheetExt14.....            | 517 |
| 2.4.558 | BrtEndSupBook .....                   | 517 |
| 2.4.559 | BrtEndSXChange .....                  | 517 |
| 2.4.560 | BrtEndSXChanges .....                 | 517 |
| 2.4.561 | BrtEndSXCondFmt .....                 | 517 |
| 2.4.562 | BrtEndSXCondFmt14 .....               | 518 |
| 2.4.563 | BrtEndSXCondFmts .....                | 518 |
| 2.4.564 | BrtEndSXCondFmts14 .....              | 518 |
| 2.4.565 | BrtEndSXCrtFormat.....                | 518 |
| 2.4.566 | BrtEndSXCrtFormats .....              | 518 |
| 2.4.567 | BrtEndSXDI.....                       | 518 |



|         |                                 |     |
|---------|---------------------------------|-----|
| 2.4.568 | BrEndSXDI                       | 518 |
| 2.4.569 | BrEndSXEdit                     | 518 |
| 2.4.570 | BrEndSXEdits                    | 519 |
| 2.4.571 | BrEndSXFilter                   | 519 |
| 2.4.572 | BrEndSXFilters                  | 519 |
| 2.4.573 | BrEndSXFormat                   | 519 |
| 2.4.574 | BrEndSxFormats                  | 519 |
| 2.4.575 | BrEndSxLI                       | 519 |
| 2.4.576 | BrEndSxLICols                   | 519 |
| 2.4.577 | BrEndSxLIRws                    | 519 |
| 2.4.578 | BrEndSXLocation                 | 520 |
| 2.4.579 | BrEndSXPI                       | 520 |
| 2.4.580 | BrEndSXPIs                      | 520 |
| 2.4.581 | BrEndSxRow                      | 520 |
| 2.4.582 | BrEndSxRules                    | 520 |
| 2.4.583 | BrEndSxRules14                  | 520 |
| 2.4.584 | BrEndSxSelect                   | 520 |
| 2.4.585 | BrEndSXTDMP                     | 520 |
| 2.4.586 | BrEndSXTDMPs                    | 520 |
| 2.4.587 | BrEndSxTH                       | 521 |
| 2.4.588 | BrEndSxTHItem                   | 521 |
| 2.4.589 | BrEndSxTHItems                  | 521 |
| 2.4.590 | BrEndSxTHs                      | 521 |
| 2.4.591 | BrEndSXTupleSet                 | 521 |
| 2.4.592 | BrEndSXTupleSetData             | 521 |
| 2.4.593 | BrEndSXTupleSetHeader           | 521 |
| 2.4.594 | BrEndSXTupleSetRow              | 521 |
| 2.4.595 | BrEndSxvcells                   | 522 |
| 2.4.596 | BrEndSXVD                       | 522 |
| 2.4.597 | BrEndSXVDs                      | 522 |
| 2.4.598 | BrEndSXVI                       | 522 |
| 2.4.599 | BrEndSXView                     | 522 |
| 2.4.600 | BrEndSXView14                   | 522 |
| 2.4.601 | BrEndSXVIs                      | 522 |
| 2.4.602 | BrEndTableSlicerCache           | 522 |
| 2.4.603 | BrEndTableStyle                 | 522 |
| 2.4.604 | BrEndTableStyles                | 523 |
| 2.4.605 | BrEndTimelineCacheID            | 523 |
| 2.4.606 | BrEndTimelineCacheIDs           | 523 |
| 2.4.607 | BrEndTimelineCachePivotCacheIDs | 523 |
| 2.4.608 | BrEndTimelineEx                 | 523 |
| 2.4.609 | BrEndTimelinesEx                | 523 |
| 2.4.610 | BrEndTimelineStyle              | 523 |
| 2.4.611 | BrEndTimelineStyleElements      | 523 |
| 2.4.612 | BrEndTimelineStyles             | 523 |
| 2.4.613 | BrEndTimelineStylesheetExt15    | 524 |
| 2.4.614 | BrEndUserCsView                 | 524 |
| 2.4.615 | BrEndUserCsViews                | 524 |
| 2.4.616 | BrEndUserShView                 | 524 |
| 2.4.617 | BrEndUserShViews                | 524 |
| 2.4.618 | BrEndVolDeps                    | 524 |
| 2.4.619 | BrEndVolMain                    | 524 |
| 2.4.620 | BrEndVolTopic                   | 524 |

|         |                             |     |
|---------|-----------------------------|-----|
| 2.4.621 | BrEndVolType.....           | 525 |
| 2.4.622 | BrEndWebExtensions .....    | 525 |
| 2.4.623 | BrEndWebPubItem.....        | 525 |
| 2.4.624 | BrEndWebPubItems .....      | 525 |
| 2.4.625 | BrEndWsSortMap.....         | 525 |
| 2.4.626 | BrEndWsView.....            | 525 |
| 2.4.627 | BrEndWsViews .....          | 525 |
| 2.4.628 | BrEOF .....                 | 525 |
| 2.4.629 | BrExternCellBlank .....     | 526 |
| 2.4.630 | BrExternCellBool.....       | 526 |
| 2.4.631 | BrExternCellError.....      | 526 |
| 2.4.632 | BrExternCellReal.....       | 526 |
| 2.4.633 | BrExternCellString .....    | 527 |
| 2.4.634 | BrExternRowHdr .....        | 527 |
| 2.4.635 | BrExternSheet.....          | 528 |
| 2.4.636 | BrExternTableEnd .....      | 528 |
| 2.4.637 | BrExternTableStart .....    | 528 |
| 2.4.638 | BrExternValueMeta .....     | 528 |
| 2.4.639 | BrFieldListActiveItem ..... | 529 |
| 2.4.640 | BrFileRecover .....         | 530 |
| 2.4.641 | BrFileSharing .....         | 530 |
| 2.4.642 | BrFileSharingIso .....      | 531 |
| 2.4.643 | BrFileVersion.....          | 531 |
| 2.4.644 | BrFill .....                | 532 |
| 2.4.645 | BrFilter .....              | 538 |
| 2.4.646 | BrFilter14 .....            | 539 |
| 2.4.647 | BrFmlaBool .....            | 539 |
| 2.4.648 | BrFmlaError .....           | 540 |
| 2.4.649 | BrFmlaNum.....              | 540 |
| 2.4.650 | BrFmlaString.....           | 541 |
| 2.4.651 | BrFmt .....                 | 541 |
| 2.4.652 | BrFnGroup .....             | 542 |
| 2.4.653 | BrFont.....                 | 542 |
| 2.4.654 | BrFRTBegin.....             | 545 |
| 2.4.655 | BrFRTEnd .....              | 545 |
| 2.4.656 | BrHLink .....               | 545 |
| 2.4.657 | BrIconFilter.....           | 546 |
| 2.4.658 | BrIconFilter14 .....        | 547 |
| 2.4.659 | BrIndexBlock .....          | 547 |
| 2.4.660 | BrIndexedColor .....        | 548 |
| 2.4.661 | BrIndexPartEnd .....        | 548 |
| 2.4.662 | BrIndexRowBlock.....        | 548 |
| 2.4.663 | BrInfo .....                | 549 |
| 2.4.664 | BrItemUniqueName .....      | 551 |
| 2.4.665 | BrKnownFonts .....          | 551 |
| 2.4.666 | BrLegacyDrawing.....        | 551 |
| 2.4.667 | BrLegacyDrawingHF .....     | 552 |
| 2.4.668 | BrList14.....               | 552 |
| 2.4.669 | BrListCCFmla .....          | 552 |
| 2.4.670 | BrListPart .....            | 553 |
| 2.4.671 | BrListTrFmla .....          | 553 |
| 2.4.672 | BrMargins .....             | 553 |
| 2.4.673 | BrMdb .....                 | 554 |

|         |                              |     |
|---------|------------------------------|-----|
| 2.4.674 | BrzMdtinfo                   | 555 |
| 2.4.675 | BrzMdxMbrIstr                | 555 |
| 2.4.676 | BrzMergeCell                 | 556 |
| 2.4.677 | brtModelRelationship         | 556 |
| 2.4.678 | BrzMModelTable               | 557 |
| 2.4.679 | BrzMURColor                  | 558 |
| 2.4.680 | BrzMName                     | 558 |
| 2.4.681 | BrzMNameExt                  | 560 |
| 2.4.682 | BrzMoleObject                | 561 |
| 2.4.683 | BrzMoleSize                  | 563 |
| 2.4.684 | BrzMPageSetup                | 563 |
| 2.4.685 | BrzMPane                     | 570 |
| 2.4.686 | BrzMPCDCalcMem15             | 571 |
| 2.4.687 | BrzMPCDField14               | 572 |
| 2.4.688 | BrzMPCDH14                   | 573 |
| 2.4.689 | BrzMPCDH15                   | 576 |
| 2.4.690 | BrzMPCDIBoolean              | 576 |
| 2.4.691 | BrzMPCDIADatetime            | 576 |
| 2.4.692 | BrzMPCDIAError               | 577 |
| 2.4.693 | BrzMPCDIAMissing             | 577 |
| 2.4.694 | BrzMPCDIANumber              | 578 |
| 2.4.695 | BrzMPCDIAStrng               | 578 |
| 2.4.696 | BrzMPCDIBoolean              | 578 |
| 2.4.697 | BrzMPCDIDatetime             | 579 |
| 2.4.698 | BrzMPCDIErrr                 | 579 |
| 2.4.699 | BrzMPCDIIndex                | 579 |
| 2.4.700 | BrzMPCDIMissing              | 580 |
| 2.4.701 | BrzMPCDINumber               | 580 |
| 2.4.702 | BrzMPCDIString               | 580 |
| 2.4.703 | BrzMPCDSFCIEntry             | 581 |
| 2.4.704 | BrzMPCRRecord                | 582 |
| 2.4.705 | BrzMPCRRecordDt              | 582 |
| 2.4.706 | BrzMPhoneticInfo             | 583 |
| 2.4.707 | BrzMPIVotCacheConnectionName | 583 |
| 2.4.708 | BrzMPIVotCacheIdVersion      | 584 |
| 2.4.709 | BrzMPIVotTableRef            | 584 |
| 2.4.710 | BrzMPlaceholderName          | 585 |
| 2.4.711 | BrzMPrintOptions             | 586 |
| 2.4.712 | BrzMQsi15                    | 586 |
| 2.4.713 | BrzMRangePr15                | 587 |
| 2.4.714 | BrzMRangeProtection          | 587 |
| 2.4.715 | BrzMRangeProtection14        | 588 |
| 2.4.716 | BrzMRangeProtectionIso       | 588 |
| 2.4.717 | BrzMRangeProtectionIso14     | 589 |
| 2.4.718 | BrzMRowHdr                   | 591 |
| 2.4.719 | BrzMRRAutoFmt                | 592 |
| 2.4.720 | BrzMRRChgCell                | 593 |
| 2.4.721 | BrzMRRConflict               | 595 |
| 2.4.722 | BrzMRRDefName                | 596 |
| 2.4.723 | BrzMRREndChgCell             | 599 |
| 2.4.724 | BrzMRREndFormat              | 599 |
| 2.4.725 | BrzMRREndInsDel              | 599 |
| 2.4.726 | BrzMRREndMove                | 599 |

|         |                                   |     |
|---------|-----------------------------------|-----|
| 2.4.727 | BrtRRFormat                       | 599 |
| 2.4.728 | BrtRRHeader                       | 601 |
| 2.4.729 | BrtRRInsDel                       | 603 |
| 2.4.730 | BrtRRInsertSh                     | 604 |
| 2.4.731 | BrtRRMove                         | 605 |
| 2.4.732 | BrtRRNote                         | 606 |
| 2.4.733 | BrtRRRenSheet                     | 607 |
| 2.4.734 | BrtRRSortItem                     | 608 |
| 2.4.735 | BrtRRTQSIF                        | 608 |
| 2.4.736 | BrtRRUserView                     | 609 |
| 2.4.737 | BrtRwDescent                      | 610 |
| 2.4.738 | BrtSel                            | 610 |
| 2.4.739 | BrtSheetCalcProp                  | 611 |
| 2.4.740 | BrtSheetProtection                | 611 |
| 2.4.741 | BrtSheetProtectionIso             | 616 |
| 2.4.742 | BrtShrFmla                        | 622 |
| 2.4.743 | BrtSlc                            | 622 |
| 2.4.744 | BrtSlicerCacheBookPivotTables     | 623 |
| 2.4.745 | BrtSlicerCacheHideItemsWithNoData | 624 |
| 2.4.746 | BrtSlicerCacheNativeItem          | 625 |
| 2.4.747 | BrtSlicerCacheOlapItem            | 625 |
| 2.4.748 | BrtSlicerCachePivotTables         | 626 |
| 2.4.749 | BrtSlicerCacheSelection           | 626 |
| 2.4.750 | BrtSlicerStyleElement             | 627 |
| 2.4.751 | BrtSmartTagType                   | 628 |
| 2.4.752 | BrtSparkline                      | 628 |
| 2.4.753 | BrtSSTItem                        | 629 |
| 2.4.754 | BrtStr                            | 629 |
| 2.4.755 | BrtStyle                          | 630 |
| 2.4.756 | BrtSupAddin                       | 631 |
| 2.4.757 | BrtSupBookSrc                     | 631 |
| 2.4.758 | BrtSupNameBits                    | 631 |
| 2.4.759 | BrtSupNameBool                    | 631 |
| 2.4.760 | BrtSupNameEnd                     | 632 |
| 2.4.761 | BrtSupNameErr                     | 632 |
| 2.4.762 | BrtSupNameFmla                    | 632 |
| 2.4.763 | BrtSupNameNil                     | 633 |
| 2.4.764 | BrtSupNameNum                     | 633 |
| 2.4.765 | BrtSupNameSt                      | 633 |
| 2.4.766 | BrtSupNameStart                   | 633 |
| 2.4.767 | BrtSupNameValueEnd                | 634 |
| 2.4.768 | BrtSupNameValueStart              | 634 |
| 2.4.769 | BrtSupSame                        | 634 |
| 2.4.770 | BrtSupSelf                        | 634 |
| 2.4.771 | BrtSupTabs                        | 635 |
| 2.4.772 | BrtSXD14                          | 635 |
| 2.4.773 | BrtSXD15                          | 636 |
| 2.4.774 | BrtSxFilter15                     | 637 |
| 2.4.775 | BrtSXTDMPOrder                    | 639 |
| 2.4.776 | BrtSXTH14                         | 639 |
| 2.4.777 | BrtSXTupleItems                   | 640 |
| 2.4.778 | BrtSXTupleSetHeaderItem           | 640 |
| 2.4.779 | BrtSXTupleSetRowItem              | 641 |

|         |                              |     |
|---------|------------------------------|-----|
| 2.4.780 | BrtSxvcellBool               | 642 |
| 2.4.781 | BrtSxvcellDate               | 642 |
| 2.4.782 | BrtSxvcellErr                | 643 |
| 2.4.783 | BrtSxvcellNil                | 644 |
| 2.4.784 | BrtSxvcellNum                | 644 |
| 2.4.785 | BrtSxvcellStr                | 645 |
| 2.4.786 | BrtSXVD14                    | 645 |
| 2.4.787 | BrtTable                     | 646 |
| 2.4.788 | BrtTableSlicerCacheID        | 648 |
| 2.4.789 | BrtTableSlicerCacheIDs       | 648 |
| 2.4.790 | BrtTableStyleClient          | 648 |
| 2.4.791 | BrtTableStyleElement         | 649 |
| 2.4.792 | BrtTextPr15                  | 650 |
| 2.4.793 | BrtTimelineCachePivotCacheID | 650 |
| 2.4.794 | BrtTimelineStyleElement      | 651 |
| 2.4.795 | BrtTop10Filter               | 651 |
| 2.4.796 | BrtUCR                       | 653 |
| 2.4.797 | BrtUserBookView              | 655 |
| 2.4.798 | BrtUsr                       | 660 |
| 2.4.799 | BrtValueMeta                 | 660 |
| 2.4.800 | BrtVolBool                   | 661 |
| 2.4.801 | BrtVolErr                    | 661 |
| 2.4.802 | BrtVolNum                    | 661 |
| 2.4.803 | BrtVolRef                    | 661 |
| 2.4.804 | BrtVolStr                    | 662 |
| 2.4.805 | BrtVolSubtopic               | 662 |
| 2.4.806 | BrtWbFactoid                 | 662 |
| 2.4.807 | BrtWbProp                    | 663 |
| 2.4.808 | BrtWbProp14                  | 665 |
| 2.4.809 | BrtWebExtension              | 666 |
| 2.4.810 | BrtWebOpt                    | 666 |
| 2.4.811 | BrtWorkbookPr15              | 667 |
| 2.4.812 | BrtWsDim                     | 668 |
| 2.4.813 | BrtWsFmtInfo                 | 668 |
| 2.4.814 | BrtWsFmtInfoEx14             | 669 |
| 2.4.815 | BrtWsProp                    | 670 |
| 2.4.816 | BrtXF                        | 672 |
| 2.5     | Structures                   | 676 |
| 2.5.1   | ACProductVersion             | 676 |
| 2.5.2   | ArgDesc                      | 676 |
| 2.5.3   | AutoFormatID                 | 677 |
| 2.5.4   | Blxf                         | 683 |
| 2.5.5   | Bold                         | 684 |
| 2.5.6   | BookProtectionFlags          | 684 |
| 2.5.7   | BorderStyle                  | 684 |
| 2.5.8   | BrtColSpan                   | 685 |
| 2.5.9   | Cell                         | 686 |
| 2.5.10  | CellStyleName                | 686 |
| 2.5.11  | CFDateOper                   | 687 |
| 2.5.12  | CFFlag                       | 687 |
| 2.5.13  | CFFlag14                     | 688 |
| 2.5.14  | CFOper                       | 688 |
| 2.5.15  | CFTemp                       | 689 |

|        |                                |     |
|--------|--------------------------------|-----|
| 2.5.16 | CFTextOper .....               | 691 |
| 2.5.17 | CFType.....                    | 691 |
| 2.5.18 | CFVOType .....                 | 692 |
| 2.5.19 | CFVOType14 .....               | 692 |
| 2.5.20 | CmdType.....                   | 693 |
| 2.5.21 | CodeName.....                  | 693 |
| 2.5.22 | Col .....                      | 694 |
| 2.5.23 | ColNullable .....              | 694 |
| 2.5.24 | ColRel .....                   | 694 |
| 2.5.25 | ColRelShort .....              | 694 |
| 2.5.26 | ColShort.....                  | 695 |
| 2.5.27 | DataConsolidationFunction..... | 695 |
| 2.5.28 | DataFunctionalityLevel .....   | 696 |
| 2.5.29 | DateAsXnum .....               | 696 |
| 2.5.30 | DBType .....                   | 696 |
| 2.5.31 | DCol .....                     | 697 |
| 2.5.32 | DColShort.....                 | 697 |
| 2.5.33 | DDEItemProperties .....        | 697 |
| 2.5.34 | DRw .....                      | 698 |
| 2.5.35 | DVals.....                     | 698 |
| 2.5.36 | DValStrings .....              | 699 |
| 2.5.37 | DXFId .....                    | 699 |
| 2.5.38 | DXFId14 .....                  | 700 |
| 2.5.39 | ECTwFldInfoData.....           | 700 |
| 2.5.40 | ECTxtWizData .....             | 700 |
| 2.5.41 | Etxp.....                      | 702 |
| 2.5.42 | ExternalNameProperties .....   | 705 |
| 2.5.43 | ExternalReferenceType.....     | 706 |
| 2.5.44 | ExtPtgArea3D.....              | 706 |
| 2.5.45 | ExtPtgAreaErr3D .....          | 707 |
| 2.5.46 | ExtPtgErr .....                | 707 |
| 2.5.47 | ExtPtgRef3D .....              | 708 |
| 2.5.48 | ExtPtgRefErr3D .....           | 708 |
| 2.5.49 | ExtSheetPair .....             | 709 |
| 2.5.50 | FillPattern .....              | 709 |
| 2.5.51 | FnGroupID.....                 | 710 |
| 2.5.52 | FontFlags .....                | 711 |
| 2.5.53 | FontScheme.....                | 712 |
| 2.5.54 | FRTBlank.....                  | 712 |
| 2.5.55 | FRTCFParsedFormula14.....      | 712 |
| 2.5.56 | FRTCFVOParsedFormula14.....    | 713 |
| 2.5.57 | FRTDVParsedFormula14 .....     | 714 |
| 2.5.58 | FRTFormula .....               | 715 |
| 2.5.59 | FRTFormulas.....               | 715 |
| 2.5.60 | FRTHeader.....                 | 716 |
| 2.5.61 | FRTProductVersion.....         | 717 |
| 2.5.62 | FRTRef .....                   | 717 |
| 2.5.63 | FRTRefs.....                   | 718 |
| 2.5.64 | FRTRelID .....                 | 719 |
| 2.5.65 | FRTSqref .....                 | 719 |
| 2.5.66 | FRTSqrefs.....                 | 720 |
| 2.5.67 | GradientStop .....             | 720 |
| 2.5.68 | GrbitBeginSlicer .....         | 720 |

|           |                           |     |
|-----------|---------------------------|-----|
| 2.5.69    | GrbitFmla                 | 721 |
| 2.5.70    | GrbitSXTupleSetHeaderItem | 721 |
| 2.5.71    | GrbitSXTupleSetRowItem    | 722 |
| 2.5.72    | HeaderFooterString        | 722 |
| 2.5.73    | HorizAlign                | 725 |
| 2.5.74    | Icon                      | 725 |
| 2.5.75    | Icv                       | 725 |
| 2.5.76    | Ifmt                      | 730 |
| 2.5.77    | IHDB                      | 731 |
| 2.5.78    | IIFtab                    | 731 |
| 2.5.79    | IsoPasswordData           | 731 |
| 2.5.80    | Istr                      | 732 |
| 2.5.81    | ISXDI                     | 732 |
| 2.5.82    | ISXTH                     | 732 |
| 2.5.83    | ISXVD                     | 733 |
| 2.5.84    | KPIProp                   | 733 |
| 2.5.85    | KPISets                   | 733 |
| 2.5.86    | KPISets14                 | 734 |
| 2.5.87    | ListTotalRowFunction      | 736 |
| 2.5.88    | ListType                  | 737 |
| 2.5.89    | LongRGBA                  | 737 |
| 2.5.90    | LPByteBuf                 | 738 |
| 2.5.91    | LPWideString              | 738 |
| 2.5.92    | Margin                    | 738 |
| 2.5.93    | Mdir                      | 739 |
| 2.5.94    | MdtFlags                  | 739 |
| 2.5.95    | MdxMbrIstrFlags           | 741 |
| 2.5.96    | OLEItemProperties         | 742 |
| 2.5.97    | Parsed Expressions        | 742 |
| 2.5.97.1  | ArrayParsedFormula        | 742 |
| 2.5.97.2  | BErr                      | 743 |
| 2.5.97.3  | Boolean                   | 743 |
| 2.5.97.4  | CellParsedFormula         | 744 |
| 2.5.97.5  | Cetab                     | 744 |
| 2.5.97.6  | CFParsedFormula           | 775 |
| 2.5.97.7  | CFVOParsedFormula         | 776 |
| 2.5.97.8  | DVParsedFormula           | 777 |
| 2.5.97.9  | FRTParsedFormula          | 778 |
| 2.5.97.10 | Ftab                      | 778 |
| 2.5.97.11 | ListParsedFormula         | 825 |
| 2.5.97.12 | NameParsedFormula         | 825 |
| 2.5.97.13 | ObjectParsedFormula       | 826 |
| 2.5.97.14 | ParameterParsedFormula    | 827 |
| 2.5.97.15 | PivotParsedFormula        | 827 |
| 2.5.97.16 | Ptg                       | 828 |
| 2.5.97.17 | PtgAdd                    | 834 |
| 2.5.97.18 | PtgArea                   | 834 |
| 2.5.97.19 | PtgArea3d                 | 834 |
| 2.5.97.20 | PtgAreaErr                | 835 |
| 2.5.97.21 | PtgAreaErr3d              | 836 |
| 2.5.97.22 | PtgAreaN                  | 836 |
| 2.5.97.23 | PtgArray                  | 837 |
| 2.5.97.24 | PtgAttrBaxcel             | 838 |

|           |                        |     |
|-----------|------------------------|-----|
| 2.5.97.25 | PtgAttrChoose .....    | 838 |
| 2.5.97.26 | PtgAttrGoTo .....      | 839 |
| 2.5.97.27 | PtgAttrIf .....        | 839 |
| 2.5.97.28 | PtgAttrIfError .....   | 839 |
| 2.5.97.29 | PtgAttrSemi.....       | 840 |
| 2.5.97.30 | PtgAttrSpace .....     | 840 |
| 2.5.97.31 | PtgAttrSpaceSemi ..... | 840 |
| 2.5.97.32 | PtgAttrSpaceType ..... | 841 |
| 2.5.97.33 | PtgAttrSum .....       | 841 |
| 2.5.97.34 | PtgBool .....          | 842 |
| 2.5.97.35 | PtgConcat .....        | 842 |
| 2.5.97.36 | PtgDataType.....       | 842 |
| 2.5.97.37 | PtgDiv .....           | 843 |
| 2.5.97.38 | PtgEq .....            | 843 |
| 2.5.97.39 | PtgErr.....            | 843 |
| 2.5.97.40 | PtgExp.....            | 844 |
| 2.5.97.41 | PtgExtraArray .....    | 844 |
| 2.5.97.42 | PtgExtraCol .....      | 845 |
| 2.5.97.43 | PtgExtraList.....      | 845 |
| 2.5.97.44 | PtgExtraMem.....       | 846 |
| 2.5.97.45 | PtgFunc .....          | 846 |
| 2.5.97.46 | PtgFuncVar.....        | 847 |
| 2.5.97.47 | PtgGe .....            | 847 |
| 2.5.97.48 | PtgGt.....             | 848 |
| 2.5.97.49 | PtgInt .....           | 848 |
| 2.5.97.50 | PtgIsect .....         | 848 |
| 2.5.97.51 | PtgLe.....             | 848 |
| 2.5.97.52 | PtgList .....          | 849 |
| 2.5.97.53 | PtgLt .....            | 850 |
| 2.5.97.54 | PtgMemArea.....        | 851 |
| 2.5.97.55 | PtgMemErr .....        | 851 |
| 2.5.97.56 | PtgMemFunc.....        | 852 |
| 2.5.97.57 | PtgMemNoMem .....      | 852 |
| 2.5.97.58 | PtgMissArg .....       | 853 |
| 2.5.97.59 | PtgMul .....           | 853 |
| 2.5.97.60 | PtgName.....           | 853 |
| 2.5.97.61 | PtgNameX .....         | 854 |
| 2.5.97.62 | PtgNe .....            | 854 |
| 2.5.97.63 | PtgNum .....           | 855 |
| 2.5.97.64 | PtgParen .....         | 855 |
| 2.5.97.65 | PtgPercent .....       | 855 |
| 2.5.97.66 | PtgPower .....         | 856 |
| 2.5.97.67 | PtgRange .....         | 856 |
| 2.5.97.68 | PtgRef .....           | 856 |
| 2.5.97.69 | PtgRef3d .....         | 857 |
| 2.5.97.70 | PtgRefErr .....        | 857 |
| 2.5.97.71 | PtgRefErr3d.....       | 858 |
| 2.5.97.72 | PtgRefN .....          | 858 |
| 2.5.97.73 | PtgRowType .....       | 859 |
| 2.5.97.74 | PtgStr.....            | 859 |
| 2.5.97.75 | PtgSub.....            | 860 |
| 2.5.97.76 | PtgSxName .....        | 860 |
| 2.5.97.77 | PtgUMinus.....         | 860 |



|            |                           |     |
|------------|---------------------------|-----|
| 2.5.97.78  | PtgUnion                  | 861 |
| 2.5.97.79  | PtgUPlus                  | 861 |
| 2.5.97.80  | RevExtern                 | 861 |
| 2.5.97.81  | RevItab                   | 862 |
| 2.5.97.82  | RevLblName                | 862 |
| 2.5.97.83  | RevName                   | 863 |
| 2.5.97.84  | RevNamePly                | 864 |
| 2.5.97.85  | RevNameTabid              | 865 |
| 2.5.97.86  | RevSheetName              | 865 |
| 2.5.97.87  | RgbExtra                  | 866 |
| 2.5.97.88  | Rgce                      | 867 |
| 2.5.97.89  | RgceArea                  | 870 |
| 2.5.97.90  | RgceAreaRel               | 871 |
| 2.5.97.91  | RgceLoc                   | 871 |
| 2.5.97.92  | RgceLocRel                | 872 |
| 2.5.97.93  | SerAr                     | 872 |
| 2.5.97.94  | SerBool                   | 873 |
| 2.5.97.95  | SerErr                    | 873 |
| 2.5.97.96  | SerNum                    | 873 |
| 2.5.97.97  | SerStr                    | 874 |
| 2.5.97.98  | SharedParsedFormula       | 874 |
| 2.5.97.99  | SxOs                      | 875 |
| 2.5.97.100 | SxSu                      | 875 |
| 2.5.97.101 | VirtualPath               | 876 |
| 2.5.97.102 | XLUncodeString            | 878 |
| 2.5.97.103 | XtiIndex                  | 879 |
| 2.5.98     | PCDCalcMemCommon          | 879 |
| 2.5.99     | PCDIAddInfo               | 880 |
| 2.5.100    | PCDIDateTime              | 881 |
| 2.5.101    | PCDISrvFmt                | 882 |
| 2.5.102    | PhRun                     | 883 |
| 2.5.103    | PivotFilterType           | 884 |
| 2.5.104    | PivotItemType             | 886 |
| 2.5.105    | PivotNumFmt               | 887 |
| 2.5.106    | PivotNumFmtExt            | 887 |
| 2.5.107    | Pnn                       | 888 |
| 2.5.108    | PRFilter                  | 888 |
| 2.5.109    | PrintErrorsAs             | 890 |
| 2.5.110    | PRuleHeaderData           | 890 |
| 2.5.111    | QsiFieldId                | 893 |
| 2.5.112    | RangeProtectionTitleSDRel | 893 |
| 2.5.113    | ReadingOrder              | 894 |
| 2.5.114    | RelID                     | 894 |
| 2.5.115    | RevisionLogSheetName      | 894 |
| 2.5.116    | RevisionType              | 895 |
| 2.5.117    | RfX                       | 895 |
| 2.5.118    | RfXRel                    | 896 |
| 2.5.119    | RgceAreaSmall             | 897 |
| 2.5.120    | RgceLocSmall              | 897 |
| 2.5.121    | RichStr                   | 897 |
| 2.5.122    | RkNumber                  | 899 |
| 2.5.123    | RRd                       | 899 |
| 2.5.124    | RRdDnGrbit                | 900 |

|         |                       |     |
|---------|-----------------------|-----|
| 2.5.125 | Rw                    | 901 |
| 2.5.126 | Rw_Col                | 901 |
| 2.5.127 | RwNullable            | 901 |
| 2.5.128 | RwRelNeg              | 901 |
| 2.5.129 | RwShort               | 901 |
| 2.5.130 | Script                | 902 |
| 2.5.131 | SdSetSortOrder        | 902 |
| 2.5.132 | ShortDtr              | 902 |
| 2.5.133 | ShowDataAs            | 903 |
| 2.5.134 | SlicerCacheLevelData  | 904 |
| 2.5.135 | SlicerCacheNativeItem | 904 |
| 2.5.136 | SlicerCachePivotTable | 905 |
| 2.5.137 | SqEtxp                | 905 |
| 2.5.138 | SrvFmtCV              | 906 |
| 2.5.139 | SrvFmtData            | 906 |
| 2.5.140 | SrvFmtFlags           | 907 |
| 2.5.141 | SrvFmtNum             | 907 |
| 2.5.142 | ST_SheetState         | 908 |
| 2.5.143 | StrRun                | 908 |
| 2.5.144 | StyleFlags            | 909 |
| 2.5.145 | SXAxis                | 909 |
| 2.5.146 | SXET                  | 909 |
| 2.5.147 | SXMA                  | 910 |
| 2.5.148 | TagFnMdx              | 910 |
| 2.5.149 | TSEType               | 910 |
| 2.5.150 | Tws                   | 915 |
| 2.5.151 | TypeSql               | 916 |
| 2.5.152 | UncheckedCol          | 916 |
| 2.5.153 | UncheckedRfX          | 916 |
| 2.5.154 | UncheckedRw           | 917 |
| 2.5.155 | UncheckedSqRfX        | 917 |
| 2.5.156 | Underline             | 917 |
| 2.5.157 | VertAlign             | 918 |
| 2.5.158 | XFProp                | 918 |
| 2.5.159 | XFPropBorder          | 921 |
| 2.5.160 | XFPropColor           | 921 |
| 2.5.161 | XFPropGradient        | 923 |
| 2.5.162 | XFPropGradientStop    | 924 |
| 2.5.163 | XFProps               | 924 |
| 2.5.164 | XFPropTextRotation    | 925 |
| 2.5.165 | XLNameWideString      | 925 |
| 2.5.166 | XLNullableWideString  | 927 |
| 2.5.167 | XLView                | 927 |
| 2.5.168 | XLWideString          | 927 |
| 2.5.169 | XmlDataType           | 928 |
| 2.5.170 | XmlMappedXPath        | 929 |
| 2.5.171 | Xnum                  | 930 |
| 2.5.172 | Xti                   | 930 |

|          |   |            |
|----------|---|------------|
| <b>3</b> | <b>Structure Examples</b>                             | <b>932</b> |
| 3.1      | Conditional Formatting                                | 932        |
| 3.1.1    | Conditional Formatting: BrtBeginConditionalFormatting | 933        |
| 3.1.2    | Conditional Formatting: BrtBeginCFRule                | 934        |

|        |   |     |
|--------|---|-----|
| 3.1.3  | Conditional Formatting: BrtEndCFRule .....                | 936 |
| 3.1.4  | Conditional Formatting: BrtEndConditionalFormatting ..... | 937 |
| 3.1.5  | Conditional Formatting: BrtDXF .....                      | 937 |
| 3.2    | Defined Name .....  | 939 |
| 3.2.1  | Defined Name: BrtName .....                               | 939 |
| 3.2.2  | Defined Name: BrtBeginExternals.....                      | 941 |
| 3.2.3  | Defined Name: BrtSupSelf.....                             | 942 |
| 3.2.4  | Defined Name: BrtExternSheet .....                        | 942 |
| 3.2.5  | Defined Name: BrtEndExternals .....                       | 942 |
| 3.3    | Table.....  | 943 |
| 3.3.1  | Table: BrtListPart .....                                  | 943 |
| 3.3.2  | Table: BrtBeginList .....                                 | 943 |
| 3.3.3  | Table: BrtBeginAFilter .....                              | 946 |
| 3.3.4  | Table: BrtEndAFilter .....                                | 946 |
| 3.3.5  | Table: BrtBeginListCols .....                             | 947 |
| 3.3.6  | Table: BrtBeginListCol 1 .....                            | 947 |
| 3.3.7  | Table: BrtEndListCol 1 .....                              | 948 |
| 3.3.8  | Table: BrtBeginListCol 2.....                             | 948 |
| 3.3.9  | Table: BrtEndListCol 2 .....                              | 949 |
| 3.3.10 | Table: BrtBeginListCol 3 .....                            | 949 |
| 3.3.11 | Table: BrtListCCFmla .....                                | 950 |
| 3.3.12 | Table: BrtEndListCol 3.....                               | 953 |
| 3.3.13 | Table: BrtEndListCols.....                                | 953 |
| 3.3.14 | Table: BrtTableStyleClient .....                          | 953 |
| 3.3.15 | Table: BrtEndList.....                                    | 954 |
| 3.4    | Filters.....  | 954 |
| 3.4.1  | Filters: BrtBeginAFilter .....                            | 955 |
| 3.4.2  | Filters: BrtBeginFilterColumn .....                       | 956 |
| 3.4.3  | Filters: BrtBeginCustomFilters.....                       | 956 |
| 3.4.4  | Filters: BrtCustomFilters.....                            | 956 |
| 3.4.5  | Filters: BrtEndCustomFilters .....                        | 957 |
| 3.4.6  | Filters: BrtEndFilterColumn.....                          | 957 |
| 3.4.7  | Filters: BrtEndAFilter .....                              | 957 |
| 3.5    | External References .....                                 | 957 |
| 3.5.1  | External References: BrtRowHdr .....                      | 958 |
| 3.5.2  | External References: BrtFmlaString .....                  | 960 |
| 3.5.3  | External References: BrtBeginSupBook .....                | 962 |
| 3.5.4  | External References: BrtSupTabs .....                     | 962 |
| 3.5.5  | External References: BrtExternTableStart 1 .....          | 963 |
| 3.5.6  | External References: BrtExternRowHdr .....                | 963 |
| 3.5.7  | External References: BrtExternCellString.....             | 963 |
| 3.5.8  | External References: BrtExternTableEnd 1.....             | 964 |
| 3.5.9  | External References: BrtExternTableStart 2 .....          | 964 |
| 3.5.10 | External References: BrtExternTableEnd 2 .....            | 965 |
| 3.5.11 | External References: BrtExternTableStart 3 .....          | 965 |
| 3.5.12 | External References: BrtExternTableEnd 3 .....            | 965 |
| 3.5.13 | External References: BrtEndSupBook .....                  | 965 |
| 3.6    | Formatting.....   | 966 |
| 3.6.1  | Formatting: BrtCellReal 1 .....                           | 966 |
| 3.6.2  | Formatting: BrtCellReal 2 .....                           | 967 |
| 3.6.3  | Formatting: BrtCellReal 3 .....                           | 968 |
| 3.6.4  | Formatting: BrtBeginFmts .....                            | 968 |
| 3.6.5  | Formatting: BrtFmt.....                                   | 968 |

|        |  |      |
|--------|--|------|
| 3.6.6  | Formatting: BrtEndFmts .....           | 969  |
| 3.6.7  | Formatting: BrtBeginFonts .....        | 969  |
| 3.6.8  | Formatting: BrtFont 1 .....            | 969  |
| 3.6.9  | Formatting: BrtFont 2 .....            | 971  |
| 3.6.10 | Formatting: BrtEndFonts .....          | 973  |
| 3.6.11 | Formatting: BrtBeginFills .....        | 973  |
| 3.6.12 | Formatting: BrtFill 1 .....            | 973  |
| 3.6.13 | Formatting: BrtFill 2 .....            | 975  |
| 3.6.14 | Formatting: BrtEndFills .....          | 977  |
| 3.6.15 | Formatting: BrtBeginCellStyleXFs ..... | 977  |
| 3.6.16 | Formatting: BrtXF 1 .....              | 977  |
| 3.6.17 | Formatting: BrtEndCellStyleXFs .....   | 979  |
| 3.6.18 | Formatting: BrtBeginCellXFs .....      | 980  |
| 3.6.19 | Formatting: BrtXF 2 .....              | 980  |
| 3.6.20 | Formatting: BrtXF 3 .....              | 981  |
| 3.6.21 | Formatting: BrtXF 4 .....              | 983  |
| 3.6.22 | Formatting: BrtXF 5 .....              | 984  |
| 3.6.23 | Formatting: BrtEndCellXFs .....        | 985  |
| 3.7    | Workbook .....                         | 986  |
| 3.7.1  | Workbook: BrtBeginBook .....           | 986  |
| 3.7.2  | Workbook: BrtFileVersion .....         | 986  |
| 3.7.3  | Workbook: BrtWbProp .....              | 987  |
| 3.7.4  | Workbook: BrtBeginBookViews .....      | 989  |
| 3.7.5  | Workbook: BrtBookView .....            | 989  |
| 3.7.6  | Workbook: BrtEndBookViews .....        | 990  |
| 3.7.7  | Workbook: BrtBeginBundleShs .....      | 990  |
| 3.7.8  | Workbook: BrtBundleSh 1 .....          | 991  |
| 3.7.9  | Workbook: BrtBundleSh 2 .....          | 991  |
| 3.7.10 | Workbook: BrtBundleSh 3 .....          | 992  |
| 3.7.11 | Workbook: BrtEndBundleShs .....        | 992  |
| 3.7.12 | Workbook: BrtCalcProp .....            | 992  |
| 3.7.13 | Workbook: BrtWbFactoid .....           | 994  |
| 3.7.14 | Workbook: BrtFileRecover .....         | 994  |
| 3.7.15 | Workbook: BrtEndBook .....             | 995  |
| 3.7.16 | Workbook: BrtBeginSst .....            | 995  |
| 3.7.17 | Workbook: BrtSSTItem 1 .....           | 995  |
| 3.7.18 | Workbook: BrtSSTItem 2 .....           | 995  |
| 3.7.19 | Workbook: BrtEndSst .....              | 996  |
| 3.7.20 | Workbook: BrtBeginSheet .....          | 996  |
| 3.7.21 | Workbook: BrtWsProp .....              | 996  |
| 3.7.22 | Workbook: BrtWsDim .....               | 999  |
| 3.7.23 | Workbook: BrtBeginWsViews .....        | 999  |
| 3.7.24 | Workbook: BrtBeginWsView .....         | 999  |
| 3.7.25 | Workbook: BrtSel .....                 | 1001 |
| 3.7.26 | Workbook: BrtEndWsView .....           | 1002 |
| 3.7.27 | Workbook: BrtEndWsViews .....          | 1003 |
| 3.7.28 | Workbook: BrtWsFmtInfo .....           | 1003 |
| 3.7.29 | Workbook: BrtBeginSheetData .....      | 1004 |
| 3.7.30 | Workbook: BrtRowHdr 1 .....            | 1004 |
| 3.7.31 | Workbook: BrtCellIsst 1 .....          | 1005 |
| 3.7.32 | Workbook: BrtRowHdr 2 .....            | 1006 |
| 3.7.33 | Workbook: BrtCellRk .....              | 1007 |
| 3.7.34 | Workbook: BrtRowHdr 3 .....            | 1008 |

|        |  |      |
|--------|--|------|
| 3.7.35 | Workbook: BrtCellIsst 2 .....              | 1009 |
| 3.7.36 | Workbook: BrtRowHdr 4.....                 | 1009 |
| 3.7.37 | Workbook: BrtFmlaNum .....                 | 1010 |
| 3.7.38 | Workbook: BrtEndSheetData.....             | 1013 |
| 3.7.39 | Workbook: BrtSheetProtection .....         | 1013 |
| 3.7.40 | Workbook: BrtPrintOptions .....            | 1015 |
| 3.7.41 | Workbook: BrtMargins.....                  | 1015 |
| 3.7.42 | Workbook: BrtEndSheet .....                | 1016 |
| 3.8    | PivotTable.....                            | 1017 |
| 3.8.1  | PivotTable: BrtBeginPivotCacheIDs .....    | 1017 |
| 3.8.2  | PivotTable: BrtBeginPivotCacheID .....     | 1018 |
| 3.8.3  | PivotTable: BrtBeginPivotCacheDef.....     | 1018 |
| 3.8.4  | PivotTable: BrtBeginPCDSOURCE.....         | 1020 |
| 3.8.5  | PivotTable: BrtBeginPCDSRANGE.....         | 1020 |
| 3.8.6  | PivotTable: BrtBeginPCDFIELDS .....        | 1021 |
| 3.8.7  | PivotTable: BrtBeginPCDFIELD 1 .....       | 1022 |
| 3.8.8  | PivotTable: BrtBeginPCDFATBL .....         | 1023 |
| 3.8.9  | PivotTable: BrtPCDIString 1.....           | 1024 |
| 3.8.10 | PivotTable: BrtPCDIString 2 .....          | 1024 |
| 3.8.11 | PivotTable: BrtBeginPCDFIELD 2 .....       | 1025 |
| 3.8.12 | PivotTable: BrtBeginPCDFATBL 1.....        | 1025 |
| 3.8.13 | PivotTable: BrtBeginPCDIRUN .....          | 1027 |
| 3.8.14 | PivotTable: BrtBeginPCDFIELD 3 .....       | 1032 |
| 3.8.15 | PivotTable: BrtBeginPCDFIELD 4 .....       | 1033 |
| 3.8.16 | PivotTable: BrtBeginPCDFIELD 5 .....       | 1034 |
| 3.8.17 | PivotTable: BrtBeginPCDFATBL 2.....        | 1035 |
| 3.8.18 | PivotTable: BrtBeginPivotCacheRecords..... | 1036 |
| 3.8.19 | PivotTable: BrtPCRRecord 1 .....           | 1036 |
| 3.8.20 | PivotTable: BrtPCRRecord 2 .....           | 1037 |
| 3.8.21 | PivotTable: BrtPCRRecord 3 .....           | 1038 |
| 3.8.22 | PivotTable: BrtPCRRecord 4 .....           | 1039 |
| 3.8.23 | PivotTable: BrtPCRRecord 5 .....           | 1040 |
| 3.8.24 | PivotTable: BrtPCRRecord 6 .....           | 1040 |
| 3.8.25 | PivotTable: BrtPCRRecord 7 .....           | 1041 |
| 3.8.26 | PivotTable: BrtBeginSXVIEW.....            | 1042 |
| 3.8.27 | PivotTable: BrtBeginSXLOCATION .....       | 1048 |
| 3.8.28 | PivotTable: BrtBeginSXVDS .....            | 1049 |
| 3.8.29 | PivotTable: BrtBeginSXVD 1.....            | 1049 |
| 3.8.30 | PivotTable: BrtBeginSXVIS 1 .....          | 1054 |
| 3.8.31 | PivotTable: BrtBeginSXVI 1.....            | 1054 |
| 3.8.32 | PivotTable: BrtBeginSXVI 2.....            | 1055 |
| 3.8.33 | PivotTable: BrtBeginSXVI 3.....            | 1056 |
| 3.8.34 | PivotTable: BrtBeginSXVI 4.....            | 1057 |
| 3.8.35 | PivotTable: BrtBeginSXVI 5.....            | 1058 |
| 3.8.36 | PivotTable: BrtBeginSXVD 2.....            | 1059 |
| 3.8.37 | PivotTable: BrtBeginSXVIS 2 .....          | 1061 |
| 3.8.38 | PivotTable: BrtBeginSXVI 6.....            | 1061 |
| 3.8.39 | PivotTable: BrtBeginSXVI 7.....            | 1062 |
| 3.8.40 | PivotTable: BrtBeginSXVI 8.....            | 1063 |
| 3.8.41 | PivotTable: BrtBeginSXVD 3.....            | 1064 |
| 3.8.42 | PivotTable: BrtBeginSXVD 4.....            | 1067 |
| 3.8.43 | PivotTable: BrtBeginSXVD 5.....            | 1069 |
| 3.8.44 | PivotTable: BrtBeginISXVDRWS.....          | 1072 |

|         |   |      |
|---------|---|------|
| 3.8.45  | PivotTable: BrtBeginSXLIRws .....       | 1073 |
| 3.8.46  | PivotTable: BrtBeginSXLI 1 .....        | 1073 |
| 3.8.47  | PivotTable: BrtBeginISXVIs 1 .....      | 1073 |
| 3.8.48  | PivotTable: BrtBeginSXLI 2 .....        | 1074 |
| 3.8.49  | PivotTable: BrtBeginISXVIs 2 .....      | 1074 |
| 3.8.50  | PivotTable: BrtBeginSXLI 3 .....        | 1075 |
| 3.8.51  | PivotTable: BrtBeginISXVIs 3 .....      | 1075 |
| 3.8.52  | PivotTable: BrtBeginSXLICols .....      | 1076 |
| 3.8.53  | PivotTable: BrtBeginSXLI 4 .....        | 1076 |
| 3.8.54  | PivotTable: BrtBeginSXPIs .....         | 1077 |
| 3.8.55  | PivotTable: BrtBeginSXPI .....          | 1077 |
| 3.8.56  | PivotTable: BrtBeginSXDI .....          | 1078 |
| 3.8.57  | PivotTable: BrtBeginSXDI .....          | 1078 |
| 3.9     | Metadata .....                          | 1079 |
| 3.9.1   | MetaData: BrtBeginExtConnections .....  | 1081 |
| 3.9.2   | MetaData: BrtBeginExtConnection .....   | 1081 |
| 3.9.3   | MetaData: BrtBeginECDBProps .....       | 1083 |
| 3.9.4   | MetaData: BrtBeginECOLapProps .....     | 1084 |
| 3.9.5   | MetaData: BrtBeginMetadata .....        | 1085 |
| 3.9.6   | MetaData: BrtBeginEsmdtinfo .....       | 1085 |
| 3.9.7   | MetaData: BrtMdtinfo .....              | 1086 |
| 3.9.8   | MetaData: BrtBeginEsstr .....           | 1087 |
| 3.9.9   | MetaData: BrtStr 1 .....                | 1087 |
| 3.9.10  | MetaData: BrtStr 2 .....                | 1088 |
| 3.9.11  | MetaData: BrtStr 3 .....                | 1088 |
| 3.9.12  | MetaData: BrtStr 4 .....                | 1088 |
| 3.9.13  | MetaData: BrtBeginEsmdx .....           | 1089 |
| 3.9.14  | MetaData: BrtBeginMdx 1 .....           | 1089 |
| 3.9.15  | MetaData: BrtBeginMdxSet .....          | 1089 |
| 3.9.16  | MetaData: BrtBeginMdx 2 .....           | 1090 |
| 3.9.17  | MetaData: BrtBeginMdxTuple 1 .....      | 1090 |
| 3.9.18  | MetaData: BrtMdxMbrIstr .....           | 1091 |
| 3.9.19  | MetaData: BrtBeginMdx 3 .....           | 1092 |
| 3.9.20  | MetaData: BrtBeginMdxTuple 2 .....      | 1092 |
| 3.9.21  | MetaData: BrtMdxMbrIstr 1 .....         | 1093 |
| 3.9.22  | MetaData: BrtBeginMdx 4 .....           | 1094 |
| 3.9.23  | MetaData: BrtBeginMdxTuple 3 .....      | 1094 |
| 3.9.24  | MetaData: BrtMdxMbrIstr 2 .....         | 1095 |
| 3.9.25  | MetaData: BrtMdxMbrIstr 3 .....         | 1096 |
| 3.9.26  | MetaData: BrtBeginEsmdb .....           | 1096 |
| 3.9.27  | MetaData: BrtMdb .....                  | 1096 |
| 3.10    | Slicer .....                            | 1097 |
| 3.10.1  | Slicer: BrtBeginSlicerCache .....       | 1099 |
| 3.10.2  | Slicer: BrtBeginSlicerCacheDef .....    | 1099 |
| 3.10.3  | Slicer: BrtSlicerCachePivotTables ..... | 1099 |
| 3.10.4  | Slicer: BrtBeginSlicerCacheNative ..... | 1100 |
| 3.10.5  | Slicer: BrtSlicerCacheNativeItem .....  | 1101 |
| 3.10.6  | Slicer: BrtEndSlicerCacheNative .....   | 1102 |
| 3.10.7  | Slicer: BrtEndSlicerCacheDef .....      | 1102 |
| 3.10.8  | Slicer: BrtEndSlicerCache .....         | 1102 |
| 3.10.9  | Slicer: BrtBeginSlicers .....           | 1103 |
| 3.10.10 | Slicer: BrtBeginSlicer .....            | 1103 |
| 3.10.11 | Slicer: BrtEndSlicer .....              | 1104 |

|  |             |
|--|-------------|
| 3.10.12 Slicer: BrtEndSlicers.....         | 1104        |
| <b>4 Security Considerations.....</b>      | <b>1105</b> |
| <b>5 Appendix A: Product Behavior.....</b> | <b>1106</b> |
| <b>6 Change Tracking.....</b>              | <b>1133</b> |
| <b>7 Index .....</b>                       | <b>1139</b> |

# 1 Introduction

The Excel Binary File Format (.xlsb) Structure is a collection of records and structures that specify **workbook** content, which can include unstructured or semi-structured tables of numbers, text, or both numbers and text, formulas, external data connections, charts and images. Workbook content is typically organized in a grid based layout, and often includes numeric data, structured data, and formulas.

Sections 1.7 and 2 of this specification are normative and can contain the terms MAY, SHOULD, MUST, MUST NOT, and SHOULD NOT as defined in RFC 2119. All other sections and examples in this specification are informative.

## 1.1 Glossary

The following terms are defined in [\[MS-GLOS\]](#):

- American National Standards Institute (ANSI) character set**
- ASCII**
- attribute**
- Augmented Backus-Naur Form (ABNF)**
- code page**
- Component Object Model (COM)**
- credential**
- GUID**
- language code identifier (LCID)**
- little-endian**
- object**
- salt**
- Unicode**
- XML**

The following terms are defined in [\[MS-OFCGLOS\]](#):

- A1**
- absolute path**
- absolute reference**
- absolute URL**
- active cell**
- active sheet**
- ActiveX control**
- ActiveX Data Objects (ADO)**
- ActiveX object**
- add-in**
- add-in function**
- aggregation function**
- ALL**
- alternate startup directory**
- ascending order**
- attribute hierarchy**
- AutoFilter**
- AutoFormat**
- automatic calculation mode**
- AutoRecover**
- AutoShow**
- background color**



**Binary Interchange File Format (BIFF)**  
**border**  
**border formatting**  
**border style**  
**build number**  
**built-in name**  
**calculated column**  
**calculation mode**  
**caption**  
**cascading style sheet (CSS)**  
**cell**  
**cell reference**  
**cell value**  
**character set**  
**chart sheet**  
**child element**  
**class identifier (CLSID)**  
**collapsed outline state**  
**color scale**  
**column**  
**comment**  
**compact axis**  
**conditional formatting**  
**connection string**  
**cube**  
**cube function**  
**custom list**  
**custom view**  
**DAO**  
**data bar**  
**data consolidation**  
**data marker**  
**data point**  
**data provider**  
**data recovery**  
**data region**  
**data source**  
**data table**  
**data validation**  
**date system**  
**DDE**  
**DDE server**  
**DDE topic**  
**defined name**  
**diagonal-down**  
**diagonal-up**  
**dialog sheet**  
**dimension**  
**display folder**  
**distributed alignment**  
**drawing object**  
**drillthrough**  
**drop zone**  
**Dynamic Data Exchange (DDE)**  
**embedded object**

**English Metric Unit (EMU)**  
**Excel Linked Library (XLL)**  
**Excel macro (XLM)**  
**expand/collapse button**  
**expression**  
**external data**  
**external link**  
**file extension**  
**file format compatibility checker**  
**fill**  
**fill color**  
**fill pattern**  
**filter**  
**fit to page**  
**floating-point number**  
**folder**  
**font**  
**font face weight**  
**font family**  
**font scheme**  
**foreground color**  
**format string**  
**formula**  
**formula bar**  
**friendly name**  
**frozen panes**  
**function**  
**function category**  
**gradient fill**  
**gradient stop**  
**gradient vector**  
**grand total**  
**gridline**  
**hash**  
**header**  
**header row**  
**hidden**  
**hidden protection**  
**hidden row**  
**hierarchy**  
**horizontal alignment**  
**hyperlink**  
**Hypertext Markup Language (HTML)**  
**icon**  
**icon set**  
**indentation level**  
**Information Rights Management (IRM)**  
**ink**  
**inner rectangle**  
**input cell**  
**Input Method Editor (IME)**  
**insert row**  
**iterative calculation**  
**justify distributed**  
**key performance indicator (KPI)**

**left-to-right level**  
**library directory**  
**line style**  
**linear gradient**  
**linked object**  
**locale**  
**locked**  
**locked protection**  
**logical left**  
**logical right**  
**logical top-left**  
**logical top-right**  
**long file name**  
**macro**  
**macro sheet**  
**major scheme**  
**Mandarin phonetic symbols**  
**manifest**  
**manual calculation mode**  
**MDX unique name**  
**measure**  
**measure group**  
**member**  
**member property**  
**merged cell**  
**MIME Encapsulation of Aggregate HTML Documents (MHTML)**  
**minimal save**  
**minor scheme**  
**module**  
**module sheet**  
**multidimensional expression (MDX)**  
**named range**  
**ninched**  
**non-contiguous range**  
**Normal view**  
**number format**  
**Object Linking and Embedding (OLE)**  
**object model**  
**ODBC**  
**OLAP**  
**OLAP All level**  
**OLAP All member**  
**OLAP allocation**  
**OLAP calculated member**  
**OLAP cube**  
**OLAP hierarchy**  
**OLAP KPI**  
**OLAP level**  
**OLAP measure**  
**OLAP member**  
**OLAP member property**  
**OLAP named set**  
**OLAP subselect**  
**OLAP tuple**

**OLAP weight expression**  
**OLE DB**  
**OLE object**  
**OLE2**  
**one-variable data table**  
**outline**  
**outline level**  
**outline state**  
**outline symbol**  
**page break**  
**Page Break Preview view**  
**Page Layout view**  
**pane**  
**phonetic guide**  
**phonetic information**  
**phonetic string**  
**phonetic text run**  
**PivotChart filter pane**  
**PivotTable**  
**PivotTable field list**  
**pixel**  
**placeholder**  
**plot area**  
**precision as displayed**  
**print area**  
**print settings**  
**print titles**  
**ProgID**  
**protected**  
**protection**  
**published**  
**query**  
**query table**  
**R1C1**  
**range**  
**reading order**  
**read-only recommended**  
**real-time data (RTD)**  
**rectangular gradient**  
**red-green-blue (RGB)**  
**red-green-blue-alpha (RGBA)**  
**refresh**  
**relative reference**  
**relative security descriptor**  
**revision**  
**revision history**  
**right-to-left**  
**root element**  
**row**  
**RTD server**  
**ruler**  
**safe load**  
**scenario**  
**Scenario Manager**  
**security descriptor**

**selected**  
**selection**  
**server name**  
**session**  
**shade**  
**shape**  
**shared workbook**  
**sheet**  
**sheet tab**  
**sheet view**  
**shrink to fit**  
**single sign-on (SSO)**  
**smart document**  
**smart tag**  
**smart tag actions button**  
**smart tag indicator**  
**smart tag recognizer**  
**sort**  
**sort condition**  
**sort order**  
**source data**  
**sparkline**  
**split pane**  
**spreadsheet data model**  
**startup directory**  
**strikethrough formatting**  
**stripe band**  
**stripe formatting**  
**stroke order**  
**Structured Query Language (SQL)**  
**style**  
**summary**  
**table**  
**table header**  
**target**  
**text importation**  
**text run**  
**theme**  
**time hierarchy**  
**ToolTip**  
**top N filter**  
**total row**  
**transfer protocol**  
**transition formula entry**  
**transition formula evaluation**  
**tuple**  
**twip**  
**two-variable data table**  
**type library**  
**UNC volume**  
**Uniform Resource Identifier (URI)**  
**Uniform Resource Locator (URL)**  
**user-defined function (UDF)**  
**VBA**  
**VBA project**

**vertical alignment**  
**visible**  
**Visual Basic for Applications (VBA)**  
**VML**  
**volatile**  
**watched cell**  
**web query**  
**workbook**  
**worksheet**  
**write reservation**  
**write-reservation password**  
**XML map**  
**XML namespace**  
**XML node**  
**XML Path Language (XPath)**  
**XML schema**  
**XML schema definition (XSD)**  
**XOR obfuscation**  
**XPath expression**  
**zoom level**

The following terms are specific to this document:

**attribute drilldown:** The process of examining the non-atomic constituent parts, such as properties or data elements, that make up an object.

**center-across-selection alignment:** A formatting setting that centers cell content horizontally within a selected range of cells.

**chart sheet view:** A set of display settings, such as zoom level, for a chart sheet window.

**double accounting:** An underline style that places two lines beneath the formatted text. Double accounting is frequently used to indicate totals.

**external workbook:** A workbook, other than the active workbook, that is on disk or in memory and to which a dependency is implied or intended.

**fill alignment:** A setting that repeats a cell value to fill the horizontal space of a cell. If the cell value exceeds the horizontal width of the cell, the value is truncated.

**font face color:** A property of a cell that specifies the color that is used to render a font.

**fragment identifier:** A portion of a URI that specifies the destination of a hyperlink within a document.

**future function:** A function that can be written to but is not implemented in a file.

**general alignment:** A default formatting setting for the horizontal alignment of cell content in a worksheet. Text is positioned to the left and numbers are positioned to the right.

**hidden column:** A column (2) that does not appear in a worksheet view because its width is set to 0 (zero). A column can be hidden if an outline is collapsed.

**justify alignment:** A formatting setting that spreads text evenly, both vertically and horizontally, between the edges of a cell, object, or page. Also referred to as distributed alignment.

**MDX query:** A query that uses the multidimensional expression (MDX) syntax.

**OLE1:** See Object Linking and Embedding (OLE).

**Open Data Protocol (OData):** A web protocol for querying and updating data specified in [MS-ODATA].

**page margin:** The white space at the top, bottom, and sides of a document when a document is printed.

**palette color:** A specific color among those that are available on the active color palette.

**print scale:** The size of the output that is printed on a page. It is expressed as a percentage of the size of the original page content.

**publish to server:** A process that facilitates saving a document or portions of a document to a web server.

**RTD topic:** A discrete combination of parameters that is used to request data from a real-time data (RTD) server.

**single accounting:** An underline style that places one line beneath the text. Single accounting can be used to indicate subtotals.

**window protection:** A workbook protection option that prevents users from changing the position and size of a window.

**workbook view:** A set of display settings, such as the height and width, for the windows in a workbook.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

References to Microsoft Open Specifications documentation do not include a publishing year because links are to the latest version of the technical documents, which are updated frequently. References to other documents include a publishing year when one is available.

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[IEEE754] Institute of Electrical and Electronics Engineers, "Standard for Binary Floating-Point Arithmetic", IEEE 754-1985, October 1985, <http://ieeexplore.ieee.org/servlet/opac?punumber=2355>

[ISO/IEC29500-1:2011] ISO/IEC, "Information Technology -- Document description and processing languages -- Office Open XML File Formats -- Part 1: Fundamentals and Markup Language Reference", ISO/IEC 29500-1:2011, 2011, [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=59575](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=59575)

[ISO/IEC29500-2:2011] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 2: Open Packaging Conventions", ISO/IEC 29500-2:2011, 2011,

[http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=59576](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=59576)

[ISO/IEC29500-4:2011] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 4: Transitional Migration Features", ISO/IEC 29500-4:2011, 2011,

[http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=59577](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=59577)

[ISO-8859-1] International Organization for Standardization, "Information Technology -- 8-Bit Single-Byte Coded Graphic Character Sets -- Part 1: Latin Alphabet No. 1", ISO/IEC 8859-1, 1998,

[http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=28245](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=28245)

[MS-DTYP] Microsoft Corporation, "[Windows Data Types](#)".

[MS-ODATA] Microsoft Corporation, "[Open Data Protocol \(OData\)](#)".

[MS-ODRAWXML] Microsoft Corporation, "[Office Drawing Extensions to Office Open XML Structure Specification](#)".

[MS-OFFCRYPTO] Microsoft Corporation, "[Office Document Cryptography Structure](#)".

[MS-OFORMS] Microsoft Corporation, "[Office Forms Binary File Format\(s\)](#)".

[MS-OSHARED] Microsoft Corporation, "[Office Common Data Types and Objects Structures](#)".

[MS-OVBA] Microsoft Corporation, "[Office VBA File Format Structure](#)".

[MS-OWEXML] Microsoft Corporation, "[Office Web Extensibility Extensions to Office Open XML Structure Specification](#)".

[MS-XLDM] Microsoft Corporation, "[Spreadsheet Data Model File Format](#)".

[MS-XLS] Microsoft Corporation, "[Excel Binary File Format \(.xls\) Structure](#)".

[MS-XLSX] Microsoft Corporation, "[Excel Extensions to the Office Open XML SpreadsheetML File Format \(.xlsx\) Specification](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.rfc-editor.org/rfc/rfc2119.txt>

[RFC3066] Alvestrand, H., "Tags for the Identification of Language", RFC 3066, January 2001, <http://www.ietf.org/rfc/rfc3066.txt>

[RFC5234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, January 2008, <http://www.rfc-editor.org/rfc/rfc5234.txt>

[UNICODE4.0] The Unicode Consortium, "Unicode 4.0.0", <http://www.unicode.org/versions/Unicode4.0.0/>

[W3C-XML] Bray, T., Paoli, J., Sperberg-McQueen, C.M., Maler, E., Yergeau, F., Eds., "Extensible Markup Language (XML) 1.1 (Second Edition)", W3C Recommendation, August 2006, <http://www.w3.org/TR/2006/REC-xml11-20060816/>

[W3C-XSD] World Wide Web Consortium, "XML Schema Part 2: Datatypes Second Edition", October 2004, <http://www.w3.org/TR/2004/REC-xmlschema-2-20041028>



[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <http://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1] Thompson, H.S., Beech, D., Maloney, M., Eds., and Mendelsohn, N., Ed., "XML Schema Part 1: Structures", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-1-20010502/>

[XMLSCHEMA2] Biron, P.V., and Malhotra, A., Eds., "XML Schema Part 2: Datatypes", W3C Recommendation, May 2001, <http://www.w3.org/TR/2001/REC-xmlschema-2-20010502/>

## 1.2.2 Informative References

[CODEPG] Microsoft Corporation, "Code Pages", <http://www.microsoft.com/globaldev/reference/cphome.mspix>

If you have any trouble finding [CODEPG], please check [here](#).

[DEVMODE] Microsoft Corporation, "DEVMODE structure", [http://msdn.microsoft.com/en-us/library/dd183565\(VS.85\).aspx](http://msdn.microsoft.com/en-us/library/dd183565(VS.85).aspx)

[ISO/IEC29500-3:2011] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 3: Markup Compatibility and Extensibility", ISO/IEC 29500-3:2011, 2011, [http://www.iso.org/iso/iso\\_catalogue/catalogue\\_tc/catalogue\\_detail.htm?csnumber=59577](http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=59577)

[MSDN-FONTS] Microsoft Corporation, "About Fonts", [http://msdn.microsoft.com/en-us/library/dd162470\(VS.85\).aspx](http://msdn.microsoft.com/en-us/library/dd162470(VS.85).aspx)

[MSDN-MDXFS] Microsoft Corporation, "FORMAT\_STRING Contents (MDX)", September 2007, <http://msdn.microsoft.com/en-us/library/ms146084.aspx>

[MSDN-ODBC] Microsoft Corporation, "ODBC Programmer's Reference", <http://msdn.microsoft.com/en-us/library/ms714177.aspx>

[MSDN-OLEDBP-OI] Microsoft Corporation, "OLE DB Programming", [http://msdn.microsoft.com/en-us/library/502e07a7\(VS.80\).aspx](http://msdn.microsoft.com/en-us/library/502e07a7(VS.80).aspx)

[MSFT-ODBCODCO] Microsoft Corporation, "ODBC--Open Database Connectivity Overview", March 2007, <http://support.microsoft.com/kb/110093>

[MS-GLOS] Microsoft Corporation, "[Windows Protocols Master Glossary](#)".

[MS-ODRAW] Microsoft Corporation, "[Office Drawing Binary File Format Structure Specification](#)".

[MS-OFGLGLOS] Microsoft Corporation, "[Microsoft Office Master Glossary](#)".

[MS-OLEDS] Microsoft Corporation, "[Object Linking and Embedding \(OLE\) Data Structures](#)".

[XPAT] Clark, J. and DeRose, S., "XML Path Language (XPath), Version 1.0", W3C Recommendation, November 1999, <http://www.w3.org/TR/xpath>

## 1.3 Structure Overview (Synopsis)

This document specifies workbook data contained in a **ZIP package** (section [2.1.1](#)) conforming to the Open Packaging Conventions as described in [\[ISO/IEC29500-1:2011\]](#). Individual files stored in the ZIP package, called parts (section [2.1.2](#)), contain information about the content of a workbook including workbook data such as **worksheet** definitions. Some parts store information by using

**XML**, some parts store information by using binary records (section [2.1.4](#)), and other parts contain information stored as a binary stream of bytes. The binary record structure and content are specified in this document. Each binary record contains its record type, information about the record size, and zero or more type-specific fields depending on its record type, which is specified in Record Enumeration (section [2.3](#)). Type-specific fields contain information further specifying the workbook data. Specifications of the fields for a given record type can be found in Records (section [2.4](#)).

Unless otherwise specified, all data in files of the type specified by this document are stored in **little-endian** format.

See File Structure (section [2.1](#)) for a more detailed overview of specific file architecture and content.

## 1.4 Relationship to Protocols and Other Structures

The Excel Binary File Format is a package as described in [\[ISO/IEC29500-1:2011\]](#) containing a set of related parts (section [2.1.2](#)). It is dependent on the structures defined in the following references:

- [\[MS-ODRAW\]](#) for the persistence format for **shapes**.
- [\[MS-OFFCRYPTO\]](#) for the persistence format for document signing, information rights management, document encryption and obfuscation.
- [\[MS-OSHARED\]](#) for the persistence format for additional common structures.
- [\[MS-OVBA\]](#) for the persistence format for a **VBA project**.
- [\[MS-XLS\]](#) for command bar information and number formatting.
- [\[MS-XLSX\]](#) for storing custom data, custom data properties, and drawing and control properties.
- [\[MS-ODRAWXML\]](#) for images stored in the workbook.
- [\[MS-DTYP\]](#) for specifying a **relative security descriptor**.

## 1.5 Applicability Statement

This document specifies a persistence format for workbook content and templates, which can include unstructured or semi-structured tables of numbers, text, or both numbers and text, formulas, external data connections, charts, and images. This persistence format is applicable for persistence of documents with a grid based layout, including those with numeric data, structured data, and formulas.

This persistence format is applicable for use as a stand-alone document, and for containment within other documents as an embedded object, as described in [\[MS-OLEDS\]](#).

This persistence format provides interoperability with applications that create or read documents conforming to this structure.

## 1.6 Versioning and Localization

This document covers versioning issues in the following areas:

**Structure Versions:** There is only one version of this file format.

**Localization:** The following records and structures contain fields that specify locale-dependent meaning:

- **BrtBeginHeaderFooter** (section [2.4.86](#))
- **BrtFmt** (section [2.4.651](#))
- **CodeName** (section [2.5.21](#))
- **BrtFont** (section [2.4.653](#))

The Security Considerations (section [4](#)), Password Verifier Algorithm (section [2.2.9](#)), Encryption (section [2.2.11](#)), and International Macro Sheet (section [2.1.7.31](#)) also specify processes and data that are locale-dependent. See each record, structure, and section description for more information.

## 1.7 Vendor-Extensible Fields

This persistence format can be extended by storing information in parts not specified in section [2.1.2](#). Implementations are not required to preserve or remove additional parts when modifying an existing document. See File Structure (section [2.1](#)) for more information. Implementations can extend a part specified in Section 2 by storing future records and alternate content blocks as specified in Future Record (section [2.1.6](#)). Implementations can extend the XML as described in [\[ISO/IEC29500-3:2011\]](#): Markup Compatibility and Extensibility.

## 2 Structures

### 2.1 File Structure

This section specifies the overall structure of a file that conforms to this specification.

A file of the type specified by this document is a package (section [2.1.1](#)) that contains a collection of related parts (section [2.1.2](#)). Parts contain information about the contents of a workbook, including workbook data and the structure of the package. Some parts contain information stored using binary records (section [2.1.4](#)), some parts contain information stored using XML, and other parts contain information stored as a binary stream of bytes. Each binary record contains zero or more structured fields that contain the workbook data.

#### 2.1.1 Package

A file of the type specified by this document is a package that is a ZIP archive that conforms to the Open Packaging Conventions as specified in [\[ISO/IEC29500-2:2011\]](#): Open Packaging Conventions, the further packaging restrictions as specified in [\[ISO/IEC29500-1:2011\]](#): Fundamentals, section 9, and this specification.

A file of the type specified by this document MUST contain exactly one **workbook** (section [2.1.7.60](#)) part, and that part (section [2.1.2](#)) MUST be the target of a relationship (section [2.1.3](#)) in the package relationship part. The **workbook** (section [2.1.7.60](#)) part is the main or starting part in a file of the type specified by this document.

#### 2.1.2 Part

A part is a stream of bytes as specified in [\[ISO/IEC29500-2:2011\]](#): Open Packaging Conventions, section 8.2. Each part has an associated content type that specifies the nature and type of content stored in the part. Some parts store information using binary records (section [2.1.4](#)). Some parts store information using XML.

The valid parts, content types, and required and optional [relationships](#) (section [2.1.3](#)) between all parts in a package (section [2.1.1](#)) are specified in **Part Enumeration** (section [2.1.7](#)). Each part that contains binary records (section [2.1.4](#)) MUST be written as a series of binary records as specified in **Part Enumeration**.

This document uses **Augmented Backus-Naur Form (ABNF)** as specified in [\[RFC5234\]](#) to specify the record (section [2.1.4](#)) sequence for parts that contain binary records.

#### 2.1.3 Relationship

A relationship specifies a connection between a source and a target resource as specified in [\[ISO/IEC29500-2:2011\]](#): Open Packaging Conventions, section 8.3. Relationship identifiers are used in binary and XML part (section [2.1.2](#)) content to reference unique relationship elements in relationship parts that in turn target other resources. There are several different types of relationships:

- A package relationship is a relationship where the target is a part and the source is the package (section [2.1.1](#)) as a whole.
- A part-to-part relationship is a relationship where the target is a part (section [2.1.2](#)) and the source is a part in the package.

- An explicit relationship is a relationship where a resource is referenced from the contents of a source part by referencing the ID attribute value of a relationship element.
- An implicit relationship is a relationship that is not explicit.
- An internal relationship is a relationship where the target is a part in the package.
- An external relationship is a relationship where the target is an external resource not in the package.

#### 2.1.4 Record

A record is the basic building block used to store information about features in a workbook. Each binary record is a variable-length sequence of bytes. A binary record consists of three components: a record type, a record size, and the record data that is specific to that record type.

The record type is an integer that specifies what type of information is specified by the record and how the structure of the record data specific to this record is ordered and structured. Each valid record type is listed in Record Enumeration (section [2.3](#)). The record type MUST be either one or two bytes. The record type MUST be two bytes if and only if the high bit in the low byte is equal to 1; otherwise, the record type MUST be one byte. If the record type is two bytes, the value consists of seven low bits of the high byte combined with the seven low bits of the low byte. This value MUST be greater than or equal to 128 and less than 16384. For performance reasons, one-byte record types are reserved for commonly used records. Record type values MUST be a value from Record Enumeration (section [2.3](#)) or the record MUST make use of the future record (section [2.1.6](#)) architecture.

The record size specifies the count of bytes that specifies the total size of the record data. This value MUST be one to four bytes. This value MUST be one byte if the high bit in the low byte is equal to 0; otherwise, this value MUST be greater than one byte. If the count of bytes is greater than one byte, the high bit in each successive byte specifies whether an additional byte is used. If the high bit of the second byte is equal to 1, then this value MUST use an additional third byte. If the high bit of the third byte is equal to 1, then this value MUST use an additional fourth byte. The high bit of the fourth byte MUST be ignored. The value consists of the seven low bits of each byte combined. The low, least significant bits are contained within the first byte, and each successive byte contains higher order bits than the previous byte.

The record data component contains fields that correspond to a particular record type and comprise the remainder of the record. The order and structure of the fields for a given record type listed in Record Enumeration (section [2.3](#)) are specified in the corresponding section for that record type in Records (section [2.4](#)). The total size of the record data component MUST be equal to the record size. Fields in the record data component can contain simple values, arrays of values, structures of several fields, arrays of fields, and arrays of structures.

For example, the following record type and record size specify a **BrtCommentText** (section [2.4.325](#)) record with a size of 200 bytes:

```
11111101 00000100 11001000 00000001 [Record Fields]
```

The first byte is 11111101, specifying a low value of 125 and that the record type requires a second byte. The second byte is 00000100, specifying a high value of  $4 * 128$ , which equals 512. The record type value is  $125 + 512$ , or 637, which corresponds to a **BrtCommentText** (section [2.4.325](#)) record type. The next byte is 11001000, specifying a low value of 72 and that the record size requires a second byte. The second byte is 00000001, specifying a higher value of  $1 * 128$  and that the record size does not require an additional byte. The record size is  $72 + 128$ , or 200, which

specifies the total size, in bytes, of the record data component. The fields in the record data component are specified by **BrтCommentText** (section [2.4.325](#)).

## 2.1.5 Collection of Records

A collection of records (section [2.1.4](#)) is a series of related records that are treated as a single set. Records in a collection do not have to share the same record type. A collection of records can further contain other collections of records. The beginning of a collection of records is sometimes indicated by a different type of record, as specified in the record sequence ABNF where the rule that contains that record is specified. Similarly the end of a collection of records is sometimes indicated by a different type of record, as specified by the record sequence ABNF where the rule that contains that record is specified. Each record or collection within the collection can be referred to by index, and the index count starts over for each collection.

In this document, record A precedes record B when record A is the last record of that type to appear before record B, in the part (section [2.1.2](#)) that contains those records.

In this document, record B follows record A when record A is the last record of that type to appear before record B, in the part that contains those records.

## 2.1.6 Future Record

The future record (section [2.1.6](#)) architecture enables the file format to be extended with new or alternate content while maintaining compatibility with applications that do not support the new content. The future record architecture consists of a future record mechanism and an alternate content mechanism. The future record mechanism enables an application that does not support certain future records to open and save the file while ignoring but preserving those future records in the file, and correctly modifying **cell references** and formulas associated with the records. The alternate content mechanism enables an application to introduce extensions that target particular implementations.

### 2.1.6.1 Future Record Mechanism

Future records are specified as a collection of records (section [2.1.4](#)) that exists between a set of **BrтFRTBegin** (section [2.4.654](#)) and **BrтFRTEnd** (section [2.4.655](#)) record pairs. An application uses the **productVersion.product** and **productVersion.version** fields of the **BrтFRTBegin** record to determine whether that application supports the collection of future records following that **BrтFRTEnd** record.

An application supports the collection of future records following a given **BrтFRTBegin** record if the **productVersion.product** field matches the application's product value, and the **productVersion.version** field is less than or equal to the application's version value. Otherwise the application does not support the collection of future records following this **BrтFRTBegin** record, and can ignore but preserve those future records in the file, including the **BrтFRTBegin** and **BrтFRTEnd** records.

Every record in the collection of future records between a set of **BrтFRTBegin** and **BrтFRTEnd** records—except **BrтFRTBegin**, **BrтFRTEnd**, **BrтACBegin** (section [2.4.2](#)), and **BrтACEnd** (section [2.4.3](#)) records—is a future record and MUST start with an **FRTHeader** (section [2.5.60](#)) structure that specifies future record attributes unless the record is less than 4 bytes, in which case an **FRTBlank** (section [2.5.54](#)) is inferred as the **FRTHeader** structure for that future record, and the bytes in the future record specify record data. Future record data that occurs after the **FRTHeader** is application specific.

For example, consider an application that implements the basic concepts of a spreadsheet as specified by the structures and records in this document and that implements other features and concepts not specified in this document. That application can use the future record mechanism to persist data associated with those other features and concepts as extensions to the structures and records specified in this document.

### 2.1.6.2 Alternate Content Mechanism

Alternate content is specified as a collection of records (section [2.1.4](#)) that exists between a set of **BrtACBegin** (section [2.4.2](#)) and **BrtACEnd** (section [2.4.3](#)) record pairs. The **RgACVer** field of a **BrtACBegin** record specifies an array of **ACProductVersion** (section [2.5.1](#)) structures that specify a list of application product and version values and whether a version value is extended for all future versions. An application uses the **RgACVer.ACProductVersion.fileproduct**, **RgACVer.ACProductVersion.fileversion** and **RgACVer.ACProductVersion.fileExtension** fields of the **BrtACBegin** record to determine whether the application is the intended target of the collection of records following that **BrtACBegin** record.

An application is the target of the collection of records following a given **BrtACBegin** if for at least one element of the **RgACVer** array the **ACProductVersion.fileproduct** field matches the application's product value, and the **ACProductVersion.fileversion** field is equal to the application's version value and the **ACProductVersion.fileExtension** field is 0, or the **ACProductVersion.fileversion** field is less than or equal to the application's version value and the **ACProductVersion.fileExtension** field is 1. Otherwise the application is not the target of the collection of records following this **BrtACBegin** record, and MUST ignore on load and discard these records when saving the file, including the associated **BrtACBegin** and **BrtACEnd** records.

Multiple blocks of alternate content for different implementations can be specified with consecutive **BrtACBegin** and **BrtACEnd** record pairs and their collections of records. Alternate content records are permitted in any record sequence within any part that contains **Binary Interchange File Format (BIFF)** records.

For example, consider an application that implements the basic concepts of a spreadsheet as specified by the structures and records in this document and enhances some of those concepts with additional features and concepts that one or more other applications support. That application can persist the basic concepts using records and structures specified by this document, and can persist the enhanced set of properties associated with those concepts and features as alternate content blocks, where each content block targets an application that supports those records. Instead of being required to maintain and preserve each of the alternate content blocks, in this case the application only loads the records it supports and discards all alternate content blocks it does not support. On save the application might or might not write an entirely new or different set of alternate content blocks.

### 2.1.7 Part Enumeration

This section specifies the parts (section [2.1.2](#)) of the Excel Binary File Format (.xlsb) package. Refer to File Structure (section [2.1](#)) and Relationship (section [2.1.3](#)) for information about packages, parts, implicit relationships, explicit relationships, and the package relationship part.

If a part is in Binary Interchange File Format (BIFF) format, the record sequence is specified using ABNF grammar. The first rule in each rule list comprises the entire record sequence for that part. Subsequent rules are fragments of the first rule.

Parts and their relationships are summarized in the following table:

| <b>Part</b>                        | <b>Relationship Target of</b>                            |
|------------------------------------|--|
| ActiveX                            | Worksheet  |
| ActiveX Binary                     | Worksheet  |
| Attached Toolbars                  | Workbook   |
| Calculation Chain                  | Workbook   |
| Chart                              | Drawings   |
| Chart Drawing                      | Chart  |
| Chart Sheet                        | Workbook   |
| Comments                           | Macro Sheet, Worksheet                                   |
| Control Properties                 | SpreadsheetML control                                    |
| Custom Data                        | Custom Data Properties                                   |
| Custom Data Properties             | Workbook   |
| Custom Property                    | Macro Sheet, Worksheet                                   |
| Custom XML Data Storage            | Workbook   |
| Custom XML Data Storage Properties | Custom XML Data Storage                                  |
| Custom XML Maps                    | Workbook   |
| Diagram Colors                     | Drawings   |
| Diagram Data                       | Drawings   |
| Diagram Layout Definition          | Drawings   |
| Diagram Styles                     | Drawings   |
| Dialog Sheet                       | Workbook   |
| Digital Signature Origin           | Package  |
| Digital Signature XML Signature    | Digital Signature Origin                                 |
| Drawings                           | Chart Sheet, Worksheet, Macro Sheet                      |
| External Data Connections          | Workbook   |
| External Link                      | Workbook   |
| File Properties, Core              | Package  |
| File Properties, Custom            | Package  |
| File Properties, Extended          | Package  |
| File Properties, Thumbnail         | Package  |
| Images                             | Chart Sheet, Macro Sheet, Theme, VML Drawings, Worksheet |



| <b>Part</b>               | <b>Relationship Target of</b>                       |
|---------------------------|---|
| International Macro Sheet | Workbook  |
| Macro Sheet               | Workbook  |
| Macro Sheet Binary Index  | Macro Sheet   |
| Metadata                  | Workbook  |
| Model                     | Workbook  |
| OLE Object                | Dialog Sheet, External Link, Macro Sheet, Worksheet |
| OLE Package               | Dialog Sheet, Macro Sheet, Worksheet                |
| PivotCache Definition     | PivotTable, Workbook                                |
| PivotCache Records        | PivotCache Definition                               |
| PivotTable                | Worksheet   |
| Printer Settings          | Chart Sheet, Dialog Sheet, Macro Sheet, Worksheet   |
| Query Table               | Table, Worksheet                                    |
| Revision Headers          | Workbook  |
| Revision Log              | Revision Headers                                    |
| Shared Strings            | Workbook  |
| Single Cell Tables        | Worksheet   |
| Slicer Cache              | Workbook  |
| Slicers                   | Worksheet   |
| Sort Map                  | Macro Sheet, Worksheet                              |
| Styles                    | Workbook  |
| Table                     | Worksheet   |
| Theme                     | Workbook  |
| Timeline Cache            | Workbook  |
| Timelines                 | Worksheet   |
| User Names                | Workbook  |
| VBA Project               | Workbook  |
| VBA Project Signature     | VBA Project   |
| VML Drawings              | Worksheet, Chart Sheet, Dialog Sheet, Macro Sheet   |
| Volatile Dependencies     | Workbook  |
| Workbook                  | Package   |

| Part                   | Relationship Target of |
|------------------------|------------------------|
| Worksheet              | Workbook               |
| Worksheet Binary Index | Worksheet              |

### 2.1.7.1 ActiveX

An instance of the **ActiveX** part specifies an **ActiveX control**.

**Content type:** application/vnd.ms-office.activeX+xml

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/control>

An **ActiveX** part MUST be the target of an explicit relationship from the **worksheet** (section [2.1.7.61](#)) part.

An **ActiveX** part is permitted to have explicit relationships to the **ActiveX Binary** (section [2.1.7.2](#)) part.

An **ActiveX** part MUST NOT have implicit or explicit relationships to any other part (section [2.1.2](#)) specified by this document.

The syntax of the structures contained in this part uses **XML schema definition (XSD)**, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#).

This specification defines and references various **XML namespaces** using the mechanisms specified in [\[XMLNS\]](#).

The content of the **ActiveX** part is XML as specified by the following XSD.

```
<?xml version="1.0" encoding="utf-8"?>
<xsd:schema
  targetNamespace="http://schemas.microsoft.com/office/2006/activeX"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns="http://schemas.microsoft.com/office/2006/activeX"
  xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
  elementFormDefault="qualified"
  attributeFormDefault="qualified"
  blockDefault="#all">
<xsd:import id="r"
  namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships" />
<xsd:element name="ocx" type="CT_Ocx" maxOccurs="1" minOccurs="1"/>
  <xsd:complexType name="CT_Ocx">
    <xsd:sequence>
      <xsd:element name="ocxPr" type="CT_OcxPr" minOccurs="0"
        maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="classid" type="ST_String" use="required"/>
    <xsd:attribute name="license" type="ST_String" use="optional" />
    <xsd:attribute ref="r:id" use="optional" />
    <xsd:attribute name="persistence" type="ST_Persistence" use="required" />
  </xsd:complexType>

  <xsd:simpleType name="ST_String">
```

```

    <xsd:restriction base="xsd:string" />
  </xsd:simpleType>

  <xsd:simpleType name="ST_Persistence">
    <xsd:restriction base="ST_String">
      <xsd:enumeration value="persistPropertyBag"/>
      <xsd:enumeration value="persistStream"/>
      <xsd:enumeration value="persistStreamInit"/>
      <xsd:enumeration value="persistStorage"/>
    </xsd:restriction>
  </xsd:simpleType>

  <xsd:complexType name="CT_OcxPr">
    <xsd:sequence>
      <xsd:choice>
        <xsd:element name="font" type="CT_Font" maxOccurs="1" minOccurs="0" />
        <xsd:element name="picture" type="CT_Picture" maxOccurs="1"
          minOccurs="0"/>
      </xsd:choice>
    </xsd:sequence>
    <xsd:attribute name="name" type="ST_String" use="required" />
    <xsd:attribute name="value" type="ST_String" use="optional" />
  </xsd:complexType>

  <xsd:complexType name="CT_Font">
    <xsd:sequence>
      <xsd:element name="ocxPr" type="CT_OcxPr" minOccurs="0"
        maxOccurs="unbounded" />
    </xsd:sequence>
    <xsd:attribute name="persistence" type="ST_Persistence" use="optional"/>
    <xsd:attribute ref="r:id" use="optional"/>
  </xsd:complexType>

  <xsd:complexType name="CT_Picture">
    <xsd:attribute ref="r:id" use="optional"/>
  </xsd:complexType>
</xsd:schema>

```

The **XML schema** associated with the imported namespace, "http://schemas.openxmlformats.org/officeDocument/2006/relationships", is specified in [\[ISO/IEC29500-1:2011\]](#), section 22.8.

### 2.1.7.1.1 Elements

This section specifies the **font** (section [2.1.7.1.1.1](#)), **ocx** (section [2.1.7.1.1.2](#)), **ocxPr** (section [2.1.7.1.1.3](#)), and **picture** (section [2.1.7.1.1.4](#)) elements that are XSD elements used for persisting ActiveX controls.

#### 2.1.7.1.1.1 font

The **font** element specifies the persistence of a standard font object (StdFont), as specified in [\[MS-OFORMS\]](#) section 2.4.9.

The following XSD fragment specifies the contents of this element:

```
<xsd:complexType name="CT_Font">
```

```

<xsd:sequence>
  <xsd:element name="ocxPr" type="CT_OcxPr" minOccurs="0"
    maxOccurs="unbounded"/>
</xsd:sequence>
<xsd:attribute name="persistence" type="ST_Persistence" use="optional"/>
<xsd:attribute ref="r:id" use="optional"/>
</xsd:complexType>

```

The following table specifies the attributes for this element:

| Attributes  | Description   |
|-------------|---|
| persistence | Specifies the method used to store properties of the font object.   |
| r:id        | An <b>ST_RelationshipID</b> , as specified in <a href="#">[ISO/IEC29500-1:2011]</a> , section 22.8, that specifies the relationship identifier to the <b>ActiveX Binary</b> (section <a href="#">2.1.7.2</a> ) part that contains the persisted font object.<br>The target of the relationship MUST be an <b>ActiveX Binary</b> (section <a href="#">2.1.7.2</a> ) part. <b>id</b> MUST exist if and only if <b>persistence</b> is equal to either <b>persistStorage</b> , <b>persistStream</b> , or <b>persistStreamInit</b> . |

### 2.1.7.1.1.2 ocx

The **ocx** element specifies the persistence of an ActiveX control.

The following XSD fragment specifies the contents of this element:

```

<xsd:complexType name="CT_Ocx">
  <xsd:sequence>
    <xsd:element name="ocxPr" type="CT_OcxPr" minOccurs="0"
      maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="classid" type="ST_String" use="required"/>
  <xsd:attribute name="license" type="ST_String" use="optional"/>
  <xsd:attribute ref="r:id" use="optional"/>
  <xsd:attribute name="persistence" type="ST_Persistence" use="required"/>
</complexType>

```

| Attributes  | Description  |
|-------------|--|
| classid     | Specifies the <b>class identifier (CLSID)</b> of the ActiveX control.  |
| license     | Specifies the license string for the ActiveX control.  |
| persistence | Specifies the method used to store properties of the ActiveX control.  |
| r:id        | An <b>ST_RelationshipID</b> , as specified in <a href="#">[ISO/IEC29500-1:2011]</a> , section 22.8, that specifies the relationship identifier to the <b>ActiveX Binary</b> (section <a href="#">2.1.7.2</a> ) part that contains the persisted ActiveX control.<br>The target of the relationship MUST be an <b>ActiveX Binary</b> part. <b>id</b> MUST exist if and only if <b>persistence</b> is equal to either <b>persistStorage</b> , <b>persistStream</b> , or <b>persistStreamInit</b> . |

### 2.1.7.1.1.3 ocxPr

The **ocxPr** element specifies a single name and value pair used to persist a property of an ActiveX control that uses the **persistPropertyBag** method as specified by **ST\_Persistence** (section [2.1.7.1.2.1](#)).

The following XSD fragment specifies the contents of this element:

```
<xsd:complexType name="CT_OcxPr">
  <xsd:sequence>
    <xsd:choice>
      <xsd:element name="font" type="CT_Font" maxOccurs="1" minOccurs="0"/>
      <xsd:element name="picture" type="CT_Picture" maxOccurs="1"
        minOccurs="0"/>
    </xsd:choice>
  </xsd:sequence>
  <xsd:attribute name="name" type="ST_String" use="required"/>
  <xsd:attribute name="value" type="ST_String" use="optional"/>
</complexType>
```

| Attributes | Description   |
|------------|---|
| name       | Specifies the name of the property. <b>name</b> MUST be unique in its collection.   |
| value      | Specifies the value of the property. <b>value</b> MUST NOT exist if the <b>font</b> or <b>picture</b> child elements exist. |

### 2.1.7.1.1.4 picture

The **picture** element specifies the persistence of a standard picture object (StdPicture), as specified in [\[MS-OFORMS\]](#) section 2.4.5.

The following XSD fragment specifies the contents of this element:

```
<xsd:complexType name="CT_Picture">
  <xsd:attribute ref="r:id" use="optional" />
</xsd:complexType>
```

| Attributes | Description  |
|------------|--|
| r:id       | An <b>ST_RelationshipID</b> , as specified in <a href="#">[ISO/IEC29500-1:2011]</a> , section 22.8, that specifies the relationship identifier to the <b>ActiveX Binary</b> (section <a href="#">2.1.7.2</a> ) part that contains the persisted picture object.<br>The target of the relationship MUST be an <b>ActiveX Binary</b> part. |

### 2.1.7.1.2 Simple Types

This section specifies the **ST\_Persistence** (section [2.1.7.1.2.1](#)) and **ST\_String** (section [2.1.7.1.2.2](#)) XSD simple types used for persisting ActiveX controls.

#### 2.1.7.1.2.1 ST\_Persistence

The **ST\_Persistence** simple type specifies the persistence method used to persist an ActiveX control.

The following XSD fragment specifies the contents of this simple type:

```
<xsd:simpleType name="ST_Persistence">
  <xsd:restriction base="ST_String">
    <xsd:enumeration value="persistPropertyBag"/>
    <xsd:enumeration value="persistStream"/>
    <xsd:enumeration value="persistStreamInit"/>
    <xsd:enumeration value="persistStorage"/>
  </xsd:restriction>
</xsd:simpleType>
```

The following are possible enumeration values for this type:

| Enumeration Value  | Description  |
|--------------------|--|
| persistPropertyBag | Specifies that the ActiveX control is persisted using property-bag-based persistence. Property-bag-based persistence stores an ActiveX control by means of a collection of name and value pairs which specify the data persisted by the ActiveX control. A child <b>ocxPr</b> (section <a href="#">2.1.7.1.1.3</a> ) element MUST appear within the element that contains this simple type if and only if <b>persistPropertyBag</b> is used. |
| persistStorage     | Specifies that the ActiveX control is persisted using storage-based persistence. The <b>id</b> attribute of the element that contains this simple type MUST specify a relationship to an <b>ActiveX Binary</b> (section <a href="#">2.1.7.2</a> ) part if <b>persistStorage</b> is used.   |
| persistStream      | Specifies that the ActiveX control is persisted using a stream-based persistence that does not support initialization of the ActiveX control to a default state. The <b>id</b> attribute of the element that contains this simple type MUST specify a relationship to an <b>ActiveX Binary</b> (section <a href="#">2.1.7.2</a> ) part if <b>persistStream</b> is used.  |
| persistStreamInit  | Specifies that the ActiveX control is persisted using a stream-based persistence that supports initialization of the ActiveX control to a default state. The <b>id</b> attribute of the element that contains this simple type MUST specify a relationship to an <b>ActiveX Binary</b> (section <a href="#">2.1.7.2</a> ) part if <b>persistStreamInit</b> is used.  |

### 2.1.7.1.2.2 ST\_String

The **ST\_String** simple type specifies a string.

The following XSD fragment specifies the contents of this simple type:

```
<xsd:simpleType name="ST_String">
  <xsd:restriction base="xsd:string"/>
</xsd:simpleType>
```

### 2.1.7.2 ActiveX Binary

An instance of the **ActiveX Binary** part specifies the persistence of an ActiveX control when the method used to persist is either **persistStream**, **persistStreamInit**, or **persistStorage**, as specified in section [2.1.7.1](#).

**Content type:** application/vnd.ms-office.activeX

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/activeXControlBinary>

An **ActiveX Binary** (section [2.1.7.2](#)) part MUST be the target of an explicit relationship from the **ActiveX** (section [2.1.7.1](#)) part.

An **ActiveX Binary** part MUST NOT have implicit or explicit relationships to any part specified by this document.

The contents of this part consist of an individual ActiveX control. The internal structure of the ActiveX control is not specified in this document. See section [2.1.7.1](#) for more information about general ActiveX control persistence.

### 2.1.7.3 Attached Toolbars

An instance of the **Attached Toolbars** part type specifies the custom toolbars attached to the file.

**Content type:** application/vnd.ms-excel.attachedToolbars

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/attachedToolbars>

The internal structure of this part is the same as the structure of the XCB binary stream specified in [\[MS-XLS\]](#) section 2.1.7.10.

An **Attached Toolbars** part MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

An **Attached Toolbars** part MUST NOT have implicit or explicit relationships to any part specified in this document.

### 2.1.7.4 Calculation Chain

The **Calculation Chain** part consists of an application-specific cache of information.

**Content type:** application/vnd.ms-excel.calcChain

**Source relationship:**  
<http://schemas.openxmlformats.org/officeDocument/2006/relationships/calcChain>

This cache exists for performance reasons only, and can be rebuilt based on information stored elsewhere in the file without affecting calculation results. A package SHOULD NOT [<1>](#) contain this part.

A package MUST contain no more than one **Calculation Chain** part. If it exists, that part MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **Calculation Chain** part MUST NOT have implicit or explicit relationships to any part.

### 2.1.7.5 Chart

The **Chart** part (section [2.2.3.1](#)) is specified in [\[ISO/IEC29500-1:2011\]](#), section 14.2.1. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 21.2.

### 2.1.7.6 Chart Drawing

The **Chart Drawing** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 14.2.2. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 21.3.

### 2.1.7.7 Chart Sheet

An instance of the **Chart Sheet** part type specifies a **chart sheet**.

**Content type:** application/vnd.ms-excel.chartsheet

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/chartsheet>

A **Chart Sheet** part MUST be the target of an explicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **Chart Sheet** part is permitted to have explicit relationships to the following parts specified by this document:

- **Drawings** (section [2.1.7.23](#))
- **Images** (section [2.1.7.30](#))
- **Printer Settings** (section [2.1.7.41](#))
- **VML Drawings** (section [2.1.7.58](#))

A **Chart Sheet** part MUST NOT have implicit or explicit relationships to any other part specified by this document.

Record sequence ABNF:

```
CHARTSHEET = BrtBeginSheet [BrtCsProp] CSVIEWS [[BrtCsProtectionIso] BrtCsProtection]  
[USERCSVIEWS] [BrtMargins] [BrtCsPageSetup] [HEADERFOOTER] BrtDrawing [BrtLegacyDrawing]  
[BrtLegacyDrawingHF] [BrtBkHim] [WEBPUBITEMS] *FRT BrtEndSheet
```

```
CSVIEWS = BrtBeginCsViews 1*CSVIEW *FRT BrtEndCsViews
```

```
CSVIEW = BrtBeginCsView *FRT BrtEndCsView
```

```
USERCSVIEWS = BrtBeginUserCsViews *USERCSVIEW BrtEndUserCsViews
```

```
USERCSVIEW = BrtBeginUserCsView [BrtMargins] [BrtCsPageSetup] [HEADERFOOTER]  
BrtEndUserCsView
```

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.8 Comments

An instance of the **Comments** part type specifies the **comments** for a given **sheet (1)**, as well as the names of the authors of those comments.

**Content type:** application/vnd.ms-excel.comments

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/comments>

A package MUST contain at most one **Comments** part per **worksheet** (section [2.1.7.61](#)) or **macro sheet** (section [2.1.7.32](#)) part, and each such part MUST be the target of an implicit relationship from a **worksheet** or **macro sheet** part.



A **Comments** part MUST NOT have implicit or explicit relationships to any part specified by this document.

Record sequence ABNF:

COMMENTS = [BrtBeginComments](#) COMMENTAUTHORS COMMENTLIST \*FRT [BrtEndComments](#)

COMMENTAUTHORS = [BrtBeginCommentAuthors](#) \*[BrtCommentAuthor](#) [BrtEndCommentAuthors](#)

COMMENTLIST = [BrtBeginCommentList](#) \*COMMENT [BrtEndCommentList](#)

COMMENT = [BrtBeginComment](#) [[BrtCommentText](#)] [BrtEndComment](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.9 Control Properties

The **Control Properties** part is specified in [\[MS-XLSX\]](#) section 2.1.1.

### 2.1.7.10 Custom Data

The **Custom Data** part is specified in [\[MS-XLSX\]](#) section 2.1.2.

### 2.1.7.11 Custom Data Properties

The **Custom Data Properties** part is specified in [\[MS-XLSX\]](#) section 2.1.3. The content associated with this part is specified in [\[MS-XLSX\]](#) section 2.4.35.

### 2.1.7.12 Custom Property

The **Custom Property** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 12.3.5.

In addition to the explicit relationships specified in [\[ISO/IEC29500-1:2011\]](#), section 12.3.5, a **Custom Property** part is permitted to be the target of an explicit relationship from the following parts specified by this document:

- **Macro Sheet** (section [2.1.7.32](#))

### 2.1.7.13 Custom XML Data Storage

The **Custom XML Data Storage** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 15.2.5.

Additional XML namespaces are specified in [\[MS-OSHARED\]](#) section 2.3.6.1.

### 2.1.7.14 Custom XML Data Storage Properties

The **Custom XML Data Storage Properties** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 15.2.6. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 22.5.

### 2.1.7.15 Custom XML Maps

The **Custom XML Maps** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 12.3.6. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 18.6.

### 2.1.7.16 Diagram Colors

The **Diagram Colors** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 14.2.3. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 21.4.4.

### 2.1.7.17 Diagram Data

The **Diagram Data** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 14.2.4. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 21.4.3.

### 2.1.7.18 Diagram Layout Definition

The **Diagram Layout Definition** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 14.2.5. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 21.4.6.

### 2.1.7.19 Diagram Styles

The **Diagram Styles** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 14.2.6. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 21.4.5.

### 2.1.7.20 Dialog Sheet

An instance of the **Dialog Sheet** part type contains information about a custom dialog box.

**Content type:** application/vnd.ms-excel.dialogsheet

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/dialogsheet>

A **Dialog Sheet** part MUST be the target of an explicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **Dialog Sheet** part is permitted to have explicit relationships to the following parts specified by this document:

- **OLE Object** (section [2.1.7.36](#))
- **OLE Package** (section [2.1.7.37](#))
- **Printer Settings** (section [2.1.7.41](#))
- **VML Drawings** (section [2.1.7.58](#))

A **Dialog Sheet** part MUST NOT have implicit or explicit relationships to any other part specified by this document.

Record sequence ABNF:

```
DIALOGSHEET = BrtBeginSheet [BrtWsProp] [WSVIEWS] [WSFMTINFO] [[BrtSheetProtectionIso]  
BrtSheetProtection] [USERSHIEWS] [BrtPrintOptions] [BrtMargins] [BrtPageSetup]  
[HEADERFOOTER] [BrtDrawing] [BrtLegacyDrawing] [BrtLegacyDrawingHF] [OLEOBJECTS] *FRT  
BrtEndSheet
```

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.21 Digital Signature Origin

The **Digital Signature Origin** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 15.2.7. Further information about digital signatures is specified in [\[ISO/IEC29500-2:2011\]](#), section 13.

### 2.1.7.22 Digital Signature XML Signature

The **Digital Signature XML Signature** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 15.2.7. The content associated with this part is specified in [\[ISO/IEC29500-2:2011\]](#), section 13.

### 2.1.7.23 Drawings

The **Drawings** part is specified in [\[ISO/IEC29500-1:2011\]](#), section 12.3.8. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#), section 20.5.

In addition to the explicit relationships specified in [\[ISO/IEC29500-1:2011\]](#), section 12.3.8, a **Drawings** part is permitted to be the target of an explicit relationship from the following parts specified by this document:

- **Macro Sheet** (section [2.1.7.32](#))

Sections [2.1.7.23.1](#) and [2.1.7.23.2](#) specify additional extensions to this part.

#### 2.1.7.23.1 compatSp

The **compatSp** element is a **CT\_CompatShape** that specifies a legacy drawing object. The legacy drawing object **MUST** be a form control, an **OLE object** or a legacy **ActiveX object**.

**Target namespace:** <http://schemas.microsoft.com/office/drawing/2010/compatibility>

```
<xsd:element name="compatSp" type="CT_CompatShape"/>
```

The **graphicData** ([\[ISO/IEC29500-1:2011\]](#) section 20.1.2.2.17) element, with parent **graphic** ([\[ISO/IEC29500-1:2011\]](#) section 20.1.2.2.16) element, with parent **graphicFrame** ([\[ISO/IEC29500-1:2011\]](#) section 20.5.2.16) element, with ancestor **twoCellAnchor** ([\[ISO/IEC29500-1:2011\]](#) section 20.5.2.33), **oneCellAnchor** ([\[ISO/IEC29500-1:2011\]](#) section 20.5.2.24), or **absoluteAnchor** ([\[ISO/IEC29500-1:2011\]](#) section 20.5.2.1) element, with parent **wsDr** ([\[ISO/IEC29500-1:2011\]](#) section 20.5.2.35) element, is extended by the addition of an **AlternateContent** ([\[ISO/IEC29500-1:2011\]](#) section 10.2.1) child element, whose structure is specified in the following table:

| AlternateContent components   | Structure of child elements   |
|---|---|
| <b>Choice:</b><br><a href="http://schemas.microsoft.com/office/drawing/2010/compatibility">http://schemas.microsoft.com/office/drawing/2010/compatibility</a> | <b>wsDr</b><br><b>twoCellAnchor</b> or <b>oneCellAnchor</b><br>or <b>absoluteAnchor</b><br><b>grpSp</b> (if inside a group)<br><b>graphicFrame</b><br><b>graphic</b><br><b>graphicData</b><br><b>compatSp</b> |
| Fallback  | Empty   |

Where the **grpSp** element is specified in [\[ISO/IEC29500-1:2011\]](#) section 20.5.2.17.

### 2.1.7.23.2 CT\_CompatShape

**CT\_CompatShape** is a complex type that specifies a legacy drawing object.

**Target namespace:** <http://schemas.microsoft.com/office/drawing/2010/compatibility>

**Referenced by:** **compatSp** (section [2.1.7.23.1](#))

**CT\_CompatShape** has the following attributes:

**spid** : An **ST\_ShapeID** ([\[ISO/IEC29500-1:2011\]](#) section 20.1.10.55) attribute that specifies the shape identifier of a legacy drawing object.

```
<xsd:complexType name="CT_CompatShape" oxsd:cname="CompatShapeStg"
  oxsd:cwrap="CompatShapeStgMethods">
  <xsd:attribute name="spid" oxsd:cname="ShapeId" type="a:ST_ShapeID" user="required"/>
</xsd:complexType>
```

### 2.1.7.24 External Data Connections

An instance of the **External Data Connections** part type specifies external connections (section [2.2.8](#)) for the workbook.

**Content type:** application/vnd.ms-excel.connections

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/connections>

A package MUST contain at most one **External Data Connections** part, which MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

An **External Data Connections** part MUST NOT have implicit or explicit relationships to any part specified by this document.

Record sequence ABNF:

EXTCONNECTIONS = [BrtBeginExtConnections](#) 1\*EXTCONNECTION [BrtEndExtConnections](#)

EXTCONNECTION = [BrtBeginExtConnection](#) [(ECDBPROPS [[ECOLAPPROPS](#) / [ECPARAMS](#)]) / ([ECWEBPROPS](#) [[ECPARAMS](#)]) / [ECTXTWIZ](#)] FRTEXTCONNECTIONS [BrtEndExtConnection](#)

ECDBPROPS = [BrtBeginECDbProps](#) [BrtEndECDbProps](#)

ECOLAPPROPS = [BrtBeginECOLapProps](#) [BrtEndECOLapProps](#)

ECWEBPROPS = [BrtBeginECWebProps](#) [[ECWPTABLES](#)] [BrtEndECWebProps](#)

ECWPTABLES = [BrtBeginEcWpTables](#) \*PCDI [BrtEndECWPTables](#)

PCDI = [BrtPCDIMissing](#) / [BrtPCDIIndex](#) / [BrtPCDIString](#)

ECTXTWIZ = [BrtBeginECTxtWiz](#) ECTWFLDINFOLST [BrtEndECTxtWiz](#)

ECTWFLDINFOLST = [BrtBeginECTWFldInfoLst](#) 1\*[BrtBeginECTwFldInfo](#) [BrtEndECTWFldInfoLst](#)

ECPARAMS = [BrtBeginECPARAMS](#) 1\*ECPARAM [BrtEndECPARAMS](#)  
 ECPARAM = [BrtBeginECPARAM](#) [BrtEndECPARAM](#)  
 FRTEXTCONNECTIONS = [[BrtFRTBegin](#) [EXTCONN14] [EXTCONN15] [BrtFRTEnd](#)] \*FRT  
 EXTCONN14 = [BrtBeginExtConn14](#) [PCDCALCMEMSEXT] [BrtEndExtConn14](#)  
 EXTCONN15 = [BrtBeginExtConn15](#) [OLEDBPR15 / DATAFEEDPR15 / TEXTPR15 / [BrtRangePr15](#)]  
[BrtEndExtConn15](#)  
 OLEDBPR15 = [BrtBeginOledbPr15](#) (DBTABLES15 / [BrtDbCommand15](#)) [BrtEndOledbPr15](#)  
 DBTABLES15 = [BrtBeginDbTables15](#) 1\*[BrtDbTable15](#) [BrtEndDbTables15](#)  
 DATAFEEDPR15 = [BrtBeginDataFeedPr15](#) DBTABLES15 [BrtEndDataFeedPr15](#)  
 TEXTPR15 = ECTXTWIZ15 [[BrtTextPr15](#)]  
 ECTXTWIZ15 = [BrtBeginECTxtWiz15](#) ECTWFLDINFOLST15 [BrtEndECTxtWiz15](#)  
 ECTWFLDINFOLST15 = [BrtBeginECTWFldInfoLst15](#) 1\*[BrtBeginECTwFldInfo15](#)  
[BrtEndECTWFldInfoLst15](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.25 External Link

An instance of the **External Link** (section [2.1.7.25](#)) part ABNF specifies an **external link** (section [2.2.7.4](#)).

**Content type:** application/vnd.ms-excel.externalLink

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/externalLink>

An **External Link** (section [2.1.7.25](#)) part ABNF MUST be the target of an explicit relationship in the **workbook** (section [2.1.7.60](#)) part.

If the **External Link** part specifies an **external link** (section [2.2.7.4](#)) that is of type **external workbook** (section [2.1.10](#)), the part MUST specify an explicit external relationship to an external workbook. If the **External Link** part specifies an **external link** (section [2.2.7.4](#)) that is of type **OLE data source** (section [2.2.7.4.3](#)), the part MUST specify an explicit external relationship to an **OLE object** (section [2.1.7.36](#)). If the **External Link** part specifies an **external link** (section [2.2.7.4](#)) that is of type **DDE data source** (section [2.2.7.4.2](#)), the part MUST NOT specify any relationship.

An **External Link** part MUST NOT have any implicit or explicit relationships to any other parts specified by this document.

Record sequence ABNF:

EXTERNALLINK = [BrtBeginSupBook](#) (EXTERNALBOOK / DDEOLELINK) \*FRT [BrtEndSupBook](#)  
 EXTERNALBOOK = [BrtSupTabs](#) \*EXTERNNAME \*EXTERNTABLE  
 DDEOLELINK = \*DDEOLEITEM  
 EXTERNNAME = [BrtSupNameStart](#) [BrtSupNameFmla](#) [BrtSupNameBits](#) [BrtSupNameEnd](#)

DDEOLEITEM = BrtSupNameStart BrtSupNameBits [DDEOLEITEMVALUES] BrtSupNameEnd  
DDEOLEITEMVALUES = [BrtSupNameValueStart](#) \*DDEOLEITEMVALUE [BrtSupNameValueEnd](#)  
DDEOLEITEMVALUE = [BrtSupNameNum](#) / [BrtSupNameBool](#) / [BrtSupNameErr](#) / [BrtSupNameSt](#) / [BrtSupNameNil](#)  
EXTERNTABLE = [BrtExternTableStart](#) \*EXTERNROW [BrtExternTableEnd](#)  
EXTERNROW = [BrtExternRowHdr](#) 1\*EXTERNVALUE  
EXTERNVALUE = [[BrtExternValueMeta](#)] EXTERNVALUEDATA  
EXTERNVALUEDATA = [BrtExternCellBlank](#) / [BrtExternCellReal](#) / [BrtExternCellBool](#) / [BrtExternCellError](#) / [BrtExternCellString](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.26 File Properties, Core

The **File Properties, Core** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.12.1. The content associated with this part is specified in [\[ISO/IEC29500-2:2011\]](#) section 11.

### 2.1.7.27 File Properties, Custom

The **File Properties, Custom** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.12.2. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#) section 22.3.

In addition, the custom properties, used by the version of the workbook that is **published** to or rendered on a Web or application server, are specified in the following table:

| Name attribute                     | Meaning  |
|------------------------------------|--|
| PROP_ <i>ParameterName</i>         | <p>Specifies a parameter, where <i>ParameterName</i> is a name specified by the user. The parameter corresponds to the <b>named range</b> specified by the <b>BrName</b> (section <a href="#">2.4.680</a>) element that has a <b>name</b> field equal to <i>ParameterName</i>.</p> <p>The contents are an empty <b>lpwstr</b> element. The <b>lpwstr</b> element is specified in <a href="#">[ISO/IEC29500-1:2011]</a> section 22.4.2.18.</p>        |
| PROP_MULTVAL_ <i>ParameterName</i> | <p>Specifies a <b>filter</b> parameter, where <i>ParameterName</i> is a name specified by the user. The parameter corresponds to the named range specified by the <b>BrName</b> (section <a href="#">2.4.680</a>) element that has a <b>name</b> field equal to <i>ParameterName</i>.</p> <p>The contents are an empty <b>lpwstr</b> element. The <b>lpwstr</b> element is specified in <a href="#">[ISO/IEC29500-1:2011]</a> section 22.4.2.18.</p> |

### 2.1.7.28 File Properties, Extended

The **File Properties, Extended** part is defined in [\[ISO/IEC29500-1:2011\]](#) section 15.2.12.3. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#) section 22.2.

In addition, this document specifies the following name value pairs for the **HeadingPairs** element specified in [\[ISO/IEC29500-1:2011\]](#) section 22.2.2.8:

| Name Value Pair        | Meaning   |
|------------------------|---|
| SheetType, <i>n</i>    | There are <i>n</i> of these type of sheets in the workbook. SheetType MUST be one of the following: "Worksheets", "Excel 4.0 Macros", "Charts", or "Dialogs". |
| Named Ranges, <i>n</i> | There are <i>n</i> named ranges in the workbook.  |

### 2.1.7.29 File Properties, Thumbnail

The **File Properties, Thumbnail** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.16. The content associated with this part is specified in [\[ISO/IEC29500-2:2011\]](#) section 12.

### 2.1.7.30 Images

The **Images** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.14.

In addition to the explicit relationships specified in [\[ISO/IEC29500-1:2011\]](#) section 22.4.2.18, an **Image** part is permitted to be the target of an explicit relationship from the following parts specified in this document:

- **Chart Sheet** (section [2.1.7.7](#))
- **Macro Sheet** (section [2.1.7.32](#))
- **Theme** (section [2.1.7.52](#))
- **Worksheet** (section [2.1.7.61](#))

### 2.1.7.31 International Macro Sheet

An instance of the **International Macro Sheet** part type specifies the same information as a **macro sheet** (section [2.1.7.32](#)) part type.

**Content type:** application/vnd.ms-excel.intlmacrosheet

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/xlIntlMacrosheet>

When this part type is present, the associated **macro sheet** will display and operate with US English **locale**, regardless of what the product locale, user locale, or system locale is. This will maximize compatibility when running under various locales.

International Macrosheet records and record sequence ABNF are identical to **macro sheet** (section [2.1.7.32](#)).

### 2.1.7.32 Macro Sheet

An instance of the **Macro Sheet** part type specifies a macro sheet.

**Content type:** application/vnd.ms-excel.macrosheet

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/xlMacrosheet>

References to the **Macro Sheet** part in this document include **International Macro Sheet** (section [2.1.7.31](#)).

A **Macro Sheet** part MUST be the target of an explicit relationship in the **workbook** (section [2.1.7.60](#)) part.

A **Macro Sheet** part is permitted to have implicit relationships to the following parts specified in this document:

- **Comments** (section [2.1.7.8](#))
- **Macro Sheet Binary Index** (section [2.1.7.33](#))
- **Sort Map** (section [2.1.7.49](#))

A **Macro Sheet** part is permitted to have explicit relationships to the following parts specified in this document:

- **Custom Property** (section [2.1.7.12](#))
- **Drawings** (section [2.1.7.23](#))
- **OLE Object** (section [2.1.7.36](#))
- **OLE Package** (section [2.1.7.37](#))
- **Images** (section [2.1.7.30](#))
- **Printer Settings** (section [2.1.7.41](#))
- **VML Drawings** (section [2.1.7.58](#))

A **Macro Sheet** part MUST NOT have implicit or explicit relationships to any other part specified in this document.

Record sequence ABNF:

```
MACROSHEET = BrtBeginSheet [BrtWsProp] [BrtWsDim] [WSVIEWS] [WSFMTINFO] *COLINFOS  
CELLTABLE [BrtSheetCalcProp] [[BrtSheetProtectionIso] BrtSheetProtection] [AUTOFILTER]  
[SORTSTATE] [DCON] [USERSHIEWS] [BrtPhoneticInfo] [BrtPrintOptions] [BrtMargins]  
[BrtPageSetup] [HEADERFOOTER] [RWBRK] [COLBRK] *BrtBigName [BrtDrawing]  
[BrtLegacyDrawing] [BrtLegacyDrawingHF] [BrtBkHim] [OLEOBJECTS] *FRT BrtEndSheet
```

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.33 Macro Sheet Binary Index

An instance of the **Macro Sheet Binary Index** part type specifies a binary index (section [2.2.1.1](#)) for a macro sheet, as specified by the **Macro Sheet** (section [2.1.7.32](#)) part.

**Content type:** application/vnd.ms-excel.binIndexMs

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/xlBinaryIndex>

This part is identical to the **worksheet binary index** (section [2.1.7.62](#)) part, except that it applies to a macro sheet.

### 2.1.7.34 Metadata

An instance of the **Metadata** part (section [2.1.7.34](#)) type specifies metadata (section [2.2.4](#)) information for a workbook.



**Content type:** application/vnd.ms-excel.sheetMetadata

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/sheetMetadata>

An instance of this part type specifies metadata (section [2.2.4](#)) information for a workbook.

A package MUST contain at most one **Metadata** part, and that part MUST be the target of an implicit relationship from the **Workbook** (section [2.1.7.60](#)) part.

A **Metadata** part MUST NOT have implicit or explicit relationships to any part specified by this document.

Record sequence ABNF:

METADATA = [BrtBeginMetadata](#) ESMDTINFO [ESSTR] [ESMDX] \*ESFMD 1\*ESMDB \*FRT  
[BrtEndMetadata](#)

ESMDTINFO = [BrtBeginEsmdtinfo](#) 1\*[BrtMdtinfo](#) [BrtEndEsmdtinfo](#)

ESSTR = [BrtBeginEsstr](#) 1\*[BrtStr](#) [BrtEndEsstr](#)

ESMDX = [BrtBeginEsmdx](#) 1\*MDX [BrtEndEsmdx](#)

MDX = [BrtBeginMdx](#) (MDXTUPLE / MDXSET / MDXMBRPROP / MDXKPI) [BrtEndMdx](#)

MDXTUPLE = [BrtBeginMdxTuple](#) \*[BrtMdxMbrIstr](#) [BrtEndMdxTuple](#)

MDXSET = [BrtBeginMdxSet](#) \*[BrtMdxMbrIstr](#) [BrtEndMdxSet](#)

MDXMBRPROP = [BrtBeginMdxMbrProp](#) [BrtEndMdxMbrProp](#)

MDXKPI = [BrtBeginMdxKPI](#) [BrtEndMdxKPI](#)

ESFMD = [BrtBeginEsfmd](#) 1\*FMD \*FRT [BrtEndEsfmd](#)

FMD = [BrtBeginFmd](#) FRT [BrtEndFmd](#)

ESMDB = [BrtBeginEsmdb](#) 1\*[BrtMdb](#) [BrtEndEsmdb](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.35 Model

The **Model** part is specified in [\[MS-XLDM\]](#).

Extensions to this specification are specified in [\[MS-XLSX\]](#) section 2.1.6.

### 2.1.7.36 OLE Object

The **OLE Object** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.10.

In addition to the explicit relationships specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.10, an **OLE Object** part is permitted to be the target of an explicit relationship from the following parts specified in this document:

- **Macro Sheet** (section [2.1.7.32](#))

- **Dialog Sheet** (section [2.1.7.20](#))
- **External Link** (section [2.1.7.25](#))
- **Worksheet** (section [2.1.7.61](#))

### 2.1.7.37 OLE Package

The **OLE Package** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.11.

In addition to the explicit relationships specified in [\[ISO/IEC29500-1:2011\]](#) section 15.2.11, an **OLE Package** part is permitted to be the target of an explicit relationship from the following parts specified in this document:

- **Macro Sheet** (section [2.1.7.32](#))
- **Dialog Sheet** (section [2.1.7.20](#))
- **Worksheet** (section [2.1.7.61](#))

### 2.1.7.38 PivotCache Definition

An instance of the **PivotCache Definition** part type specifies a **PivotCache** (section [2.2.5.2](#)) for one or more **PivotTables** (section [2.2.5](#)) or **cube functions**.

**Content type:** application/vnd.ms-excel.pivotCacheDefinition

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/pivotCacheDefinition>

A package MUST contain one **PivotCache Definition** part per **BrtBeginPivotCacheID** (section [2.4.163](#)) record in the **workbook** (section [2.1.7.60](#)) part, and each such part MUST be the target of an explicit relationship from a **workbook** part. In addition, if the **idCache** field of the **BrtBeginSXView** (section [2.4.264](#)) record in a **PivotTable** (section [2.1.7.40](#)) part is equal to the **idSx** field of any **BrtBeginPivotCacheID** record in the **workbook** part, then the **PivotCache Definition** part corresponding to that **BrtBeginPivotCacheID** record MUST be the target of an implicit relationship from that **PivotTable** (section [2.1.7.40](#)) part.

A **PivotCache Definition** part is permitted to have an explicit relationship to the following part specified in this document:

- **PivotCache Records** (section [2.1.7.39](#))

A **PivotCache Definition** part MUST NOT have any implicit or explicit relationships to any other parts specified by this document.

Record sequence ABNF:

```
PIVOTCACHEDEF = BrtBeginPivotCacheDef PCDSOURCE PCDFIELDS [PCDCALCITEMS]
[PCDHIERARCHIES] [PCDKPIS] [PCDCALCMEMS] [PCSDTUPLECACHE] [DIMS] [MGS [MGMAPS]]
FRTPIVOTCACHEDEF BrtEndPivotCacheDef
```

```
PCDSOURCE = BrtBeginPCDSOURCE [PCDSRANGE / PCDSCONSOL] PCDSOURCE14 BrtEndPCDSOURCE
```

```
PCDSRANGE = BrtBeginPCDSRange BrtEndPCDSRange
```

```
PCDSCONSOL = BrtBeginPCDSConsol [PCDSCPAGES] PCDSCSETS BrtEndPCDSConsol
```

PCDSCPAGES = [BrtBeginPCDSCPages](#) \*4PCDSCPAGE [BrtEndPCDSCPages](#)

PCDSCPAGE = [BrtBeginPCDSCPage](#) \*PCDSCPITEM [BrtEndPCDSCPage](#)

PCDSCPITEM = [BrtBeginPCDSCPItem](#) [BrtEndPCDSCPItem](#)

PCDSCSETS = [BrtBeginPCDSCSets](#) 1\*PCDSCSET [BrtEndPCDSCSets](#)

PCDSCSET = [BrtBeginPCDSCSet](#) [BrtEndPCDSCSet](#)

PCDFIELDS = [BrtBeginPCDFields](#) \*PCDFIELD [BrtEndPCDFields](#)

PCDFIELD = [BrtBeginPCDField](#) [PNAMES] [PCDFATBL] [PCDFGROUP] FRTPCDFIELD [BrtEndPCDField](#)

FRTPCDFIELD = [FRTPCDFIELD14] [FRTPCDFIELD15] \*FRT

FRTPCDFIELD14 = [BrtFRTBegin](#) [BrtPCDField14](#) [BrtFRTEnd](#)

FRTPCDFIELD15 = [BrtFRTBegin](#) ITEMUNIQUENAMES [BrtFRTEnd](#)

ITEMUNIQUENAMES = [BrtBeginItemUniqueNames](#) 1\*[BrtItemUniqueName](#) [BrtEndItemUniqueNames](#)

PNAMES = [BrtBeginPNames](#) \*PNAME [BrtEndPNames](#)

PNAME = [BrtBeginPName](#) [PNPAIRS] [BrtEndPName](#)

PNPAIRS = [BrtBeginPNPairs](#) PNPAIR [BrtEndPNPairs](#)

PNPAIR = [BrtBeginPNPair](#) [BrtEndPNPair](#)

PCDFATBL = [BrtBeginPCDFatbl](#) \*(PCDI / PCDIA) [BrtEndPCDFatbl](#)

PCDI = [BrtPCDIMissing](#) / [BrtPCDINumber](#) / [BrtPCDIBoolean](#) / [BrtPCDIError](#) / [BrtPCDIString](#) / [BrtPCDIDatetime](#) / PCDIRUN

PCDIA = [BrtPCDIAMissing](#) / [BrtPCDIANumber](#) / [BrtPCDIABoolean](#) / [BrtPCDIAError](#) / [BrtPCDIAStrng](#) / [BrtPCDIADatetime](#)

PCDIRUN = [BrtBeginPCDIRun](#) [BrtEndPCDIRun](#)

PCDFGROUP = [BrtBeginPCDFGroup](#) [PCDFGRANGE / PCDFGDISCRETE] [PCDFGITEMS] [BrtEndPCDFGroup](#)

PCDFGRANGE = [BrtBeginPCDFGRange](#) [BrtEndPCDFGRange](#)

PCDFGDISCRETE = [BrtBeginPCDFGDiscrete](#) 1\*[BrtPCDIIndex](#) [BrtEndPCDFGDiscrete](#)

PCDFGITEMS = [BrtBeginPCDFGItems](#) \*PCDI [BrtEndPCDFGItems](#)

PCDCALCITEMS = [BrtBeginPCDCalcItems](#) 1\*PCDCALCITEM [BrtEndPCDCalcItems](#)

PCDCALCITEM = [BrtBeginPCDCalcItem](#) PIVOTRULE [PNAMES] \*FRT [BrtEndPCDCalcItem](#)

PCDHIERARCHIES = [BrtBeginPCDHierarchies](#) 1\*PCDHIERARCHY [BrtEndPCDHierarchies](#)

PCDHIERARCHY = [BrtBeginPCDHierarchy](#) [PCDHFIELDSUSAGE] [PCDHGLEVELS] FRTPCDHIERARCHY [BrtEndPCDHierarchy](#)

PCDHFIELDSUSAGE = [BrtBeginPCDHFieldsUsage](#) [BrtEndPCDHFieldsUsage](#)

PCDHGLEVELS = [BrtBeginPCDHGLevels](#) 1\*PCDHGLEVEL [BrtEndPCDHGLevels](#)

PCDHGLEVEL = [BrtBeginPCDHGLevel](#) [PCDHGLGROUPS] \*FRT [BrtEndPCDHGLevel](#)

PCDHGLGROUPS = [BrtBeginPCDHGLGroups](#) 1\*PCDHGLGROUP [BrtEndPCDHGLGroups](#)

PCDHGLGROUP = [BrtBeginPCDHGLGroup](#) PCDHGLGMEMBERS [BrtEndPCDHGLGroup](#)

PCDHGLGMEMBERS = [BrtBeginPCDHGLGMembers](#) 1\*PCDHGLGMEMBER [BrtEndPCDHGLGMembers](#)

PCDHGLGMEMBER = [BrtBeginPCDHGLGMember](#) [BrtEndPCDHGLGMember](#)

FRTPCDHIERARCHY = [BrtFRTBegin [BrtPCDH14](#) BrtFRTEnd] \*FRT

PCDKPIS = [BrtBeginPCDKPIs](#) \*PCDKPI [BrtEndPCDKPIs](#)

PCDKPI = [BrtBeginPCDKPI](#) [BrtEndPCDKPI](#)

PCDCALCMEMS = [BrtBeginPCDCalcMems](#) 1\*PCDCALCMEM [BrtEndPCDCalcMems](#)

PCDCALCMEM = [BrtBeginPCDCalcMem](#) FRTPCDCALCMEM [BrtEndPCDCalcMem](#)

FRTPCDCALCMEM = [BrtFRTBegin PCDCALCMEM14 BrtFRTEnd] \*FRT

PCSDTUPLECACHE = [BrtBeginPCSDTupleCache](#) [PCSDTCENTRIES] [PCSDTCSETS] [PCSDTCQUERIES] [PCDSFCIENTRIES] \*FRT [BrtEndPCSDTupleCache](#)

PCSDTCENTRIES = [BrtBeginPCSDTCEntries](#) \*PCSDTCENTRY [BrtEndPCSDTCEntries](#)

PCSDTCENTRY = (BrtPCDIMissing / BrtPCDINumber / BrtPCDIError / BrtPCDIString) [PCSDTCEMEMBERS]

PCSDTCEMEMBERS = [BrtBeginPCSDTCEMembers](#) 1\*PCSDTCEMEMBER [BrtEndPCSDTCEMembers](#)

PCSDTCEMEMBER = [BrtBeginPCSDTCEMember](#) [BrtEndPCSDTCEMember](#)

PCSDTCSETS = [BrtBeginPCSDTCSets](#) 1\*PCSDTCSET [BrtEndPCSDTCSets](#)

PCSDTCSET = [BrtBeginPCSDTCSet](#) \*PCSDTCEMEMBERS [PCSDTCEMEMBERSSORTBY] [BrtEndPCSDTCSet](#)

PCSDTCEMEMBERSSORTBY = [BrtBeginPCSDTCEMembersSortBy](#) 1\*PCSDTCEMEMBER [BrtEndPCSDTCEMembers](#)

PCSDTCQUERIES = [BrtBeginPCSDTCQueries](#) 1\*PCSDTCQUERY [BrtEndPCSDTCQueries](#)

PCSDTCQUERY = [BrtBeginPCSDTCQuery](#) [PCSDTCEMEMBERS] [BrtEndPCSDTCQuery](#)

PCDSFCIENTRIES = [BrtBeginPcdSFCIEntries](#) 1\*[BrtPCDSFCIEntry](#) [BrtEndPCDSFCIEntries](#)

DIMS = [BrtBeginDims](#) 1\*DIM [BrtEndDims](#)

DIM = [BrtBeginDim](#) [BrtEndDim](#)

MGS = [BrtBeginMgs](#) \*MG [BrtEndMGs](#)

MG = [BrtBeginMG](#) [BrtEndMG](#)

MGMAPS = [BrtBeginMGMaps](#) \*MAP [BrtEndMGMaps](#)

MAP = [BrtBeginMap](#) [BrtEndMap](#)

FRTPIVOTCACHEDEF = [BrtFRTBegin PCD14 BrtFRTEnd] [PCD15] \*FRT

PCD14 = [BrtBeginPCD14](#) [BrtEndPCD14](#)

PCDSOURCE14 = [BrtFRTBegin [BrtPivotCacheConnectionName](#) BrtFRTEnd] \*FRT

PCD15 = BrtFRTBegin [BrtPivotCacheIdVersion](#) BrtFRTEnd

PCDH15 = BrtFRTBegin [BrtPCDH15](#) BrtFRTEnd

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.39 PivotCache Records

An instance of the **PivotCache Records** part type specifies cache records (section [2.2.5.2.10](#)) for a **PivotTable** (section [2.2.5](#)).

**Content type:** application/vnd.ms-excel.pivotCacheRecords

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/spreadsheetml/pivotCacheRecords>

A package MUST contain at most one **PivotCache Records** part per **PivotCache Definition** (section [2.1.7.38](#)) part, and each such part MUST be the target of an explicit relationship from the **PivotCache Definition** part.

A **PivotCache Records** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

PIVOTCACHERECORDS = [BrtBeginPivotCacheRecords](#) \*PIVOTCACHERECORD \*FRT  
[BrtEndPivotCacheRecords](#)

PIVOTCACHERECORD = [BrtPCRRecord](#) / PIVOTCACHERECORDDDT

PIVOTCACHERECORDDDT = [BrtPCRRecordDt](#) 1\*PCDIDT

PCDIDT = [BrtPCDIMissing](#) / [BrtPCDINumber](#) / [BrtPCDIBoolean](#) / [BrtPCDIError](#) / [BrtPCDIString](#) /  
[BrtPCDIDatetime](#) / [BrtPCDIIndex](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.40 PivotTable

An instance of the **PivotTable** part type specifies a **PivotTable** View (section [2.2.5.3](#)).

**Content type:** application/vnd.ms-excel.PivotTable

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/PivotTable>

A **PivotTable** part MUST be the target of an implicit relationship from a **worksheet** (section [2.1.7.61](#)) part.

A **PivotTable** part is permitted to have implicit relationships to the following parts specified in this document:

- **PivotCache Definition** (section [2.1.7.38](#))

A **PivotTable** part MUST NOT have any implicit or explicit relationships to any other parts specified in this document.

Record sequence ABNF:

PIVOTTABLE = [BrtBeginSXView](#) SXLOCATION [SXVDS] [ISXVDRWS] [SXLIRWS] [ISXVDCOLS] [SXLICOLS] [SXPIS] [SXDIS] [SXFORMATS] [SXCONDFMTS] [SXCRTFORMATS] [SXTHS] [BrtTableStyleClient](#) [SXFILTERS] [ISXTHRWS] [ISXTHCOLS] FRTSXVIEW [BrtEndSXView](#)

SXLOCATION = [BrtBeginSXLocation](#) [BrtEndSXLocation](#)

SXVDS = [BrtBeginSXVDS](#) 1\*SXVD [BrtEndSXVDS](#)

ISXVDRWS = [BrtBeginISXVDRws](#) [BrtEndISXVDRws](#)

SXVD = [BrtBeginSXVD](#) [SXVIS] [AUTOSORTSCOPE] [FRTSXVD] [BrtEndSXVD](#)

AUTOSORTSCOPE = [BrtBeginAutoSortScope](#) PIVOTRULE [BrtEndAutoSortScope](#)

SXVIS = [BrtBeginSXVIs](#) 1\*SXVI [BrtEndSXVIs](#)

SXVI = [BrtBeginSXVI](#) [BrtEndSXVI](#)

FRTSXVD = [[BrtFRTBegin](#) [BrtSXVD14](#) [BrtFRTEnd](#)] \*FRT

SXLIRWS = [BrtBeginSXLIRws](#) 1\*SXLI [BrtEndSXLIRws](#)

SXLI = [BrtBeginSXLi](#) [ISXVIS] [BrtEndSXLi](#)

ISXVIS = [BrtBeginISXVIs](#) [BrtEndISXVIs](#)

ISXVDCOLS = [BrtBeginISXVDCols](#) [BrtEndISXVDCols](#)

SXLICOLS = [BrtBeginSXLICols](#) 1\*SXLI [BrtEndSXLICols](#)

SXPIS = [BrtBeginSXPIs](#) 1\*256SXPI [BrtEndSXPIs](#)

SXPI = [BrtBeginSXPI](#) \*FRT [BrtEndSXPI](#)

SXDIS = [BrtBeginSXDI](#)s 1\*SXDI [BrtEndSXDI](#)s

SXDI = [BrtBeginSXDI](#) FRTSXDI [BrtEndSXDI](#)

FRTSXDI = [[BrtFRTBegin](#) [BrtSXDI14](#) [BrtFRTEnd](#)] [[BrtFRTBegin](#) [BrtSXDI15](#) [BrtFRTEnd](#)] \*FRT

SXFORMATS = [BrtBeginSXFormats](#) 1\*SXFORMAT [BrtEndSxFormats](#)

SXFORMAT = [BrtBeginSXFormat](#) PIVOTRULE \*FRT [BrtEndSXFormat](#)

SXCONDFMTS = [BrtBeginSXCondFmts](#) 1\*SXCONDFMT [BrtEndSXCondFmts](#)

SXCONDFMT = [BrtBeginSXCondFmt](#) PIVOTRULES \*FRT [BrtEndSXCondFmt](#)  
 SXCRTFORMATS = [BrtBeginSXCrtFormats](#) 1\*SXCRTFORMAT [BrtEndSXCrtFormats](#)  
 SXCRTFORMAT = [BrtBeginSXCrtFormat](#) PIVOTRULE [BrtEndSXCrtFormat](#)  
 SXTHS = [BrtBeginSXTHs](#) 1\*SXTH [BrtEndSXTHs](#)  
 SXTH = [BrtBeginSXTH](#) [SXTDMPs] \*SXTHITEMS FRTSXTH [BrtEndSXTH](#)  
 FRTSXTH = [BrtFRTBegin [BrtSXTH14](#) BrtFRTEnd] \*FRT  
 SXTHITEMS = [BrtBeginSXTHItems](#) 1\*SXTHITEM [BrtEndSXTHItems](#)  
 SXTHITEM = [BrtBeginSXTHItem](#) [BrtEndSXTHItem](#)  
 SXTDMPs = [BrtBeginSXTDMPs](#) \*SXTDMP [BrtEndSXTDMPs](#)  
 SXTDMP = ([BrtSXTDMPOrder](#) / [BrtBeginSXTDMP](#)) [BrtEndSXTDMP](#)  
 ISXTHRWS = [BrtBeginISXTHRws](#) [BrtEndISXTHRws](#)  
 ISXTHCOLS = [BrtBeginISXTHCols](#) [BrtEndISXTHCols](#)  
 SXFILTERS = [BrtBeginSXFilters](#) 1\*SXFILTER [BrtEndSXFilters](#)  
 SXFILTER = [BrtBeginSXFILTER](#) AFILTER FRTSXFILTER [BrtEndSXFilter](#)  
 AFILTER = [BrtBeginAFilter](#) 1\*PIVOTFILTERCOLUMN [BrtEndAFilter](#)  
 PIVOTFILTERCOLUMN = [BrtBeginFilterColumn](#) ([BrtDynamicFilter](#) / [BrtTop10Filter](#) / CUSTOMFILTERS / PIVOTFILTERS) \*FRT  
 PIVOTFILTERS = [BrtBeginFilters](#) \*[BrtFilter](#) [BrtEndFilters](#)  
 PIVOTRULES = [BrtBeginSXRules](#) PIVOTRULE [BrtEndSxRules](#)  
 FRTSXVIEW = [BrtFRTBegin SXVIEW14 BrtFRTEnd] [FRTSXVIEW15] \*FRT  
 SXVIEW14 = [BrtBeginSXView14](#) [SXCHANGES] [SXEDITS] [SXCONDFMTS14] [BrtEndSXView14](#)  
 SXCHANGE = [BrtBeginSXChange](#) [BrtSXTupleItems](#) [BrtEndSXChange](#)  
 SXCHANGES = [BrtBeginSXChanges](#) 1\*2147483647SXCHANGE [BrtEndSXChanges](#)  
 SXEDITS = [BrtBeginSXEdits](#) 1\*2147483647SXEDIT [BrtEndSXEdits](#)  
 SXEDIT = [BrtBeginSXEdit](#) BrtSXTupleItems PIVOTRULE14 [BrtEndSXEdit](#)  
 SXCONDFMTS14 = [BrtBeginSXCondFmts14](#) 1\*SXCONDFMT14 [BrtEndSXCondFmts14](#)  
 SXCONDFMT14 = [BrtBeginSXCondFmt14](#) PIVOTRULES14 [BrtEndSXCondFmt14](#)  
 PIVOTRULES14 = [BrtBeginSXRules14](#) PIVOTRULE14 [BrtEndSXRules14](#)  
 PIVOTRULE14 = [BrtBeginPRule14](#) [PRFILTERS14] \*FRT [BrtEndPRule14](#)  
 PRFILTERS14 = [BrtBeginPRFilters14](#) 1\*2147483647PRFILTER14 [BrtEndPRFilters14](#)  
 PRFILTER14 = [BrtBeginPRFilter14](#) 1\*2147483647PRFITEM14 [BrtEndPRFilter14](#)

PRFITEM14 = [BrtBeginPRFItem14](#) [BrtEndPRFItem14](#)

FRTSXVIEW15 = [PIVOTVALUECELLS15] [PIVOTTABLEUISETTINGS]

PIVOTVALUECELLS15 = BrtFRTBegin [BrtBeginSxvcells](#) 1\*PIVOTROWS15 [BrtEndSxvcells](#) BrtFRTEnd

PIVOTROWS15 = [[BrtBeginSxRow](#) 1\*PIVOTVALUECELL15 [BrtEndSxRow](#)]

PIVOTVALUECELL15 = [BrtSxvcellNum](#) / [BrtSxvcellStr](#) / [BrtSxvcellErr](#) / [BrtSxvcellBool](#) / [BrtSxvcellDate](#) / [BrtSxvcellNil](#)

PIVOTTABLEUISETTINGS = BrtFRTBegin BrtPivotTableUISettings \*[BrtFieldListActiveItem](#) [BrtEndPivotTableUISettings](#) BrtFRTEnd

FRTSXFILTER = [BrtFRTBegin [BrtSxFilter15](#) BrtFRTEnd] \*FRT

For ABNF rules not listed here, see section [2.1.8](#).

#### 2.1.7.41 Printer Settings

An instance of the **Printer Settings** part type specifies information about the initialization and environment of a printer or a display device

**Content type:** application/vnd.openxmlformats-officedocument.spreadsheetml.printerSettings

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/printerSettings>

This part type MUST contain exactly one DEVMODE structure, as described in [\[DEVMODE\]](#), with a **dmSize** greater than 0, including printer driver specific data.

A package MUST contain at most one **Printer Settings** part per **chart sheet** (section [2.1.7.7](#)), **dialog sheet** (section [2.1.7.20](#)), **worksheet** (section [2.1.7.61](#)), or **macro sheet** (section [2.1.7.32](#)) part, and that part MUST be the target of an explicit relationship from a **chart sheet**, **dialog sheet**, **worksheet**, or **macro sheet** part.

A **Printer Settings** part MUST NOT have implicit or explicit relationships to any part specified by this document.

#### 2.1.7.42 Query Table

An instance of the **Query Table** part type specifies a **query table** that is associated with a **table** or **range**.

**Content type:** application/vnd.ms-excel.queryTable

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/queryTable>

If a **Query Table** part is the target of an implicit relationship from a **table** (section [2.1.7.51](#)) part, this relationship specifies that the query table is associated with that table. If a **Query Table** part is the target of an implicit relationship from a **worksheet** (section [2.1.7.61](#)) part, this relationship specifies that the query table is associated with a range on that sheet.

A **Query Table** part MUST be the target of exactly one implicit relationship from either a **worksheet** (section [2.1.7.61](#)) part or a **table** (section [2.1.7.51](#)) part.



A **Query Table** part MUST NOT have implicit or explicit relationships to any part specified by this document.

Record sequence ABNF:

QSI = [BrtBeginQSI](#) [QSIR] FRTQSI [BrtEndQSI](#)

QSIR = [BrtBeginQSIR](#) QSIFS [DELETEDNAMES] [SORTSTATE] \*FRT [BrtEndQSIR](#)

QSIFS = [BrtBeginQSIFs](#) \*QSIF [BrtEndQSIFs](#)

QSIF = [BrtBeginQSIF](#) \*FRT [BrtEndQSIF](#)

DELETEDNAMES = [BrtBeginDeletedNames](#) 1\*DELETEDNAME [BrtEndDeletedNames](#)

DELETEDNAME = [BrtBeginDeletedName](#) [BrtEndDeletedName](#)

FRTQSI = [[BrtQsi15](#)] \*FRT

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.43 Revision Headers

An instance of the **Revision Headers** part type specifies the revision header logs (section [2.2.12.2](#)) for a shared workbook (section [2.2.12](#)).

**Content type:** application/vnd.ms-excel.revisionHeaders

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/revisionHeaders>

If the workbook is a shared workbook (section [2.2.12](#)), the package MUST contain exactly one **Revision Headers** part, and that part MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part. If the workbook is not a shared workbook, the package MUST NOT contain a **Revision Headers** part.

A **Revision Headers** part is permitted to have explicit relationships to the following parts specified in this document:

- **Revision Log** (section [2.1.7.44](#))

A **Revision Headers** part MUST NOT have any implicit or explicit relationships to any other parts specified in this document.

Record sequence ABNF:

REVISIONHEADERS = [BrtInfo](#) \*([BrtRRHeader](#) \*FRT) [BrtEOF](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.44 Revision Log

An instance of the **Revision Log** part type specifies the revision logs (section [2.2.12.3](#)) for a shared workbook (section [2.2.12](#)).

**Content type:** application/vnd.ms-excel.revisionLog

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/revisionLog>

A package MUST contain one **Revision Log** part for each revision header log (section [2.2.12.2](#)) specified in the **revision headers** (section [2.1.7.43](#)) part, and each part MUST be the target of an explicit relationship from the **revision headers** part.

A **Revision Log** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

REVISIONLOG = \*(RRINSDel / RRINSMove / RRCHGCell / RRFORMAT / RRMISC) [BrtEOF](#)

RRINSDel = [BrtRRInsDel](#) \*[BrtUCR](#) \*RRCF [BrtRREndInsDel](#)

RRINSMove = [BrtRRMove](#) \*[BrtUCR](#) \*RRCF [BrtRREndMove](#)

RRCF = RRCHGCell / RRFORMAT

RRCHGCell = [BrtRRChgCell](#) 1\*2CELL 0\*2DXF \*FRT [BrtRREndChgCell](#)

CELL = [BrtCellBlank](#) / [BrtCellRk](#) / [BrtCellError](#) / [BrtCellBool](#) / [BrtCellReal](#) / [BrtCellSt](#) / [BrtCellIsst](#) / [BrtFmlaString](#) / [BrtFmlaNum](#) / [BrtFmlaBool](#) / [BrtFmlaError](#) / [BrtCellRString](#)

RRFORMAT = [BrtRRFormat](#) [DXF] \*FRT [BrtRREndFormat](#)

RRMISC = [BrtCUsr](#) / [BrtUsr](#) / [BrtBeginUsers](#) / [BrtRRUserView](#) / ([BrtRRRenSheet](#) \*FRT) / [BrtRRInsertSh](#) / ([BrtRRDefName](#) \*FRT) / [BrtRRNote](#) / [BrtRRConflict](#) / [BrtRRTQSIF](#) / [BrtRRAutoFmt](#)

DXF = [BrtBeginDXFs](#) [BrtDXF](#) [BrtEndDXFs](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.45 Shared Strings

An instance of the **Shared Strings** (section [2.1.7.45](#)) part ABNF type specifies the unique strings that occur on all sheets in a workbook.

**Content type:** application/vnd.ms-excel.sharedStrings

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/sharedStrings>

A package MUST contain at most one **Shared Strings** (section [2.1.7.45](#)) part ABNF, and that part MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **Shared Strings** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

SHAREDSTRINGS = [BrtBeginSst](#) \*[BrtSSTItem](#) \*FRT [BrtEndSst](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.46 Single Cell Tables

An instance of the **Single Cell Tables** part type specifies how elements and attributes in an **XML map**, as specified by the **Custom XML Maps** (section [2.1.7.15](#)) part, are associated with sheet **cells**. Sheet cells are used for elements and attributes in an XML map that are specified as occurring only once, or when a user forces an otherwise repeating element or attribute to occur only once.

**Content type:** application/vnd.ms-excel.tableSingleCells

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/tableSingleCells>

Use tables, as specified by the **table** (section [2.1.7.51](#)) part, for elements and attributes in an XML map that are specified as occurring more than once, or to force an otherwise non-repeating element or attribute to repeat more than once.

A package MUST contain at most one **Single Cell Tables** part per **worksheet** (section [2.1.7.61](#)) part, and that part MUST be the target of an implicit relationship from a **Worksheet** part.

A **Single Cell Tables** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

SINGLECELLTABLES = [BrtBeginSingleCells](#) \*LIST [BrtEndSingleCells](#)

LIST = [BrtBeginList](#) LISTCOLS \*FRT [BrtEndList](#)

LISTCOLS = [BrtBeginListCols](#) LISTCOL [BrtEndListCols](#)

LISTCOL = [BrtBeginListCol](#) [LISTXMLCPR] \*FRT [BrtEndListCol](#)

LISTXMLCPR = [BrtBeginListXmlCPr](#) \*FRT [BrtEndListXmlCPr](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.47 Slicer Cache

An instance of the **Slicer Cache** part type specifies a single slicer cache (section [2.2.14.1](#)) in the workbook<2> (section [2.1.7.60](#)).

**Content type:** application/vnd.ms-excel.slicerCache

**Source relationship:** <http://schemas.microsoft.com/office/2007/relationships/slicerCache>

A package MUST contain one **Slicer Cache** part per **BrtBeginSlicerCacheID** (section [2.4.194](#)) record in the **workbook** (section [2.1.7.60](#)) part, and that part MUST be the target of an explicit relationship from the **workbook** part.

A **Slicer Cache** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

SLICERCACHE = [BrtBeginSlicerCache](#) [BrtBeginSlicerCacheDef](#) [[BrtSlicerCachePivotTables](#)]  
(SLICERCACHEOLAPIMPL / SLICERCACHENATIVEITEMS) FRTSLICERCACHE [BrtEndSlicerCacheDef](#)  
[BrtEndSlicerCache](#)

SLICERCACHEOLAPIMPL = [BrtBeginSlicerCacheOlapImpl](#) SLICERCACHELEVELSDATA  
 SLICERCACHESELECTIONS \*FRT [BrtEndSlicerCacheOlapImpl](#)

SLICERCACHELEVELSDATA = [BrtBeginSlicerCacheLevelsData](#)  
 1\*2147483647SLICERCACHELEVELDATA [BrtEndSlicerCacheLevelsData](#)

SLICERCACHELEVELDATA = [BrtBeginSlicerCacheLevelData](#) SLICERCACHESIRANGES  
[BrtEndSlicerCacheLevelData](#)

SLICERCACHESIRANGES = [BrtBeginSlicerCacheSiRanges](#) \*2147483647SLICERCACHESIRANGE  
[BrtEndSlicerCacheSiRanges](#)

SLICERCACHESIRANGE = [BrtBeginSlicerCacheSiRange](#) 1\*1000[BrtSlicerCacheOlapItem](#)  
[BrtEndSlicerCacheSiRange](#)

SLICERCACHESELECTIONS = [BrtBeginSlicerCacheSelections](#) 1\*2147483647[BrtSlicerCacheSelection](#)  
[BrtEndSlicerCacheSelections](#)

SLICERCACHENATIVEITEMS = [BrtBeginSlicerCacheNative](#) [BrtSlicerCacheNativeItem](#) \*FRT  
[BrtEndSlicerCacheNative](#)

FRTSLICERCACHE = [SLICERCACHEBOOKPIVOTTABLES] [TABLESLICERCACHE]  
 [SLICERCACHECROSSFILTEREXT] \*FRT

SLICERCACHEBOOKPIVOTTABLES = [BrtFRTBegin](#) [BrtSlicerCacheBookPivotTables](#) [BrtFRTEnd](#)

TABLESLICERCACHE = BrtFRTBegin [BrtBeginTableSlicerCache](#) \*FRT [BrtEndTableSlicerCache](#)  
 BrtFRTEnd

SLICERCACHECROSSFILTEREXT = BrtFRTBegin [BrtSlicerCacheHideItemsWithNoData](#) BrtFRTEnd

For ABNF rules not listed here, see section [2.1.8](#).

#### 2.1.7.48 Slicers

An instance of the **Slicers** part specifies the Slicer Views (section [2.2.14.2](#)) for a single **worksheet** (section [2.1.7.61](#)).

**Content type:** application/vnd.ms-excel.slicer

**Source relationship:** <http://schemas.microsoft.com/office/2007/relationships/slicer>

The presence of a **Slicers** part indicates that there is at least one Slicer View on the associated **worksheet** (section [2.1.7.61](#)), and this part MUST be the target of an explicit relationship from the **Worksheet** part ABNF (section [2.1.7.61](#)).

A **Slicers** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

SLICERS = [BrtBeginSlicers](#) 1\*2147483647SLICER [BrtEndSlicers](#)

SLICER = [BrtBeginSlicer](#) \*FRT [BrtEndSlicer](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.49 Sort Map

An instance of the **Sort Map** part specifies a series of before and after **row (2)** or **column (2)** mappings to resolve different **sort** operations performed on the same range by different users in a shared workbook (section [2.2.12](#)).

**Content type:** application/vnd.ms-excel.wsSortMap

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/wsSortMap>

A package MUST contain at most one **Sort Map** part for each **worksheet** (section [2.1.7.61](#)) or **macro sheet** (section [2.1.7.32](#)) part in a shared workbook (section [2.2.12](#)), and that part MUST be the target of an implicit relationship from the **worksheet** or **macro sheet** part.

A **Sort Map** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

SORTMAP = [BrtBeginWsSortMap](#) \*RRSORT [BrtEndWsSortMap](#)

RRSORT = [BrtBeginRRSort](#) \*[BrtRRSortItem](#) [BrtEndRRSort](#)

### 2.1.7.50 Styles

An instance of the **Styles** part type specifies style (section [2.2.6](#)) information for a workbook.

**Content type:** application/vnd.ms-excel.styles

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/styles>

A package MUST contain at most one **Styles** part, and that part MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **Styles** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

STYLESHEET = [BrtBeginStyleSheet](#) [FMTS] [FONTS] [FILLS] [BORDERS] CELLSTYLEXFS CELLXFS  
STYLES DXFS TABLESTYLES [COLORPALETTE] FRTSTYLESHEET [BrtEndStyleSheet](#)

FMTS = [BrtBeginFmts](#) 1\*[BrtFmt](#) [BrtEndFmts](#)

FONTS = [BrtBeginFonts](#) 1\*65491[BrtFont](#) [ACFONTS] [BrtEndFonts](#)

ACFONTS = [BrtACBegin](#) [BrtKnownFonts](#) [BrtACEnd](#)

FILLS = [BrtBeginFills](#) 1\*65431[BrtFill](#) [BrtEndFills](#)

BORDERS = [BrtBeginBorders](#) 1\*65430[BrtBorder](#) [BrtEndBorders](#)

CELLSTYLEXFS = [BrtBeginCellStyleXFs](#) 1\*65430([BrtXF](#) \*FRT) [BrtEndCellStyleXFs](#)

CELLXFS = [BrtBeginCellXFs](#) 1\*65430([BrtXF](#) \*FRT) [BrtEndCellXFs](#)

STYLES = [BrtBeginStyles](#) 1\*65430([BrtStyle](#) \*FRT) [BrtEndStyles](#)

DXFS = [BrtBeginDXFs](#) \*2147483647([BrtDXF](#) \*FRT) [BrtEndDXFs](#)

TABLESTYLES = [BrtBeginTableStyles](#) \*TABLESTYLE [BrtEndTableStyles](#)

TABLESTYLE = [BrtBeginTableStyle](#) \*28[BrtTableStyleElement](#) [BrtEndTableStyle](#)

COLORPALETTE = [BrtBeginColorPalette](#) [INDEXEDCOLORS] [MRUCOLORS] [BrtEndColorPalette](#)

INDEXEDCOLORS = [BrtBeginIndexedColors](#) 64[BrtIndexedColor](#) [BrtEndIndexedColors](#)

MRUCOLORS = [BrtBeginMRUColors](#) 1\*10[BrtMRUColor](#) [BrtEndMRUColors](#)

FRTSTYLESHEET = [STYLESHEET14] [DXF14S] [STYLESHEET15] [DXFS15] \*FRT

STYLESHEET14 = [BrtFRTBegin](#) [BrtBeginStyleSheetExt14](#) [SLICERSTYLES] [BrtEndStyleSheetExt14](#) [BrtFRTEnd](#)

SLICERSTYLES = [BrtBeginSlicerStyles](#) \*2147483647SLICERSTYLE [BrtEndSlicerStyles](#)

SLICERSTYLE = [BrtBeginSlicerStyle](#) [BrtBeginSlicerStyleElements](#) \*8[BrtSlicerStyleElement](#) [BrtEndSlicerStyleElements](#) [BrtEndSlicerStyle](#)

DXF14S = BrtFRTBegin [BrtBeginDXF14s](#) 1\*2147483647[BrtDXF14](#) [BrtEndDXF14s](#) BrtFRTEnd

STYLESHEET15 = BrtFRTBegin [BrtBeginTimelineStyleSheetExt15](#) TIMELINESTYLES [BrtEndTimelineStyleSheetExt15](#) BrtFRTEnd

TIMELINESTYLES = [BrtBeginTimelineStyles](#) \*2147483647TIMELINESTYLE [BrtEndTimelineStyles](#)

TIMELINESTYLE = [BrtBeginTimelineStyle](#) [BrtBeginTimelineStyleElements](#) \*7[BrtTimelineStyleElement](#) [BrtEndTimelineStyleElements](#) [BrtEndTimelineStyle](#)

DXFS15 = BrtFRTBegin [BrtBeginDXFs15](#) 1\*2147483647[BrtDXF15](#) [BrtEndDXFs15](#) BrtFRTEnd

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.51 Table

An instance of the **Table** part type specifies a single table and its **AutoFilter** information.

**Content type:** application/vnd.ms-excel.table

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/tableSingleCells>

The data contained within the table is stored in the corresponding **worksheet** (section [2.1.7.61](#)) part.

A **Table** part MUST be the target of an explicit relationship from a **Worksheet** part ABNF (section [2.1.7.61](#)).

A **Table** part is permitted to have implicit relationships to the following parts specified by this document:

- **Query Table** (section [2.1.7.42](#))

A **Table** part MUST NOT have any implicit or explicit relationships to any other part specified by this document.

Record sequence ABNF:

TABLE = [BrtBeginList](#) [AUTOFILTER] [SORTSTATE] LISTCOLS [BrtTableStyleClient](#) FRTTABLE [BrtEndList](#)

LISTCOLS = [BrtBeginListCols](#) 1\*LISTCOL [BrtEndListCols](#)

LISTCOL = [BrtBeginListCol](#) [[BrtListCCFmla](#)] [[BrtListTrFmla](#)] [LISTXMLCPR] \*FRT [BrtEndListCol](#)

LISTXMLCPR = [BrtBeginListXmlCPr](#) \*FRT [BrtEndListXmlCPr](#)

FRTTABLE = [[BrtFRTBegin](#) [BrtList14](#) [BrtFRTEnd](#)] \*FRT

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.52 Theme

The **Theme** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 14.2.7. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#) section 20.1.4.

### 2.1.7.53 Timeline Cache

An instance of the **Timeline Cache** part type specifies a single **Timeline cache** (section [2.2.15.1](#)) in the **workbook** (section [2.1.7.60](#)).

**Content type:** application/vnd.ms-excel.TimelineCache+xml

**Source relationship:** <http://schemas.microsoft.com/office/2010/relationships/TimelineCache>

A package MUST contain one **Timeline Cache** part per **BrtBeginTimelineCacheID** (section [2.4.270](#)) record in the **workbook** part, and that part MUST be the target of an explicit relationship from the **workbook** part.

A **Timeline Cache** part MUST NOT have implicit or explicit relationships to any part specified in this document.

The syntax of the structures contained in this part uses XSD, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#).

This specification defines and references various XML namespaces by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is XML, and the **root element** for the part is the **timelineCacheDefinition** element, as specified in [\[MS-XLSX\]](#) section 2.4.58.

### 2.1.7.54 Timelines

An instance of the **Timelines** part specifies the **Timeline views** (section [2.2.15.2](#)) for a single **worksheet** (section [2.1.7.61](#)).

**Content type:** application/vnd.ms-excel.Timeline+xml

**Source relationship:** <http://schemas.microsoft.com/office/2010/relationships/Timeline>

The presence of a **Timelines** part indicates that there is at least one **Timeline view** (section [2.2.15.2](#)) on the associated **worksheet** (section [2.1.7.61](#)), and this part MUST be the target of an explicit relationship from the **Worksheet** part ABNF (section [2.1.7.61](#)).

A **Timelines** part MUST NOT have implicit or explicit relationships to any part specified in this document.

The syntax of the structures contained in this part uses XSD, as specified in [\[XMLSCHEMA1\]](#) and [\[XMLSCHEMA2\]](#).

This specification defines and references various XML namespaces by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is XML, and the root element for the part is the **timelines** element, as specified in [\[MS-XLSX\]](#) section 2.4.57.

### 2.1.7.55 User Names

An instance of the **User Names** part type specifies the user log (section [2.2.12.1](#)) for a shared workbook (section [2.2.12](#)).

**Content type:** application/vnd.ms-excel.userNames

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/usernames>

The presence of the **User Names** part indicates the workbook is a shared workbook (section [2.2.12](#)). The **User Names** part MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **User Names** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

USERNAMES = [BrtCUsr](#) [BrtBeginUsers](#) \*255([BrtUusr](#) \*FRT) [BrtEOF](#)

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.56 VBA Project

The **VBA Project** part is specified in [\[MS-OVBA\]](#).

**Content type:** application/vnd.ms-office.vbaProject

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/vbaProject>

A package MUST contain at most one **VBA Project** part, which MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **VBA Project** part is permitted to contain implicit relationships to the following parts specified in this document:

- **VBA Project Signature** (section [2.1.7.57](#))

A **VBA Project** part MUST NOT have implicit or explicit relationships to any other part specified in this document.

### 2.1.7.57 VBA Project Signature

The **VBA Project Signature** part is specified in [\[MS-OSHARED\]](#) section 2.3.2.



**Content type:** application/vnd.ms-office.vbaProjectSignature

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/vbaProjectSignature>

A package MUST contain at most one **VBA Project Signature** part. That part MUST be the target of an implicit relationship from the **VBA project** (section [2.1.7.56](#)) part.

A **VBA Project Signature** part MUST NOT have implicit or explicit relationships to any part specified in this document.

### 2.1.7.58 VML Drawings

The **VML Drawings** part is specified in [\[ISO/IEC29500-4:2011\]](#) section 8.1. The content associated with this part is specified in [\[ISO/IEC29500-4:2011\]](#) section 14.4.

In addition to the explicit relationships specified in [\[ISO/IEC29500-4:2011\]](#) section 8.1, a **VML Drawings** part is permitted to be the target of an explicit relationship from the following parts specified by this document:

- **Chart Sheet** (section [2.1.7.7](#))
- **Dialog Sheet** (section [2.1.7.20](#))
- **Macro Sheet** (section [2.1.7.32](#))

### 2.1.7.59 Volatile Dependencies

An instance of the **Volatile Dependencies** part type specifies the Volatile Dependencies (section [2.2.13](#)) for a workbook.

**Content type:** application/vnd.ms-excel.volatileDependencies

**Source relationship:**  
<http://schemas.openxmlformats.org/officeDocument/2006/relationships/volatileDependencies>

A package MUST contain at most one **Volatile Dependencies** part, and that part MUST be the target of an implicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **Volatile Dependencies** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

VOLATILEDEPENDENCIES = [BrtBeginVolDeps](#) 1\*VOLTYPE \*FRT [BrtEndVolDeps](#)

VOLTYPE = [BrtBeginVolType](#) 1\*VOLMAIN [BrtEndVolType](#)

VOLMAIN = [BrtBeginVolMain](#) 1\*VOLTOPIC [BrtEndVolMain](#)

VOLTOPIC = [BrtBeginVolTopic](#) VOLDATA \*[BrtVolSubtopic](#) 1\*[BrtVolRef](#) [BrtEndVolTopic](#)

VOLDATA = [BrtVolNum](#) / [BrtVolErr](#) / [BrtVolStr](#) / [BrtVolBool](#)

For ABNF rules not listed here, see Common Productions (section [2.1.8](#)).

### 2.1.7.60 Workbook

An instance of the **Workbook** (section [2.1.7.60](#)) part type specifies workbook data and references to all of its sheets.

**Content type:** application/vnd.ms-excel.main

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/officeDocument>

A package MUST contain exactly one **Workbook** part, and that part MUST be the target of a relationship in the package relationship part, as specified in section [2.1](#).

A **Workbook** part is permitted to have implicit relationships to the following parts specified in this document:

- **Attached Toolbars** (section [2.1.7.3](#))
- **Calculation Chain** (section [2.1.7.4](#))
- **Metadata** (section [2.1.7.34](#))
- **External Data Connections** (section [2.1.7.24](#))
- **Custom XML Maps** (section [2.1.7.15](#))
- **Custom XML Data Storage** (section [2.1.7.13](#))
- **Shared Strings** (section [2.1.7.45](#))
- **Revision Headers** (section [2.1.7.43](#))
- **User Names** (section [2.1.7.55](#))
- **Styles** (section [2.1.7.50](#))
- **Theme** (section [2.1.7.52](#))
- **VBA Project** (section [2.1.7.56](#))
- **Volatile Dependencies** (section [2.1.7.59](#))

A **Workbook** part is permitted to have explicit relationships to the following parts specified in this document:

- **Chart Sheet** (section [2.1.7.7](#))
- **Dialog Sheet** (section [2.1.7.20](#))
- **External Links** (section [2.1.7.25](#))
- **Macro Sheet** (section [2.1.7.32](#))
- **International Macro Sheet** (section [2.1.7.31](#))
- **PivotCache Definition** (section [2.1.7.38](#))
- **Slicer Cache** (section [2.1.7.47](#))

- **Worksheet** (section [2.1.7.61](#))
- **Timeline Cache** (section [2.1.7.53](#))

A **Workbook** part MUST NOT have implicit or explicit relationships to any other part specified in this document.

Record sequence ABNF:

WORKBOOK = [BrtBeginBook](#) [[BrtFileVersion](#)] [[[BrtFileSharingIso](#)] [BrtFileSharing](#)] [[BrtWbProp](#)] [[ACABSPATH](#)] [[[BrtBookProtectionIso](#)] [BrtBookProtection](#)] [[BOOKVIEWS](#)] [BUNDLES](#) [[FNGROUP](#)] [[EXTERNALS](#)] \*[BrtName](#) [[BrtCalcProp](#)] [[BrtOleSize](#)] \*([BrtUserBookView](#) \*FRT) [[PIVOTCACHEIDS](#)] [[BrtWbFactoid](#)] [[SMARTTAGTYPES](#)] [[BrtWebOpt](#)] \*[BrtFileRecover](#) [[WEBPUBITEMS](#)] [[CRERRS](#)] FRTWORKBOOK [BrtEndBook](#)

[ACABSPATH](#) = [BrtACBegin](#) [BrtAbsPath15](#) [BrtACEnd](#)

[BOOKVIEWS](#) = [BrtBeginBookViews](#) 1\*([BrtBookView](#) \*FRT) [BrtEndBookViews](#)

[BUNDLES](#) = [BrtBeginBundleShs](#) 1\*BrtBundleSh [BrtEndBundleShs](#)

[FNGROUP](#) = [BrtBeginFnGroup](#) \*[BrtFnGroup](#) [BrtEndFnGroup](#)

[EXTERNALS](#) = [BrtBeginExternals](#) \*SUP [BrtExternSheet](#) [BrtEndExternals](#)

SUP = [BrtSupSelf](#) / SUPSAME / SUPADDIN / [BrtSupBookSrc](#)

SUPSAME = [BrtSupSame](#) \*[BrtPlaceholderName](#)

SUPADDIN = [BrtSupAddin](#) 1\*BrtPlaceholderName

[PIVOTCACHEIDS](#) = [BrtBeginPivotCacheIDs](#) 1\*PIVOTCACHEID [BrtEndPivotCacheIDs](#)

PIVOTCACHEID = [BrtBeginPivotCacheID](#) [BrtEndPivotCacheID](#)

[SMARTTAGTYPES](#) = [BrtBeginSmartTagTypes](#) 1\*BrtSmartTagType [BrtEndSmartTagTypes](#)

[CRERRS](#) = [BrtBeginCRErrs](#) \*[BrtCrashRecErr](#) [BrtEndCRErrs](#)

FRTWORKBOOK = [[NAMEEXT](#)] [[SLICERCACHESPIVOTCACHEIDS](#)] [[SLICERCACHEIDS](#)] [[WORKBOOKPR14](#)] [[DECOUPLEDPIVOTCACHEIDS](#)] [[PIVOTTABLEREFS](#)] [[TIMELINECACHEPIVOTCACHEIDS](#)] [[TIMELINECACHEIDS](#)] [[TABLESLICERCACHEIDS](#)] [[WORKBOOKPR15](#)] [[DATAMODEL](#)] \*FRT

[NAMEEXT](#) = [BrtFRTBegin](#) 1\*BrtNameExt [BrtFRTEnd](#)

[SLICERCACHESPIVOTCACHEIDS](#) = BrtFRTBegin [BrtBeginSlicerCachesPivotCacheIDs](#) 1\*SLICERCACHESPIVOTCACHEID [BrtEndSlicerCachesPivotCacheIDs](#) BrtFRTEnd

[SLICERCACHESPIVOTCACHEID](#) = [BrtBeginSlicerCachesPivotCacheID](#) [BrtEndSlicerCachesPivotCacheID](#)

[SLICERCACHEIDS](#) = BrtFRTBegin [BrtBeginSlicerCacheIDs](#) 1\*SLICERCACHEID [BrtEndSlicerCacheIDs](#) BrtFRTEnd

SLICERCACHEID = [BrtBeginSlicerCacheID](#) [BrtEndSlicerCacheID](#)

[WORKBOOKPR14](#) = BrtFRTBegin [BrtWbProp14](#) BrtFRTEnd

DECOUPLEDPIVOTCACHEIDS = BrtFRTBegin [BrtBeginDecoupledPivotCacheIDs](#)  
1\*[BrtDecoupledPivotCacheID](#) [BrtEndDecoupledPivotCacheIDs](#) BrtFRTEnd

PIVOTTABLEREFS = BrtFRTBegin [BrtBeginPivotTableRefs](#) 1\*[BrtPivotTableRef](#) [BrtEndPivotTableRefs](#)  
BrtFRTEnd

TIMELINECACHEPIVOTCACHEIDS = BrtFRTBegin [BrtBeginTimelineCachePivotCacheIDs](#)  
1\*TIMELINECACHEPIVOTCACHEID [BrtEndTimelineCachePivotCacheIDs](#) BrtFRTEnd

TIMELINECACHEPIVOTCACHEID = [BrtTimelineCachePivotCacheID](#)

TIMELINECACHEIDS = BrtFRTBegin [BrtBeginTimelineCacheIDs](#) 1\*TIMELINECACHEID  
[BrtEndTimelineCacheIDs](#) BrtFRTEnd

TIMELINECACHEID = [BrtBeginTimelineCacheID](#) [BrtEndTimelineCacheID](#)

TABLESLICERCACHEIDS = BrtFRTBegin [BrtTableSlicerCacheIDs](#) 1\*TABLESLICERCACHEID BrtFRTEnd

TABLESLICERCACHEID = [BrtTableSlicerCacheID](#)

WORKBOOKPR15 = BrtFRTBegin [BrtWorkBookPr15](#) BrtFRTEnd

DATAMODEL = [BrtBeginDataModel](#) MODELTABLES MODELRELATIONSHIPS [BrtEndDataModel](#)

MODELTABLES = [BrtBeginModelTables](#) 1\*[BrtModelTable](#) [BrtEndModelTables](#)

MODELRELATIONSHIPS = [brtBeginModelRelationships](#) 1\*[brtModelRelationship](#)  
[brtEndModelRelationships](#)

For ABNF rules not listed here, see Common Productions (section [2.1.8](#)).

### 2.1.7.61 Worksheet

An instance of the **Worksheet** part type specifies a worksheet.

**Content type:** application/vnd.ms-excel.worksheet

**Source relationship:**

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/worksheet>

A **Worksheet** part MUST be the target of an explicit relationship from the **workbook** (section [2.1.7.60](#)) part.

A **Worksheet** part is permitted to contain implicit relationships to the following parts specified in this document:

- **Comments** (section [2.1.7.8](#))
- **PivotTable Definitions** (section [2.1.7.40](#))
- **Query Table** (section [2.1.7.42](#))
- **Single Cell Tables** (section [2.1.7.46](#))
- **Worksheet Binary Index** (section [2.1.7.62](#))
- **Sort Map** (section [2.1.7.49](#))

A **Worksheet** part is permitted to contain explicit relationships to the following parts specified in this document:

- **ActiveX** (section [2.1.7.1](#))
- **Custom Property** (section [2.1.7.12](#))
- **Drawings** (section [2.1.7.23](#))
- **OLE Object** (section [2.1.7.36](#))
- **OLE Package** (section [2.1.7.37](#))
- **Hyperlinks** (section [2.1.9](#))
- **Images** (section [2.1.7.30](#))
- **Printer Settings** (section [2.1.7.41](#))
- **Slicers** (section [2.1.7.48](#))
- **Table Definition** (section [2.1.7.51](#))
- **VML Drawings** (section [2.1.7.58](#))
- **Timelines** (section [2.1.7.54](#))

A **Worksheet** part MUST NOT have implicit or explicit relationships to any other part specified in this document.

Record sequence ABNF:

```
WORKSHEET = BrtBeginSheet [BrtWsProp] [BrtWsDim] [WSVIEWS2] [WSFMTINFO] *COLINFOS  
CELLTABLE [BrtSheetCalcProp] [[BrtSheetProtectionIso] BrtSheetProtection]  
*([BrtRangeProtectionIso] BrtRangeProtection) [SCENMAN] [AUTOFILTER] [SORTSTATE] [DCON]  
[USERSHIEWS] [MERGECELLS] [BrtPhoneticInfo] *CONDITIONALFORMATTING [DVALS] *BrtHLink  
[BrtPrintOptions] [BrtMargins] [BrtPageSetup] [HEADERFOOTER] [RWBRK] [COLBRK] *BrtBigName  
[CELLWATCHES] [IGNOREECS] [SMARTTAGS] [BrtDrawing] [BrtLegacyDrawing]  
[BrtLegacyDrawingHF] [BrtBkHim] [OLEOBJECTS] [ACTIVEXCONTROLS] [WEBPUBITEMS]  
[LISTPARTS] FRTWORKSHEET BrtEndSheet
```

```
WSVIEWS2 = BrtBeginWsViews 1*WSVIEW2 *FRT BrtEndWsViews
```

```
WSVIEW2 = BrtBeginWsView [BrtPane] *4BrtSel *4SXSELECT *FRT BrtEndWsView
```

```
SXSELECT = BrtBeginSxSelect PIVOTRULE BrtEndSxSelect
```

```
SCENMAN = BrtBeginScenMan 1*32767SCT BrtEndScenMan
```

```
SCT = BrtBeginSct 1*32BrtSlc BrtEndSct
```

```
MERGECELLS = BrtBeginMergeCells 1*BrtMergeCell BrtEndMergeCells
```

```
DVALS = BrtBeginDVals 1*65534([ACDVALLIST] BrtDVal) BrtEndDVals
```

```
CELLWATCHES = BrtBeginCellWatches 1*BrtCellWatch BrtEndCellWatches
```

```
IGNOREECS = BrtBeginCellIgnoreECs 1*BrtCellIgnoreEC *FRT BrtEndCellIgnoreECs
```

SMARTTAGS = [BrtBeginSmartTags](#) 1\*CELLSMARTTAGS [BrtEndSmartTags](#)

CELLSMARTTAGS = [BrtBeginCellSmartTags](#) 1\*CELLSMARTTAG [BrtEndCellSmartTags](#)

CELLSMARTTAG = [BrtBeginCellSmartTag](#) \*[BrtCellSmartTagProperty](#) [BrtEndCellSmartTag](#)

ACTIVEXCONTROLS = [BrtBeginActiveXControls](#) 1\*[BrtActiveX](#) [BrtEndActiveXControls](#)

LISTPARTS = [BrtBeginListParts](#) \*[BrtListPart](#) [BrtEndListParts](#)

FRTWORKSHEET = [CONDITIONALFORMATTINGS] [DVALS14] [SPARKLINEGROUPS] [SLICERSEX] [RANGEPROTECTION14] [IGNOREECS14] [WEBEXTENSIONS] [TABLESLICERSEX] [TIMELINESEX] \*FRT

CONDITIONALFORMATTINGS = [BrtFRTBegin](#) [BrtBeginConditionalFormattings](#) \*2147483647CONDITIONALFORMATTING14 [BrtEndConditionalFormattings](#) [BrtFRTEnd](#)

DVALS14 = BrtFRTBegin [BrtBeginDVals14](#) 1\*65534([ACDVALLIST] [BrtDVal14](#)) [BrtEndDVals14](#) BrtFRTEnd

SPARKLINEGROUPS = BrtFRTBegin [BrtBeginSparklineGroups](#) 1\*2147483647SPARKLINEGROUP [BrtEndSparklineGroups](#) BrtFRTEnd

SPARKLINEGROUP = [BrtBeginSparklineGroup](#) [BrtBeginSparklines](#) 1\*2147483647[BrtSparkline](#) [BrtEndSparklines](#) [BrtEndSparklineGroup](#)

SLICERSEX = BrtFRTBegin [BrtBeginSlicersEx](#) SLICEREX [BrtEndSlicersEx](#) BrtFRTEnd

SLICEREX = [BrtBeginSlicerEx](#) [BrtEndSlicerEx](#)

TABLESLICERSEX = BrtFRTBegin BrtBeginSlicersEx TABLESLICEREX BrtEndSlicersEx BrtFRTEnd

TABLESLICEREX = BrtBeginSlicerEx BrtEndSlicerEx

RANGEPROTECTION14 = BrtFRTBegin 1\*([[BrtRangeProtectionIso14](#)] [BrtRangeProtection14](#)) BrtFRTEnd

IGNOREECS14 = BrtFRTBegin [BrtBeginCellIgnoreECs14](#) 1\*[BrtCellIgnoreEC14](#) [BrtEndCellIgnoreECs14](#) BrtFRTEnd

ACDVALLIST = [BrtACBegin](#) [BrtDValList](#) [BrtACEnd](#)

TIMELINESEX = BrtFRTBegin [BrtBeginTimelinesEx](#) TIMELINEEX [BrtEndTimelinesEx](#) BrtFRTEnd

TIMELINEEX = [BrtBeginTimelineEx](#) [BrtEndTimelineEx](#)

WEBEXTENSIONS = BrtFRTBegin [BrtBeginWebExtensions](#) 1\*[BrtWebExtension](#) [BrtEndWebExtensions](#) BrtFRTEnd

For ABNF rules not listed here, see section [2.1.8](#).

### 2.1.7.62 Worksheet Binary Index

An instance of the **Worksheet Binary Index** part type specifies a binary index (section [2.2.1.1](#)) for a worksheet, as specified by the worksheet (section [2.1.7.61](#)) part.

**Content type:** application/vnd.ms-excel.binIndexWs

**Source relationship:** <http://schemas.microsoft.com/office/2006/relationships/xlBinaryIndex>

A **Worksheet Binary Index** part MUST be the target of an implicit relationship from a **worksheet** (section [2.1.7.61](#)) part.

A **Worksheet Binary Index** part MUST NOT have implicit or explicit relationships to any part specified in this document.

Record sequence ABNF:

SHEETINDEX = 1\*([BrtIndexBlock](#) [[BrtIndexRowBlock](#)]) 1\*2[BrtIndexPartEnd](#)

## 2.1.8 Common Productions

Record sequence fragments that are common to multiple parts are specified in this section. If a fragment cannot be found under its part, it can be found in the following ABNF grammar.

The FRT rule can contain any number of other valid Records (section [2.1.4](#)) between **BrfFRTBegin** (section [2.4.654](#)) and **BrfFRTEnd** (section [2.4.655](#)).

WSVIEWS = [BrtBeginWsViews](#) 1\*WSVIEW \*FRT [BrtEndWsViews](#)

WSVIEW = [BrtBeginWsView](#) [[BrtPane](#)] \*4[BrtSel](#) \*FRT [BrtEndWsView](#)

WSFMTINFO = [[ACWSFMTINFO](#)] [BrtWsFmtInfo](#)

ACWSFMTINFO = [BrtACBegin](#) [BrtWsFmtInfoEx14](#) [BrtACEnd](#)

COLINFOS = [BrtBeginColInfos](#) 1\*[BrtColInfo](#) [BrtEndColInfos](#)

CELLTABLE = [BrtBeginSheetData](#) \*1048576([[ACCELLTABLE](#)] [BrtRowHdr](#) \*16384CELL \*FRT) [BrtEndSheetData](#)

ACCELLTABLE = [BrtACBegin](#) [BrtRwDescent](#) [BrtACEnd](#)

CELL = (DATACELL / FMLACELL / SHRFMLACELL / TABLECELL) \*FRT

DATACELL = CELLMETA ([BrtCellBlank](#) / [BrtCellRk](#) / [BrtCellError](#) / [BrtCellBool](#) / [BrtCellReal](#) / [BrtCellIsst](#) / [BrtCellSt](#))

FMLACELL = CELLMETA ([BrtFmlaString](#) / [BrtFmlaNum](#) / [BrtFmlaBool](#) / [BrtFmlaError](#))

SHRFMLACELL = FMLACELL ([BrtShrFmla](#) / [BrtArrFmla](#))

TABLECELL = [BrtTable](#) CELLMETA ([BrtCellRk](#) / [BrtCellError](#) / [BrtCellBool](#) / [BrtCellReal](#) / [BrtCellSt](#))

CELLMETA = [[BrtCellMeta](#)] [[BrtValueMeta](#)]

AUTOFILTER = [BrtBeginAFilter](#) \*FILTERCOLUMN [[SORTSTATE](#)] \*FRT [BrtEndAFilter](#)

FILTERCOLUMN = [BrtBeginFilterColumn](#) [[BrtDynamicFilter](#) / [BrtTop10Filter](#) / [BrtColorFilter](#) / [BrtIconFilter](#) / CUSTOMFILTERS / FILTERS / [ACFILTERCONTENT](#)] \*FRT [BrtEndFilterColumn](#)

CUSTOMFILTERS = [BrtBeginCustomFilters](#) 1\*2[BrtCustomFilter](#) [BrtEndCustomFilters](#)

FILTERS = [BrtBeginFilters](#) \*[BrtFilter](#) \*[BrtAFilterDateGroupItem](#) [BrtEndFilters](#)

ACFILTERCONTENT = (ACFILTERS / ACCUSTOMFILTER / ACICONFILTER) [BrtACBegin](#) CUSTOMFILTERS [BrtACEnd](#)

ACCUSTOMFILTER = [BrtBeginCustomFilters14](#) 1\*2[BrtCustomFilter14](#) BrtEndCustomFilters  
 ACFILTERS = BrtACBegin BrtBeginFilters \*[BrtFilter14](#) BrtEndFilters BrtACEnd  
 ACICONFILTER = BrtACBegin [BrtIconFilter14](#) BrtACEnd  
 SORTSTATE = [BrtBeginSortState](#) (SORTCONDS / ACSORTCONDS) \*FRT [BrtEndSortState](#)  
 SORTCONDS = \*64SORTCOND  
 SORTCOND = [BrtBeginSortCond](#) [BrtEndSortCond](#)  
 ACSORTCONDS = BrtACBegin \*64SORTCOND14 BrtACEnd  
 SORTCOND14 = [BrtBeginSortCond14](#) [BrtEndSortCond14](#)  
 DCON = [BrtBeginDCon](#) [DREFS] [BrtEndDCon](#)  
 DREFS = [BrtBeginDRefs](#) \*[BrtDRef](#) [BrtEndDRefs](#)  
 USERSHVIEWS = [BrtBeginUserShViews](#) 1\*USERSHVIEW [BrtEndUserShViews](#)  
 USERSHVIEW = [BrtBeginUserShView](#) [BrtPane] [BrtSel] [RWBRK] [COLBRK] [[BrtMargins](#)]  
 [[BrtPrintOptions](#)] [[BrtPageSetup](#)] [HEADERFOOTER] [AUTOFILTER] \*FRT [BrtEndUserShView](#)  
 HEADERFOOTER = [BrtBeginHeaderFooter](#) [BrtEndHeaderFooter](#)  
 CONDITIONALFORMATTING = [BrtBeginConditionalFormatting](#) 1\*65534CFRULE \*FRT  
[BrtEndConditionalFormatting](#)  
 CFRULE = [BrtBeginCFRule](#) [COLORSCALE / DATABAR / ICONSET] FRTCFRULE [BrtEndCFRule](#)  
 FRTCFRULE = [BrtFRTBegin [BrtCFRuleExt](#) BrtFRTEnd] \*FRT  
 COLORSCALE = [BrtBeginColorScale](#) ((2CFVO 2[BrtColor](#)) / (3CFVO 3[BrtColor](#))) [BrtEndColorScale](#)  
 DATABAR = [BrtBeginDatabar](#) 2CFVO [BrtColor](#) [BrtEndDatabar](#)  
 ICONSET = [BrtBeginIconSet](#) 3\*5CFVO [BrtEndIconSet](#)  
 CFVO = [BrtCFVO](#) \*FRT  
 CFRULE14 = [BrtBeginCFRule14](#) [COLORSCALE14 / DATABAR14 / ICONSET14] \*FRT [BrtEndCFRule14](#)  
 CONDITIONALFORMATTING14 = [BrtBeginConditionalFormatting14](#) 1\*65534CFRULE14 \*FRT  
[BrtEndConditionalFormatting14](#)  
 COLORSCALE14 = [BrtBeginColorScale14](#) ((2CFVO14 2[BrtColor14](#)) / (3CFVO14 3[BrtColor14](#)))  
[BrtEndColorScale14](#)  
 DATABAR14 = [BrtBeginDatabar14](#) 2CFVO14 \*5[BrtColor14](#) [BrtEndDatabar14](#)  
 ICONSET14 = [BrtBeginIconSet14](#) 3\*5CFVO14 [3\*5[BrtCFIcon](#)] [BrtEndIconSet14](#)  
 CFVO14 = [BrtCFVO14](#) \*FRT  
 RWBRK = [BrtBeginRwBrk](#) \*[BrtBrk](#) [BrtEndRwBrk](#)  
 COLBRK = [BrtBeginColBrk](#) \*[BrtBrk](#) [BrtEndColBrk](#)



OLEOBJECTS = [BrtBeginOleObjects](#) 1\*[BrtOleObject](#) [BrtEndOleObjects](#)

WEBPUBITEMS = [BrtBeginWebPubItems](#) 1\*WEBPUBITEM [BrtEndWebPubItems](#)

WEBPUBITEM = [BrtBeginWebPubItem](#) [BrtEndWebPubItem](#)

PIVOTRULE = [BrtBeginPRule](#) [PRFILTERS] \*FRT [BrtEndPRule](#)

PRFILTERS = [BrtBeginPRFilters](#) 1\*PRFILTER [BrtEndPRFilters](#)

PRFILTER = [BrtBeginPRFilter](#) \*PRFITEM [BrtEndPRFilter](#)

PRFITEM = [BrtBeginPRFItem](#) [BrtEndPRFItem](#)

PCDCALCMEMSEXT = [BrtBeginPCDCalcMemsExt](#) 1\*2147483647PCDCALCMEMEXT  
[BrtEndPCDCalcMemsExt](#)

PCDCALCMEM14 = [BrtBeginPCDCalcMem14](#) [SXTUPLESET] [BrtEndPCDCalcMem14](#)

PCDCALCMEMEXT = [BrtBeginPCDCalcMemExt](#) [BrtFRTBegin PCDCALCMEM14 BrtFRTEnd]  
[PCDCALCMEM15] \*FRT [BrtEndPCDCalcMemExt](#)

SXTUPLESET = [BrtBeginSXTupleSet](#) SXTUPLESETHEDER SXTUPLESETDATA [BrtEndSXTupleSet](#)

SXTUPLESETHEDER = [BrtBeginSXTupleSetHeader](#) 1\*3000[BrtSXTupleSetHeaderItem](#)  
[BrtEndSXTupleSetHeader](#)

SXTUPLESETDATA = [BrtBeginSXTupleSetData](#) 1\*3000SXTUPLESETROW [BrtEndSXTupleSetData](#)

SXTUPLESETROW = [BrtBeginSXTupleSetRow](#) 1\*3000[BrtSXTupleSetRowItem](#) [BrtEndSXTupleSetRow](#)

PCDCALCMEM15 = BrtFRTBegin [BrtPCDCalcMem15](#) BrtFRTEnd

FRT = BrtFRTBegin BrtFRTEnd

### 2.1.9 Hyperlinks

Storage of hyperlinks is specified in [\[ISO/IEC29500-1:2011\]](#) section 15.3.

### 2.1.10 External Workbooks

**Source relationship:** See section [2.1.10.1](#).

When a package uses an **external workbook**, it MUST store the location of the workbook using one of the relationships specified in section [2.1.10.1](#), and that relationship MUST be an explicit relationship from the **external link** (section [2.1.7.25](#)) part.

An external workbook MUST be located external to the package containing the source relationship (expressed syntactically, the **TargetMode** attribute of the **Relationship** element MUST be "External").

#### 2.1.10.1 External Workbook Base Paths

The source relationship specifies the base path to use for the path to the external workbook (section [2.1.10](#)).

| Source relationship   | Relationship base path  |
|---|---|
| <a href="http://schemas.openxmlformats.org/officeDocument/2006/relationships/externalLinkPath">http://schemas.openxmlformats.org/officeDocument/2006/relationships/externalLinkPath</a>                 | Specifies that the path is relative to the location of the package containing the relationship. |
| <a href="http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlStartup">http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlStartup</a>                   | Specifies that the path is relative to the <b>startup directory</b> .                           |
| <a href="http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlAlternateStartup">http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlAlternateStartup</a> | Specifies that the path is relative to the <b>alternate startup directory</b> .                 |
| <a href="http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlLibrary">http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlLibrary</a>                   | Specifies that the path is relative to the <b>library directory</b> .                           |
| <a href="http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlPathMissing">http://schemas.microsoft.com/office/2006/relationships/xlExternalLinkPath/xlPathMissing</a>           | No base path is inferred.   |

## 2.2 Conceptual Overview

This section specifies how higher-level features of the file format are represented by combinations of records.

### 2.2.1 Cell Table

Text, formulas, and numerical data within worksheets are primarily stored in the cells that make up worksheets (section [2.1.7.61](#)) and macro sheets (section [2.1.7.32](#)). Cells are the fundamental building blocks that contain data, formulas (section [2.2.2](#)), and formatting to form the worksheets. The data structure associated with the grid of cells is called the cell table.

The cell table is stored in the sequence of records that conform to the **CELLTABLE** rule in the **Common Productions** (section [2.1.8](#)) part ABNF. The cells are contained between **BrtBeginSheetData** (section [2.4.189](#)) and **BrtEndSheetData** (section [2.4.524](#)) records. They are stored in a row (2)-major order, with a **BrtRowHdr** (section [2.4.718](#)) record saved for every non-empty row (2), where a non-empty row (2) is a row (2) that contains data, formatting, metadata, or **phonetic information**.

Every row (2) is divided into 16 column (2) blocks, and each column (2) block spans 1024 columns (2). Each **BrtRowHdr** (section [2.4.718](#)) record contains an array of **BrtColSpan** (section [2.5.8](#)) structures that specifies the column (2) blocks in that row (2) that have non-empty cells, where a

non-empty cell is a cell that contains data, individual cell formatting, metadata, or phonetic information. Formatting information for a cell can be derived from individual cell formatting, row (2) formatting, column (2) formatting, or the default cell format as specified by the Normal Style (section [2.2.6.1.2.2](#)). The order of precedence for formatting is individual cell formatting with the highest precedence, followed by row (2) formatting, and then column (2) formatting, and lastly the default cell format.

Cells are specified by **BrCellBlank** (section [2.4.303](#)), **BrCellRk** (section [2.4.311](#)), **BrCellError** (section [2.4.305](#)), **BrCellBool** (section [2.4.304](#)), **BrCellReal** (section [2.4.310](#)), **BrCellSt** (section [2.4.314](#)), **BrCellIsst** (section [2.4.308](#)), **BrFmlaString** (section [2.4.650](#)), **BrFmlaNum** (section [2.4.649](#)), **BrFmlaBool** (section [2.4.647](#)), **BrFmlaError** (section [2.4.648](#)), or **BrCellRString** (section [2.4.312](#)) records. Each of these records contains a **Cell** (section [2.5.9](#)) structure that specifies which column (2) the cell belongs to.

The sequence of records that conform to the **CELLTABLE** rule (defined in section [2.1.8](#)) begin with the **BrtBeginSheetData** (section [2.4.189](#)) record, followed by the first **BrRowHdr** (section [2.4.718](#)) representing the first non-empty row (2). The **BrRowHdr** is followed by records representing every non-empty cell in that row (2) in column (2)-major order, including any of the records in the **CELL** rule (defined in section [2.1.8](#)). This series of records is repeated for every non-empty row (2) and non-empty cell, and ends with the **BrtEndSheetData** (section [2.4.524](#)) record.

A cell in the cell table is referred to by its row (2) and column (2) indexes, which are zero-based. The maximum row (2) index is 1048575; the maximum column (2) index is 16383. The bounding box of the actual non-empty cells is stored in the **BrWsDim** (section [2.4.812](#)) record. Information pertaining to each column (2) is specified in the **COLINFOS** collection (section [2.1.8](#)).

### 2.2.1.1 Retrieval of Last-Calculated Cell Values Without Loading Cell Table

The only way to retrieve formulas, formats and other cell data is to read the cell table normally as defined previously. However, in certain situations (for example when resolving external references to values) it is beneficial to retrieve only the last calculated value from a cell, without actually loading the cell table. For this reason, a binary index exists within the file that specifies data used to improve the performance of a random read access to the cell table (section [2.2.1](#)) data in a **worksheet** (section [2.1.7.61](#)) part or **macro sheet** (section [2.1.7.32](#)) part. To find a position of a particular cell within a file, an application can perform the following steps:

1. Open the **worksheet binary index** (section [2.1.7.62](#)) part or the **macro sheet binary index** part (section [2.1.7.33](#)) that corresponds to the sheet to which the cell belongs.
2. Read **BrtIndexBlock** (section [2.4.659](#)) records to find one such that the zero-based cell row (2) is greater than or equal to **rwMic** and less than **rwMac**.
3. If no such **BrtIndexBlock** record exists, then the row (2) has no data or formatting.
4. Read a **BrtIndexRowBlock** (section [2.4.662](#)) record that immediately follows this **BrtIndexBlock** record, and compute the data offset according to the description of the **BrtIndexRowBlock** record.
5. Open the corresponding **Worksheet** part (section [2.1.7.61](#)) or **macro sheet** part (section [2.1.7.32](#)).
6. Read cell table (section [2.2.1](#)) data starting from the previously computed position to find the cell record for the target cell.
7. If the end of the row (2) in the cell table (section [2.2.1](#)) or a record whose column (2) is greater than the column (2) of the target cell is reached, then the cell is blank and has no formatting.

## 2.2.2 Formulas

A formula is sequence of values, cell references, names, functions, or operators in a cell that together produce a new value. Formulas are stored in a tokenized representation known as a parsed expression. In this section, formula is a synonym for parsed expression. A parsed expression is converted into a textual formula at runtime for display and user editing. Cell formulas are specified by the **BrfFmlaBool** (section [2.4.647](#)), **BrfFmlaError** (section [2.4.648](#)), **BrfFmlaNum** (section [2.4.649](#)) and **BrfFmlaString** (section [2.4.650](#)) records. Array formulas are specified by the **BrfArrFmla** (section [2.4.6](#)) record. Shared formulas are specified by the **BrfShrFmla** (section [2.4.742](#)) record.

Formulas that are part of a **revision** as specified in the Shared Workbooks (section [2.2.12](#)) overview are specified by the **rgce.rgce** field or the **rgceOld.rgce** field of the **BrfRRDefName** (section [2.4.722](#)) record, or by the sequence of records that conform to the **CELL** rule (defined in section [2.1.7.44](#)) in the **BrfRRChgCell** (section [2.4.720](#)) collection.

A parsed **expression** contains a sequence of parse tokens, each of which is either an operand token (section [2.2.2.2](#)), an operator token (section [2.2.2.1](#)), a control token (section [2.2.2.3](#)), a display token (section [2.2.2.4](#)), or a mem token (section [2.2.2.5](#)). All tokens are stored as Parse Things (section [2.5.97.16](#)).

With the exception of control tokens, display tokens and mem tokens that are described in subsequent sections, parsed expressions are stored in an **Rgce** (section [2.5.97.88](#)) structure using Reverse-Polish notation. Reverse-Polish notation is a logical system for the specification of mathematical formulas in which operands are followed by operators. Inside an **Rgce**, the operands and operators are represented by an array of **Ptg** (section [2.5.97.16](#)) structures of variable lengths. The first one or two bytes of a **Ptg** structure contain the token type that determines which specific **Ptg** type the **Ptg** is, as specified in the **Ptg** structure. The remainder of the structure varies according to the token type.

Evaluation of a formula specified in Reverse-Polish notation is usually based around an evaluation stack. The expression is parsed from beginning to end, and operands are pushed onto the stack as they are encountered. When operators are encountered, the required number of operands is popped from the stack and the result of the operation is pushed back onto the stack. Evaluation begins with an empty stack, and when the evaluation is finished, there will be exactly one value left on the stack. The value is the result of the evaluation. Subsequent subsections refer to a stack as described by this model.

### 2.2.2.1 Operator Tokens

#### Unary Operator Tokens

Unary operator tokens specify operations that are performed on the previous element in the grammar specified by **Rgce** (section [2.5.97.88](#)). For example, **PtgPercent** (section [2.5.97.65](#)) divides the last expression on the stack by 100.

#### Binary Operator Tokens

Binary operator tokens specify operations that are performed on the previous two elements in the grammar specified by **Rgce** (section [2.5.97.88](#)). For example, **PtgIsect** (section [2.5.97.50](#)) intersects the topmost two expressions on the stack.

### 2.2.2.2 Operand Tokens

Operand tokens represent values and references that are used by operators and functions. Operands fall into one of two classes, reference class (section [2.2.2.2.2](#)) or value class (section [2.2.2.2.1](#)), depending on what result type the formula expects from the operand.

#### 2.2.2.2.1 Value Class

The value class operand is the most common type of operand, and represents a single value or array of values. When **Ptgs** (section [2.5.97.16](#)) with reference contents are used by an operator that requires value class operands, the **Ptgs** can be stored as value class operands rather than reference class (section [2.2.2.2.2](#)) operands. For example, in a formula where the contents of A1 is added to the integer value 1, the value of cell A1 is pushed onto the stack as a value class operand **PtgRef** (section [2.5.97.68](#)) because the subsequent **PtgAdd** (section [2.5.97.17](#)) operator requires value class operands. Arrays are stored in a similar fashion. For example, when adding the array of values {1,2,3,4,5,6}, the values are stored in a **PtgArray** (section [2.5.97.23](#)) operand.

#### 2.2.2.2.2 Reference Class

When operands are stored as reference class operands, any references contained in the operand are not de-referenced and do not return the underlying value or values. They are pushed onto the stack in reference form.

#### 2.2.2.3 Control Tokens

Control tokens do not perform operations or push values onto the stack. Conditional control tokens **PtgAttrIf** (section [2.5.97.27](#)), **PtgAttrChoose** (section [2.5.97.25](#)), **PtgAttrIfError** (section [2.5.97.28](#)), and **PtgAttrGoTo** (section [2.5.97.26](#)) are used at runtime to prescribe short-circuit evaluation inside conditional functions and can be ignored when converting parsed expressions into textual formulas.

#### 2.2.2.4 Display Tokens

Display tokens, such as control tokens, do not perform operations or push values onto the stack. Display tokens **PtgParen** (section [2.5.97.64](#)) and **PtgAttrSpace** (section [2.5.97.30](#)) are used at runtime to represent parentheses and space characters in a formula when parsed expressions are converted into textual formulas. Display tokens do not affect the order of operations of the formula.

#### 2.2.2.5 Mem Tokens

Mem tokens have two purposes: they cache the results of reference class (section [2.2.2.2.2](#)) expressions and they can return the results of reference class expressions as value class (section [2.2.2.2.1](#)) expressions. Mem tokens act on binary-reference-expressions (section [2.5.97.88](#)) that follow them in a mem-area-expression (section [2.5.97.88](#)).

#### 2.2.2.6 Formula Elements

Some **Ptgs** (section [2.5.97.16](#)) require extra data that is not stored in the **Rgce** (section [2.5.97.88](#)). When an **Rgce** contains one or more of these **Ptgs**, the containing formula structure includes an **RgbExtra** (section [2.5.97.87](#)) containing the data for those **Ptgs**. The size of these components is specified by the **RgbExtra** structures. The **Ptgs** do not contain an offset into the **RgbExtra** for their data. The **Ptgs** that require a corresponding structure in **RgbExtra** are specified in **RgbExtra**.

## 2.2.3 Charts

### 2.2.3.1 Chart Part

A **chart** part is specified in [\[ISO/IEC29500-1:2011\]](#) section 14.2.1. The content associated with this part is specified in [\[ISO/IEC29500-1:2011\]](#) section 21.2.


### 2.2.3.2 Pivot Chart

A pivot chart is a specific type of **chart** part (section [2.2.3.1](#)) that uses a **PivotTable** (section [2.2.5](#)) as its **data source (1)**.

## 2.2.4 Metadata

Metadata is additional data associated with a particular cell or its content.

All metadata information is located in the metadata part (section [2.1.7.34](#)), within the **BrtBeginMetadata** (section [2.4.108](#)) and **BrtEndMetadata** (section [2.4.444](#)) records.

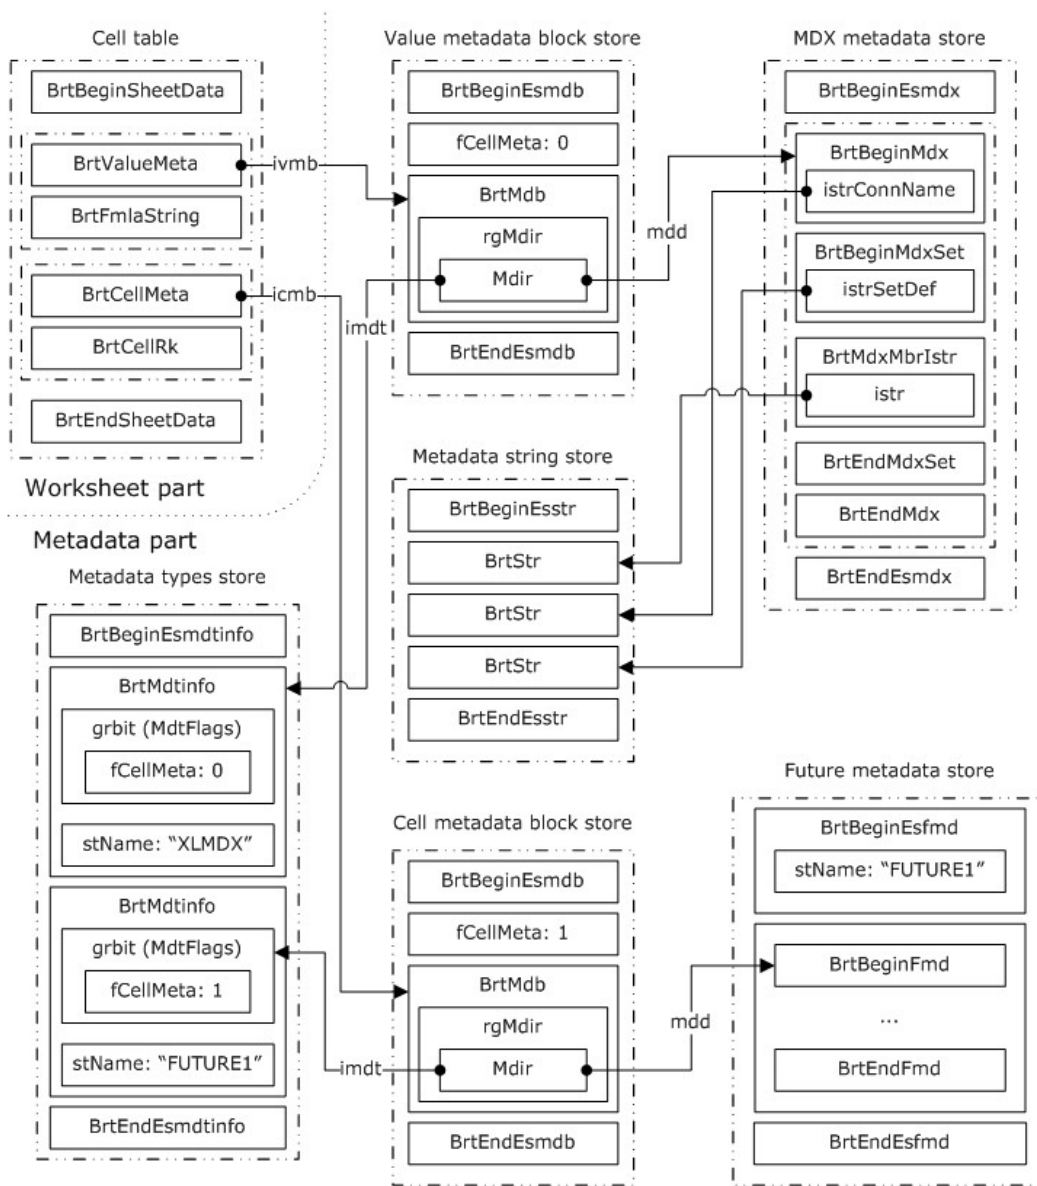

**Figure 1: Metadata**

The following sections define terms used in the previous figure.

### 2.2.4.1 Metadata Types

The architecture of metadata allows for multiple types of metadata.

Each type of metadata has a metadata store (section 2.2.4.4) inside the metadata part (section 2.1.7.34), a unique name, and a set of predefined properties. Those properties describe whether the metadata propagates with the cell or its content during runtime operations (for example, insert, shift, copy/paste, merge, or unmerge operations), as well as whether the metadata is cell metadata (section 2.2.4.2) or value metadata (section 2.2.4.3).

A metadata type is represented by a **BrzMdtinfo** (section [2.4.674](#)) record. All metadata types are located within the **BrBeginEsmdtinfo** (section [2.4.71](#)) and **BrEndEsmdtinfo** (section [2.4.407](#)) records inside the metadata part (section [2.1.7.34](#)).

#### 2.2.4.2 Cell Metadata

Cell metadata is metadata associated with a cell itself. Cell metadata is associated with a cell through a **BrCellMeta** (section [2.4.309](#)) record referencing a cell metadata block (section [2.2.4.5](#)) within the metadata part (section [2.1.7.34](#)).

#### 2.2.4.3 Value Metadata

Value metadata is metadata associated with the value of a particular cell. Value metadata is associated with a cell through a **BrValueMeta** (section [2.4.799](#)) record, or with an **External Cell** (section [2.2.7.4.1.2.1](#)) through a **BrExternValueMeta** (section [2.4.638](#)) record. Either record references a metadata block (section [2.2.4.5](#)) containing value metadata within the metadata part (section [2.1.7.34](#)).

#### 2.2.4.4 Metadata Stores

Actual metadata values are stored in metadata record stores. There are two types of metadata records stores: **MDX** metadata store for holding MDX metadata (section [2.2.4.8](#)), and future metadata store for holding non-MDX metadata known as future metadata (section [2.2.4.9](#)).

#### 2.2.4.5 Metadata Block

Cells are associated with actual metadata values using a metadata mapping table, known as a metadata block. A metadata block contains a collection of indexes into a metadata store (section [2.2.4.4](#)), along with the corresponding metadata types (section [2.2.4.1](#)).

#### 2.2.4.6 Metadata Block Stores

Metadata blocks (section [2.2.4.5](#)) are stored within collections called metadata block stores inside the metadata part (section [2.1.7.34](#)). There can be two of these metadata block collections: one for cell metadata (section [2.2.4.2](#)) and another for value metadata (section [2.2.4.3](#)).

The collection of records that specifies the metadata for a metadata block store starts with a **BrBeginEsmdb** (section [2.4.70](#)) record and ends with a **BrEndEsmdb** (section [2.4.406](#)) record. Within each collection is a set of **BrMdb** (section [2.4.673](#)) records that each specifies a metadata block.

#### 2.2.4.7 Metadata String Store

Metadata-related text strings are assembled in a single metadata string store. The stored strings are unique, and each string can be indexed by one or more metadata records. The metadata string store is a performance optimization for reading and writing repetitive information only once. For example, a metadata string can be a connection name to an **OLAP cube** that is used in several cube functions in the workbook.

A metadata string is represented by a **BrStr** (section [2.4.754](#)) record. All metadata strings are located within the **BrBeginEsstr** (section [2.4.73](#)) and **BrEndEsstr** (section [2.4.409](#)) records inside the metadata part.



## 2.2.4.8 MDX Metadata

MDX is the only defined metadata type. MDX metadata is used to maintain cached state for cube functions.

The metadata type (section [2.2.4.1](#)) of MDX metadata MUST have the following properties:

- The **grbit** field of the **BrtMdtinfo** (section [2.4.674](#)) record MUST have the following values:

| MdtFlags properties | Value |
|---------------------|-------|
| fGhostRw            | 0     |
| fGhostCol           | 0     |
| fEdit               | 0     |
| fDelete             | 0     |
| fCopy               | 1     |
| fPasteAll           | 1     |
| fPasteFmlas         | 0     |
| fPasteValues        | 1     |
| fPasteFmts          | 0     |
| fPasteComments      | 0     |
| fPasteDv            | 0     |
| fPasteBorders       | 0     |
| fPasteColWidths     | 0     |
| fPasteNumFmts       | 0     |
| fMerge              | 1     |
| fSplitFirst         | 1     |
| fSplitAll           | 0     |
| fRwColShift         | 1     |
| fClearAll           | 0     |
| fClearFmts          | 1     |
| fClearContents      | 0     |
| fClearComments      | 1     |
| fAssign             | 1     |
| fCanCoerce          | 1     |
| fAdjust             | 0     |

| MdtFlags properties | Value |
|---------------------|-------|
| fCellMeta           | 0     |

- The **metadataID** field of the **BrtMdtinfo** (section [2.4.674](#)) record MUST be 120000.
- The **stName** field of the **BrtMdtinfo** record MUST be "XLMDX".

MDX metadata records are stored in the MDX metadata store (section [2.2.4.4](#)). An MDX metadata record references the connection name and the cube function used to calculate the **cell value**.

An MDX metadata record also contains one additional record that further describes the MDX metadata record. That additional record depends on the type of cube function used, and MUST be an MDX tuple metadata (section [2.2.4.8.1](#)) record, an **MDX set metadata** (section [2.2.4.8.2](#)) record, an MDX member property metadata (section [2.2.4.8.3](#)) record, or an MDX KPI metadata (section [2.2.4.8.4](#)) record.

An MDX metadata record is specified by a **BrtBeginMdx** (section [2.4.102](#)) record and ends with a **BrtEndMdx** (section [2.4.438](#)) record. All MDX metadata records are stored in the MDX metadata store (section [2.2.4.4](#)) specified by the **BrtBeginEsmdx** (section [2.4.72](#)) record and ends with a **BrtEndEsmdx** (section [2.4.408](#)) record.

### 2.2.4.8.1 MDX Tuple Metadata

An MDX **tuple** is the intersection between two or more **members (3)** from different **dimensions (1)**.

MDX tuple metadata is used by cube functions returning a member (3) or a value.

MDX tuple metadata is represented within an MDX metadata (section [2.2.4.8](#)) record as an ordered collection of members (3).

An MDX tuple is specified by a **BrtBeginMdxTuple** (section [2.4.106](#)) record and ends with a **BrtEndMdxTuple** (section [2.4.442](#)) record. Members (3) are specified by **BrtMdxMbrIstr** (section [2.4.675](#)) records.

### 2.2.4.8.2 MDX Set Metadata

An MDX set is an ordered collection of members (3) within the same dimension (1).

MDX set metadata is used by cube functions returning a set or the number of items in a set.

An MDX set is specified by a **BrtBeginMdxSet** (section [2.4.105](#)) record and ends with **BrtEndMdxSet** (section [2.4.441](#)) record within an MDX metadata store (section [2.2.4.4](#)). Members (3) are specified by **BrtMdxMbrIstr** (section [2.4.675](#)) records.

### 2.2.4.8.3 MDX Member Property Metadata

An MDX **member property** represents the property value of a member (3).

MDX member property metadata references a member (3) name and a property name.

An MDX member property is specified by a **BrtBeginMdxMbrProp** (section [2.4.104](#)) record and a **BrtEndMdxMbrProp** (section [2.4.440](#)) record within an MDX metadata store (section [2.2.4.4](#)).

#### 2.2.4.8.4 MDX KPI Metadata

An MDX **key performance indicator (KPI)** represents the KPI property value of a KPI member (3).

MDX KPI metadata references a KPI name, a KPI property, and a member (3) name.

An MDX KPI is specified by a **BrBeginMdxKPI** (section [2.4.103](#)) record and a **BrEndMdxKPI** (section [2.4.439](#)) record within an MDX metadata store (section [2.2.4.4](#)).

#### 2.2.4.9 Future Metadata

Future metadata is non-MDX metadata.

Each metadata type (section [2.2.4.1](#)) of future metadata, inside the metadata part (section [2.1.7.34](#)), has its own metadata store (section [2.2.4.4](#)) that is uniquely identified by its name and that contains future metadata records.

Each future metadata can be indexed by either a cell metadata (section [2.2.4.2](#)) or a metadata block (section [2.2.4.5](#)) for value metadata (section [2.2.4.3](#)).

A future metadata is specified by a **BrBeginFmd** (section [2.4.82](#)) record and ends with a **BrEndFmd** (section [2.4.418](#)) record within a metadata store (section [2.2.4.4](#)).

#### 2.2.5 PivotTables

A PivotTable is a mechanism for summarizing source data (section [2.2.5.2.1](#)) to get an overview of the distribution of that data. In a **PivotTable**, applicable columns (2) of the source data become fields that can be used to summarize data. In the case of using OLAP source data, **OLAP hierarchies** and some other OLAP entities become fields in the PivotTable.

A PivotTable has two major parts, a **PivotCache** (section [2.2.5.2](#)) and a PivotTable view (section [2.2.5.3](#)). There can be multiple PivotTable views based on a single **PivotCache**.

OLAP PivotTables have one PivotTable view based on a **PivotCache**, see section [2.2.5.3.1](#) for details. See section [2.2.5.2.1](#) for the specification of an OLAP **PivotCache**. See section [2.2.5.3](#) for the specification of an OLAP PivotTable view.

The values produced by a PivotTable are placed in cells of a sheet and these cells make up a PivotTable report.

The PivotTable structures are not needed to obtain values from a PivotTable report because those values are available in the sheet cells. The structures are needed for the following purposes:

- To show extra information related to a PivotTable in an application, such as sort and filter information.
- To recalculate a PivotTable view, incorporating changes made to it such as sort and filter, and update the corresponding PivotTable report accordingly.
- To refresh a **PivotCache**, incorporating changes made to the source data (section [2.2.5.2.1](#)), and then recalculate any PivotTable views associated with the **PivotCache** and update the corresponding PivotTable reports accordingly.

In addition to being used by PivotTable views, a **PivotCache** is used by cube functions for caching data. For details, see section [2.2.5.2](#) and section [2.2.5.2.11](#).

### 2.2.5.1 Data Functionality Level

A data functionality level is a number that represents a set of features and runtime behaviors in areas related to data manipulation and display, which includes PivotTable view (section [2.2.5.3](#)), query tables and External Connections (section [2.2.8](#)).

The data functionality level that a **PivotCache** (section [2.2.5.2](#)) is created with is specified by the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record. The data functionality level that a PivotTable view is created with is specified by the **bVerSxMacro** field of the **BrtBeginSXView** (section [2.4.264](#)) record.

The following table specifies various restrictions based on the value of the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record.

| Restriction   | Restriction for data functionality level <3 | Restriction for data functionality level >=3 |
|---|---|--|
| Maximum number of cache fields (section <a href="#">2.2.5.2.2</a> )   | 1024  | 16384  |
| Maximum number of cache items (section <a href="#">2.2.5.2.3</a> ) of a cache field   | 32500                                       | 1048576                                      |
| Maximum string length of a cache item name  | 256   | 32767  |
| Maximum number of pivot items (section <a href="#">2.2.5.3.3</a> ) to show in an AutoFilter   | 255   | 2147483647                                   |
| Maximum string length of the MDX <b>formula</b> specified by the <b>pcdCalcMemCommon.stMdx</b> field in the <b>BrtBeginPCDCalcMem</b> (section <a href="#">2.4.120</a> ) record | 2048  | 32767  |

The **bVerSxMacro** field of the **BrtBeginSXView** (section [2.4.264](#)) record MUST be greater than or equal to 3 if and only if the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record is greater than or equal to 3.

### 2.2.5.2 PivotCache

The **PivotCache** contains cached information about source data (section [2.2.5.2.1](#)). The cached information is used by **PivotTable Views** (section [2.2.5.3](#)) to generate **PivotTable** (section [2.2.5](#)) reports, or it is used by cube functions to display OLAP data sets and values. The same **PivotCache** MUST NOT be used by both a PivotTable view and a cube function. The information contained in a **PivotCache** includes organization, data types and the values of the source data.

The PivotCache is divided into two parts. The first part consists of the optional cache record (section [2.2.5.2.10](#)) structures, as specified by the **PivotCache record** (section [2.1.7.39](#)) part. The cache record structures represent a snapshot of the source data (section [2.2.5.2.1](#)) and enable a PivotTable view (section [2.2.5.3](#)) that uses a **PivotCache** to be recalculated without retrieving the source data. The cache record structures do not exist for OLAP source data.

The second part of a **PivotCache** is the set of structures that describe metadata about the source data (section [2.2.5.2.1](#)), such as where it comes from, the data entities it has, and the unique values of those entities, as specified by the **PivotCache definition** (section [2.1.7.38](#)) part.

See section [2.2.5.2.1](#) for the specification of an OLAP **PivotCache**.

### 2.2.5.2.1 Source Data

A **PivotCache** (section [2.2.5.2](#)) can be based on four different types of source data. The type of source data is specified by the **iSrcType** field of the **BrtBeginPCDSrc** (section [2.4.160](#)) record.

When the source data type is a range, which occurs when **iSrcType** is equal to 0x00000000, the source data is read from a range specified by the **BrtBeginPCDSRange** (section [2.4.161](#)) record. If the range specified by the **BrtBeginPCDSRange** record is a table then the **PivotCache** (section [2.2.5.2](#)) has one cache field (section [2.2.5.2.2](#)) for each column (2) of the table, using the column (2) header captions for cache field names, and the **data region** of the table as source data values, specified by cache records (section [2.2.5.2.10](#)). If the range specified by the **BrtBeginPCDSRange** record is not a table then the **PivotCache** has one cache field for each column (2) of the range, using the values in the first row (2) of the range for cache field names, and all other rows (2) are used as source data values, specified by cache records.

When the source data type is a scenario, which occurs when **iSrcType** is equal to 0x00000003, no new source data is available for the **PivotCache** (section [2.2.5.2](#)) and the **PivotCache** cannot be refreshed. A snapshot of the source data might be available in the cache records.

When the source data type is multiple consolidation ranges (section [2.2.5.2.1.1](#)), which occurs when **iSrcType** is equal to 0x00000002, the source data is read from one or more ranges. For more details, see section [2.2.5.2.1.1](#).

When the source data type is external, which occurs when **iSrcType** is equal to 0x00000001, the source data is read from an external data source (1). The **dwConnID** field of the **BrtBeginPCDSrc** record specifies the associated external connection that is used to obtain data from the external data source (1). An external data source (1) can either be an OLAP or non-OLAP data source (1).

An OLAP **PivotCache** (section [2.2.5.2](#)) is specified to be a **PivotCache** has an associated external connection that is an OLAP connection (section [2.2.8.3.1](#)). For an OLAP **PivotCache**, the source data is handled by the data provider specified by the associated OLAP connection. See OLAP Data Model (section [2.2.5.4](#)) for more information. An OLAP **PivotCache** MUST NOT have cache records (section [2.2.5.2.10](#)).

For a non-OLAP **PivotCache** the source data is always a rectangular set of data and the **PivotCache** has one cache field (section [2.2.5.2.2](#)) for each column (2) of data, using the source field names for cache field names, and the rows (2) of the source data as data values, specified by cache records.

When a pivot field (section [2.2.5.3.2](#)) is on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view (section [2.2.5.3](#)), it is a server-based page field if the **fServerBased** field of the **BrtBeginSXVD** (section [2.4.261](#)) record is equal to 1 and the **fServerBased** field of the associated **BrtBeginPCDFld** (section [2.4.130](#)) record is equal to 1. A server-based page field is a pivot field on the page axis (section [2.2.5.3.7.1](#)) that causes the query that is used to retrieve source data for populating the **PivotCache** to be parameterized. The query is parameterized according to the page filter criteria, as specified in section [2.2.5.3.7.1](#). This feature can only be used for a **PivotCache** with **ODBC** external source data.

#### 2.2.5.2.1.1 Multiple Consolidation Ranges

A multiple consolidation ranges **PivotCache** (section [2.2.5.2](#)) is used for summarizing multiple ranges containing source data in cross-tab format. Each range is specified by the **rfx** field or the **irstName** field of the **BrtBeginPCDSCSet** (section [2.4.148](#)) record. The sequence of records that conform to the **PCDSCONSOL** rule (defined in section [2.1.7.38](#)) specify information that only exists for a multiple consolidation ranges **PivotCache**.

An example of a range in cross-tab format is illustrated in the following figure. The first column (2) of the range contains names of sales people (George and Allan). The first row (2) in the range contains product groups (Cars and Bikes) and the rest of the cells in the range contain numeric values representing how many products in a certain product group that each sales person sold.

|        | Cars | Bikes |
|--------|------|-------|
| George | 1    | 2     |
| Allan  | 3    | 4     |

**Figure 2: Example of a range in cross-tab format**

A multiple consolidation ranges **PivotCache** (section [2.2.5.2](#)) is used to summarize multiple cross-tab ranges as illustrated in the next figure which shows eight cross-tab ranges.

|    | A       | B    | C     | D | E       | F    | G     |
|----|---------|------|-------|---|---------|------|-------|
| 1  | 2006 Q1 |      |       |   | 2007 Q1 |      |       |
| 2  |         | Cars | Bikes |   |         | Cars | Bikes |
| 3  | George  | 1    | 2     |   | George  | 17   | 18    |
| 4  | Allan   | 3    | 4     |   | Allan   | 19   | 20    |
| 5  |         |      |       |   |         |      |       |
| 6  | 2006 Q2 |      |       |   | 2007 Q2 |      |       |
| 7  |         | Cars | Bikes |   |         | Cars | Bikes |
| 8  | George  | 5    | 6     |   | George  | 21   | 22    |
| 9  | Allan   | 7    | 8     |   | Allan   | 23   | 24    |
| 10 |         |      |       |   |         |      |       |
| 11 | 2006 Q3 |      |       |   | 2007 Q3 |      |       |
| 12 |         | Cars | Bikes |   |         | Cars | Bikes |
| 13 | George  | 9    | 10    |   | George  | 25   | 26    |
| 14 | Allan   | 11   | 12    |   | Allan   | 27   | 28    |
| 15 |         |      |       |   |         |      |       |
| 16 | 2006 Q4 |      |       |   | 2007 Q4 |      |       |
| 17 |         | Cars | Bikes |   |         | Cars | Bikes |
| 18 | George  | 13   | 14    |   | George  | 29   | 30    |
| 19 | Allan   | 15   | 16    |   | Allan   | 31   | 32    |

**Figure 3: Example of eight ranges in cross-tab format**

The values in the first column (2) of each range are used to create a cache field (section [2.2.5.2.2](#)) with the default name "Row" (or corresponding localized name); each cache item (section [2.2.5.2.3](#)) of this cache field corresponds to one of the values in the first column (2) of the ranges, eliminating duplicates. This cache field is the first cache field in the **BrtBeginPCDFields** (section [2.4.131](#)) collection.

The values in the first row (2) of each range are used to create a cache field with the default name "Column" (or corresponding localized name); each cache item of this cache field corresponds to one of the values in the first row (2) of the ranges, eliminating duplicates. This cache field is the second cache field in the **BrtBeginPCDFields** collection.

The values in all other cells of each range are used to create a cache field with the default name "Value" (or corresponding localized name); each cache item of this cache field corresponds to one of the values in the ranges that are not in the first column (2) or first row (2), eliminating duplicates. This cache field is the third cache field in the **BrtBeginPCDFields** collection.

Up to four additional cache fields can optionally exist with the default names "Page1", "Page2", "Page3" and "Page4" (or corresponding localized names). The number of optional cache fields created is user defined and is equal to the **cPages** field of the **BrtBeginPCDSCPages** (section [2.4.146](#)) record. Each optional cache field corresponds to a **BrtBeginPCDSCPage** (section [2.4.145](#)) record.

The first through fourth **BrtBeginPCDSCPage** record in the **BrtBeginPCDSCPages** collection corresponds to the fourth through seventh cache field in the **BrtBeginPCDFields** (section [2.4.131](#)) collection and each cache item of this cache field corresponds to the **BrtBeginPCDSCItem** (section [2.4.147](#)) record in that **BrtBeginPCDSCPage** collection with the same index.

The **rgiItem** field of the **BrtBeginPCDSCSet** (section [2.4.148](#)) record is an array of indexes that specifies **BrtBeginPCDSCItem** (section [2.4.147](#)) records in the **PCDSCPAGE** rule (defined in section [2.1.7.38](#)). Each **BrtBeginPCDSCItem** record specifies the value of a cache item associated with a range.

The first element in the **rgiItem** array corresponds to the first **BrtBeginPCDSCPage** collection in the **BrtBeginPCDSCPages** collection following the **BrtBeginPCDSCConsol** (section [2.4.144](#)) collection that precedes this record.

The second element in the **rgiItem** array corresponds to the second **BrtBeginPCDSCPage** collection in the **BrtBeginPCDSCPages** collection following the **BrtBeginPCDSCConsol** collection that precedes this record.

The third element in the **rgiItem** array corresponds to the third **BrtBeginPCDSCPage** collection in the **BrtBeginPCDSCPages** collection following the **BrtBeginPCDSCConsol** collection that precedes this record.

The fourth element in the **rgiItem** array corresponds to the fourth **BrtBeginPCDSCPage** collection in the **BrtBeginPCDSCPages** collection following the **BrtBeginPCDSCConsol** collection that precedes this record.

Each cache record (section [2.2.5.2.10](#)) for a multiple consolidation ranges **PivotCache** (section [2.2.5.2](#)) corresponds to the intersection of a value in the first row (2) of one of the ranges, a value in the first column (2) of one of the ranges and the set of **BrtBeginPCDSCItem** records associated with that range.

The preceding example with the eight ranges and with two of the optional **BrtBeginPCDSCPage** records specified ("Page1" and "Page2"), corresponds to cache records as illustrated in the following table.



| Row    | Column | Value | Page1 | Page2 |
|--------|--------|-------|-------|-------|
| Allan  | Bikes  | 4     | 2006  | Q1    |
| Allan  | Cars   | 3     | 2006  | Q1    |
| George | Bikes  | 2     | 2006  | Q1    |
| George | Cars   | 1     | 2006  | Q1    |
| Allan  | Bikes  | 8     | 2006  | Q2    |
| Allan  | Cars   | 7     | 2006  | Q2    |
| George | Bikes  | 6     | 2006  | Q2    |
| George | Cars   | 5     | 2006  | Q2    |
| Allan  | Bikes  | 12    | 2006  | Q3    |
| Allan  | Cars   | 11    | 2006  | Q3    |
| George | Bikes  | 10    | 2006  | Q3    |
| George | Cars   | 9     | 2006  | Q3    |
| Allan  | Bikes  | 16    | 2006  | Q4    |
| Allan  | Cars   | 15    | 2006  | Q4    |
| George | Bikes  | 14    | 2006  | Q4    |
| George | Cars   | 13    | 2006  | Q4    |
| Allan  | Bikes  | 20    | 2007  | Q1    |
| Allan  | Cars   | 19    | 2007  | Q1    |
| George | Bikes  | 18    | 2007  | Q1    |
| George | Cars   | 17    | 2007  | Q1    |
| Allan  | Bikes  | 24    | 2007  | Q2    |
| Allan  | Cars   | 23    | 2007  | Q2    |
| George | Bikes  | 22    | 2007  | Q2    |
| George | Cars   | 21    | 2007  | Q2    |
| Allan  | Bikes  | 28    | 2007  | Q3    |
| Allan  | Cars   | 27    | 2007  | Q3    |
| George | Bikes  | 26    | 2007  | Q3    |
| George | Cars   | 25    | 2007  | Q3    |
| Allan  | Bikes  | 32    | 2007  | Q4    |
| Allan  | Cars   | 31    | 2007  | Q4    |
| George | Bikes  | 30    | 2007  | Q4    |
| George | Cars   | 29    | 2007  | Q4    |

**Figure 4: Figure Representation of cache records based on eight consolidation ranges**

The following figure illustrates a **PivotTable** (section 2.2.5) report with multiple consolidation ranges and two pivot fields (section 2.2.5.3.2) on the page axis (section 2.2.5.3.7.1). The **PivotTable** report is based on the previous figure that illustrates eight ranges in cross-tab format and is summarizing the values from all the ranges because no manual filter (section 2.2.5.3.5) has



been applied to any of the pivot fields on the page axis ("Page1" and "Page2" are both set to summarize all values).

|                     |       |              |             |                    |
|---------------------|-------|--------------|-------------|--------------------|
| Page1               | (All) | ▼            |             |                    |
| Page2               | (All) | ▼            |             |                    |
| <b>Sum of Value</b> |       |              |             |                    |
| Column              | ▼     |              |             |                    |
| Row                 | ▼     | <b>Bikes</b> | <b>Cars</b> | <b>Grand Total</b> |
| Allan               |       | 144          | 136         | 280                |
| George              |       | 128          | 120         | 248                |
| <b>Grand Total</b>  |       | <b>272</b>   | <b>256</b>  | <b>528</b>         |

**Figure 5: Multiple consolidation ranges PivotTable**

### 2.2.5.2.2 Cache Fields

A cache field represents an entity by which data can be summarized. An example of such an entity is country/region. Having a country/region cache field enables users to summarize data by country/region.

Consider a **PivotCache** (section [2.2.5.2](#)) based on the following source data (section [2.2.5.2.1](#)):

| Country/Region | Product | Date      | Sales |
|----------------|---------|-----------|-------|
| USA            | Bicycle | 6/5/2007  | 500   |
| USA            | Car     | 8/3/2007  | 20000 |
| Canada         | Bicycle | 9/2/2007  | 300   |
| Canada         | Car     | 10/5/2007 | 35000 |

In this example, four cache fields exist in the **PivotCache**. Each cache field corresponds to one of the columns (2) in the source data: Country/Region, Product, Date and Sales.

The sequence of records that conform to the **PCDFIELD** rule (defined in section [2.1.7.38](#)) specifies a cache field. A cache field is contained in a **PivotCache**.

The sequence of records that conform to the **PCDFIELDS** rule (defined in section [2.1.7.38](#)) specifies all cache fields of the **PivotCache**.

A cache field index is a zero-based index of a **PCDFIELD** rule in the sequence of records specified by the **PCDFIELDS** rule.

A cache field typically corresponds to a source data column (2) or to a level of an OLAP hierarchy. However, grouping (section [2.2.5.2.4](#)) cache fields and cache fields representing calculated fields (section [2.2.5.2.5](#)) do not correspond to source data entities. Such cache fields are fully specified by information in the **PivotCache**.

The **fSrcField** field of the **BrtBeginPCDField** (section [2.4.130](#)) record specifies whether the cache field corresponds to a source data entity. A non-OLAP **PivotCache** MUST have one or more cache fields corresponding to source data columns (2). An OLAP **PivotCache** MUST NOT have cache fields that do not correspond to source data entities.

All cache fields that do not correspond to source data entities MUST be located after cache fields that do correspond to source data entities in the sequence of records that conform to the **PCDFIELDS** rule.

In a non-OLAP **PivotCache**, a cache field corresponds to one column (2) in the source data and contains information about that column (2). The cache field name is specified by the **stFldName** field of the **BrtBeginPCDField** record. The cache field name of a cache field corresponding to a source data column (2) is derived from the name of the column (2) in the source data and is used to associate the cache field with the source data column (2).

A cache field name MUST be valid as specified by the **stFldName** field of the **BrtBeginPCDField** record.

Except for grouping (section [2.2.5.2.4](#)) cache fields in non-OLAP **PivotCaches**, all cache field names MUST be unique, when using a case-insensitive comparison, within the **PivotCache**.

In an OLAP **PivotCache**, each cache field is associated with a cache hierarchy (section [2.2.5.2.7](#)). Each cache hierarchy has an associated sequence of records that conform to the **PCDHFIELDSUSAGE** rule (defined in section [2.1.7.38](#)) which specify the cache field indexes of the cache fields that are associated with that cache hierarchy. The cache hierarchy to which cache fields are associated is specified by the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record preceding the sequence of records that conform to the **PCDHFIELDSUSAGE** rule.

If a cache hierarchy (section [2.2.5.2.7](#)) is not a measure (section [2.2.5.2.7.1](#)) or a named set (section [2.2.5.2.7.3](#)) there can be more than one cache field associated with it. Each cache field corresponds to an **OLAP level** or to a member (3) property of the associated OLAP hierarchy in the source data (section [2.2.5.2.1](#)). The **fOlapMemPropField** of the **BrtBeginPCDField** (section [2.4.130](#)) record specifies whether a cache field is a member (3) property.

#### 2.2.5.2.2.1 Member Properties

A member (3) property is the **PivotTable** (section [2.2.5](#)) representation of an **OLAP member property**. Member (3) properties can have properties that are associated with the **PivotCache** (section [2.2.5.2](#)) and a PivotTable view (section [2.2.5.3](#)).

A member (3) property is associated with one OLAP member property of the OLAP hierarchy specified by the associated cache hierarchy (section [2.2.5.2.7](#)) of the member (3) property.

A member (3) property can be associated with a cache field (section [2.2.5.2.2](#)) and a pivot field (section [2.2.5.3.2](#)). The **fOlapMemPropField** field of the **BrtBeginPCDField** (section [2.4.130](#)) record of a cache field specifies whether a cache field is a member (3) property cache field. The associated pivot field of a member (3) property cache field is a member (3) property pivot field.

A member (3) property with an associated member (3) property cache field and member (3) property pivot field is associated with the cache hierarchy (section [2.2.5.2.7](#)) and pivot hierarchy (section [2.2.5.3.4](#)) of the associated member (3) property cache field and member (3) property pivot field.

If a member (3) property is associated with a member (3) property cache field, the association of the member (3) property and an OLAP member property is specified by the **stFldName** field of the

**BrtBeginPCDField** record of the member (3) property cache field, which specifies the **MDX unique name** of the OLAP member property.

An association between a member (3) property and a cache field or pivot field is not required. If the value of the **isxvd** field of the **BrtBeginSXTDMP** (section [2.4.250](#)) record for a member (3) property is -1, then the member (3) property is not associated with any cache field or pivot field. Such a member (3) property is not displayed on the row (2) axis or column (2) axis. A member (3) property that is not associated with any cache field is associated with the pivot hierarchy that contains the member (3) property, and with the cache hierarchy associated with the pivot hierarchy. If a member (3) property is not associated with a cache field, the association between the member (3) property and an OLAP member property is specified by the **irstProperty** field of the **BrtBeginSXTDMP** record specifying the unique name of the OLAP member property.

If the value of the **bVerSxMacro** field of the **BrtBeginSXView** (section [2.4.264](#)) record of the PivotTable view (section [2.2.5.3](#)) containing the member (3) property is less than 3, **BrtSXTDMPOrder** (section [2.4.775](#)) records MUST NOT be present in the PivotTable view. If the value of the **bVerSxMacro** field of the **BrtBeginSXView** (section [2.4.264](#)) record of the PivotTable view containing the member (3) property is greater than or equal to 3, **BrtBeginSXTDMP** records MUST NOT be present in the PivotTable view. The **isxvd** field of a **BrtSXTDMPOrder** record MUST refer to the member (3) property pivot field associated with the pivot hierarchy (section [2.2.5.3.4](#)) that contains the **BrtSXTDMPOrder** record.

A member (3) property pivot field (section [2.2.5.3.2](#)) can be shown only in the row (2) area or column (2) area of a PivotTable view. A member (3) property pivot field can only be shown after the last **visible** OLAP level of the corresponding pivot hierarchy. The order of member (3) property pivot fields shown in the PivotTable view is the same as the order of member (3) properties in the **BrtBeginSXTDMP** (section [2.4.250](#)) collection of the corresponding pivot hierarchy, as specified by the **SXTDMPS** rule in the **PivotTable** (section [2.1.7.40](#)) part ABNF.

### 2.2.5.2.3 Cache Items

Cache items represent specific instances of the entities represented by cache fields (section [2.2.5.2.2](#)). For example, an instance of a Country/Region cache field might be the USA cache item. Having a USA cache item in the Country/Region cache field enables the associated PivotTable view (section [2.2.5.3](#)) to display data by USA.

Each cache item specifies a value and a type. In some cases, a cache item can have additional information associated with it as well.

A cache item is contained in a cache field. A cache field can have zero cache items if the cache field is not in use in the PivotTable view.

A cache item index can be used to reference a cache item within the cache field. Referencing a cache item by index requires an implicit or explicit reference to that cache field because a cache item collection is associated with a specific cache field. A cache field can be referenced by a cache field index, as specified in section [2.2.5.2.2](#).

If the records that specify the cache field include a sequence of records that conform to the **PCDFATBL** rule (defined in section [2.1.7.38](#)), then the records that conform to the **PCDFATBL** rule specify the raw cache items of the cache field.

If the records that specify the cache field include a sequence of records that conform to the **PCDFGITEMS** rule (defined in section [2.1.7.38](#)), then the records that conform to the **PCDFGITEMS** rule specify the grouping (section [2.2.5.2.4](#)) cache items of the cache field. These are used for some grouping cache fields in non-OLAP **PivotCaches** (section [2.2.5.2](#)).

If there are no grouping cache items but there are raw cache items, the cache item index is a zero-based index into the raw cache items.

If there are grouping cache items, then the cache item index is a zero-based index into the grouping cache items.

For raw cache items (records in **PCDFATBL**), each raw cache item is specified by one of the following:

- A record that conforms to the **PCDI** rule (defined in section [2.1.7.38](#)), excluding the records specified by the sequence of records that conform to the **PCDIRUN** rule (defined in section [2.1.7.38](#)).
- A record that conforms to the **PCDIA** rule (defined in section [2.1.7.38](#)). These raw cache items have additional information.
- An entry in the **rgPCDINumber**, **rgPCDIString**, **rgPCDIError** or **rgPCDIDatetime** fields of the **BrtBeginPCDIRun** (section [2.4.141](#)) record.

There can be multiple entries of source data (section [2.2.5.2.1](#)) that have the same combination of value and type for a cache field (section [2.2.5.2.2](#)). Each raw cache item within a cache field MUST have a unique combination of value and type.

For grouping cache items (records in **PCDFGITEMS** (section [2.1.7.38](#)), each grouping cache item is specified by one of the following:

- A **PCDI** rule (defined in section [2.1.7.38](#)), excluding the records specified by the **PCDIRUN** rule (defined in section [2.1.7.38](#)).
- An entry in the **rgPCDINumber**, **rgPCDIString**, **rgPCDIError** or **rgPCDIDatetime** fields of the **BrtBeginPCDIRun** record.

A **BrtBeginPCDIRun** record specifies multiple sequential cache items of the same type and is used to reduce file size.

A grouping (section [2.2.5.2.4](#)) cache field MUST have grouping cache items.

A grouping cache field with the **fSrcField** field of the **BrtBeginPCDField** (section [2.4.130](#)) record of the cache field equal to 1 MUST have raw cache items.

A cache field that is not a grouping cache field MUST NOT have grouping cache items.

If there are one or more references by index to cache items of a particular cache field, that cache field MUST have cache items.

For an OLAP **PivotCache** (section [2.2.5.2](#)), a measure (section [2.2.5.2.7.1](#)) cache field associated with a cache hierarchy (section [2.2.5.2.7](#)) MUST NOT have cache items.

For an OLAP **PivotCache**, a cache item with a string value specifies the unique name of an **OLAP member**, unless the cache field is a member (3) property cache field.

Raw cache items can contain unused cache items, each specified by a sequence of records that conform to the **PCDIA** rule. Unused cache items are values that did not exist in the source data (section [2.2.5.2.1](#)) when the **PivotCache** was last refreshed, but existed when the **PivotCache** was refreshed previously. The **PivotCache** can retain such unused cache items to preserve information associated with them to reapply that information if the value corresponding to the cache item is added back to the source data. The **fGhost** field of the **PCDIAddInfo** (section [2.5.99](#)) structure specifies whether a cache item is unused.

The following example shows cache items and their association with source data.

Consider a **PivotCache** based on the following source data table:

| Country/Region | Product | Date      | Sales |
|----------------|---------|-----------|-------|
| USA            | Bicycle | 6/5/2007  | 500   |
| USA            | Car     | 8/3/2007  | 20000 |
| Canada         | Bicycle | 9/2/2007  | 500   |
| Canada         | Car     | 10/5/2007 | 35000 |

Four cache fields exist, and each one corresponds to one of the columns (2): Country/Region, Product, Date, and Sales. Each of the four cache fields can have cache items corresponding to the unique values in the source data columns (2) as illustrated in the following tables.

| Cache items for the Country/Region cache field |
|--|
| Canada   |
| USA  |

| Cache items for the Product cache field |
|---|
| Bicycle                                 |
| Car                                     |

| Cache items for the Date cache field |
|--------------------------------------|
| 6/5/2007                             |
| 8/3/2007                             |
| 9/2/2007                             |
| 10/5/2007                            |

| Cache items for the Sales cache field |
|---------------------------------------|
| 500                                   |
| 20000                                 |
| 3500                                  |

#### 2.2.5.2.4 Grouping

Grouping is used to combine a set of cache items (section [2.2.5.2.3](#)) into a group. There are three different types of grouping: numeric grouping, date grouping, and discrete grouping. Numeric grouping combines numeric cache items into ranges of values. Date grouping combines date cache items into date ranges. Discrete grouping combines specifically selected cache items into groups.

The cache field (section [2.2.5.2.2](#)) that contains the cache items (section [2.2.5.2.3](#)) that are to be grouped is called the base cache field. The resultant cache field that contains the groups of cache items is called the parent grouping cache field. Each group of cache items in the base cache field is associated with a single cache item in the parent grouping cache field. Often cache items in parent grouping cache fields can be further grouped, creating a hierarchy of parent grouping cache fields. The base cache field is at the lowest level of the hierarchy.

Grouping is specified by a sequence of records that conform to the **PCDFGROUP** rule (defined in section [2.1.7.38](#)).

Numeric grouping and date grouping are specified by records in the **PivotCache Definition** part (section [2.1.7.38](#)) that conform to the **PCDFGRANGE** rule (defined in section [2.1.7.38](#)).

Discrete grouping is specified by records in the **PivotCache Definition** part that conform to the **PCDFDISCRETE** rule (defined in section [2.1.7.38](#)).

A numeric grouping or date grouping cache field (section [2.2.5.2.2](#)) is specified by the presence of a **BrBeginPCDFGRange** (section [2.4.128](#)) record following the **BrBeginPCDFField** (section [2.4.130](#)) record associated with that cache field. For a numeric grouping cache field, the **iByType** field of the associated **BrBeginPCDFGRange** record is equal to 0. For a date grouping cache field, the **iByType** field of the **BrBeginPCDFGRange** record is greater than or equal to 1 and less than or equal to 7.

A discrete grouping cache field (section [2.2.5.2.2](#)) is specified by the presence of a **BrBeginPCDFGDiscrete** (section [2.4.126](#)) record following the **BrBeginPCDFField** record associated with the cache field.

The **ifdbBase** field of the **BrBeginPCDFGroup** (section [2.4.129](#)) record that follows the **BrBeginPCDFField** record specifies a cache field index to the base cache field for a grouping cache field.

The **ifdbParent** field of the **BrBeginPCDFGroup** record that follows the **BrBeginPCDFField** record specifies a cache field index to the parent grouping cache field of a grouping cache field or of a base cache field.

For numeric grouping, there is only one cache field (section [2.2.5.2.2](#)) associated with the grouping and it serves as both the grouping cache field and the base cache field. Therefore, for a numeric grouping cache field, the **ifdbBase** field of the **BrBeginPCDFGroup** record that follows the **BrBeginPCDFField** (section [2.4.130](#)) record MUST specify a cache field index to that same **BrBeginPCDFField** record. For numeric grouping, the **ifdbParent** field of the **BrBeginPCDFGroup** record MUST be -1.

For date grouping, there can be up to seven levels of grouping hierarchy. The grouping level for a cache field (section [2.2.5.2.2](#)) is specified by the **iByType** field of the **BrBeginPCDFGRange** record. The cache field with the lowest **iByType** value is at the lowest level of the hierarchy, the cache field with the next lowest **iByType** value is at the next lowest level of the hierarchy, and so on. See the specification of the **BrBeginPCDFGRange** record for the list of levels of date grouping hierarchy. Each cache field in the hierarchy MUST have an **BrBeginPCDFGRange** record with a unique **iByType** value.

The cache field (section [2.2.5.2.2](#)) corresponding to the lowest level of the date grouping hierarchy serves as both a grouping cache field and the base cache field. Therefore, in the cache field corresponding to the lowest level of the date grouping hierarchy, the **ifdbBase** field of the **BrtBeginPCDFGroup** (section [2.4.129](#)) record that follows the **BrtBeginPCDFField** record MUST specify a cache field index to that same **BrtBeginPCDFField** record.

The cache items (section [2.2.5.2.3](#)) of a grouping cache field (section [2.2.5.2.2](#)), each corresponding to a single group, are specified by the sequence of records that conform to the **PCDFGITEMS** rule (defined in section [2.1.7.38](#)).

For discrete grouping, the mapping between each group in a grouping cache field (section [2.2.5.2.2](#)) and the cache items cache items (section [2.2.5.2.3](#)) of the base cache field that are in each group, is specified by the **PCDFGDISCRETE** rule (defined in section [2.1.7.38](#)) in the following way: there MUST be one **BrtPCDIIndex** (section [2.4.699](#)) record corresponding to every cache item in the cache items collection of the base cache field. Each **BrtPCDIIndex** record specifies a cache item in the **PCDFGITEMS** rule that is the parent grouping cache item of the cache item in the cache items collection for the base cache field with the same index as that **BrtPCDIIndex** record in the **PCDFGDISCRETE** rule.

The following paragraphs explain the three different types of grouping and provide examples of them.

Numeric grouping combines numeric cache items (section [2.2.5.2.3](#)) into ranges. For example, consider the following PivotTable report where the number of people (represented by "Count of Name") of a certain age are listed.

| Age                | Count of Name |
|--------------------|---------------|
| 5                  | 1             |
| 11                 | 1             |
| 20                 | 2             |
| 34                 | 2             |
| 45                 | 1             |
| 50                 | 1             |
| <b>Grand Total</b> | <b>8</b>      |

**Figure 6: PivotTable report with ages**

Analysis of specific ages might not be particularly meaningful. Instead, looking at age groups can be more interesting. The following PivotTable (section [2.2.5](#)) report shows numeric grouping applied to the "Age" cache field (section [2.2.5.2.2](#)). In this example, the numeric grouping is set to start at 0, end at 100 and have groups of 20 years.

| Age                | Count of Name |
|--------------------|---------------|
| <0                 |               |
| 0-19               | 2             |
| 20-39              | 4             |
| 40-59              | 2             |
| 60-79              |               |
| 80-100             |               |
| >100               |               |
| <b>Grand Total</b> | <b>8</b>      |

**Figure 7: PivotTable report with age groups**

Date grouping is similar to numeric grouping and is used to group cache items (section [2.2.5.2.3](#)) into date ranges.

One to seven grouping cache fields (section [2.2.5.2.2](#)) can exist when date grouping is applied to a cache field, each corresponding to a different level of detail of date and time information. The cache field to which the date grouping is originally applied is included in the set of grouping cache fields and is considered the base cache field of the grouping cache fields. For date grouping, the base cache field represents the lowest level of the date grouping hierarchy. The following levels of detail of date information are available, each corresponding to one cache field:

- Years
- Quarters
- Months
- Days
- Hours
- Minutes
- Seconds

For example, consider the following PivotTable report where the number of sales is listed for each individual date.



| Date               | # of Sales |
|--------------------|------------|
| 1/1/2007           | 1          |
| 1/1/2008           | 16         |
| 2/2/2007           | 2          |
| 3/3/2007           | 3          |
| 4/4/2007           | 4          |
| 5/5/2007           | 5          |
| 6/6/2007           | 6          |
| 7/7/2007           | 7          |
| 8/8/2007           | 8          |
| 9/9/2007           | 9          |
| 10/10/2007         | 10         |
| 11/11/2007         | 11         |
| 12/12/2007         | 12         |
| 2/2/2008           | 17         |
| 3/3/2008           | 18         |
| 4/4/2008           | 19         |
| 5/5/2008           | 20         |
| 6/6/2008           | 21         |
| 7/7/2008           | 22         |
| 8/8/2008           | 23         |
| 9/9/2008           | 24         |
| 10/10/2008         | 25         |
| 11/11/2008         | 26         |
| 12/12/2008         | 27         |
| <b>Grand Total</b> | <b>336</b> |

**Figure 8: PivotTable report with dates**

This information could be too granular for some analytical purposes. With date grouping, a more useful higher level summary can be created. The following PivotTable report shows the result of applying date grouping to the "Date" cache field (section [2.2.5.2.2](#)) and including two levels of grouping ("Years" and "Quarters"). In this example, the "Quarters" cache field represents the lowest

hierarchical level of date information included and is therefore the base cache field for this date grouping. The "Years" cache field is a grouping cache field with the "Quarters" cache field as its base cache field. The items "<1/1/2007" in the two cache fields represent dates before 1/1/2007, the start date specified by the **xnumStart** field of the **BrtBeginPCDFGRange** record. The items ">12/13/2008" in the two cache fields represent dates after 12/13/2008, the end date specified by the **xnumEnd** field of the **BrtBeginPCDFGRange** record.

| Years - Quarters ▾ | # of Sales |
|--------------------|------------|
| ▢ <1/1/2007        |            |
| <1/1/2007          |            |
| ▢ 2007             | 78         |
| Qtr1               | 6          |
| Qtr2               | 15         |
| Qtr3               | 24         |
| Qtr4               | 33         |
| ▢ 2008             | 258        |
| Qtr1               | 51         |
| Qtr2               | 60         |
| Qtr3               | 69         |
| Qtr4               | 78         |
| ▢ >12/13/2008      |            |
| >12/13/2008        |            |
| <b>Grand Total</b> | <b>336</b> |

**Figure 9: PivotTable report with date groups**

Discrete grouping combines specifically selected cache items (section [2.2.5.2.3](#)) into groups. When discrete grouping is applied to a cache field (section [2.2.5.2.2](#)), a separate grouping cache field is created and the cache field that the grouping is applied to is the base cache field for that grouping cache field. Multiple grouping cache fields can exist for one base cache field, forming a hierarchy of grouping cache fields. A grouping cache field higher in the hierarchy is considered a parent grouping cache field of the grouping cache field or base cache field immediately following it in the hierarchy. For a grouping cache field, each cache item in the cache items collection represents one group.

For example, consider the following PivotTable report listing sales by states in the United States.

| Row Labels         | Sum of Sales Amount   |
|--------------------|-----------------------|
| Alabama            | \$37.29               |
| Arizona            | \$2,104.02            |
| California         | \$5,714,257.69        |
| Florida            | \$7,760.91            |
| Georgia            | \$1,658.92            |
| Illinois           | \$2,828.09            |
| Kentucky           | \$216.96              |
| Massachusetts      | \$2,049.10            |
| Minnesota          | \$91.28               |
| Mississippi        | \$82.59               |
| Missouri           | \$81.46               |
| Montana            | \$92.08               |
| New York           | \$4,124.19            |
| North Carolina     | \$7.28                |
| Ohio               | \$359.18              |
| Oregon             | \$1,170,991.54        |
| South Carolina     | \$2,434.92            |
| Texas              | \$1,789.10            |
| Utah               | \$4,419.58            |
| Virginia           | \$39.98               |
| Washington         | \$2,467,248.34        |
| Wyoming            | \$7,115.01            |
| <b>Grand Total</b> | <b>\$9,389,789.51</b> |

**Figure 10: PivotTable report with state names**

Discrete grouping can be used to group sets of states, for example, into geographical areas. The following PivotTable report shows the result of applying six groups ("Group1" through "Group6") to the cache field (section [2.2.5.2.2](#)) representing states. The cache field representing states is considered the base cache field for the discrete grouping in this example. Each group in the example, represented by a cache item (section [2.2.5.2.3](#)) in the grouping cache field, combines states in the same geographical area.

| Row Labels         | Sum of Sales Amount   |
|--------------------|-----------------------|
| <b>Group1</b>      | <b>\$3,000.83</b>     |
| Illinois           | \$2,828.09            |
| Minnesota          | \$91.28               |
| Missouri           | \$81.46               |
| <b>Group2</b>      | <b>\$6,532.47</b>     |
| Massachusetts      | \$2,049.10            |
| New York           | \$4,124.19            |
| Ohio               | \$359.18              |
| <b>Group3</b>      | <b>\$1,171,083.62</b> |
| Montana            | \$92.08               |
| Oregon             | \$1,170,991.54        |
| <b>Group4</b>      | <b>\$2,478,782.93</b> |
| Utah               | \$4,419.58            |
| Washington         | \$2,467,248.34        |
| Wyoming            | \$7,115.01            |
| <b>Group5</b>      | <b>\$12,238.85</b>    |
| Alabama            | \$37.29               |
| Florida            | \$7,760.91            |
| Georgia            | \$1,658.92            |
| Kentucky           | \$216.96              |
| Mississippi        | \$82.59               |
| North Carolina     | \$7.28                |
| South Carolina     | \$2,434.92            |
| Virginia           | \$39.98               |
| <b>Group6</b>      | <b>\$5,718,150.81</b> |
| Arizona            | \$2,104.02            |
| California         | \$5,714,257.69        |
| Texas              | \$1,789.10            |
| <b>Grand Total</b> | <b>\$9,389,789.51</b> |

**Figure 11: PivotTable report with state groups**

### 2.2.5.2.5 Calculated Fields

Calculated fields allow users to add calculations to a PivotTable (section [2.2.5](#)) report. For example, if a PivotTable report contains values for sales and cost by products but no profit values, a calculated field with the formula " $\text{=sales-cost}$ " can be added so that profit values are calculated and can be analyzed in the PivotTable report.

A calculated field is a cache field (section [2.2.5.2.2](#)) that does not correspond to a column (2) in the source data (section [2.2.5.2.1](#)). The values for a calculated field are calculated based on the formula specified for the calculated field. A calculated field is specified by the **fLoadFmla** field of the **BrtBeginPCDField** (section [2.4.130](#)) record being equal to 1. The formula is specified by the **fldFmla** field of the **BrtBeginPCDField** record.

The sequence of records that conforms to the **PNAMES** rule (defined in section [2.1.7.38](#)) specifies any cache field (section [2.2.5.2.2](#)) referenced by the formula.

For calculated fields, the **fSrcField** record of the **BrtBeginPCDField** record MUST be 0.

A pivot field (section [2.2.5.3.2](#)) associated with a calculated field MUST NOT appear on the row (2) axis, column (2) axis or page axis (section [2.2.5.3.7.1](#)) of a PivotTable view (section [2.2.5.3](#)).

An OLAP **PivotCache** (section [2.2.5.2](#)) MUST NOT have calculated fields.

### 2.2.5.2.6 Calculated Items

Calculated items allow users to add cache items (section [2.2.5.2.3](#)) to a cache field (section [2.2.5.2.2](#)) that do not exist in a column (2) in the source data (section [2.2.5.2.1](#)). For example, consider a PivotTable report displaying sales for all four quarters of 2007. If there are no source data rows (2) for sales in 2008, a calculated item can be used to add an additional cache item as a calculated item that calculates the projected sales for the first quarter of the year 2008 as being 25% higher than the sales for the fourth quarter of 2007. The following figure illustrates a PivotTable report with such a calculated item ("2008 Q1 projected").

| Date               | Sum of Sales           |
|--------------------|------------------------|
| 2007 Q1            | \$4,000,000.00         |
| 2007 Q2            | \$3,500,000.00         |
| 2007 Q3            | \$5,000,000.00         |
| 2007 Q4            | \$5,200,000.00         |
| 2008 Q1 projected  | \$6,500,000.00         |
| <b>Grand Total</b> | <b>\$24,200,000.00</b> |

**Figure 12: PivotTable report with calculated item**

A calculated item is a cache item (section [2.2.5.2.3](#)) that does not correspond to values in the source data (section [2.2.5.2.1](#)). The values for a calculated item are calculated based on the formula specified for the calculated item. The **fFmla** field of the **PCDIAddInfo** (section [2.5.99](#)) record specifies if a cache item specified by the **PCDIA** rule (defined in section [2.1.7.38](#)) is a calculated item.

The sequence of records that conforms to the **PCDCALCITEMS** rule (defined in section [2.1.7.38](#)) specifies the calculations for all calculated items of a **PivotCache**. Each **PCDCALCITEM** rule (defined in section [2.1.7.38](#)) in the sequence of records that conforms to the **PCDCALCITEMS** rule specifies one calculation for a specific calculated item. Each calculated item can have multiple calculations associated with it and in that case, there are multiple elements in the **PCDCALCITEMS** rule corresponding to the same calculated item. The calculated item that a calculation is associated with is specified by the sequence of records that conforms to the **PIVOTRULE** rule (defined in section [2.1.8](#)) in the **PCDCALCITEM** rule. The **PIVOTRULE** rule can also specify additional scoping information; for example, if one calculation for a calculated item named "2008 Q1 projected" only applies to the "Cars" product group, the **PIVOTRULE** rule (defined in section [2.1.8](#)) will specify the cache field (section [2.2.5.2.2](#)) corresponding to "product group" and the cache item (section [2.2.5.2.3](#)) corresponding to "Cars".

The **fmla** field of the **BrBeginPCDCalcItem** (section [2.4.118](#)) record specifies the formula that is used for a calculation.

Any cache field (section [2.2.5.2.2](#)) and associated cache items (section [2.2.5.2.3](#)), or pivot fields (section [2.2.5.3.2](#)) and associated pivot items (section [2.2.5.3.3](#)), that are referenced by the formula of a calculation are specified by the sequence of records that conforms to the **PNAMES** rule (defined in section [2.1.7.38](#)) in each **PCDCALCITEM** rule (defined in section [2.1.7.38](#)).

An OLAP **PivotCache** (section [2.2.5.2](#)) MUST NOT have calculated items (section [2.2.5.2.6](#)).

### 2.2.5.2.7 Cache Hierarchies

A cache hierarchy corresponds to one of the following entities in the OLAP source data (section [2.2.5.2.1](#)) associated with an OLAP **PivotCache** (section [2.2.5.2](#)):

- OLAP hierarchy
- **OLAP measure**
- **OLAP named set**
- OLAP key performance indicator (KPI)

Cache hierarchies are only present in OLAP **PivotCaches** and MUST NOT exist in a non-OLAP **PivotCache**.

The sequence of records that conforms to the **PCDHIERARCHY** rule (defined in section [2.1.7.38](#)) specifies a cache hierarchy that corresponds to an OLAP hierarchy, an OLAP measure or an OLAP named set, as specified in the following table.

| <b>fMeasure field of BrtBeginPCDHierarchy</b> | <b>fSet field of BrtBeginPCDHierarchy</b> | <b>Meaning</b> |
|---|---|----------------|
| 0   | 0   | OLAP hierarchy |
| 0   | 1   | OLAP named set |
| 1   | 0   | OLAP measure   |

The sequence of records that conforms to the **PCDKPI** rule (defined in section [2.1.7.38](#)) specifies a cache hierarchy that corresponds to an **OLAP KPI**.

The association between a cache hierarchy and the corresponding OLAP entity in the OLAP source data (section [2.2.5.2.1](#)) is specified by the **stUnique** field of the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record or by the **stUnique** field of the **BrtBeginPCDKPI** (section [2.4.142](#)) record.



For a cache hierarchy that corresponds to an OLAP hierarchy, OLAP measure or OLAP named set, the cache hierarchy index is the zero-based index of a **BrBeginPCDHierarchy** record in the **BrBeginPCDHierarchies** (section [2.4.139](#)) collection.

For a cache hierarchy that corresponds to an OLAP KPI, the cache hierarchy index is the  $n$ -based index of a **BrBeginPCDKPI** record in the **BrBeginPCDKPIs** (section [2.4.143](#)) collection, where  $n$  is the number of **BrBeginPCDHierarchy** records in the **BrBeginPCDHierarchies** collection, as specified in section [2.1.7.38](#).

A cache field (section [2.2.5.2.2](#)) can be associated with a cache hierarchy as specified by the **ihdb** field of the **BrBeginPCDField** (section [2.4.130](#)) record of the cache field.

A cache hierarchy that corresponds to an OLAP hierarchy represents one or more OLAP levels related via hierarchical relationships. For example, an OLAP hierarchy consisting of country/region, province, and city can be used to summarize national/regional, area, and municipal sales data. For a cache hierarchy that corresponds to an OLAP hierarchy, and is not a single field page hierarchy, each cache field (section [2.2.5.2.2](#)) associated with the cache hierarchy corresponds to an OLAP level of the OLAP hierarchy or is a member (3) property cache field.

A single field page hierarchy is a cache hierarchy that corresponds to an OLAP hierarchy in a **PivotCache** (section [2.2.5.2](#)) that has a **bVerCacheCreated** field of the **BrBeginPivotCacheDef** (section [2.4.162](#)) less than 3 and has a PivotTable view (section [2.2.5.3](#)) that has the associated pivot hierarchy (section [2.2.5.3.4](#)) on the page axis (section [2.2.5.3.7.1](#)). For a single field page hierarchy a single cache field is associated with the cache hierarchy.

### 2.2.5.2.7.1 Measures

A measure cache hierarchy is a cache hierarchy (section [2.2.5.2.7](#)) that is associated with an OLAP measure. The **fMeasure** field of the **BrBeginPCDHierarchy** (section [2.4.140](#)) record specifies if a cache hierarchy (section [2.2.5.2.7](#)) is a measure cache hierarchy. An OLAP measure MUST NOT have more than one cache field (section [2.2.5.2.2](#)) associated with it. A pivot hierarchy (section [2.2.5.3.4](#)) corresponding to a measure cache hierarchy MUST NOT be located on the row (2) axis, column (2) axis or page axis (section [2.2.5.3.7.1](#)).

If a pivot field (section [2.2.5.3.2](#)) associated with a pivot hierarchy corresponding to a measure cache hierarchy appears on the data axis (section [2.2.5.3.7.5](#)) more than once, data items (section [2.2.5.3.7.5.1](#)) that specify that pivot field after the first data item that specifies that pivot field MUST contain a **BrSXDI14** (section [2.4.772](#)) record with an **isxvd** field greater than or equal to 0.

### 2.2.5.2.7.2 KPIs

A key performance indicator (KPI) cache hierarchy (section [2.2.5.2.7](#)) is a cache hierarchy that is associated with an OLAP KPI. A KPI cache hierarchy includes the four main components of an OLAP KPI; value, goal, status and trend. KPI cache hierarchies are specified by the **BrBeginPCDKPI** (section [2.4.142](#)) record as specified by the sequence of records that conform to the **PCDKPI** rule in section [2.1.7.38](#).

### 2.2.5.2.7.3 Named Sets

A named set cache hierarchy (section [2.2.5.2.7](#)) is a cache hierarchy that is associated with an OLAP named set. The **fSet** field of the **BrBeginPCDHierarchy** (section [2.4.140](#)) record specifies if a cache hierarchy (section [2.2.5.2.7](#)) is a named set cache hierarchy. An OLAP named set MUST NOT have more than one cache field (section [2.2.5.2.2](#)) associated with it. A pivot hierarchy (section [2.2.5.3.4](#)) corresponding to a named set cache hierarchy MUST NOT be located on the data axis (section [2.2.5.3.7.5](#)) or page axis (section [2.2.5.3.7.1](#)).

### 2.2.5.2.8 OLAP Grouping

Grouping in an OLAP **PivotCache** (section [2.2.5.2](#)) is the associating of multiple OLAP members that belong to the same OLAP level of an OLAP hierarchy and have the same OLAP member parent. When OLAP members in a particular OLAP level are grouped, a parent grouping OLAP level exists. Each group is represented in the parent grouping OLAP level by one parent grouping OLAP member, and one or more child OLAP members in the OLAP level that the grouping is applied to.

The sequence of records that conforms to the **PCDHGLEVELS** rule (defined in section [2.1.7.38](#)) specifies grouping for the associated cache hierarchy (section [2.2.5.2.7](#)), which MUST be associated with an OLAP hierarchy. Each sequence of records that conforms to the **PCDHGLEVEL** rule (defined in section [2.1.7.38](#)) specifies a grouping for one OLAP level with the same zero-based ordinal as the zero-based index of the **PCDHGLEVEL** rule in the **PCDHGLEVELS** rule.

The set of groups for one OLAP level is specified by a sequence of records that conforms to the **PCDHGLGROUPS** rule (defined in section [2.1.7.38](#)) in the **PCDHGLEVEL** rule (defined in section [2.1.7.38](#)). Each individual group is specified by a sequence of records that conforms to the **PCDHGLGROUP** rule (defined in section [2.1.7.38](#)) in the **PCDHGLGROUPS** rule. The set of OLAP members for a group is specified by the sequence of records that conforms to the **PCDHGLGMEMBERS** rule (defined in section [2.1.7.38](#)) within a **PCDHGLGROUP** rule. Membership in the group is specified by the sequence of records that conforms to the **PCDHGLGMEMBER** rule (defined in section [2.1.7.38](#)) within the **PCDHGLGMEMBERS** rule.

### 2.2.5.2.9 OLAP Calculated Members

A calculated member (3) is specified by the sequence of records that conform to the **PCDCALCMEM** rule (defined in section [2.1.7.38](#)) and is used to create an **OLAP calculated member** or an OLAP named set with an associated user-specified MDX expression for a custom calculation.

The **pcdCalcMemCommon.stMdx** field in the **BrtBeginPCDCalcMem** record specifies the user-specified MDX expression.

The **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** record specifies whether the associated calculated member (3) creates an OLAP named set or an OLAP calculated member.

If the user-specified MDX expression associated with a calculated member (3) defines an OLAP measure, then this calculated member (3) will be associated with a measure cache hierarchy as specified in section [2.2.5.2.7.1](#).

If the user-specified MDX expression associated with a calculated member (3) specifies an OLAP member in an OLAP hierarchy other than the OLAP measure hierarchy, then this calculated member (3) can only be associated with a cache item (section [2.2.5.2.3](#)).

If a calculated member (3) specifies an OLAP named set, then this calculated member (3) is associated with a named set cache hierarchy as specified in section [2.2.5.2.7.3](#).

If a collection of a OLAP calculated member (3) is associated with an external connection that is not associated with a **PivotCache** (section [2.2.5.2](#)), this collection is specified by the sequence of records that conform to the **PCDCALCMEMSEXT** rule (defined in section [2.1.8](#)).

The extended properties of a calculated member (3) are specified by the sequence of records that conform to the **FRTPCDCALCMEM** rule (defined in section [2.1.7.38](#)). This sequence of records is present in the file if at least one of the following conditions is satisfied:

1. The named set is defined by an OLAP named set array.
2. The named set has a **display folder** specified.



3. The MDX expression is longer than 32765 characters.
4. Each member (3) from a different level of the same cache hierarchy (section [2.2.5.2.7](#)) of this named set (section [2.2.5.2.7.3](#)) is displayed in a separate pivot field (section [2.2.5.3.2](#)).
5. This named set is automatically ordered and has duplicate tuples removed.

### 2.2.5.2.10 Cache Records

Cache records represent a snapshot of the source data (section [2.2.5.2.1](#)) of a **PivotCache** (section [2.2.5.2](#)) and allow for PivotTable views (section [2.2.5.3](#)) using a **PivotCache** to be recalculated without retrieving the source data.

Cache records are specified by the **PivotCache Records** (section [2.1.7.39](#)) part, which contains sequences of records that conform to the **PIVOTCACHERECORD** rule (defined in section [2.1.7.39](#)). Each **PIVOTCACHERECORD** rule specifies one cache record (section [2.2.5.2.10](#)) and corresponds to one row (2) in the source data. The **PIVOTCACHERECORD** rules each specify a sequence of values. Each of these values MUST correspond to a different cache field (section [2.2.5.2.2](#)) as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The order of the values, corresponding to different cache fields, in each **PIVOTCACHERECORD** rule MUST be the same as the order of the cache fields in the collection of cache fields specified by the **BrBeginPCDFields** (section [2.4.131](#)) collection. The number of values, corresponding to different cache fields, in each **PIVOTCACHERECORD** rule MUST be equal to the number of **BrBeginPCDField** (section [2.4.130](#)) records, for which the **fSrcField** field is equal to 1, in the **BrBeginPCDFields** collection.

If a pivot field (section [2.2.5.3.2](#)) associated with a cache field (section [2.2.5.2.2](#)) exists in the PivotTable view (section [2.2.5.3](#)), the cache field MUST have associated cache items; if not, associated cache items (section [2.2.5.2.3](#)) are optional.

For cache fields that have cache items, the cache items of the cache fields are referenced by an index. For sequences of records that conform to the **PIVOTCACHERECORDDT** (defined in section [2.1.7.39](#)), the index is specified by the **BrPCDIIndex** (section [2.4.699](#)) record. For **BrPCRRecord** (section [2.4.704](#)) records, the index is stored in the **rgb** field of the **BrPCRRecord** record.

For cache fields (section [2.2.5.2.2](#)) that do not have cache items (section [2.2.5.2.3](#)), the sequence of records that conform to a **PCDIDT** (defined in section [2.1.7.39](#)) in a **PIVOTCACHERECORD** (defined in section [2.1.7.39](#)) specify individual values of the corresponding source data (section [2.2.5.2.1](#)) row (2). For **BrPCRRecord** (section [2.4.704](#)) records, the values of the corresponding source data row (2) are stored in the **rgb** field of the **BrPCRRecord** record.

An OLAP **PivotCache** (section [2.2.5.2](#)) MUST NOT have cache records (section [2.2.5.2.10](#)). Cache records are optional for a non-OLAP **PivotCache**.

### 2.2.5.2.11 Tuple Cache

An OLAP **PivotCache** (section [2.2.5.2](#)) can contain cached data called a tuple cache which is used by cube functions for recalculation without accessing the data provider specified by the associated OLAP connection (section [2.2.8.3.1](#)).

A tuple cache is specified by a sequence of records that conforms to the **PCSDTUPLECACHE** rule (defined in section [2.1.7.38](#)).

If the OLAP **PivotCache** contains a tuple cache, the **fSheetData** field in the **BrBeginPivotCacheDef** (section [2.4.162](#)) record MUST be equal to 1.

A tuple cache can contain a cache of cube values specified by a sequence of records that conforms to the **PCSDTCENTRIES** rule (defined in section [2.1.7.38](#)), a cache of cube members (3) (specified by a sequence of records that conforms to the **PCSDTCQUERIES** rule (defined in section [2.1.7.38](#)), a cache of cube sets specified by a sequence of records that conforms to the **PCSDTCSETS** rule (defined in section [2.1.7.38](#)), and a cache of cube value server formats (specified by a sequence of records that conforms to the **PCDSFCIENTRIES** rule).

The sequence of records that conform to the **PCSDTCEMEMBER** rule (defined in section [2.1.7.38](#)) specifies a tuple cache entry. A tuple cache entry specifies an OLAP member or a reference to a tuple cache set. See section [2.4.150](#) for details.

A cache of cube values is a collection of values specified by the **BrtpCDIMissing** (section [2.4.700](#)), **BrtpCDINumber** (section [2.4.701](#)), **BrtpCDIError** (section [2.4.698](#)), or **BrtpCDIString** (section [2.4.702](#)) records. Each of these values is optionally followed by a collection of tuple cache entries specified by a sequence of records that conforms to the **PCSDTCEMEMBERS** rule (defined in section [2.1.7.38](#)), which specify the OLAP members or tuple cache sets corresponding to the value.

A cache of cube members (3) is specified by a sequence of records that conforms to the **PCSDTCQUERIES** rule. Each of the cube members (3) has an MDX expression, specified by the **BrtpBeginPCSDTCQuery** (section [2.4.155](#)) record. Each of the **BrtpBeginPCSDTCQuery** records is optionally followed by a collection of tuple cache entries specified by a sequence of records that conforms to the **PCSDTCEMEMBERS** rule (defined in section [2.1.7.38](#)) corresponding to the MDX expression.

A cache of cube sets is a collection of tuple cache sets specified by a sequence of records that conforms to the **PCSDTCSETS** rule (defined in section [2.1.7.38](#)). Each tuple cache set optionally has a collection of tuple cache entries specified by a sequence of records that conform to the **PCSDTCEMEMBERS** rule (defined in section [2.1.7.38](#)) corresponding to the MDX expression specified in the **BrtpBeginPCSDTCSet** (section [2.4.156](#)) record.

A cache of cube value server formats is a collection of **number formats** specified by the **BrtpCDSFCIEntry** (section [2.4.703](#)) record.

### 2.2.5.3 PivotTable View

A **PivotTable** view is a set of structures that specify layout, filtering, sorting, and other properties. These properties are used to produce a **PivotTable** (section [2.2.5](#)) report based on data from the **PivotCache** (section [2.2.5.2](#)).

A **PivotTable** view is specified by the sequence of records that conforms to the **PIVOTTABLE** rule (defined in section [2.1.7.40](#)).

An OLAP **PivotTable** view has an associated **PivotCache** (see section [2.2.5.3.1](#)) that is an OLAP **PivotCache** (section [2.2.5.2](#)).

Functionality specified by a **PivotTable** (section [2.2.5](#)) view includes:

- The arrangement of pivot fields (section [2.2.5.3.2](#)) on the row (2) axis, column (2) axis, or both to produce a **PivotTable** report.
- Using data items (section [2.2.5.3.7.5.1](#)) on the data axis (section [2.2.5.3.7.5](#)) to show summarized result values in the **PivotTable** report.
- Filtering data in the **PivotTable** report by performing manual filtering (section [2.2.5.3.5](#)), filtering by criteria (section [2.2.5.3.6](#)), or filtering in the page axis (section [2.2.5.3.7.1](#)).
- Determining the **PivotTable** layout (section [2.2.5.3.8](#)).

- Formatting the entire **PivotTable** report with a tables style (section [2.2.6.3](#)). See section [2.4.790](#) for details.
- Formatting an area of the **PivotTable** report in a way that logically tracks changes in the **PivotTable** report. Formatting settings are associated with logical parts of the **PivotTable** view, and not with fixed ranges on the sheet. See the sequence of records conforming to the **SXFORMAT** rule (defined in section [2.1.7.40](#)) for details.
- **Conditional formatting** an area of the **PivotTable** report in a way that logically tracks changes in the **PivotTable** report and performs calculations based on the fact that the area is in a **PivotTable** report. See the sequence of records conforming to the **SXCONDFMT** rule (defined in section [2.1.7.40](#)) for details.
- Sorting pivot items (section [2.2.5.3.3](#)) of pivot fields (section [2.2.5.3.2](#)) within the **PivotTable** report. For details, see section [2.2.5.3.2.1](#).

Non-OLAP **PivotTable** views enable the creation of different **PivotTable** reports associated with the same **PivotCache**. This enables the creation of different visual representations without duplicating the **PivotCache**.

### 2.2.5.3.1 Relationship to PivotCache

A PivotTable view (section [2.2.5.3](#)) is associated with a **PivotCache** (section [2.2.5.2](#)) through the **idSx** field of a **BrtBeginPivotCacheID** (section [2.4.163](#)) record that matches the **idCache** field of the **BrtBeginSXView** (section [2.4.264](#)) record that corresponds to this PivotTable view.

A PivotTable view MUST have one and only one associated **PivotCache**. An OLAP **PivotCache** MUST NOT be associated with more than one PivotTable view. A non-OLAP **PivotCache** can be associated with more than one PivotTable view.

### 2.2.5.3.2 Pivot Fields

A pivot field corresponds to a cache field (section [2.2.5.2.2](#)). A pivot field specifies display information of the data in the PivotTable view.

A pivot field is specified by the sequence of records that conform to the **SXVD** rule (defined in section [2.1.7.40](#)). A pivot field is contained in the PivotTable view. A PivotTable view contains a collection of pivot fields which is specified by the **SXVDS** rule (defined in section [2.1.7.40](#)).

A pivot field index, which identifies a pivot field, is specified to be the zero-based index of a sequence of records that conform to the **SXVD** rule in the sequence of records that conforms to the **SXVDS** rule.

Each pivot field is associated with the cache field (section [2.2.5.2.2](#)) with a cache field index equal to the pivot field index of the pivot field. For more details, see section [2.2.5.2.2](#). The number of pivot fields in the PivotTable view (section [2.2.5.3](#)) MUST equal the number of cache fields in the associated **PivotCache** (section [2.2.5.2](#)).

The principal way that the structure of a PivotTable view is used to create a PivotTable report is that pivot fields can be part of PivotTable axes (section [2.2.5.3.7](#)). Also, a data item (section [2.2.5.3.7.5.1](#)) can refer to a pivot field.

A pivot field can have pivot items (section [2.2.5.3.3](#)). A pivot field can describe various information such as pivot field sorting (section [2.2.5.3.2.1](#)) and subtotaling (section [2.2.5.3.7.4.2](#)) settings.

The following figure illustrates a **PivotTable** (section [2.2.5](#)) report with four pivot fields displaying Sales by Product, Country/Region, and Date.

| Sum of Sales       | Column Labels |          |          |           |             |
|--------------------|---------------|----------|----------|-----------|-------------|
| Row Labels         | 6/5/2007      | 8/3/2007 | 9/2/2007 | 10/5/2007 | Grand Total |
| Bicycle            | 500           |          | 300      |           | 800         |
| Canada             |               |          | 300      |           | 300         |
| USA                | 500           |          |          |           | 500         |
| Car                |               | 20000    |          | 35000     | 55000       |
| Canada             |               |          |          | 35000     | 35000       |
| USA                |               | 20000    |          |           | 20000       |
| <b>Grand Total</b> | 500           | 20000    | 300      | 35000     | 55800       |

**Figure 13: PivotTable report with four pivot fields**

### 2.2.5.3.2.1 Pivot Field Sorting

Pivot items (section [2.2.5.3.3](#)) of a pivot field (section [2.2.5.3.2](#)) appear in the PivotTable view (section [2.2.5.3](#)) in a specific order. This **sort order (2)** is only applicable to pivot fields in the row (2) axis or column (2) axis and can be based on the following entities:

- The values of the pivot items associated with the pivot field (section [2.2.5.3.2](#)).
- The values of the data items (section [2.2.5.3.7.5.1](#)) that correspond to the pivot items associated with the pivot field
- The values of the pivot items (section [2.2.5.3.3](#)) of a pivot field (section [2.2.5.3.2](#)) associated with an OLAP member property. See member (3) properties for more details.
- The ordering of the pivot items associated with the pivot field as determined by the source data (section [2.2.5.2.1](#)) provider.
- The ordering of instances of the sequence of the records that conform to the **SXVI** rule (as defined in section [2.1.7.40](#)) for the pivot field within the file.

The sort order (2) of a pivot field (section [2.2.5.3.2](#)) is specified by the **fAutoSort** field of the **BrBeginSXVD** (section [2.4.261](#)) record. If **fAutoSort** is equal to 1, then the sort is performed every time the **PivotTable** (section [2.2.5](#)) is recalculated.

If the **fAutoSort** field of the **BrBeginSXVD** record is equal to 1, the sort order (2) is specified by the value of the **fAscendSort** field of the **BrBeginSXVD** record which determines whether the sort is ascending or descending.

The existence of a **BrBeginAutoSortScope** (section [2.4.9](#)) record following the **BrBeginSXVD** record specifies the scope of the sort, as specified in the following table.

| <b>BrBeginAutoSortScope existence</b> | <b>Meaning</b>  |
|---------------------------------------|---|
| Does not exist                        | Sorting is based on the values of the pivot items (section <a href="#">2.2.5.3.3</a> ) of the pivot field (section <a href="#">2.2.5.3.2</a> ). |
| Exists                                | Sorting is either based on the values in the data area (section <a href="#">2.2.5.3.8.1.4</a> )   |

| <b>BrBeginAutoSortScope existence</b> | <b>Meaning</b>   |
|---------------------------------------|--|
|                                       | or on the values of member (3) properties associated with the pivot field as specified by the sequence of records that conform to the <b>PIVOTRULE</b> rule (as defined in section <a href="#">2.1.8</a> ) in the sequence of records that conform to the <b>AUTOSORTSCOPE</b> rule (as defined in section <a href="#">2.1.7.40</a> ). |

If the **fAutoSort** field of the **BrBeginSXVD** (section [2.4.261](#)) record is equal to 0, the sort order (2) is determined by the order of instances of the sequence of the records that conform to the **SXVI** rule for this pivot field.

For OLAP **PivotTables**, if the **fTensorSort** field of the **BrBeginSXVD** record is equal to 1, the sort order (2) is determined by the OLAP source data (section [2.2.5.2.1](#)) provider.

### 2.2.5.3.3 Pivot Items

Pivot items represent specific instances of the entities represented by pivot fields (section [2.2.5.3.2](#)). Each pivot item specifies its display properties. For example it can contain the user defined caption for the pivot item or information about whether the pivot item is hidden or not.

A pivot item is specified by the sequence of records that conform to the **SXVI** rule (as defined in section [2.1.7.40](#)). A pivot item is contained in a pivot field. The collection specified by the sequence of records that conform to the **SXVIS** rule (as defined in section [2.1.7.40](#)) specifies the pivot items of a pivot field.

A pivot item can be referenced by a pivot item index. A pivot item index is specified to be the zero-based index of an **SXVI** rule in the collection specified by the **SXVIS** rule.

A pivot item can be associated with a cache item (section [2.2.5.2.3](#)). The **iCache** field of the **BrBeginSXVI** (section [2.4.263](#)) record of the pivot item specifies the cache item index of the associated cache item in the associated cache field (section [2.2.5.2.2](#)). If the **itmtype** field of this **BrBeginSXVI** record is not **PITDATA** (section [2.5.104](#)), then this pivot item MUST NOT have an associated cache item. Two pivot items MUST NOT be associated with the same cache item. Note that although a pivot field (section [2.2.5.3.2](#)) index references a pivot field that corresponds to the cache field with the same cache field index, a pivot item index might not reference a pivot item that corresponds to a cache item with the same cache item index.

The number of pivot items, where the **itmtype** field of the **BrBeginSXVI** (section [2.4.263](#)) record of the pivot item is **PITDATA** (section [2.5.104](#)), MUST equal zero or the number of cache items in the cache field of the pivot field (section [2.2.5.3.2](#)).

### 2.2.5.3.4 Pivot Hierarchies

A pivot hierarchy corresponds to a cache hierarchy (section [2.2.5.2.7](#)).

A pivot hierarchy is specified by the sequence of records that conform to the **SXTH** rule (defined in section [2.1.7.40](#)). A pivot hierarchy is contained in a PivotTable view (section [2.2.5.3](#)).

Pivot hierarchies MUST NOT exist in a non-OLAP PivotTable view.

A PivotTable view has a collection of pivot hierarchies as specified by the sequence of records that conform to the **SXTHS** rule (defined in section [2.1.7.40](#)).

A pivot hierarchy can be referenced by a pivot hierarchy index which is a zero-based index of an **SXTH** rule in the collection specified by the **SXTHS** rule.

Each pivot hierarchy is associated with a cache hierarchy with a cache hierarchy index, as specified in section [2.2.5.2.7](#), equal to the pivot hierarchy index of the pivot hierarchy.

A pivot hierarchy can have pivot field (section [2.2.5.3.2](#)) associated with it. The pivot fields associated with a pivot hierarchy do not need to exist if they have not been used by the application.

The association between a pivot hierarchy and pivot fields can be determined by the following: A pivot hierarchy has an associated cache hierarchy. This associated cache hierarchy in turn has cache field (section [2.2.5.2.2](#)) associated with it. These specific cache fields have pivot fields associated with them. See section [2.2.5.3.2](#) for more details.

A pivot hierarchy can be on a PivotTable axis (section [2.2.5.3.7](#)). When a pivot field (section [2.2.5.3.2](#)) associated with a pivot hierarchy is referenced by a data item (section [2.2.5.3.7.5.1](#)) the pivot hierarchy is on the data axis (section [2.2.5.3.7.5](#)). All pivot fields associated with a pivot hierarchy that is used on a PivotTable axis MUST be placed on the same PivotTable axis as the pivot hierarchy or not on any PivotTable axis.

### 2.2.5.3.5 Manual Filters

A manual filter enables specific pivot items (section [2.2.5.3.3](#)) or OLAP members associated with pivot fields (section [2.2.5.3.2](#)) to be shown or **hidden** in the PivotTable view (section [2.2.5.3](#)). Manual filtering affects subtotal calculations when pivot fields that have manual filters are located on the row (2) axis, column (2) axis, or page axis (section [2.2.5.3.7.1](#)). The pivot items that are hidden for such pivot fields are not included when calculating subtotals.

At least one **BrtBeginSXVI** (section [2.4.263](#)) record in the **BrtBeginSXVIs** (section [2.4.266](#)) collection MUST have the **fHidden** field equal to 0x0.

Manual filters are applied during **PivotTable** (section [2.2.5](#)) report calculation prior to any of the other types of filters specified in the following sections. If there are multiple manual filters, they are not applied in a specific order.

Details about manual filtering for pivot fields (section [2.2.5.3.2](#)) on the page axis are covered in section [2.2.5.3.7.1](#).

#### 2.2.5.3.5.1 Non-OLAP Manual Filters

For non-OLAP **PivotTable** (section [2.2.5](#)), the state of the manual filter on a pivot field (section [2.2.5.3.2](#)) can be determined by the value of the **fHidden** field of the **BrtBeginSXVI** (section [2.4.263](#)) records directly following the corresponding **BrtBeginSXVD** (section [2.4.261](#)). This field specifies whether the corresponding pivot item (section [2.2.5.3.3](#)) is hidden by the manual filter and therefore not displayed in the **PivotTable** report.

If the **fFilterInclusive** field of the **BrtBeginSXVD** record is equal to 0x1, pivot items (section [2.2.5.3.3](#)) corresponding to new values in the source data (section [2.2.5.2.1](#)) are not displayed by default in the PivotTable (section [2.2.5](#)) report after the associated **PivotCache** (section [2.2.5.2](#)) has been refreshed.

#### 2.2.5.3.5.2 OLAP Manual Filters

For OLAP PivotTable views (section [2.2.5.3](#)), manual filtering operates on pivot hierarchies (section [2.2.5.3.4](#)). OLAP manual filtering uses filtering lists to determine what filtering to apply.

The SXTHItem list is specified to be the list of the OLAP members specified by **BrtBeginSXTHItem** (section [2.4.253](#)) records of the pivot hierarchy (section [2.2.5.3.4](#))



The selected pivot items (section [2.2.5.3.3](#)) list is specified to be the list of pivot items, with the **fOlapFilterSelected** field of the **BrtBeginSXVI** (section [2.4.263](#)) record equal to 0x1, in the pivot fields (section [2.2.5.3.2](#)) associated with the pivot hierarchy.

If both the SXTHItem list and the selected pivot items list are empty then, no manual filtering is specified for the pivot hierarchy. Otherwise, the value of the **fFilterInclusive** field of the **BrtBeginSXTH** (section [2.4.252](#)) record of the pivot hierarchy determines how the lists will be used.

If the **fFilterInclusive** field of the **BrtBeginSXTH** record of the pivot hierarchy is equal to 0x1, the OLAP members in the SXHItem list and their ascendants and descendants are included in the manual filter, and the pivot items (section [2.2.5.3.3](#)) in the selected pivot items list and their ascendants and descendants are included in the manual filter. New OLAP members in the source data (section [2.2.5.2.1](#)) will be excluded by default when the PivotTable view (section [2.2.5.3](#)) is refreshed.

If the **fFilterInclusive** field of the **BrtBeginSXTH** (section [2.4.252](#)) record of the pivot hierarchy (section [2.2.5.3.4](#)) is equal to 0x0, the OLAP members in the SXHItem list and their descendants, are excluded in the manual filter, and the pivot items (section [2.2.5.3.3](#)) in the selected pivot items list and their descendants, are excluded in the manual filter. New OLAP members in the source data will be included by default when the PivotTable view is refreshed.

The filtering lists do not include OLAP members which are ascendants or descendants of other OLAP members in the lists.

### 2.2.5.3.6 Filtering by Criteria

Filtering by criteria is the ability to conditionally show pivot items (section [2.2.5.3.3](#)) of pivot fields (section [2.2.5.3.2](#)) based on user-defined criteria. For example, a criteria filter might be defined to show all products that sold for more than \$30,000.

#### 2.2.5.3.6.1 Advanced Filters

An advanced filter specifies a user-defined criterion that is used to determine the pivot items (section [2.2.5.3.3](#)) of a pivot field (section [2.2.5.3.2](#)) that are included in subtotal calculations for the PivotTable view (section [2.2.5.3](#)) and that are displayed in the **PivotTable** (section [2.2.5](#)) report.

Only advanced filters that are associated with pivot fields that are located on the row (2) axis or the column (2) axis are applied when the PivotTable view is calculated.

An advanced filter is specified by the sequence of records that conforms to the **SXFILTER** rule (defined in section [2.1.7.40](#)), and the **isxvd** field of the **BrtBeginSXFILTER** (section [2.4.236](#)) record specifies the pivot field associated with the advanced filter.

Advanced filters MUST NOT be applied to pivot fields of a PivotTable view if the value of the **bVerSxMacro** field of the **BrtBeginSXView** (section [2.4.264](#)) record corresponding to the PivotTable view is less than 3, or OLAP PivotTable views with a value of 0 for the **fSupportSubquery** field of the corresponding **BrtBeginPivotCacheDef** (section [2.4.162](#)) record.

There are three types of advanced filters: label filter (section [2.2.5.3.6.1.1](#)), date filter (section [2.2.5.3.6.1.2](#)), and value filter (section [2.2.5.3.6.1.3](#)).

A pivot field (section [2.2.5.3.2](#)) MUST NOT have more than one associated advanced filter of the same type.

### 2.2.5.3.6.1.1 Label Filters

A label filter specifies criteria that are applied to pivot item (section [2.2.5.3.3](#)) captions to determine which pivot items (section [2.2.5.3.3](#)) are included in the calculation of values for the PivotTable view (section [2.2.5.3](#)) and displayed in the **PivotTable** (section [2.2.5](#)) report.

A label filter is specified by a **BrtBeginSXFILTER** (section [2.4.236](#)) record with the **sxft** field equal to a value in the range 0x00000004 through 0x00000011.

Label filters are applied before any value filters (section [2.2.5.3.6.1.3](#)), but the order of label filters is not specified.

If a caption is specified for a pivot item (section [2.2.5.3.3](#)), the label filter is applied to the **displayName** field of the **BrtBeginSXVI** (section [2.4.263](#)) record associated with that pivot item. If a caption is not specified for a pivot item, the label filter is applied to the value of the cache item (section [2.2.5.2.3](#)) associated with that pivot item.

A label filter can be applied to member (3) properties. The **isxvdMProp** field of the **BrtBeginSXFILTER** record specifies the member (3) property on which this label filter is applied.

### 2.2.5.3.6.1.2 Date Filters

A date filter specifies a criterion that is applied to pivot items (section [2.2.5.3.3](#)) of date type of a pivot field (section [2.2.5.3.2](#)). A date filter determines which pivot items are included in the calculation of the PivotTable view (section [2.2.5.3](#)) and displayed in the **PivotTable** (section [2.2.5](#)) report.

Date filters are specified by **BrtBeginSXFILTER** (section [2.4.236](#)) records with the **sxft** field in the range 0x0000001A through 0x00000041.

For non-OLAP PivotTable views, a date filter can be applied if and only if the **BrtBeginPCDFAtbl** (section [2.4.125](#)) record associated with the corresponding cache field (section [2.2.5.2.2](#)) has the **fDateInField** field equal to 1, the **fMixedTypesIgnoringBlanks** field equal to 0, and the **fNonDates** field is equal to 0. For OLAP PivotTable views, a date filter can be applied if and only if the **wAttributeMemberValueType** field of the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record specifies that the cache hierarchy (section [2.2.5.2.7](#)) has a data type of date and the **fTimeHierarchy** field of the **BrtBeginPCDHierarchy** record is equal to 1, or the **fAttributeMemberValueTypeKnown** field of the **BrtBeginPCDHierarchy** record is equal to 0 and the **fTimeHierarchy** field of the **BrtBeginPCDHierarchy** record is equal to 1.

Date filters are applied before value filters (section [2.2.5.3.6.1.3](#)) and in no specific order.

### 2.2.5.3.6.1.3 Value Filters

A value filter specifies a criterion that is applied to values of a data item (section [2.2.5.3.7.5.1](#)) for pivot items (section [2.2.5.3.3](#)) of the pivot field (section [2.2.5.3.2](#)) that the value filter is applied to. The value filter determines which pivot items are included in the subtotal calculation of the PivotTable view (section [2.2.5.3](#)) and displayed in the PivotTable view report.

A value filter is specified by the sequence of records specified by the sequence of records that conforms to the **SXFILTER** rule (defined in section [2.1.7.40](#)) that contain a **BrtBeginSXFILTER** (section [2.4.236](#)) record with the **sxft** field equal to a value in one of the following the ranges: 0x00000001 through 0x00000003 or 0x00000012 through 0x00000019.

Value filters are applied after manual filters (section [2.2.5.3.5](#)), date filters section [2.2.5.3.6.1.2](#)), and label filters (section [2.2.5.3.6.1.1](#)) are applied. Value filters are applied in the order in which



they are specified in the collection specified by the sequence of records that conforms to the **SXFILTERS** rule (defined in section [2.1.7.40](#)). The subtotals generated as a result of a value filter being applied are used to evaluate the next value filter specified in the **SXFILTERS** rule.

### 2.2.5.3.6.2 Simple Filters

A simple filter is a **top N filter** which is also known as an **AutoShow**. The **fAutoShow** field of the **BrBeginSXVD** (section [2.4.261](#)) record specifies whether a simple filter is applied for a pivot field (section [2.2.5.3.2](#)). The **fTopAutoShow** field of the **BrBeginSXVD** record specifies whether a simple filter applies to the top or bottom *N* items. The **citmAutoShow** field of the **BrBeginSXVD** record specifies the number of pivot items (section [2.2.5.3.3](#)) displayed.

Simple filters MUST only be applied to pivot fields of a PivotTable view (section [2.2.5.3](#)) with the **bVerSxMacro** field of the corresponding **BrBeginSXView** (section [2.4.264](#)) record less than or equal to 2, or to pivot fields of an OLAP PivotTable view with the **fSupportSubquery** field of the **BrBeginPivotCacheDef** (section [2.4.162](#)) record of the corresponding **PivotCache** (section [2.2.5.2](#)) equal to 0.

### 2.2.5.3.7 PivotTable Axes

A **PivotTable** (section [2.2.5](#)) axis is the set of pivot fields (section [2.2.5.3.2](#)) or pivot hierarchies (section [2.2.5.3.4](#)) in a PivotTable view (section [2.2.5.3](#)) used to populate an area of the **PivotTable** report. The placement and positions of pivot fields on the axes are used to determine the **PivotTable Layout** (section [2.2.5.3.8](#)). The four axes of a PivotTable view are the page axis (section [2.2.5.3.7.1](#)), the row (2) axis, the column (2) axis, and the data axis (section [2.2.5.3.7.5](#)). For non-OLAP **PivotTables**, a pivot field MUST NOT appear more than once on the PivotTable view, with the exception of the data axis. For non-OLAP **PivotTables**, a pivot field can be placed one or more times on the data axis independently of whether it was placed on any other axis. For OLAP **PivotTables**, a pivot field MUST NOT be placed more than once on any axis. For both OLAP and non-OLAP **PivotTables**, pivot fields (section [2.2.5.3.2](#)) do not have to be placed on any **PivotTable** axis.

#### 2.2.5.3.7.1 Page Axis

The page axis contains the pivot fields (section [2.2.5.3.2](#)) or pivot hierarchies (section [2.2.5.3.4](#)) used to populate the page area (section [2.2.5.3.8.1.3](#)) of the **PivotTable** (section [2.2.5](#)) report, as specified by **PivotTable Layout** (section [2.2.5.3.8](#)), and are intended for use as filters. These pivot fields and pivot hierarchies do not affect the layout of the other areas of the **PivotTable** report, but rather filter the data used by the entire PivotTable view (section [2.2.5.3](#)).

The page axis is specified by the sequence of records that conforms to the **SXPIS** rule (defined in section [2.1.7.40](#)). For non-OLAP **PivotTables**, each sequence of records that conforms to the **SXPI** rule (defined in section [2.1.7.40](#)) specifies one pivot field on the page axis. For OLAP **PivotTables**, each **SXPI** rule specifies one pivot hierarchy (section [2.2.5.3.4](#)) on the page axis. The order in which the pivot fields and pivot hierarchies appear in the **SXPIS** rule specifies the order that the pivot fields and pivot hierarchies appear in on the page axis.

For non-OLAP **PivotTables**, the **isxvd** field of the **BrBeginSXPI** (section [2.4.244](#)) record specifies the associated pivot field (section [2.2.5.3.2](#)). For OLAP **PivotTables**, the **isxth** field of the **BrBeginSXPI** record specifies the associated pivot hierarchy.

##### 2.2.5.3.7.1.1 Non-OLAP Page Filtering

A non-OLAP PivotTable view (section [2.2.5.3](#)) can be filtered to not include some pivot items (section [2.2.5.3.3](#)) from the pivot field (section [2.2.5.3.2](#)) on the page axis (section [2.2.5.3.7.1](#)).

The **PivotTable** (section [2.2.5](#)) report only includes values specified by cache items (section [2.2.5.2.3](#)) that are associated with pivot items that are filtered in.

The following table specifies how the filtering of pivot items of a pivot field is specified.

In the following table, the first column is the value of the **fEnableMultiplePageItems** field of the **BrBeginSXVD** (section [2.4.261](#)) record of the corresponding pivot field (section [2.2.5.3.2](#)), the second column is the value of the **isxvi** field of the **BrBeginSXPI** (section [2.4.244](#)) record, and the third column is the value of the **fSubtotalHiddenPageItems** field of the **BrBeginSXView** (section [2.4.264](#)) record.

| <b>fEnableMultiplePageItems</b> | <b>isxvi</b>      | <b>fSubtotalHiddenPageItems</b> | <b>Filtering Behavior</b>   |
|---------------------------------|-------------------|---------------------------------|---|
| 0                               | Not<br>0x001000FE | Any                             | Specifies that the <b>isxvi</b> field of the <b>BrBeginSXPI</b> record specifies a pivot item (section <a href="#">2.2.5.3.3</a> ) index, as specified by section <a href="#">2.2.5.3.3</a> , of the one pivot item of a pivot field that is filtered in. |
| Any                             | 0x001000FE        | 0                               | Specifies that pivot items are filtered in if and only if the <b>fHidden</b> field of the corresponding <b>BrBeginSXVI</b> (section <a href="#">2.4.263</a> ) records is equal to 0.  |
| Any                             | 0x001000FE        | 1                               | Specifies that all pivot items of a pivot field filtered in.  |

If the **fEnableMultiplePageItems** field of the corresponding pivot field (section [2.2.5.3.2](#)) is equal to 1, the **isxvi** field of the **BrBeginSXPI** (section [2.4.244](#)) record MUST be equal to 0x001000FE and MUST be ignored.

### 2.2.5.3.7.1.2 OLAP Page Filtering

The following table specifies which OLAP members in the pivot hierarchy (section [2.2.5.3.4](#)) on the page axis (section [2.2.5.3.7.1](#)) are filtered in.

In the following table, the first column is the value of the **fEnableMultiplePageItems** field of the **BrBeginSXTH** (section [2.4.252](#)) record.

| <b>fEnableMultiplePageItems</b> | <b>Filtering behavior</b>  |
|---------------------------------|--|
| 0                               | Specifies that the <b>irstUnique</b> field of the <b>BrBeginSXPI</b> (section <a href="#">2.4.244</a> ) record specifies the one OLAP member that is filtered in.  |
| 1                               | Specifies that the filtering is applied as specified by Manual Filters (section <a href="#">2.2.5.3.5</a> ) and OLAP Manual Filters (section <a href="#">2.2.5.3.5.2</a> ) for the pivot hierarchy (section <a href="#">2.2.5.3.4</a> ). |

### 2.2.5.3.7.2 Row Axis

The row (2) axis contains the pivot fields (section [2.2.5.3.2](#)), and an optional data field (section [2.2.5.3.7.5.2](#)), used to populate the row (2) area of the **PivotTable** (section [2.2.5](#)) report, as specified by **PivotTable Layout** (section [2.2.5.3.8](#)).

The pivot fields on the row (2) axis are specified by the **BrBeginISXVDRws** (section [2.4.93](#)) record. The order that the pivot fields and the optional data field (section [2.2.5.3.7.5.2](#)) appear in that record specifies the order that the pivot fields and the optional data field appear in on the row (2) axis. The order that the pivot fields and the optional data field appear in on the row (2) axis corresponds to the order that the pivot fields and the optional data field are placed in on the row (2) area of the **PivotTable** (section [2.2.5](#)) report.

For adjacent **ISXVD** (section [2.5.83](#)) records in the **rgisxvdrws** field of the **BrBeginISXVDRws** (section [2.4.93](#)) record, the pivot field (section [2.2.5.3.2](#)) or data field (section [2.2.5.3.7.5.2](#)) that the first **ISXVD** references is defined to be an outer field with respect to the pivot field or the data field that the second **ISXVD** references. The pivot field or data field that the second **ISXVD** references is defined to be an inner field with respect to the pivot field or the data field that the first **ISXVD** references.

For OLAP **PivotTables** (section [2.2.5](#)), all **ISXVD** (section [2.5.83](#)) records in the **rgisxvdrws** field of the **BrBeginISXVDRws** (section [2.4.93](#)) record that reference pivot fields that are associated with the same pivot hierarchy (section [2.2.5.3.4](#)) MUST be adjacent. Pivot fields associated with member (3) properties of the pivot hierarchy MUST be located on the row (2) axis after other types of pivot fields associated with the same pivot hierarchy. Pivot fields not associated with member (3) properties of the pivot hierarchy MUST appear on the row (2) axis in an order such that the zero-based index of the level of each pivot field associated with the same pivot hierarchy is ascending. The level of a pivot field (section [2.2.5.3.2](#)) is specified by the **isxtl** field of the **BrBeginPCDField** (section [2.4.130](#)) record of the cache field (section [2.2.5.2.2](#)) associated with the pivot field.

For OLAP **PivotTables**, the **rgisxth** field of the **BrBeginISXTHRws** (section [2.4.91](#)) record specifies the order of pivot hierarchies (section [2.2.5.3.4](#)) on the row (2) axis.

See section [2.2.5.3.7.4](#) also.

### 2.2.5.3.7.3 Column Axis

The column (2) axis contains the pivot fields (section [2.2.5.3.2](#)), and an optional data field (section [2.2.5.3.7.5.2](#)), used to populate the column (2) area of the **PivotTable** (section [2.2.5](#)) report, as specified by **PivotTable Layout** (section [2.2.5.3.8](#)).

The pivot fields on the column (2) axis are specified by the **BrBeginISXVDCols** (section [2.4.92](#)) record. The order that the pivot fields and the optional data field (section [2.2.5.3.7.5.2](#)) appear in that record specifies the order that the pivot fields and the optional data field appear on the column (2) axis. The order that the pivot fields and the optional data field appear in on the column (2) axis corresponds to the order that the pivot fields and the optional data field are placed in on the column (2) area of the **PivotTable** report.

For adjacent **ISXVD** (section [2.5.83](#)) records in the **rgisxvdcols** field of the **BrBeginISXVDCols** record, the pivot field (section [2.2.5.3.2](#)) or data field that the first **ISXVD** references is defined to be an outer field with respect to the pivot field or the data field that the second **ISXVD** references. The pivot field or data field that the second **ISXVD** references is defined to be an inner field with respect to the pivot field or the data field that the first **ISXVD** references.

For OLAP **PivotTables** (section [2.2.5](#)), all **ISXVD** (section [2.5.83](#)) records in the **rgisxvdcols** field of the **BrBeginISXVDCols** record that reference pivot fields that are associated with the same

pivot hierarchy (section [2.2.5.3.4](#)) MUST be adjacent. Pivot fields associated with member (3) properties of the pivot hierarchy MUST be located on the column (2) axis after other types of pivot fields associated with the same pivot hierarchy. Pivot fields not associated with member (3) properties of the pivot hierarchy MUST appear on the column (2) axis in an order such that the zero-based index of the level of each pivot field associated with the same pivot hierarchy is ascending. The level of a pivot field is specified by the **isxtl** field of the **BrtBeginPCDField** (section [2.4.130](#)) record of the cache field (section [2.2.5.2.2](#)) associated with the pivot field (section [2.2.5.3.2](#)).

For OLAP **PivotTables**, the **rgisxth** field of the **BrtBeginISXTHCols** (section [2.4.90](#)) record specifies the order of pivot hierarchies (section [2.2.5.3.4](#)) on the column (2) axis.

See section [2.2.5.3.7.4](#) also.

### 2.2.5.3.7.4 Nesting

This section applies to both the row (2) axis and column (2) axis unless otherwise specified. Within this section, axis means the row (2) axis or the column (2) axis as appropriate; fields mean pivot fields (section [2.2.5.3.2](#)) on the axis, the data field (section [2.2.5.3.7.5.2](#)) on the axis, or both; area means the row (2) area or column (2) area as appropriate; items mean pivot items (section [2.2.5.3.3](#)) or data items (section [2.2.5.3.7.5.1](#)) as appropriate.

The axes specify an order in which the fields are represented in the areas, see section [2.2.5.3.8](#) for more information about the areas. Pivot lines (section [2.2.5.3.8.3](#)) within the areas have references to items. Usually a pivot line including an item of an outer field only includes items in the inner fields that exist with the item of the outer field in the source data (section [2.2.5.2.1](#)), subject to the filtering on the PivotTable view. Usually all the instances of an item in the area are grouped together, with grouping on the outer fields taking precedence over grouping on the inner fields. This process is called nesting.

A nested item group is specified to be the contiguous set of pivot lines (section [2.2.5.3.8.3](#)) that have the same item in an outer field.

The following table shows an example of nested item groups for Country/Region, State, and City.

| Country/Region | State     | City        |
|----------------|-----------|-------------|
| USA            | Illinois  | Chicago     |
| USA            | Illinois  | Springfield |
| USA            | Louisiana | New Orleans |
| USA            | Louisiana | Baton Rouge |
| Mexico         | Jalisco   | Guadalajara |

The first two lines are a nested item group for Illinois. The next two lines are a nested item group for Louisiana. The first four lines are a nested item group for USA. The last line is both a nested item group for Jalisco and Mexico. Note that often in a **PivotTable** (section [2.2.5](#)) report the repeated item labels will be omitted.

For an OLAP PivotTable view (section [2.2.5.3](#)), nesting can be the result of either of the following conditions but not both:

- Items of an inner field that are in a different pivot hierarchy (section [2.2.5.3.4](#)) than an outer pivot field (section [2.2.5.3.2](#)).

- Items of an inner field that is associated with the same pivot hierarchy as an outer pivot field and that correspond to child OLAP members of the OLAP members corresponding to the items of the outer field.

#### 2.2.5.3.7.4.1 Collapsing

Settings in the file format can specify that a pivot item (section [2.2.5.3.3](#)) of an outer pivot field (section [2.2.5.3.2](#)), rather than having nested pivot items of inner pivot fields, is collapsed. Usually when a pivot item on an outer pivot field is collapsed, it does not have a nested pivot item group and when it appears in a pivot line (section [2.2.5.3.8.3](#)), the pivot items of the inner pivot fields for the collapsed pivot item do not appear in the pivot line.

In the example from section [2.2.5.3.7.4](#), if Illinois and Mexico were collapsed, the result might look like the following table:

| Country/Region | State     | City        |
|----------------|-----------|-------------|
| USA            | Illinois  |             |
| USA            | Louisiana | New Orleans |
| USA            | Louisiana | Baton Rouge |
| Mexico         |           |             |

For a non-OLAP PivotTable view (section [2.2.5.3](#)), the collapsed state is specified by the **fHideDetail** field of the **BrtBeginSXVI** (section [2.4.263](#)) record.

For an OLAP PivotTable view, there are two types of collapsing: child collapsing and attribute hierarchy collapsing.

Child collapsing is when the child pivot items (section [2.2.5.3.3](#)), corresponding to child OLAP members, of a pivot item corresponding to a parent OLAP member in an OLAP hierarchy are not shown.

If a pivot field (section [2.2.5.3.2](#)) is the first pivot field of the pivot hierarchy (section [2.2.5.3.4](#)) on the axis then the **fDrilledLevel** field of the **BrtBeginSXVD** (section [2.4.261](#)) record of the pivot field MUST be 1.

If a pivot field is not the first pivot field of the pivot hierarchy on the axis and if the **fDrilledLevel** field of the **BrtBeginSXVD** record of the pivot field is 1, then there is no child collapsing for the preceding pivot field of the pivot hierarchy on the axis and the **fDrilledMember** field of the **BrtBeginSXVI** (section [2.4.263](#)) records for the pivot items (section [2.2.5.3.3](#)) of the preceding pivot field of the pivot hierarchy on the axis MUST be 0.

If a pivot field (section [2.2.5.3.2](#)) is followed by another pivot field of the same pivot hierarchy on the axis, and the **fDrilledLevel** field of the **BrtBeginSXVD** record of the outer pivot field is equal to 0 and the **fDrilledMember** field of a **BrtBeginSXVI** record of the pivot item of the outer pivot field is 0, then the pivot item containing the **BrtBeginSXVI** record is collapsed using child collapsing.

Attribute hierarchy collapsing only occurs when an outer pivot field is associated with a pivot hierarchy (section [2.2.5.3.4](#)) that is an attribute hierarchy, as specified by the **fAttributeHierarchy** field of the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record of the associated cache hierarchy (section [2.2.5.2.7](#)), and the inner pivot field immediately following that outer pivot field is associated with a different pivot hierarchy that is an attribute hierarchy. In that case, if a pivot item (section [2.2.5.3.3](#)) is attribute hierarchy collapsed, pivot items (section [2.2.5.3.3](#)), corresponding to

OLAP members, will not be shown for the inner pivot field. The attribute hierarchy collapsed state of a pivot item is specified by the **fCollapsedMember** field of the **BrtBeginSXVI** (section [2.4.263](#)) record. The **fItemsDrilledByDefault** field of the **BrtBeginSXVD** (section [2.4.261](#)) record provides a default value for pivot items of the pivot field.

For an OLAP PivotTable view (section [2.2.5.3](#)), there can be pivot items from an inner pivot field (section [2.2.5.3.2](#)) on the pivot line (section [2.2.5.3.8.3](#)) if either the outer pivot field is collapsed and the inner pivot field and outer pivot field are in different pivot hierarchies (section [2.2.5.3.4](#)) and attribute hierarchy collapsing is not being used or if the pivot items are member (3) properties.

#### 2.2.5.3.7.4.2 Subtotaling

A nested item group, as specified in section [2.2.5.3.7.4](#), can have summaries of the values for the items in the nested item group, called subtotals. A subtotal is typically an aggregation such as a sum, count, or average of the values of the items.

The creation of subtotals is specified by the **fDefault**, **fSum**, **fCounta**, **fAverage**, **fMax**, **fMin**, **fProduct**, **fCount**, **fStdev**, **fStdevp**, **fVariance**, and **fVariancep** fields of the **BrtBeginSXVD** (section [2.4.261](#)) record of the pivot field (section [2.2.5.3.2](#)). If none of the fields are equal to 1, then no subtotals exist for the pivot field. If the **fDefault** field is equal to 1, the subtotal calculation for each item is done according to the **aggregation functions** of the data items (section [2.2.5.3.7.5.1](#)) on the data axis (section [2.2.5.3.7.5](#)), as specified by the **iiftab** field of the **BrtBeginSXDI** (section [2.4.232](#)) record for each data item.

For example, the subtotal is calculated as the sum of the relevant values of the nested item group for a data item with a sum aggregation function and subtotal is calculated as the average of the relevant values of the nested item group for a data item with an average aggregation function.

The other subtotal fields are called custom subtotals because they override the data item (section [2.2.5.3.7.5.1](#)) aggregation function when calculating subtotals. In some cases, such as for certain OLAP PivotTable views (section [2.2.5.3](#)), the source data (section [2.2.5.2.1](#)) is not able to provide a requested subtotal.

The **fOutline** field of the **BrtBeginSXVD** (section [2.4.261](#)) record specifies that an extra pivot line (section [2.2.5.3.8.3](#)) is added at the logical top of the nested item groups if the pivot field (section [2.2.5.3.2](#)) is on the row (2) axis. This pivot line contains the item and any items of member (3) property pivot fields, if they are shown, but no other items of pivot fields inner of this pivot field.

The **fOutlineData** field of the **BrtBeginSXView** (section [2.4.264](#)) record specifies that an extra pivot line is added at the logical top of the nested item groups if the data field (section [2.2.5.3.7.5.2](#)) is on the row (2) axis. This pivot line contains the data item, but no other items for inner pivot fields of this data field.

If the **fDefault** field of the **BrtBeginSXVD** (section [2.4.261](#)) record of the pivot field (section [2.2.5.3.2](#)) is equal to 1, and the **fOutline** field of the **BrtBeginSXVD** record of the pivot field is equal to 1, the pivot field is on the row (2) axis, and the data field is not placed inner of the pivot field on the row (2) axis, then the **fSubtotalAtTop** field of the **BrtBeginSXVD** record of the pivot field has a value as specified in the following table:

| Value of <b>fSubtotalAtTop</b> | Meaning   |
|--------------------------------|---|
| 0x0                            | Specifies that subtotal pivot lines (section <a href="#">2.2.5.3.8.3</a> ) are added at the bottom of the nested item groups.<br>If the <b>irstSub</b> field of the <b>BrtBeginSXVD</b> (section <a href="#">2.4.261</a> ) record is present, it specifies details for the subtotal label used. |



| Value of fSubtotalAtTop | Meaning   |
|-------------------------|---|
|                         | If the <b>irstSub</b> field of the <b>BrBeginSXVD</b> record is not present, an application specific subtotal label is used.  |
| 0x1                     | Specifies that the pivot lines added, as specified by the <b>fOutline</b> field of the <b>BrBeginSXVD</b> record being equal to 1, are used for displaying the subtotals in the data area (section <a href="#">2.2.5.3.8.1.4</a> ). |

In the following figure, the Category, Subcategory, and Product columns (2) represent pivot fields (section [2.2.5.3.2](#)) on the row (2) axis and the Color column (2) represents a member (3) property pivot field associated with the Product pivot field. Subtotals are displayed at the logical top of the nested item groups for Clothing, Caps and Gloves.

| Category    | Subcategory | Product               | Color | Internet Sales Amount |
|-------------|-------------|-----------------------|-------|-----------------------|
| Clothing    |             |                       |       | \$54,708.80           |
|             | Caps        |                       |       | \$19,688.10           |
|             |             | AWC Logo Cap          | Multi | \$19,688.10           |
|             | Gloves      |                       |       | \$35,020.70           |
|             |             | Half-Finger Gloves, S | Black | \$11,951.12           |
|             |             | Half-Finger Gloves, M | Black | \$12,220.51           |
|             |             | Half-Finger Gloves, L | Black | \$10,849.07           |
| Grand Total |             |                       |       | \$54,708.80           |

**Figure 14: PivotTable report with Category and Subcategory pivot fields with fOutline and fSubtotalAtTop fields of the BrtBeginSXVD records equal to 1**

### 2.2.5.3.7.5 Data Axis

The data axis contains the pivot field (section [2.2.5.3.2](#)) values that are used to populate the data area (section [2.2.5.3.8.1.4](#)) of the **PivotTable** (section [2.2.5](#)) report, as specified by **PivotTable Layout** (section [2.2.5.3.8](#)). This axis also specifies additional information related to aggregation and presentation of the values, as specified in section [2.2.5.3.7.5.1](#). The data axis is specified by the sequence of records that conforms to the **SXDIS** rule (as defined in section [2.1.7.40](#)). The order in which the records appear in the **SXDIS** rule specifies the order that the pivot fields appear in on the data axis.

#### 2.2.5.3.7.5.1 Data Items

A data item is a pivot field (section [2.2.5.3.2](#)) placed on the data axis (section [2.2.5.3.7.5](#)). Each data item is specified by the sequence of records that conforms to the **SXDI** rule (as defined in section [2.1.7.40](#)).

A **BrBeginSXDI** (section [2.4.232](#)) record or a **BrtSXDI14** (section [2.4.772](#)) record specifies the reference to the pivot field that is associated with a data item. The **BrBeginSXDI** record and **BrtSXDI14** records also specify additional information that is used to produce or present aggregated values.

A data item can be referenced by a data item index, which is the zero-based index of the **BrBeginSXDI** record in the collection of **BrBeginSXDI** records, as specified by the **SXDI** rule in the **PivotTable** (section [2.1.7.40](#)) part ABNF.


## 2.2.5.3.7.5.2 Data Field

The data field is a conceptual field that represents all data items (section [2.2.5.3.7.5.1](#)) and allows them to be referenced as a single object. The data field is intended to allow all data items to be placed on the row (2) axis or column (2) axis.

If the PivotTable view (section [2.2.5.3](#)) has more than one data item (section [2.2.5.3.7.5.1](#)), then the data field MUST be located on either the row (2) axis, as specified by the **rgisxvdrws** field of the **BrBeginISXVDRws** (section [2.4.93](#)) record, or the column (2) axis, as specified by the **rgisxvdcols** field of the **BrBeginISXVDCols** (section [2.4.92](#)) record. For an OLAP **PivotTable** (section [2.2.5](#)) that has the data field located on the row (2) axis, the data field MUST be referenced in the **rgisxth** field of the **BrBeginISXTHRws** (section [2.4.91](#)) record. For an OLAP **PivotTable** that has the data field located on the column (2) axis, the data field MUST be referenced in the **rgisxth** field of the **BrBeginISXTHCols** (section [2.4.90](#)) record.

## 2.2.5.3.8 PivotTable Layout

The **PivotTable** (section [2.2.5](#)) report in the sheet has four main areas: the row (2) area, the column (2) area, the data area (section [2.2.5.3.8.1.4](#)), and the page area (section [2.2.5.3.8.1.3](#)).

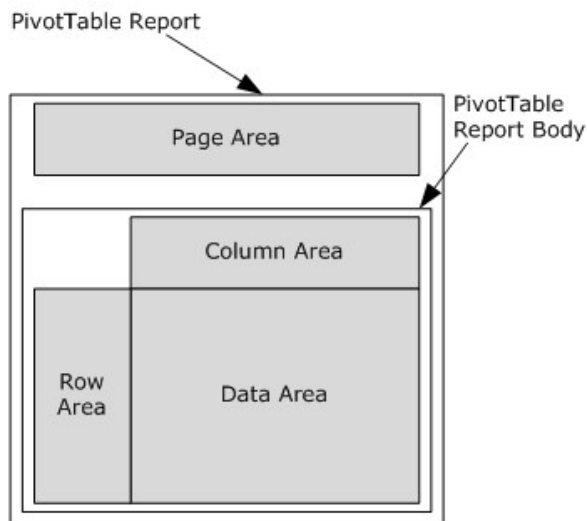

**Figure 15: PivotTable report illustrating the four different areas**

All the records described in this section MUST exist in the same **PivotTable** part as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

### 2.2.5.3.8.1 Location and Body

The column (2) area is located immediately above the data area (section [2.2.5.3.8.1.4](#)). The cell in the column (2) area containing the pivot item (section [2.2.5.3.3](#)) **caption** or data item (section [2.2.5.3.7.5.1](#)) caption to the farthest **logical left** is in the same column (2) as the **logical top-left** cell of the data area.

The row (2) area is located immediately to the logical left of the data area. The cell in the row (2) area containing the top-most pivot item caption or data item caption is in the same row (2) as the logical top-left cell of the data area (section [2.2.5.3.8.1.4](#)).



The **PivotTable** (section [2.2.5](#)) report body is the rectangular area defined by the union of the row (2) area, column (2) area, and data area.

The page area (section [2.2.5.3.8.1.3](#)), if it is not empty, is located above the **PivotTable** report body. There is one row (2) between the top-most cell of the **PivotTable** report body and the bottom-most cell of the page area.

The **PivotTable** report is a **non-contiguous range** containing the union of the **PivotTable** report body and the page area.

A **BrtBeginSXLocation** (section [2.4.243](#)) record specifies details about the location in the sheet and sizes of the areas of the **PivotTable** report as specified by the following.

The column (2) area of the **PivotTable** (section [2.2.5](#)) report is a range of cells as specified in the following table.

| Column area              | Row or column index    |
|--------------------------|------------------------|
| Top row (2)              | <b>rfxGeom.rwFirst</b> |
| Bottom row (2)           | <b>rwFirstData - 1</b> |
| Logical left column (2)  | <b>colFirstData</b>    |
| Logical right column (2) | <b>rfxGeom.colLast</b> |

If **colFirstData** is greater than **rfxGeom.colLast**, the column (2) area does not exist for this **PivotTable** report.

The row (2) area of the **PivotTable** (section [2.2.5](#)) report is a range of cells as specified in the following table.

| Row area                 | Row or column index     |
|--------------------------|-------------------------|
| Top row (2)              | <b>rwFirstData</b>      |
| Bottom row (2)           | <b>rfxGeom.rwLast</b>   |
| Logical left column (2)  | <b>rfxGeom.colFirst</b> |
| Logical right column (2) | <b>colFirstData - 1</b> |

If **colFirstData - 1** is less than **rfxGeom.colFirstData**, the row (2) area does not exist for this **PivotTable** report.

The data area (section [2.2.5.3.8.1.4](#)) of the **PivotTable** (section [2.2.5](#)) report is a range of cells as specified in the following table.

| Data Area                | Row or Column Index    |
|--------------------------|------------------------|
| Top row (2)              | <b>rwFirstData</b>     |
| Bottom row (2)           | <b>rfxGeom.rwLast</b>  |
| Logical left column (2)  | <b>colFirstData</b>    |
| Logical right column (2) | <b>rfxGeom.colLast</b> |

If the row (2) area or the column (2) area does not exist for this PivotTable report, the data area (section [2.2.5.3.8.1.4](#)) does not exist for this **PivotTable** report.

The page area (section [2.2.5.3.8.1.3](#)) of the **PivotTable** (section [2.2.5](#)) report is a range of cells as specified in the following table.

| Page area                | Row or column index                             |
|--------------------------|---|
| Top row (2)              | $\text{rfxGeom.rwFirst} - \text{cRwPage} - 1$   |
| Bottom row (2)           | $\text{rfxGeom.rwFirst} - 2$                    |
| Logical left column (2)  | $\text{rfxGeom.colFirst}$                       |
| Logical right column (2) | $\text{rfxGeom.colFirst} + \text{cColPage} - 1$ |

If **cRwPage** is equal to 0 and the **fNewDropZones** field of the **BrtBeginSXView** (section [2.4.264](#)) record is equal to 1 the page area does not exist for this **PivotTable** report. If **cRwPage** is equal to 0 and the **fNewDropZones** field of the **BrtBeginSXView** (section [2.4.264](#)) record is equal to 0, then the page area (section [2.2.5.3.8.1.3](#)) of the **PivotTable** report is a range of cells as specified in the following table.

| Page area                | Row or column index          |
|--------------------------|------------------------------|
| Top row (2)              | $\text{rfxGeom.rwFirst} - 2$ |
| Bottom row (2)           | $\text{rfxGeom.rwFirst} - 2$ |
| Logical left column (2)  | $\text{rfxGeom.colFirst}$    |
| Logical right column (2) | $\text{rfxGeom.colLast}$     |

### 2.2.5.3.8.1.1 Row Area

The row (2) area contains pivot fields (section [2.2.5.3.2](#)), the optional data field (section [2.2.5.3.7.5.2](#)), or both that are placed on the row (2) axis, along with associated pivot items (section [2.2.5.3.3](#)) and data items (section [2.2.5.3.7.5.1](#)). The first row (2) of the row (2) area can contain pivot field or data field captions (or both) as specified by the **fNoHeaders** field of the **BrtBeginSXView** (section [2.4.264](#)) record. If **fNoHeaders** is equal to 0, the pivot field and data field captions are located above their pivot items or data items.

Pivot items (section [2.2.5.3.3](#)) or data items (section [2.2.5.3.7.5.1](#)) of the pivot field (section [2.2.5.3.2](#)) or data field (section [2.2.5.3.7.5.2](#)) that have a position of zero on the row (2) axis are placed in the first column (2) of the row (2) axis. For every other pivot field or data field on the row (2) axis, placement of pivot items or data items are calculated as follows:

- If the previous pivot field or data field is not in **compact axis** mode, then pivot items or data items of the current pivot field or data field are placed in the next column (2) of the row (2) area. Pivot items or data items are grouped by the parent pivot item or data item, which is the pivot item or data item on the immediate logical left. To achieve this, pivot items or data items of the parent pivot field or data field can be repeated multiple times. In this case, when pivot items or data items are repeated, the caption is not necessarily displayed in every cell that contains a pivot item or data item. For more details, see section [2.2.5.3.8.3](#).
- If the previous pivot field or data field is in compact axis mode, then the pivot items or data items of the current pivot field or data field are placed in the same column (2) as pivot items of

the previous pivot field or data field. Pivot items or data items are grouped by the parent pivot item or data item and placed immediately under the parent pivot item or data item.

For the data field (section [2.2.5.3.7.5.2](#)), if the **fCompactData** field and the **fOutlineData** field of the **BrBeginSXView** (section [2.4.264](#)) record are equal to 1, then the data field is specified to be in compact axis mode. For pivot fields (section [2.2.5.3.2](#)), if the **fCompact** field of the **BrBeginSXVD** (section [2.4.261](#)) record is equal to 1 and the **fOutline** field of the **BrBeginSXVD** record is equal to 1, then the pivot field is specified to be in compact axis mode.

The row (2) area can have special entries at the end for **grand totals**. If there are no pivot fields and no data field on the row (2) axis, then the row (2) area is empty.

### 2.2.5.3.8.1.2 Column Area

The column (2) area contains pivot fields (section [2.2.5.3.2](#)), the optional data field (section [2.2.5.3.7.5.2](#)), or both that are placed on the column (2) axis, along with associated pivot items (section [2.2.5.3.3](#)) and data items (section [2.2.5.3.7.5.1](#)). The first row (2) of the column (2) area can contain pivot field and data field captions as specified by the **fNoHeaders** field of the **BrBeginSXView** (section [2.4.264](#)) record.

If the **fNoHeaders** field and the **fCompactData** field of the **BrBeginSXView** record are both equal to 0 and no pivot fields are in compact axis mode, then the pivot field (section [2.2.5.3.2](#)) or data field (section [2.2.5.3.7.5.2](#)) captions (or both) are placed sequentially in cells of the first row (2) of the column (2) area according to their placement on the column (2) axis.

If the **fNoHeaders** field of the **BrBeginSXView** record is equal to 0 and the **fCompactData** field and the **fOutline** field of the **BrBeginSXView** record are both equal to 1, or if the **fNoHeaders** field of the **BrBeginSXView** record is equal to 0 and any pivot field is in compact axis mode, then the pivot field or the data field captions (or both) are placed in the top logical left cell of the column (2) area.

For the data field, if the **fCompactData** field and the **fOutlineData** field of the **BrBeginSXView** record are equal to 1, then the data field is specified to be in compact axis mode. For pivot fields (section [2.2.5.3.2](#)), if the **fCompact** field of the **BrBeginSXVD** (section [2.4.261](#)) record is equal to 1 and the **fOutline** field of the **BrBeginSXVD** record is equal to 1, then the pivot field is specified to be in compact axis mode.

If the **fNoHeaders** field of the **BrBeginSXView** (section [2.4.264](#)) record is equal to 1, the pivot field (section [2.2.5.3.2](#)) and data field (section [2.2.5.3.7.5.2](#)) captions are not displayed. The row (2) containing pivot item (section [2.2.5.3.3](#)) or data items (section [2.2.5.3.7.5.1](#)) captions for the pivot field or data field at position  $n$  on the column (2) axis is row (2)  $n$  of the column (2) area.

If the **fNoHeaders** field of the **BrBeginSXView** record is equal to 0, the second row (2) in the column (2) area contains pivot item or data item captions for the pivot field or data field placed first on the column (2) axis, and each subsequent row (2) contains the pivot item or data item captions for pivot fields or data fields that occur later on the column (2) axis. The row (2) containing pivot item or data item captions for the pivot field or data field at position  $n$  is row (2)  $(n+1)$  of the column (2) area.

The column (2) area can have special entries at the end for grand totals.

### 2.2.5.3.8.1.3 Page Area

The page area contains pivot fields (section [2.2.5.3.2](#)) that are placed on the page axis (section [2.2.5.3.7.1](#)) for non-OLAP PivotTable views (section [2.2.5.3](#)) and pivot hierarchies (section [2.2.5.3.4](#)) that are placed on the page axis for OLAP PivotTable views. For each pivot field or pivot

hierarchy (section [2.2.5.3.4](#)) on the page axis, there are two cells in the page area. The cells are arranged in pairs with each pair having a logical left cell and a **logical right** cell that are horizontally adjacent to each other. The cell on the logical left contains the caption of the pivot field and the cell on the logical right contains information about the current filtering associated with the pivot field or pivot hierarchy. The relative position of the page area is specified by the **BrBeginSXLocation** (section [2.4.243](#)) record. For more details, see section [2.2.5.3.8.1](#).

#### 2.2.5.3.8.1.4 Data Area

The data area contains summarized values for the PivotTable view (section [2.2.5.3](#)). Cells in the data area contain summarized values for associated data items (section [2.2.5.3.7.5.1](#)). The summarized value in a cell is restricted by all the pivot items (section [2.2.5.3.3](#)) in the column (2) area that are located in the same column (2), by all the pivot items in the row (2) area that are located on the same row (2), and by any page filtering applied, as specified in section [2.2.5.3.7.1](#).

If the row (2) area has a grand total, then the value in that row (2) is not restricted by pivot items (section [2.2.5.3.3](#)) from the row (2) area. If the column (2) area has a grand total, then the value in that column (2) is not restricted by pivot items from the column (2) area. If the PivotTable view has more than one data item (section [2.2.5.3.7.5.1](#)), then the associated data item is the one that is located in the same column (2) in the column (2) area or the same row (2) in the row (2) area as the cell with the summarized value. If a PivotTable view has zero data items then the data area is empty.

#### 2.2.5.3.8.2 Truncation

When a **PivotTable** (section [2.2.5](#)) report does not fit within the boundaries of the sheet it is truncated from the logical right and the bottom. It is truncated such that a part of the **PivotTable** report is displayed within the sheet boundaries.

#### 2.2.5.3.8.3 Pivot Lines

A pivot line specifies a collection of pivot line entries (section [2.2.5.3.8.4](#)) for a single row (2) or column (2) in the **PivotTable** (section [2.2.5](#)) report.

Each range that is an intersection of one column (2) and cells from the column (2) area that have pivot items (section [2.2.5.3.3](#)), data items (section [2.2.5.3.7.5.1](#)), or a grand total is a pivot line of the column (2) area.

Each range that is an intersection of one row (2) and cells from the row (2) area that have pivot items, data items, or a grand total is a pivot line of the row (2) area.

A pivot line is specified by the sequence of records that conforms to the **SXLI** rule (defined in section [2.1.7.40](#)). The sequence of records that conforms to the **SXLIRWS** rule (defined in section [2.1.7.40](#)) specifies the collection of pivot lines for the row (2) area. The order of the SXLIItem structures in the **SXLI** rules in **SXLIRWS** is the same as the top-to-bottom order of the pivot lines of the row (2) area.

The sequence of records that conforms to the **SXLICOLS** rule (defined in section [2.1.7.40](#)) specifies the collection of pivot lines for the column (2) area. The order of **SXLI** rules (defined in section [2.1.7.40](#)) in the **SXLICOLS** rule is the same as the logical left to logical right order of pivot lines of the column (2) area.

Each pivot line contains a number of pivot line entries (section [2.2.5.3.8.4](#)). The first number of pivot line entries are specified to be identical to those of the immediately preceding pivot line. These pivot line entries are not stored in the file for this pivot line. The number of pivot line entries that are identical to those of the immediately preceding pivot line is specified by the **CSic** field of the

**BrBeginSXLI** (section [2.4.240](#)) record. Additional pivot line entries are specified by the **BrBeginIsxvis** (section [2.4.94](#)) record.

The first pivot line in the row (2) area or the column (2) area MUST have a **cSic** field of its associated **BrBeginSXLI** record equal to 0.

The following figure shows an example of how to construct pivot lines from an **SXLIRWS** rule (defined in section [2.1.7.40](#)).

| Country         | State            | City          | Sales | cSic | rgisxvi | Copied | Pivot Line |
|-----------------|------------------|---------------|-------|------|---------|--------|------------|
| Australia       | Queensland       | Brisbane      | 10779 | 0    | {0,1,0} | {}     | {0,1,0}    |
|                 |                  | Hawthorne     | 13721 | 2    | {1}     | {0,1}  | {0,1,1}    |
|                 | Queensland Total |               | 24500 | 1    | {1}     | {0}    | {0,1}      |
| Australia Total |                  |               | 24500 | 0    | {0}     | {}     | {0}        |
| USA             | California       | San Francisco | 15998 | 0    | {1,0,2} | {}     | {1,0,2}    |
|                 | California Total |               | 15998 | 1    | {0}     | {1}    | {1,0}      |
|                 | Washington       | Seattle       | 12335 | 1    | {2,3}   | {1}    | {1,2,3}    |
|                 |                  | Tacoma        | 11498 | 2    | {4}     | {1,2}  | {1,2,4}    |
|                 | Washington Total |               | 23833 | 1    | {2}     | {1}    | {1,2}      |
| USA Total       |                  |               | 39831 | 0    | {1}     | {}     | {1}        |

**Figure 16: PivotTable and the table used to create each pivot line on the row axis**

In this example, the table to the right contains the different components used to construct each pivot line (section [2.2.5.3.8.3](#)), and the resulting pivot line. The first column (2) contains the value of the **cSic** field from each **BrBeginSXLI** (section [2.4.240](#)) in the **SXLIRWS** rule (defined in section [2.1.7.40](#)). The second column (2) contains the array of pivot line entries (section [2.2.5.3.8.4](#)) specified by the **rgisxvi** field in the **BrBeginIsxvis** (section [2.4.94](#)) record of each **SXLI** rule (defined in section [2.1.7.40](#)).

The third column (2), labeled "Copied", represents the array of pivot line entries (section [2.2.5.3.8.4](#)) of the previous pivot line that are to be copied to construct the current pivot line. The values in this column (2) are determined by copying the first *n* items, where *n* is equal to the value in the **cSic** column (2). If the value in the **cSic** column (2) is 0, no items need to be copied from the preceding pivot line.

The fourth column (2), labeled "Pivot Line", represents the final array of pivot line entries that make up the pivot line. This array is constructed by taking the union of the array in the "Copied" column (2) and the "rgisxvi" column (2), maintaining the order.

#### 2.2.5.3.8.4 Pivot Line Entries

Pivot line entries specify references to the pivot items (section [2.2.5.3.3](#)) or data items (section [2.2.5.3.7.5.1](#)) of a pivot line (section [2.2.5.3.8.3](#)). Pivot line entries are specified by the records that conform to the **ISXVIS** rule (defined in section [2.1.7.40](#)) in the **SXLI** rule (defined in section [2.1.7.40](#)). A pivot line entry is an element in the array specified by the **rgisxvis** field of the **BrBeginIsxvis** (section [2.4.94](#)) record.

All pivot line entries with a zero-based index in a pivot line less than the value specified by the **cSic** field of the **BrBeginSXLI** (section [2.4.240](#)) record of this pivot line are specified to be identical to those of the preceding pivot line.

For the purposes of the rest of this section, *n* specifies a position of the pivot line entry on this pivot line.

If the value of  $n$  is less than the **cSic** field of the **BrtBeginSXLI** record of a given pivot line (section [2.2.5.3.8.3](#)), then the pivot line entry at position  $n$  is identical to the corresponding pivot line entry of the pivot line preceding the given pivot line.

If the value of  $n$  is greater than or equal to the **cSic** field of the **BrtBeginSXLI** record of this pivot line, then the value of  $n$  is equal to the sum of the **cSic** field of the **BrtBeginSXLI** record and the current index in the **rgisxvis** field of the **BrtBeginIsxvis** (section [2.4.94](#)) record of this pivot line.

If a pivot line entry is in a pivot line in the row (2) area, each pivot line entry at any position  $n$  specifies a pivot item (section [2.2.5.3.3](#)) index of a pivot item in the  $n$ th pivot field (section [2.2.5.3.2](#)) on the row (2) axis or specifies a data item (section [2.2.5.3.7.5.1](#)) index, if the  $n$ th field on the row (2) axis is the data field (section [2.2.5.3.7.5.2](#)).

If a pivot line entry is in a pivot line (section [2.2.5.3.8.3](#)) in the column (2) area, each pivot line entry at any position  $n$  specifies a pivot item index of a pivot item in the  $n$ th pivot field on the column (2) axis or specifies a data item index, if the  $n$ th field on the column (2) axis is the data field.

If the  $n$ th pivot field (section [2.2.5.3.2](#)) on the row (2) axis or column (2) axis is the data field, the pivot line entry is a data item index, as specified in section [2.2.5.3.7.5.1](#).

Pivot items (section [2.2.5.3.3](#)) and data items are specified sequentially from logical left to logical right for row (2) pivot lines, and from top to bottom for column (2) pivot lines.

A pivot line entry with a value of 0x001000FE is used to specify the absence of a pivot item or data item (section [2.2.5.3.7.5.1](#)).

### 2.2.5.3.9 PivotTable Rules

A **PivotTable** rule can be used to identify cells in a **PivotTable** (section [2.2.5](#)) report. A **PivotTable** rule is specified by the sequence of records that conforms to the **PIVOTRULE** (section [2.1.8](#)) or **PIVOTRULE14** rule (as defined in section [2.1.7.40](#)). Each **PivotTable** rule references a specific area of a **PivotTable** report, pivot fields (section [2.2.5.3.2](#)), the data field (section [2.2.5.3.7.5.2](#)), or cache fields (section [2.2.5.2.2](#)) and optionally corresponding pivot items (section [2.2.5.3.3](#)), data items (section [2.2.5.3.7.5.1](#)), or cache items (section [2.2.5.2.3](#)) associated with cells in a **PivotTable** report. When cache items are referenced, the **PivotTable** rule references calculated items (section [2.2.5.2.6](#)) associated with those cache items.

Each sequence of records that conforms to the **PRFILTER** (defined in section [2.1.8](#)) or **PRFILTER14** rule (as defined in section [2.1.7.40](#)) in the **PIVOTRULE** or **PIVOTRULE14** rule (respectively) specifies a set of pivot items (section [2.2.5.3.3](#)), data items (section [2.2.5.3.7.5.1](#)), or cache items for an individual pivot field (section [2.2.5.3.2](#)), data field, or cache field. This set of pivot items, data items, or cache items is specified by the sequence of records that conforms to the **PRFITEM** (section [2.1.8](#)) or **PRFITEM14** rules (as defined in section [2.1.7.40](#)) within the **PRFILTER** or **PRFILTER14** rule, respectively.

The **pruleheaderdata.fCacheBased** field in the **BrtBeginPRule** (section [2.4.178](#)) record specifies whether the **PivotTable** rule specifies cache items (section [2.2.5.2.3](#)). The **pruleheaderdata.isxvd** field in the **BrtBeginPRule** and **BrtBeginPRule14** (section [2.4.179](#)) records specifies whether the **PivotTable** rule specifies pivot items (section [2.2.5.3.3](#)), or data items (section [2.2.5.3.7.5.1](#)) as follows:

- If **pruleheaderdata.fCacheBased** field in the **BrtBeginPRule** record equals 1, then this **PivotTable** rule references cache items. The **pruleheaderdata.fCacheBased** field in the **BrtBeginPRule14** record always equals 0.



- If the **pruleheaderdata.fCacheBased** field in the **BrtBeginPRule** record equals 0 and the record is a **BrtBeginPRule14** record and the **pruleheaderdata.isxvd** field in the same **BrtBeginPRule** or **BrtBeginPRule14** record equals -2, then this **PivotTable** rule references the data field (section [2.2.5.3.7.5.2](#)).
- If the **pruleheaderdata.fCacheBased** field in the **BrtBeginPRule** record equals 0 and the record is a **BrtBeginPRule14** record and the **pruleheaderdata.isxvd** field in the same **BrtBeginPRule** or **BrtBeginPRule14** record does not equal -2, then this **PivotTable** rule references pivot items.

Cells that are associated with any pivot item, data item (section [2.2.5.3.7.5.1](#)), or cache item (section [2.2.5.2.3](#)) from an individual **PRFILTER** (defined in section [2.1.8](#)) or **PRFILTER14** rule (as defined in section [2.1.7.40](#)) and that meet restrictions specified by the corresponding **BrtBeginPRFilter** (section [2.4.172](#)) or **BrtBeginPRFilter14** (section [2.4.173](#)) record are associated with this **PRFILTER** or **PRFILTER14** rule, respectively.

Cells that are associated with every **PRFILTER** (defined in section [2.1.8](#)) or **PRFILTER14** rule (as defined in section [2.1.7.40](#)) of the **PIVOTRULE** (section [2.1.8](#)) or **PIVOTRULE14** rule (as defined in section [2.1.7.40](#)) (respectively) are associated with the **PRFILTERS** or **PRFILTERS14** rule (respectively) in the **PIVOTRULE** or **PIVOTRULE14** rule (respectively). Cells that are associated with the **PRFILTERS** or **PRFILTERS14** rule (as defined in section [2.1.7.40](#)) in the **PIVOTRULE** (section [2.1.8](#)) or **PIVOTRULE14** rule (respectively) and that meet the restrictions specified by the corresponding **BrtBeginPRule** (section [2.4.178](#)) or **BrtBeginPRule14** (section [2.4.179](#)) record are the cells specified by the **PivotTable** rule (section [2.2.5.3.9](#)).

A cell is associated with a particular cache item (section [2.2.5.2.3](#)) if it is associated with the pivot item (section [2.2.5.3.3](#)) that has an association with that cache item.

### 2.2.5.3.10 PivotTable What-if Analysis

**PivotTable** What-if Analysis enables the editing of summarized values in an OLAP **PivotTable** view (section [2.2.5.3](#)), for example, editing summarized values in the data area (section [2.2.5.3.8.1.4](#)) of the **PivotTable** view.

The sequence of records that conform to the **SXEDITS** rule (defined in section [2.1.7.40](#)) specifies the values in the OLAP **PivotTable** view that have been modified and specifies the corresponding values in the OLAP source data (section [2.2.5.2.1](#)). The sequence of records that conform to the **SXEDIT** rule (defined in section [2.1.7.40](#)) specifies a value or a formula. A value is specified by the **Xnum** (section [2.5.171](#)) field of a **BrtBeginSXEdit** (section [2.4.234](#)) record and MUST exist if and only if the **sxet** field of the **BrtBeginSXEdit** record is equal to **SXET\_NUM** (section [2.5.146](#)). A formula is specified by the **FRTHeader** field of the **BrtBeginSXEdit** record. The location of the modified value in the OLAP **PivotTable** view is specified by the **PivotTable** rule (section [2.2.5.3.9](#)) that immediately follows the **BrtBeginSXEdit** record. The **OLAP tuple** that identifies the corresponding value in the OLAP source data is specified by the **rgStTuple** field of the **BrtSXTupleItems** (section [2.4.777](#)) record that immediately follows the **BrtBeginSXEdit** record.

The sequence of records that conforms to the **SXCHANGES** rule (defined in section [2.1.7.40](#)) specifies the values in the OLAP **PivotTable** view that have been designated for **OLAP allocation** and specifies the corresponding values in the OLAP source data. The order of the **BrtBeginSXChange** (section [2.4.224](#)) records determines the order in which they are designated for OLAP allocation. The sequence of records that conforms to the **SXCHANGE** rule (defined in section [2.1.7.40](#)) specifies a single edited value designated for OLAP allocation. An OLAP allocation value is specified by the **xnum** field of a **BrtBeginSXChange** record. The OLAP tuple that identifies the location of the edited value in the OLAP **PivotTable** view and the corresponding value in the OLAP source data is specified by the **rgStTuple** field of a **BrtSXTupleItems** record that

immediately follows the **BrtBeginSXChange** record. The **sxma** field of the **BrtBeginSXChange** record specifies the OLAP allocation method.

For example, when an OLAP **PivotTable** is refreshed, the values designated for OLAP allocation (**SXCHANGES**) are sent to the OLAP source data (section [2.2.5.2.1](#)) provider along with the OLAP allocation method indicating how to allocate the updated values. The OLAP source data provider updates the values, and those new values are then refreshed and summarized in the data area (section [2.2.5.3.8.1.4](#)) of the **PivotTable** view (section [2.2.5.3](#)) instead of summarizing the original values from the OLAP source data.

If the **fEnableWB** field of the **BrtBeginSXView14** (section [2.4.265](#)) is 0x0, **SXEDITS** (section [2.1.7.40](#)) and **SXCHANGES** (section [2.1.7.40](#)) MUST NOT exist in the part. **PivotTable** What-if Analysis is enabled if and only if the **fEnableWB** field of the **BrtBeginSXView14** record is 0x1 and the source data is OLAP.

#### 2.2.5.4 OLAP Data Model

This section provides background information about the underlying data model for OLAP entities.

The principal unit of scope is an **OLAP cube**. See section [2.2.8](#) for information about how an OLAP cube is accessed. Items within an OLAP cube can be addressed by an MDX unique name string. Within an OLAP cube, there are OLAP hierarchies, OLAP measures and OLAP named sets.

An OLAP hierarchy consists of one or more OLAP levels and OLAP member properties. An OLAP level consists of one or more OLAP members. An OLAP member is an atomic unit of data, for example customer "Jim Smith", or a grouping of data, for example "customers in the city of Chicago". OLAP levels contain OLAP members of similar type within an OLAP hierarchy. OLAP members can have parent and child members (3) in OLAP levels above and below them, for example "Jim Smith" might be a child of "customers in the city of Chicago". An OLAP member property can be associated with a single OLAP level or all OLAP levels of an OLAP hierarchy, for example a "Mayor" OLAP member property might be associated with a "City" OLAP level.

An OLAP tuple is a way of combining multiple OLAP members to reference a particular point in an OLAP cube, for example "customers in the city of Chicago" and "2008" references data in the OLAP cube corresponding to the year 2008 and customers in Chicago.

An OLAP measure is a value that is available in the OLAP cube. Usually it is numeric, "Sales" and "Head Count" are typical examples of OLAP measures. An OLAP measure is an OLAP member in a measures OLAP hierarchy. For a PivotTable view (section [2.2.5.3](#)), OLAP measures are stored differently from other OLAP members in this file format.

An OLAP tuple including an OLAP measure can be used to get a value, for example "customers in the city of Chicago", "2008" and "sales" might reference the value \$659,000.

An OLAP named set is a collection of OLAP tuples. OLAP named sets are typically used for specific analytical needs that require custom logic, for example an OLAP named set might be defined as the OLAP tuples corresponding to "the top 10 customers by month and sales".

#### 2.2.5.5 Non-Worksheet PivotTables

A **PivotTable** (section [2.2.5](#)) with a **PivotTable** (section [2.1.7.40](#)) part that is a target of an explicit relationship from a **workbook** (section [2.1.7.60](#)) part, is specified to be a Non-Worksheet PivotTable. Non-Worksheet PivotTables provide a way for **Charts** (section [2.2.3](#)) to be based on PivotTable data without having to show the data in a **worksheet** (section [2.1.7.61](#)), for more information see [\[MS-ODRAWXML\]](#) section 2.6.1.21. A Non-Worksheet PivotTable MUST NOT be referenced by any other part than the **workbook** part.



There MUST be a **BrtPivotCacheIdVersion** (section [2.4.708](#)) record between the **BrtBeginPivotCacheDef** (section [2.4.162](#)) and **BrtEndPivotCacheDef** (section [2.4.497](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, that specify the **PivotCache** (section [2.2.5.2](#)) associated with a Non-Worksheet PivotTable.

The value of the **bVerSxMacro** field defined in the **BrtBeginSXView** (section [2.4.264](#)) record associated with a Non-Worksheet PivotTable MUST be greater than or equal to 3.

The field **rfxGeom** of the **BrtBeginSXLocation** (section [2.4.243](#)) record as specified by the SXLOCATION rule in the **PivotTable** (section [2.1.7.40](#)) part ABNF, MUST have value 0 for its members **rwFirst** and **colFirst**.

The records **BrtBeginSxEdits** (section [2.4.235](#)) and **BrtEndSxEdits** (section [2.4.570](#)) as specified by SXEDITS rule in the **PivotTable** part ABNF MUST NOT exist in this PivotTable part.

The records **BrtBeginSxChanges** (section [2.4.225](#)) and **BrtEndSxChanges** (section [2.4.560](#)) as specified by SXCHANGES rule in the **PivotTable** part ABNF MUST NOT exist in this PivotTable part.

The records **BrtBeginSXCondFmts** (section [2.4.228](#)) and **BrtEndSXCondFmts** (section [2.4.563](#)) as specified by SXCONDFMTS rule in the **PivotTable** part ABNF MUST NOT exist in this PivotTable part.

The **BrtBeginSXView** (section [2.4.264](#)) record that specifies a Non-Worksheet PivotTable MUST satisfy the following conditions.

- The **fEnableDataEd** field MUST be 0.
- The PivotTable name specified by the **irstName** field MUST be unique among all the Non-Worksheet PivotTables in the **workbook**.

## 2.2.5.6 PivotValues

The **PivotValues** collection is a collection of values that exist in the data area (section [2.2.5.3.8.1.4](#)) of a **PivotTable** view (section [2.2.5.3](#)). **PivotValues** contains a collection of **PivotValueCell** (section [2.2.5.6.1](#)) data units that are organized as rows (2) and columns (2) in the data area of the **PivotTable** view.

For a **Non-Worksheet PivotTable** (section [2.2.5.5](#)), the values of **PivotValues** are specified by the **BrtBeginSxvcells** (section [2.4.260](#)) and the **BrtEndSxvcells** (section [2.4.595](#)) records.

For **PivotTable** structures on a **worksheet** (section [2.1.7.61](#)), the values of **PivotValues** are specified by the cells of the worksheet cell table in the locations that are specified by the **BrtBeginSXLocation** (section [2.4.243](#)) record and the **BrtEndSXLocation** (section [2.4.578](#)) record.

### 2.2.5.6.1 PivotValueCell

A PivotValueCell is an individual data unit in the Data Area (section [2.2.5.3.8.1.4](#)) of a PivotTable View (section [2.2.5.3](#)). PivotValueCells contain summarized values for associated PivotTable Data Items (section [2.2.5.3.7.5.1](#)). Every PivotValueCell can have two kinds of information associated with it, the Value (section [2.2.5.6.1.1](#)) and the Server Formatting (section [2.2.5.6.1.2](#)) information.

#### 2.2.5.6.1.1 Value

The value of a PivotValueCell (section [2.2.5.6.1](#)) is specified to be the number, string, error, date associated with the PivotValueCell.

### 2.2.5.6.1.2 Server Formatting

The server formatting of a PivotValueCell (section [2.2.5.6.1](#)) specifies formatting to be applied to the PivotValueCell and is specified by the **PCDISrvFmt** (section [2.5.101](#)) structure.

## 2.2.6 Styles

The **styles** (section [2.1.7.50](#)) part contains formatting and **protection** information. This information is used to describe the cell formatting in a sheet.

Cell formatting is composed of several sets of properties:

- **Font** properties such as bold, italic, font color, and font size.
- **Fill** properties such as foreground and **background colors**, pattern, and gradient.
- Alignment properties such as left, center, and right alignment.
- **Border** properties such as left, right, top, bottom, thick or thin, and color.
- Number formatting properties (date, time, number of decimal places, etc...)
- Protection properties such as **locked** and hidden.

These properties, as a whole, describe how a particular cell is displayed and printed.

There are two types of objects in the **styles** part that contain formatting properties. They are **XFs** (section [2.2.6.1](#)) and **DXFs** (section [2.2.6.2](#)). In general, **XFs** describe the formatting directly associated with a cell, and **DXFs** describe additional formatting properties that can be applied to one or more cells.

### 2.2.6.1 XFs

XF's specify formatting for cells and cell styles (section [2.2.6.1.2](#)).

XF's are specified by **BrtXF** (section [2.4.816](#)) records. **BrtXF** records specify font, fill, border and number formatting via indices into the **FONTS** (section [2.1.7.50](#)), **FILLS** (section [2.1.7.50](#)), **BORDERS** (section [2.1.7.50](#)), and **FMTS** (section [2.1.7.50](#)) collections. Alignment and protection properties are specified directly in the **BrtXF** record.

#### 2.2.6.1.1 Cell XF's

Cell XF's are specified by **BrtXF** (section [2.4.816](#)) records in the **CELLXF's** (section [2.1.7.50](#)) collection. Each cell MUST reference a cell XF. These records specify the complete set of formatting properties for the cells that reference them.

#### 2.2.6.1.2 Cell Styles

Cell styles specify a set of formatting properties that can be associated with one or more cells. Cell styles provide the following two benefits:

- The set of formatting properties in a cell style can be applied to one or more cells in a single operation.
- Once a cell style is applied to a cell, subsequent changes to the formatting properties in the cell style can be propagated to the cell automatically.

For example, if it is desired that multiple cells in a sheet share a common set of formatting properties, such as bold font with a blue fill, then cell styles make it convenient to apply this set of formatting, and potentially modify the set later.

A **BrStyle** (section [2.4.755](#)) record specifies a **friendly name** for a cell style.

### 2.2.6.1.2.1 Cell Style XFs

A cell style XF defines the set of formatting properties in a cell style (section [2.2.6.1.2](#)), and is specified by a **BrXF** (section [2.4.816](#)) record in the **CELLSTYLEXFS** (section [2.1.7.50](#)) collection. Each cell MUST reference a **cell XF** (section [2.2.6.1.1](#)), and each **cell XF** MUST reference a cell style XF with the **ixfParent** field.

### 2.2.6.1.2.2 Normal Style

At least one cell style (section [2.2.6.1.2](#)) MUST be included in the **STYLES** (section [2.1.7.50](#)) collection and this cell style (section [2.2.6.1.2](#)) is called the normal style. The normal style MUST reference the first **BrXF** (section [2.4.816](#)) record in the **CELLSTYLEXFS** collection, and this **BrXF** record MUST be a cell style XF (section [2.2.6.1.2.1](#)), where the **fStyle** field equals 1.

The normal style, being the only required cell style, ensures that all cells have a cell style to reference. The normal style also provides a convenient object in which to store default cell formatting properties for an entire workbook, because all cells reference the normal style by default, until they are modified to reference a different cell style.

### 2.2.6.2 Differential Formatting (DXFs)

Like **XF**s (section [2.2.6.1](#)), **DXF**s define a set of formatting properties. Unlike **XF**s, **DXF**s can define any number of formatting properties, from just one to all of them.

DXFs provide a way for features to reference a set of formatting properties. How those properties are used depends on the feature. The subsections that follow describe each of these features and how they use DXFs.

**DXF**s are specified by **BrDXF** (section [2.4.342](#)) records in the **DXFS** (section [2.1.7.50](#)) collection, or by **BrDXF14** (section [2.4.343](#)) records in the **DXF14S** collection.

Future records (section [2.1.6](#)) that refer to differential formatting MUST refer to **BrDXF14** records.

#### 2.2.6.2.1 Conditional Formatting

Some conditional formatting rules, as specified by **BrBeginCFRule** (section [2.4.21](#)), reference a **DXF** (section [2.2.6.2](#)). That **DXF** describes additional formatting applied to cells within the bounds of the rule, if the rule's condition is TRUE for those cells.

#### 2.2.6.2.2 Table Style Elements

Table style elements are specified either by **BrTableStyleElement** (section [2.4.791](#)) or, in the case of table style element specific to slicer styles (section [2.2.6.3.1](#)), by **BrSlicerStyleElement** (section [2.4.750](#)), or, in the case of table style element specific to timeline styles (section [2.2.6.3.2](#)), by **BrTimelineStyleElement** (section [2.4.794](#)). In whichever case, table style elements can reference a **DXF** (section [2.2.6.2](#)) which specifies the formatting to apply to a particular portion of a table, **PivotTable** (section [2.2.5](#)), slicer (section [2.2.14.2](#)) or timeline (section [2.2.15.2](#)) within the bounds of the table style element. If no **DXF** is referenced, this specifies no formatting.

The bounds of a table style element are specified by the **tseType** field in the **BrTableStyleElement** record, the **tseType** field in the **BrTableSlicerStyleElement** record, or the **tseType** field in the **BrTableTimelineStyleElement** record.

### 2.2.6.2.3 Table Block-Level Formatting

A table, as specified by the **BrTableBeginList** (section [2.4.96](#)) record, can reference a **DXF** (section [2.2.6.2](#)) via the **nDxfHeader**, **nDxfData**, **nDxfAgg**, **nDxfBorder**, **nDxfHeaderBorder** or **nDxfAggBorder** fields. These **DXFs** (section [2.2.6.2](#)) represent formatting that can be applied to the cells within those areas of the table.

### 2.2.6.2.4 PivotTable Areas

A **PivotTable** (section [2.2.5](#)) format record, as specified by **BrTableBeginSXFormat** (section [2.4.238](#)), can reference a **DXF** (section [2.2.6.2](#)). This **DXF** represents formatting that can be applied to the cells within the appropriate area of the **PivotTable**.

### 2.2.6.2.5 Sorting and Filtering

Sorting, as specified by the **BrTableBeginSortCond** (section [2.4.213](#)), and filtering, as specified by the **BrTableColorFilter** (section [2.4.323](#)) record, can include formatting properties as part of their criteria. These properties are stored as **DXFs** (section [2.2.6.2](#)). For example, a filter criteria that is "filter only cells with red font color" will reference a **DXF** with the property "font color = red".

### 2.2.6.3 Table Styles

Table styles specify additional formatting for cells inside tables, **PivotTables** (section [2.2.5](#)), for visual components of slicer views (section [2.2.14.2](#)), or for visual components of timeline views (section [2.2.15.2](#)). Table styles used for slicer views are specified in slicer styles (section [2.2.6.3.1](#)). Table styles used for timeline views are specified in timeline styles (section [2.2.6.3.2](#)).

Tables and **PivotTables** specify an applied table style with the **BrTableStyleClient** (section [2.4.790](#)) record. For tables, this record MUST exist in the collection of records beginning with **BrTableBeginList** (section [2.4.96](#)). For **PivotTables**, this record MUST exist in the collection of records beginning with **BrTableBeginSXView** (section [2.4.264](#)).

A **BrTableStyleClient** (section [2.4.790](#)) record references a table style by name with the **stStyleName** field.

Table styles are either built-in or user-defined. Built-in table styles for tables and **PivotTables** (section [2.2.5](#)) are specified in [\[ISO/IEC29500-1:2011\]](#) section 18.8. User-defined table styles are specified in the collection of records beginning with **BrTableBeginTableStyles** (section [2.4.269](#)).

A table style consists of a collection of table style elements (section [2.2.6.2.2](#)). For user-defined table styles, these elements are specified by the collection of **BrTableStyleElement** (section [2.4.791](#)) records following **BrTableBeginTableStyle** (section [2.4.268](#)).

Each table style element specifies the formatting to be applied to cells in a particular region of the table or **PivotTable**, or visual components in a particular region of a slicer view or timeline view. These regions or visual components are specified by the possible values of the **tseType** field of the **BrTableStyleElement**, **BrTableSlicerStyleElement** (section [2.4.750](#)) and **BrTableTimelineStyleElement** (section [2.4.794](#)) records.

### 2.2.6.3.1 Slicer Styles

Slicer styles specify the formatting to apply to visual components of slicer views (section [2.2.14.2](#)).

The **stStyle** field of the **BrtBeginSlicer** (section [2.4.191](#)) record specifies the slicer style to be applied. A slicer style can be either built-in or user-defined. Built-in slicer styles are specified in **BrtBeginSlicer**. User-defined slicer styles are specified in the collection of records beginning with **BrtBeginSlicerStyles** (section [2.4.210](#)).

A slicer style is an extension of a table style (section [2.2.6.3](#)). A user-defined slicer style is specified by a **BrtBeginSlicerStyle** (section [2.4.208](#)) record and the **BrtBeginTableStyle** (section [2.4.268](#)) record it references. A slicer style consists of a collection of table style elements (section [2.2.6.2.2](#)). For user-defined slicer styles, these elements are specified by the collection of **BrtSlicerStyleElement** (section [2.4.750](#)) records following **BrtBeginSlicerStyle** and the table style elements specified by the user-defined table style referenced by **stName** field of the **BrtBeginSlicerStyle** record.

### 2.2.6.3.2 Timeline Styles

Timeline styles specify the formatting to apply to visual components of timeline views (section [2.2.15.2](#)).

The **style** attribute of the **CT\_Timeline** element ([\[MS-XLSX\]](#) section 2.6.111) specifies the timeline style to be applied. A timeline style can be either built-in or user-defined. Built-in timeline styles are specified in **CT\_Timeline** element. User-defined timeline styles are specified in the collection of records beginning with **BrtBeginTimelineStyles** (section [2.4.277](#)).

A timeline style is an extension of a table style (section [2.2.6.3](#)). A user-defined timeline style is specified by a **BrtBeginTimelineStyle** (section [2.4.275](#)) record and the **BrtBeginTableStyle** (section [2.4.268](#)) record it references. A timeline style consists of a collection of table style elements (section [2.2.6.2.2](#)). For user-defined timeline styles, these elements are specified by the collection of **BrtTimelineStyleElement** (section [2.4.794](#)) records following **BrtBeginTimelineStyle** and the table style elements specified by the user-defined table style referenced by **stName** field of the **BrtBeginTimelineStyle** record.


### 2.2.6.4 Format Conflicts

As described previously, the formatting to be displayed or printed for a particular cell can be specified in several independent records. It is up to the application to resolve conflicting formatting properties for a particular cell.

For example, suppose a cell has a conditional format (section [2.2.6.2.1](#)) applied and also falls within the bounds of a table with a table style (section [2.2.6.3](#)). Furthermore, suppose the **cell XF** (section [2.2.6.1.1](#)), conditional format and table style element (section [2.2.6.2.2](#)) all specify a different font color. It is up to the application to decide the appropriate font color to use in this situation.

## 2.2.7 External References

The External References infrastructure exists to support formulas (section [2.2.2](#)) that reference data sources (1) outside the scope of the sheet on which the formula resides. These sources could be other sheets in the same workbook, data in another workbook, **DDE** links, or **Object Linking and Embedding (OLE)** links. A workbook which uses External References will contain a collection of supporting link records (section [2.2.7.3](#)), each of which denotes a link to a data source (1). Each formula which incorporates an external reference will point to the appropriate supporting link record to specify the source of the data.

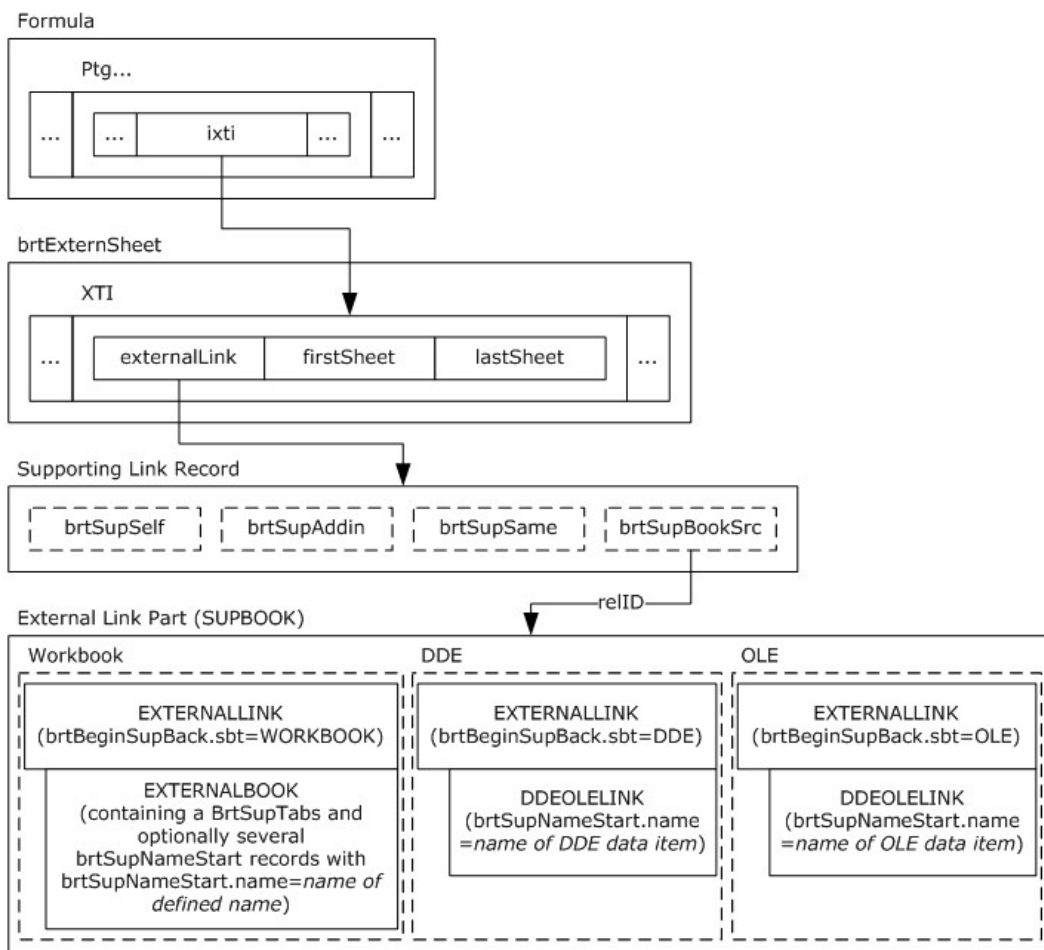

**Figure 17: External references**

The following sections define terms used in the preceding diagram.

### 2.2.7.1 External Reference Consumers

Within the formula, only certain formula elements (section 2.2.2.6) can contain external references. These specific formula elements contain an **XtiIndex** (section 2.5.97.103) structure specifying an **Xti** (section 2.5.172), which in turn specifies the location and type of the external reference data. Only the following **Ptgs** (section 2.5.97.16) can be external reference consumers:

- **PtgRef3d** (section 2.5.97.69)
- **PtgRefErr3d** (section 2.5.97.71)
- **PtgArea3d** (section 2.5.97.19)
- **PtgAreaErr3d** (section 2.5.97.21)
- **PtgNameX** (section 2.5.97.61)
- **PtgList** (section 2.5.97.52)

## 2.2.7.2 Supporting Link

Each formula element (section [2.2.2.6](#)) which references external data refers to an **Xti** (section [2.5.172](#)). The **Xti** specifies a particular supporting link record (section [2.2.7.3](#)) from the collection stored in the workbook. The **Xti** and supporting link record together specify where the data used by the formula element resides, and in certain cases, additional data about the supporting link.

## 2.2.7.3 Supporting Link Record

There are four types of supporting links, which are represented by the four types of supporting link records. The type of the supporting link used is specified by the type of supporting link record that is specified by the **Xti** (section [2.5.172](#)). These supporting link types, and the corresponding supporting link record types, are defined in the following table.

| Supporting link type      | Supporting link record type                                | Meaning  |
|---------------------------|--|--|
| Self-Referencing          | <b>BrtSupSelf</b><br>(section <a href="#">2.4.770</a> )    | A reference back into the same workbook.<br>This supporting link type supports cross-sheet references, where the target sheets are specified by the scope information in the <b>Xti</b> . This record can also support <b>defined name</b> or <b>UDF</b> reference on the same book, although using the <b>PtgName</b> (section <a href="#">2.5.97.60</a> ) formula element (section <a href="#">2.2.2.6</a> ) can be simpler. |
| Same-Sheet Referencing    | <b>BrtSupSame</b><br>(section <a href="#">2.4.769</a> )    | A reference to the <b>active sheet</b> in the context of the consuming formula (section <a href="#">2.2.2</a> ).<br>This supporting link type is used by formula in macro sheets and in defined names to reference the sheet of the caller.  |
| Add-in Referencing        | <b>BrtSupAddin</b><br>(section <a href="#">2.4.756</a> )   | A reference to a UDF on any <b>Excel Linked Library (XLL)</b> or <b>COM automation add-in</b> .  |
| External Link Referencing | <b>BrtSupBookSrc</b><br>(section <a href="#">2.4.757</a> ) | A reference to an external link (section <a href="#">2.2.7.4</a> ).  |

## 2.2.7.4 External Link

An external link is a type of supporting link (section [2.2.7.2](#)) that references a data source (1) outside the current workbook. The **BrtSupBookSrc** (section [2.4.757](#)) record that specifies an external link that contains a relationship to an **External Links** (section [2.1.7.25](#)) part that will contain further information about this external link. There are three types of external links. The type is specified by the **sbt** field in the **BrtBeginSupBook** (section [2.4.223](#)) record in the **External Links** part. These three types of external links are specified by the sequence of records that conform to the **EXTERNALBOOK** rule (as defined in section [2.1.7.25](#)) or by the sequence of records that conform to the **DDEOLELINK** rule (as defined in section [2.1.7.25](#)) in the **External Links** part ABNF, and are defined in the following table.

| External link type                                   | Record sequence ABNF |
|--|----------------------|
| External Workbook (section <a href="#">2.1.10</a> )  | <b>EXTERNALBOOK</b>  |
| DDE Data Source (section <a href="#">2.2.7.4.2</a> ) | <b>DDEOLELINK</b>    |
| OLE Data Source (section <a href="#">2.2.7.4.3</a> ) | <b>DDEOLELINK</b>    |



#### 2.2.7.4.1 External Workbook Links

An external workbook link is a reference to a workbook other than the one in which the source formula (section [2.2.2](#)) resides. It contains the referencing expression, and data relating to that expression. This data includes the workbook location, sheet names, external defined names (section [2.2.7.4.1.1](#)), and an external cell cache (section [2.2.7.4.1.2](#)) for referenced cells in that workbook.

##### 2.2.7.4.1.1 External Defined Name

An external defined name is a reference to a defined name in an [external workbook](#) (section [2.1.10](#)). The records specifying the external defined name will provide the name, scope, and formula (section [2.2.2](#)) of the defined name on that workbook. The restrictions on the types of formulas supported in external defined names are described in section [2.4.762](#).

##### 2.2.7.4.1.2 External Cell Cache

To allow external cell references to be calculated without opening the referenced workbook, an external cell cache is stored in the file which contains cached values for cells in a sheet in an [external workbook](#) (section [2.1.10](#)). The external cell cache contains cell values and value metadata (section [2.2.4.3](#)) information only about the specific cells which are referenced in that sheet.

The external cell cache is composed of a collection of rows (2) that correspond to rows (2) in the source sheet. These rows (2), and their row (2) indexes in the source sheet, are specified by a **BrtExternRowHdr** (section [2.4.634](#)) record. The rows (2) MUST be specified in order of increasing row (2) index. Each row (2) MUST contain one or more external cells (section [2.2.7.4.1.2.1](#)).

##### 2.2.7.4.1.2.1 External Cells

An external cell is cached data about a single cell in the external cell cache (section [2.2.7.4.1.2](#)) and is represented by the following records:

- **BrtExternCellBlank** (section [2.4.629](#))
- **BrtExternCellString** (section [2.4.633](#))
- **BrtExternCellReal** (section [2.4.632](#))
- **BrtExternCellError** (section [2.4.631](#))
- **BrtExternCellBool** (section [2.4.630](#))

External cell records specify the data type, data value, and the column (2) location of that cell in the source sheet. The external cells in a row (2) in an external cell cache (section [2.2.7.4.1.2](#)) MUST be specified in order of increasing column (2) index. Any value metadata (section [2.2.4.3](#)) in the External cell is specified by an optional **BrtExternValueMeta** (section [2.4.638](#)) record preceding the data records listed earlier.

##### 2.2.7.4.2 DDE Data Source

A DDE Data Source will provide information about the **DDE server** and **DDE topic** name of a **Dynamic Data Exchange (DDE)** connection. The **External Links** (section [2.1.7.25](#)) part specifying this DDE Data Source will also specify individual DDE data items (section [2.2.7.4.2.1](#)) used by this data source (1).



#### 2.2.7.4.2.1 DDE Data Item

A DDE data item will specify the name and properties of a DDE item. It also contains cached values from the most recent DDE data update.

#### 2.2.7.4.3 OLE Data Source

An OLE data source will provide information about an **OLE2** data connection. It will specify the path to the OLE2 data source (1), and the **ProgID** of the application handler. This also specifies the names of the OLE Data Items (section [2.2.7.4.3.1](#)) used in this data source (1).

##### 2.2.7.4.3.1 OLE Data Item

An OLE data item will specify the name and properties of a connection to an OLE2 data object, and optionally [<3>](#) cached values for the most recent data update.

### 2.2.8 External Connections

A workbook often pulls in data from external data sources (1), such as a database or an OLAP cube. An external connection represents a link between a workbook and a particular external data source (1). It contains properties about the way that the application establishes the connection to the data source (1) and retrieves the data, such as the type of **data provider** (**OLE DB**, ODBC, and other data providers), a **server name**, security information, and a command to execute on the server. In addition, the external connection contains details about the way the connection is used in the workbook, such as how often to **refresh** the data.

A data connection object contains external connection information for an external data source (1) that a workbook uses. Data connection objects are independent of the constructs in the workbook that display data, such as tables or **PivotTables** (section [2.2.5](#)).

A connection definition can be established in an external connection file for easier sharing and reuse, but this overview describes the representation for external data connections that are directly embedded within a workbook file. This embedded representation is required whenever external data is used, and ensures portability of the document and continued operation of the external query in the most cases.

An external connection is specified by a set of records, as defined in **EXTCONNECTION** (section [2.1.7.24](#)). The types of records in the collection are specified by the **idbtype** field of the **BrBeginExtConnection** (section [2.4.76](#)) record.

The following record types refer to external connections:

- **BrBeginPCDSOURCE** (section [2.4.160](#))
- **BrBeginQSI** (section [2.4.180](#))
- **BrBeginList** (section [2.4.96](#))

The link between a **BrBeginExtConnection** record and the records referring to it is specified by the unique connection identifier. The connection identifier is specified by the **dwConnID** field in the **BrBeginExtConnection** record and in the **dwConnID** fields in the records that refer to it. If the **dwConnID** field in one of the referring records is 0, this record does not refer to **external data**.

It is possible for an external connection to not be used by any workbook object. In this case there is no record referring to it.

### 2.2.8.1 Connection Name

Each external connection has a unique name, which can be used by the application as a friendly name for the connection, for example for user interface purposes. The connection name is specified by the **stConnName** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record.

### 2.2.8.2 External Connection Files

An external connection file specifies an external connection in a separate file (external to the workbook). An external connection file enables managing connection information separately from a specific workbook and sharing it among multiple workbooks. It is used for creating a new external connection in a workbook or for restoring a lost connection. The **stConnectionFile** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record specifies a path to an external connection file.

### 2.2.8.3 OLE DB Connections

An OLE DB connection is a connection to an OLE DB data provider. An external connection is an OLE DB connection if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTOLEDB** (section [2.5.30](#)). Properties of an OLE DB connection are specified by a **BrtBeginECDbProps** (section [2.4.57](#)) record that MUST follow the **BrtBeginExtConnection** (section [2.4.76](#)) record. For more information about OLE DB, see [\[MSDN-OLEDBP-OI\]](#).

#### 2.2.8.3.1 OLAP Connections

An OLAP connection is a connection to an OLE DB for OLAP data provider. An OLE DB connection is an OLAP connection if the **icmdtype** field of the **BrtBeginECDbProps** (section [2.4.57](#)) is **CMDCUBE** (section [2.5.20](#)). Properties of an OLAP connection are specified by a **BrtBeginECOlapprops** (section [2.4.58](#)) record that MUST follow the **BrtBeginECDbProps** record.

#### 2.2.8.4 ODBC Connections

An ODBC connection is a connection to an ODBC data provider. An external connection is an ODBC connection if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTODBC** (section [2.5.30](#)). Properties of an ODBC connection are specified by a **BrtBeginECDbProps** (section [2.4.57](#)) record that MUST follow the **BrtBeginExtConnection** (section [2.4.76](#)) record. If an ODBC connection has parameters, these parameters are specified by a **BrtBeginECParams** (section [2.4.60](#)) record. For more information about ODBC, see [\[MSFT-ODBCODCO\]](#).

#### 2.2.8.5 Web Connections

A Web connection pulls the content of a Web page, or part of a Web page (an **HTML** table), into the workbook. An external connection is a Web connection if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTWEB** (section [2.5.30](#)). Properties of a Web connection are specified by a **BrtBeginECWebProps** (section [2.4.67](#)) record that MUST follow the **BrtBeginExtConnection** (section [2.4.76](#)) record. If a Web connection has parameters, these parameters are specified by a **BrtBeginECParams** (section [2.4.60](#)) record.

#### 2.2.8.6 Text Import Connections

A **text importation** connection pulls in data from a structured text file into the workbook. An external connection is a text importation connection if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTTEXT** (section [2.5.30](#)). Properties of a text importation connection are specified by a **BrtBeginECTxtWiz** (section [2.4.65](#)) record that MUST follow the **BrtBeginExtConnection** record.

## 2.2.8.7 ADO Recordset Connections

An ADO recordset pulls in data from a set of records in an ADO data provider. An external connection is an ADO recordset connection if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTADO** (section [2.5.30](#)). The sequence of records that conforms to the **EXTCONNECTION** rule (as defined in section [2.1.7.24](#)) for this connection type MUST NOT contain the sequence of records that conforms to any of the following rules: **ECDBPROPS** (section [2.1.7.24](#)), **ECOLAPPROPS** (section [2.1.7.24](#)), **ECWEBPROPS** (section [2.1.7.24](#)), **ECTXTWIZ** (section [2.1.7.24](#)), or **ECPARAMS** (section [2.1.7.24](#)).

Note: For this type of connection, the file format does not contain sufficient information for establishing the connection and fetching a recordset. Data is provided to the application through another mechanism, for example by script code using an **object model**.

## 2.2.8.8 DAO Recordset Connections

A **DAO** recordset pulls in data from a set of records in a DAO data provider. An external connection is a DAO recordset connection if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTDAO** (section [2.5.30](#)). The sequence of records that conforms to the **EXTCONNECTION** rule (as defined in section [2.1.7.24](#)) for this connection type MUST NOT contain the sequence of records that conforms to any of the following rules: **ECDBPROPS** (section [2.1.7.24](#)), **ECOLAPPROPS** (section [2.1.7.24](#)), **ECWEBPROPS** (section [2.1.7.24](#)), **ECTXTWIZ** (section [2.1.7.24](#)), or **ECPARAMS** (section [2.1.7.24](#)).

Note: For this type of connection, the file format does not contain sufficient information for establishing the connection and fetching a recordset. Data is provided to the application through another mechanism, for example by script code using an object model.

## 2.2.8.9 Model Data Source Connections

Model data source connections pull data in to the Spreadsheet Data Model (see [\[MS-XLDM\]](#)) instead of directly pulling it into workbook. A connection is a model data source if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is one of the following (section [2.5.30](#)):

- **DBTOLEDBPP**
- **DBTDATAFEED**
- **DBTWORKSHEET**
- **DBTTEXTTPP**

### 2.2.8.9.1 Model Data Source OLE DB Connections

An OLE DB connection is a connection to an OLE DB data provider. An external connection is a **model data source OLE DB connection** if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTOLEDBPP**, as specified in section [2.5.30](#). Properties of a **model data source OLE DB connection** are specified by a **BrtBeginOledbPr15** record (section [2.4.115](#)) that MUST follow the **BrtBeginExtConn15** record (section [2.4.75](#)). For more information about OLE DB, see [\[MSDN-OLEDBP-OI\]](#).

### 2.2.8.9.2 Model Data Source Data Feed Connections

A data feed connection is a connection to an **OData** data provider. An external connection is a **model data source data feed connection** if the **idbtype** field of the **BrtBeginExtConnection** record (section [2.4.76](#)) is **DBTDATAFEED** (section [2.5.30](#)). Properties of a **model data source**

**data feed connection** are specified by a **BrtBeginDataFeedPr15** record (section [2.4.42](#)) that MUST follow the **BrtBeginExtConn15** record (section [2.4.75](#)). For more information about OData, see [\[MS-ODATA\]](#).

### 2.2.8.9.3 Model Data Source Worksheet Connections

A Worksheet data connection pulls data from a workbook range. An external connection is a **model data source worksheet connection** if the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record is **DBTWORKSHEET**, as specified in section [2.5.30](#). Properties of a **model data source worksheet connection** are specified by a **BrtRangePr15** record (section [2.4.713](#)) that MUST follow the **BrtBeginExtConn15** record (section [2.4.75](#)).

### 2.2.8.9.4 Model Data Source Text import Connections

A text importation connection pulls in data from a structured text file into the workbook. A model data source connection is a text importation connection if the **idbtype** field of the **BrtBeginExtConnection** record (section [2.4.76](#)) is **DBTTEXTTPP** (section [2.5.30](#)). Properties of a text importation connection are specified by a **BrtBeginECTxtWiz15** record (section [2.4.66](#)) that MUST follow the **BrtBeginExtConn15** record (section [2.4.75](#)). The **BrtBeginECTxtWiz15** record could be followed by a **BrtTextPr15** record (section [2.4.792](#)).

## 2.2.9 Password Verifier Algorithm

Several protection records **BrtBookProtection** (section [2.4.296](#)), **BrtSheetProtection** (section [2.4.740](#)), **BrtCsProtection** (section [2.4.329](#)), **BrtRangeProtection** (section [2.4.714](#)), **BrtRangeProtectionIso** (section [2.4.716](#)), **BrtRangeProtectionIso14** (section [2.4.717](#)), **BrtRangeProtection14** (section [2.4.715](#)), and **BrtFileSharing** (section [2.4.641](#)) use a password verifier to provide a locking and unlocking system for viewing or editing parts of the workbook. This password verifier is used to prevent accidental editing, and is not designed to be used as a security feature. The verifier value is calculated in two stages. First, the provided **Unicode** password string is converted to a new character string in the ANSI codepage of the current system using the algorithm specified in the **revisionsPassword** attribute in [\[ISO/IEC29500-1:2011\]](#) section 18.2.29. Second, this string is input into the **XOR obfuscation** algorithm specified in [\[MS-OFFCRYPTO\]](#) section 2.3.7.1, Binary Document Password Verifier Derivation Method 1 to produce a 16-bit password verifier value.

See section [4](#) for information about security concerns related to the use of this algorithm for password verification in this file format.

### 2.2.10 Strong Password Verifier Algorithm

Several protection records **BrtBookProtectionIso** (section [2.4.297](#)), **BrtSheetProtectionIso** (section [2.4.741](#)), **BrtCsProtectionIso** (section [2.4.330](#)), **BrtRangeProectionIso** (section [2.4.716](#)), **BrtRangeProtection14** (section [2.4.715](#)), and **BrtFileSharingIso** (section [2.4.642](#)) use a strong password hash (compatible with ISO/IEC 29500 as described in [\[ISO/IEC29500-1:2011\]](#) sections 18.2.12, 18.2.29, 18.3.1.71, 18.3.1.84, and 18.3.1.85) to provide a locking and unlocking system for viewing or editing parts of the workbook. This password hash is used to prevent accidental editing, and is not designed to be used as a security feature. Password hashes are usually computed by the algorithm specified in [\[MS-OFFCRYPTO\]](#) section 2.4.2.4 ISO Write Protection Method. Under some circumstances, the password is first converted to a 16-bit verifier value as specified by the Password Verifier Algorithm (section [2.2.9](#)) and reinterpreted as a single Unicode character, which is then passed to the algorithm specified in [\[MS-OFFCRYPTO\]](#) section 2.4.2.4 ISO Write Protection Method. There is no way to determine which method was used to generate a hash without knowledge of the password; it is necessary to compute both hashes to verify the password.

See section [4](#) for information about security concerns related to the use of this algorithm for password verification in this file format.

### 2.2.11 Encryption (Password to Open)


Workbook files can contain sensitive information that needs to be protected. A file can be protected by encrypting it using a password. Once a file is encrypted, the data can only be accessed by decrypting the file using a password.

File encryption for this format is specified in [\[MS-OFFCRYPTO\]](#) section 2.3.4.

See section [4](#) for information about security concerns relating to file encryption for this file format.

### 2.2.12 Shared Workbooks

The **shared workbook** infrastructure is used to enable multiple users to make changes to a workbook at the same time and track changes made by certain users. A shared workbook contains a collection of users that currently have the document open and revision logs (section [2.2.12.3](#)) that contain the changes that users have made to the workbook. Each of these logs has a corresponding revision header associated with it and contains either zero or more revision records (section [2.2.12.4](#)) that have been made to the shared workbook since it has been shared. A workbook is a shared workbook if and only if the user names (section [2.1.7.55](#)) stream exist.

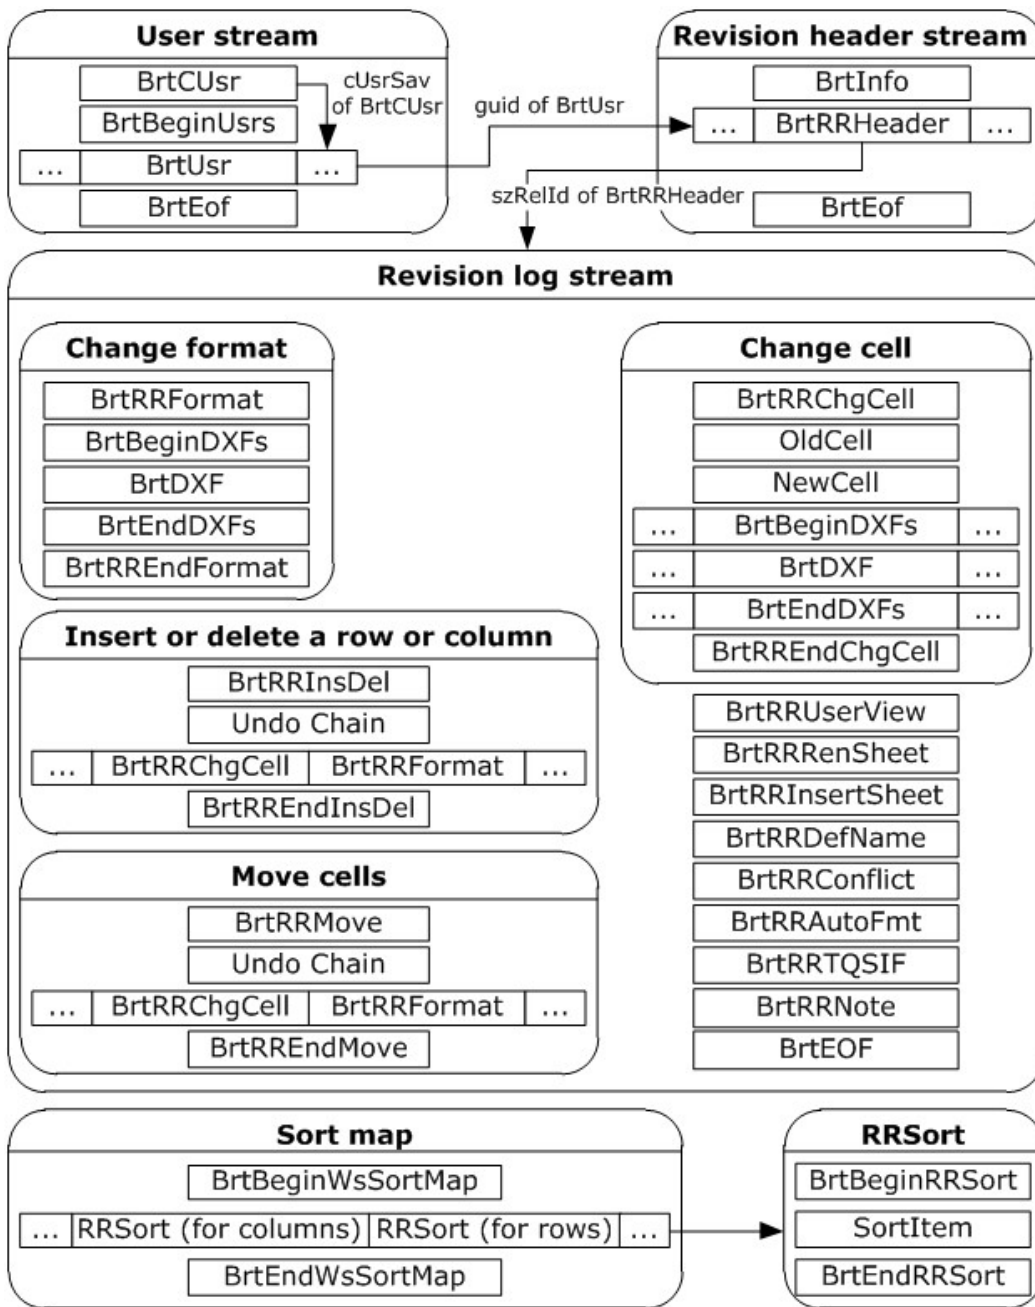

**Figure 18: Shared workbooks**

The following sections define terms used in the preceding diagram.

### 2.2.12.1 User Log

The user log contains the set of users who currently have the workbook open. **BrnCUsr** (section [2.4.331](#)) specifies the number of **BrnUsr** (section [2.4.798](#)) records that the user log contains. Each **BrnUsr** record corresponds to a user that currently has the workbook open. The **guid** field of **BrnUsr**

maps to the **guid** field of **BrRRHeader** (section [2.4.728](#)) to specify the latest revision header and revision logs (section [2.2.12.3](#)) pair that the user is currently synchronized to.

### 2.2.12.2 Revision Headers Log

The revision header log contains revision headers **BrRRHeader** (section [2.4.728](#)) that are used to provide general information about the revision logs (section [2.2.12.3](#)). A single revision header exists for each of the revision logs in the workbook and specifies basic information about that particular revision log. The **szRelId** field of the **BrRRHeader** specifies a relationship identifier for the corresponding revision log (section [2.2.12.3](#)). Each revision log and revision header specifies a user action, such as a unique user opening the workbook for the first time, or a set of changes made by a single user to the shared workbook (section [2.2.12](#)). The user's name is specified in the **stName** field of **BrRRHeader**. The **Revision Headers** (section [2.1.7.43](#)) part ABNF also contains general information about the shared workbook in **BrInfo** (section [2.4.663](#)).

### 2.2.12.3 Revision Logs

The revision logs contain either various revision records (section [2.2.12.4](#)) that a single user has made to a shared workbook (section [2.2.12](#)) or no revision records if the revision log is meant to specify a user action.

### 2.2.12.4 Revision Records

Revision records specify changes, or revisions, that a single user has made to a shared workbook (section [2.2.12](#)). The following changes can be recorded by the shared workbook:

- Inserting or deleting a row or column (2) **BrRRInsDel** (section [2.4.729](#)).
- Moving a cell **BrRRMove** (section [2.4.731](#)).
- Changing a cell **BrRRChgCell** (section [2.4.720](#)).
- Adding or removing a **custom view** **BrRRUserView** (section [2.4.736](#)).
- Renaming an existing sheet **BrRRRenSheet** (section [2.4.733](#)).
- Inserting a new sheet **BrRRInsertSh** (section [2.4.730](#)).
- Changing a defined name **BrRRDefName** (section [2.4.722](#)).
- Changing a comment **BrRRNote** (section [2.4.732](#)).
- Conflict resolution from previous conflicting changes **BrRRConflict** (section [2.4.721](#)).
- Removing a query table **BrRRTQSIF** (section [2.4.735](#)).
- Changing the format **BrRRFormat** (section [2.4.727](#)).
- Changing the **AutoFormat** information for a table **BrRRAutoFmt** (section [2.4.719](#)).

If a change is a reviewable revision, then it will have a **revid** field that is greater than or equal to the **revidMin** field and less than or equal to the **revidMax** field from the corresponding revision header to the revision log (section [2.2.12.3](#)) that this is contained in.



### 2.2.12.5 Format Revision

This revision corresponds to a change in formatting. In between **BrRRFormat** (section [2.4.727](#)) and **BrRREndFormat** (section [2.4.724](#)), a **BrDXF** (section [2.4.342](#)) record can appear in between a **BrtBeginDXFs** (section [2.4.55](#)) and a **BrtEndDXFs** (section [2.4.393](#)). This record specifies the new formatting information associated with this format change.

### 2.2.12.6 Insertion / Deletion of Rows / Columns Revision

This revision corresponds to an insertion or deletion of a row (2) or column (2). In between **BrRRInsDel** (section [2.4.729](#)) and **BrRREndInsDel** (section [2.4.725](#)), any number of **BrRRFormat** (section [2.4.727](#)) and **BrRRChgCell** (section [2.4.720](#)) records can appear as well as the other records associated with them. These records specify the cell and format changes as a result of inserting or deleting the row (2) or column (2). Immediately following **BrRRInsDel** (section [2.4.729](#)), an undo chain (section [2.2.12.9](#)) can appear.

### 2.2.12.7 Move Cells Revision

This revision corresponds to moving of a range of cells. In between **BrRRMove** (section [2.4.731](#)) and **BrRREndMove** (section [2.4.726](#)), any number of **BrRRFormat** (section [2.4.727](#)) and **BrRRChgCell** (section [2.4.720](#)) records can appear as well as the other records associated with them. These records specify the cell and format changes as a result of moving the range of cells. Immediately following **BrRRMove**, an undo chain (section [2.2.12.9](#)) can appear.

### 2.2.12.8 Change Cells Revision

This revision corresponds to a change or edit of a cell. In between **BrRRChgCell** (section [2.4.720](#)) and **BrRREndChgCell** (section [2.4.723](#)), one or two cell descriptions as well as zero to two **BrDXF** (section [2.4.342](#)) records can appear in between a **BrtBeginDXFs** (section [2.4.55](#)) and a **BrtEndDXFs** (section [2.4.393](#)). The cell descriptions are one of the following records:

- **BrCellBlank** (section [2.4.303](#))
- **BrCellRk** (section [2.4.311](#))
- **BrCellError** (section [2.4.305](#))
- **BrCellBool** (section [2.4.304](#))
- **BrCellReal** (section [2.4.310](#))
- **BrCellSt** (section [2.4.314](#))
- **BrCellIsst** (section [2.4.308](#))
- **BrFmlaString** (section [2.4.650](#))
- **BrFmlaNum** (section [2.4.649](#))
- **BrFmlaBool** (section [2.4.647](#))
- **BrFmlaError** (section [2.4.648](#))

If there are two cell descriptions, the first one specifies the old cell value, and the second one specifies the new cell value. If there is just one cell description, it specifies the new cell value. If **BrDXF** (section [2.4.342](#)) records follow, the first one specifies the old formatting information associated with the cell and the second one specifies the new formatting information that is



associated with the cell. If only one **BrtdXF** record appears, the following heuristic can be used to determine if the formatting information specifies the old or new formatting.

If the **fDxf** field of **BrtrRChgCell** (section [2.4.720](#)) is true and **fDxfNull** is false, then it specifies new formatting information. If the **fOldFmt** field of **BrtrRChgCell** is true and **fOldFmtNull** is false, then it specifies old formatting information.

### 2.2.12.9 Undo Chain

The undo chain is made up of a group of zero or more **BrTUcr** (section [2.4.796](#)) records that specify undo information for the revision that it is associated with.

### 2.2.12.10 Sort Map

The sort map contains changes to sorting done on the sheet level in a shared workbook (section [2.2.12](#)); each sheet can have a sort map **BrTBginWsSortMap** (section [2.4.291](#)) / **BrTEndWsSortMap** (section [2.4.625](#)). At a maximum, there are only ever two sorts **BrTBginRRSort** (section [2.4.184](#)) / **BrTEndRRSort** (section [2.4.519](#)) per sort map, one specifies sheet level sort changes in rows (2) followed by sheet level sort changes in columns (2). If there are not any changes in sort for rows (2) or columns (2), the sort map does not exist for rows (2) or columns (2) respectively.

## 2.2.13 Volatile Dependencies

Volatile dependencies specify information necessary to update cells that depend on values provided by **real-time data (RTD)** server or cube functions. A cell has a dependency upon an **RTD server** if it contains a formula (section [2.2.2](#)) with a call to the RTD sheet **function**. A cell has a dependency upon an cube function if it contains a formula with a call to one of the cube functions.

All volatile dependencies are organized into a **hierarchy**. The first level of the hierarchy separates dependencies based on their types. Within each type, dependencies are grouped based on their main topic. Within a main topic, each particular volatile dependency on this main topic is specified in a collection.

### 2.2.13.1 Types

Volatile dependencies are specified in two collections, each specifying all volatile dependency information relating to a specific type of volatile dependencies. The two types of volatile dependencies are those relating to RTD servers and those relating to cube functions. Each of these collections is specified by **BrTBginVolType** (section [2.4.287](#)) and **BrTEndVolType** (section [2.4.621](#)) records, as defined in the **Volatile Dependencies** (section [2.1.7.59](#)) part.

### 2.2.13.2 Main Topic

All volatile dependency information that relates to calls to an RTD or cube function that share the same first parameter value is grouped together in a collection specified by **BrTBginVolMain** (section [2.4.285](#)) and **BrTEndVolMain** (section [2.4.619](#)) records, as defined in the **Volatile Dependencies** (section [2.1.7.59](#)) part.

### 2.2.13.3 Subtopic Sequences

All volatile dependency information relating to cells that contain calls to an RTD or cube function that share the same set of parameter values is specified by a collection of records specified by **BrTBginVolTopic** (section [2.4.286](#)) and **BrTEndVolTopic** (section [2.4.620](#)) records, as defined in the **Volatile Dependencies** (section [2.1.7.59](#)) part.

A volatile dependency collection specifies the following:

- The sequence of subtopics which define the dependency, corresponding to a call's parameter values. This is specified by the sequence of **BrtVolSubtopic** (section [2.4.805](#)) records.
- The last value returned by the call that corresponds to the volatile dependency.
- The set of cells which depend upon the data specified by this volatile dependency, and need to be updated whenever the value cached for this dependency changes. This is specified by the set of **BrtVolRef** (section [2.4.803](#)) records.

#### 2.2.13.4 Cached returned values

The type of the last value returned by the call that corresponds to a volatile dependency, as well as the value itself, are specified by the **BrtVolNum** (section [2.4.802](#)), **BrtVolErr** (section [2.4.801](#)), **BrtVolBool** (section [2.4.800](#)), or **BrtVolStr** (section [2.4.804](#)) records, as defined in the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The value is stored with the volatile dependency until a different value is returned by the corresponding call.

#### 2.2.14 Slicers

A slicer is a mechanism for filtering data in PivotTable views (section [2.2.5.3](#)) and cube functions, tables and Charts ([\[ISO/IEC29500-1:2011\]](#) section 21.2) based on [Non-Worksheet PivotTables](#). A slicer is based on a column (2) in the source data (section [2.2.14.1.1](#)) and the slicer filters on distinct values in that column (2). In the case of using OLAP source data, a slicer is based on an OLAP hierarchy.

A slicer has two major parts, a **slicer cache** (section [2.2.14.1](#)) and a **slicer view** (section [2.2.14.2](#)). There can be more than one slicer view based on a single slicer cache. When filtering multi-level OLAP hierarchies using slicers, separate slicer views are used for each OLAP level.

##### 2.2.14.1 Slicer Cache

A slicer cache specifies the subset of slicer source data (section [2.2.14.1.1](#)) that is cached for display in slicer views (section [2.2.14.2](#)) as well as properties related to slicer (section [2.2.14](#)) filtering. A slicer cache is specified by the sequence of records that conform to the **SLICERCACHE** rule (defined in section [2.1.7.47](#)).

A slicer cache has an associated **PivotCache** (section [2.2.5.2](#)) as specified in section [2.2.14.1.2](#), or **Table** (section [2.1.7.51](#)).

If the slicer source data is an OLAP data source (1), the **stHierarchy** field of the **BrtBeginSlicerCacheDef** (section [2.4.193](#)) record specifies the MDX unique name of the associated OLAP hierarchy.

If the slicer source data is a non-OLAP data source (1), the **stHierarchy** field of the **BrtBeginSlicerCacheDef** record specifies the associated cache field (section [2.2.5.2.2](#)) of the associated **PivotCache**.

If the slicer source data is a table data source (1), the **stHierarchy** field of the **BrtBeginSlicerCacheDef** record specifies the associated table column (2).

If the slicer (section [2.2.14](#)) is used to filter PivotTable views (section [2.2.5.3](#)), the slicer cache specifies the PivotTable views being filtered as specified in section [2.2.14.1.3](#).

### 2.2.14.1.1 Slicer Source Data

The source data for a slicer (section [2.2.14](#)) is specified by the associated **PivotCache** (section [2.2.5.2](#)) or **Table** (section [2.1.7.51](#)). See section [2.2.14.1.2](#).

### 2.2.14.1.2 Slicer Cache Relationship to PivotCache

A slicer cache (section [2.2.14.1](#)) is associated with a **PivotCache** (section [2.2.5.2](#)) or **Table** (section [2.1.7.51](#)). The association is specified by the following rules.

If a slicer cache contains the sequence of records that conforms to the **SLICERCACHEOLAPIMPL** rule (defined in section [2.1.7.47](#)) then the type of slicer source data (section [2.2.14.1.1](#)) is OLAP and the associated **PivotCache** (section [2.2.5.2](#)) of the slicer cache is specified by the **ipivotcacheid** field of the **BrtBeginSlicerCacheOlapImpl** (section [2.4.199](#)) record of the slicer cache. The associated **PivotCache** MUST be an OLAP **PivotCache** as specified in section [2.2.5.2.1](#). The **fSlicerData** field of the **BrtBeginPCD14** (section [2.4.117](#)) record of the associated **PivotCache** MUST be 1.

If a slicer cache contains the sequence of records that conforms to the **SLICERCACHENATIVEITEMS** rule (defined in section [2.1.7.47](#)) then the type of slicer source data (section [2.2.14.1.1](#)) is non-OLAP and the associated **PivotCache** (section [2.2.5.2](#)) of the slicer cache is specified by the **dwcacheId** field of the **BrtBeginSlicerCacheNative** (section [2.4.198](#)) record of the slicer cache. The associated **PivotCache** MUST NOT be an OLAP **PivotCache** (section [2.2.5.2](#)) as specified in section [2.2.5.2.1](#).

If a slicer cache contains the sequence of records that conforms to the **TABLESLICERCACHE** rule (defined in section [2.1.7.47](#)) then the type of slicer source data (section [2.2.14.1.1](#)) is table and the associated **Table** (section [2.1.7.51](#)) of the slicer cache is specified by the **dwLstd** field of the **BrtBeginTableSlicerCache** (section [2.4.267](#)) record of the slicer cache.

Multiple slicer caches can be associated with one **PivotCache**.

If a slicer cache is associated (as specified in section [2.2.14.1.3](#)) with one or more PivotTable views (section [2.2.5.3](#)) and the slicer source data (section [2.2.14.1.1](#)) type is non-OLAP then the slicer cache and each associated PivotTable view (section [2.2.5.3](#)), as specified in section [2.2.5.3.1](#), MUST be associated with the same **PivotCache** and the **fSlicerData** field of the **BrtBeginPCD14** record of that **PivotCache** MUST be 0.

If a slicer cache is associated (as specified in section [2.2.14.1.3](#)) with one or more PivotTable views and the slicer source data type is OLAP then the **PivotCache** that is associated with the slicer cache and all **PivotCaches** that are associated with the PivotTable views MUST be based on the same OLAP connection (section [2.2.8.3.1](#)) and the **PivotCaches** associated with the PivotTable views MUST NOT be associated with any slicer cache. The **fSlicerData** field of the **BrtBeginPCD14** record for each **PivotCache** associated with the PivotTable views MUST be 0.

### 2.2.14.1.3 Slicer Cache Relationship to PivotTable View

A slicer cache (section [2.2.14.1](#)) can be associated with PivotTable views (section [2.2.5.3](#)) and Charts ([\[ISO/IEC29500-1:2011\]](#) section 21.2) based on [Non-Worksheet PivotTables](#). Associated PivotTable views are specified by the **BrtSlicerCachePivotTables** (section [2.4.748](#)) record of the slicer cache.

If the associated **PivotCache** (section [2.2.5.2](#)) of a slicer cache (as specified in section [2.2.14.1.2](#)) is an OLAP **PivotCache**, then the slicer items (section [2.2.14.1.4](#)) in the slicer cache are used to apply OLAP manual filters (section [2.2.5.3.5.2](#)) to the pivot hierarchy (section [2.2.5.3.4](#)) specified by the **stHierarchy** field of the **BrtBeginSlicerCacheDef** (section [2.4.193](#)) record in all associated

PivotTable views (section [2.2.5.3](#)) and Charts based on Non-Worksheet PivotTables of the slicer cache. The selected slicer items (section [2.2.14.1.4](#)) in the slicer cache are converted into OLAP manual filters by the application to apply the filter state of the slicer cache to the associated PivotTable views.

If the associated **PivotCache** of a slicer cache (as specified in section [2.2.14.1.2](#)) is a non-OLAP **PivotCache**, then the **PivotCache** of the PivotTable views and the **PivotCache** of the slicer cache MUST be the same. If the slicer cache is associated with at least one Chart based on Non-Worksheet PivotTable then the slicer cache MUST be OLAP sourced.

If the associated **PivotCache** of a slicer cache (as specified in section [2.2.14.1.2](#)) is a non-OLAP **PivotCache**, then the slicer items (section [2.2.14.1.4](#)) in the slicer cache are used to apply non-OLAP manual filters (section [2.2.5.3.5.1](#)) to the pivot field (section [2.2.5.3.2](#)) specified by the **stHierarchy** field of the **BrtBeginSlicerCacheDef** record in all associated PivotTable views (section [2.2.5.3](#)) of the slicer cache. The selected slicer items in the slicer cache are converted into selected pivot items (section [2.2.5.3.3](#)) in the non-OLAP manual filters by the application to apply the filter state of the slicer cache to the associated PivotTable views.

When an OLAP PivotTable views is associated with a slicer cache, there MUST NOT be more than one slicer cache for each OLAP hierarchy.

A slicer cache (section [2.2.14.1](#)) can be associated with a column (2) in a **Table** (section [2.1.7.51](#)). Associated column (2) is specified by the **dwColumn** field of the **BrtBeginTableSlicerCache** (section [2.4.267](#)) record of the slicer cache.

#### 2.2.14.1.4 Slicer Items

Slicer items in a slicer cache (section [2.2.14.1](#)) represent distinct values in a column (2) of the slicer source data (section [2.2.14.1.1](#)). In the case of slicers (section [2.2.14](#)) based on OLAP slicer source data, the slicer cache is based on an OLAP hierarchy and slicer items represent OLAP members within levels of that OLAP hierarchy.

For slicers that are associated with PivotTable views (section [2.2.5.3](#)), each slicer item specifies whether slicer source data exists for that slicer item. For more information, see section [2.2.14.1.5](#).

Each slicer item also specifies item **selection** state, used for filtering, and can specify additional properties. For more information see section [2.2.14.1.4.1](#) and section [2.2.14.1.4.2](#).

##### 2.2.14.1.4.1 Non-OLAP Slicer Items

The slicer items of a non-OLAP slicer are specified by an ordered sequence of records that conform to the **SLICERCACHENATIVEITEMS** rule (as defined in section [2.1.7.47](#)). Each slicer item is associated with a cache item (section [2.2.5.2.3](#)) of the associated cache field (section [2.2.5.2.2](#)) in the associated **PivotCache** (section [2.2.5.2](#)). Also see section [2.2.14.1.2](#).

The associated cache field is specified by the **stHierarchy** field of the **BrtBeginSlicerCacheDef** (section [2.4.193](#)) record and MUST be equal to the **stFldName** field of a **BrtBeginPCDField** (section [2.4.130](#)) record in the collection of cache fields of the associated **PivotCache**. The associated cache item is specified by the **iCache** field of the **SlicerCacheNativeItem** (section [2.5.135](#)) structure. The **iCache** field of the **SlicerCacheNativeItem** structure specifies a cache item index of the associated cache item in the associated cache field. Two non-OLAP slicer items MUST NOT be associated with the same cache item.

The order of non-OLAP slicer items in the slicer cache (section [2.2.14.1](#)) is specified by the **fSortOrder**, **fCrossFilter** and **fSortUsingCustomLists** fields of the **BrtBeginSlicerCacheNative** (section [2.4.198](#)) record.

The **SlicerCacheNativeItem** structure also specifies whether the non-OLAP slicer item is selected for filtering and if data exists in the slicer source data (section [2.2.14.1.1](#)) for it. Also see section [2.2.14.1.5](#).

#### 2.2.14.1.4.2 OLAP Slicer Items

OLAP slicer items are specified by the sequence of records that conform to the **SLICERCACHEOLAPIMPL** rule (as defined in section [2.1.7.47](#)).

The cache for an OLAP level in an OLAP slicer cache (section [2.2.14.1](#)) is specified by the sequence of records that conform to the **SLICERCACHESIRANGES** rule (as defined in section [2.1.7.47](#)).

The cache is organized into ranges of cached OLAP slicer items for each OLAP level in the slicer cache. Each range is specified by the sequence of records that conform to the **SLICERCACHESIRANGE** rule (as defined in section [2.1.7.47](#)). The **itemstart** field of the **BrBeginSlicerCacheSiRange** (section [2.4.201](#)) record specifies the zero-based index of the first OLAP slicer item in this cached range in the ordered collection of all OLAP members that exist in the slicer source data (section [2.2.14.1.1](#)) for the associated OLAP level. The collection in the slicer source data is ordered as specified by the **fSortOrder** and **fCrossFilter** fields of the preceding **BrBeginSlicerCacheLevelData** (section [2.4.196](#)) record.

Each cached OLAP slicer item in a range is specified by a **BrSlicerCacheOlapItem** (section [2.4.747](#)) record.

The OLAP slicer items that are selected for filtering are specified by the sequence of records that conform to the **SLICERCACHESELECTIONS** rule (as defined in section [2.1.7.47](#)).

Each individual OLAP slicer item selected for filtering is specified by a **BrSlicerCacheSelection** (section [2.4.749](#)) record.

#### 2.2.14.1.5 Slicer Cross Filtering

Cross filtering is an application behavior that allows one slicer to reflect the results of filtering by another. This behavior exposes whether data exists in the slicer source data (section [2.2.14.1.1](#)) for each slicer item (section [2.2.14.1.4](#)) when the slicer source data is filtered by the selected slicer items of all associated slicer caches (section [2.2.14.1](#)) of a PivotTable view (section [2.2.5.3](#)), as specified in section [2.2.14.1.3](#), and all manual filters (section [2.2.5.3.5](#)) in the PivotTable view.

If the type of slicer source data is OLAP then the existence of data, after filtering, for a slicer item is specified by the **fNoData** field of the **BrSlicerCacheOlapItem** (section [2.4.747](#)) record. If the type of source data (section [2.2.5.2.1](#)) is non-OLAP then the existence of data for a slicer item is specified by the **fNoData** field of the **SlicerCacheNativeItem** (section [2.5.135](#)) structure contained in the **BrSlicerCacheNativeItem** (section [2.4.746](#)) record.

If the type of slicer source data (section [2.2.14.1.1](#)) is non-OLAP, the **fCrossFilter** field of the **BrBeginSlicerCacheNative** record as specified by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF specifies how the non-OLAP slicer items (section [2.2.14.1.4.1](#)) that have no data are displayed.

If the type of slicer source data is OLAP, the **fCrossFilter** field of the **BrBeginSlicerCacheLevelData** (section [2.4.196](#)) record as specified by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF specifies how the OLAP slicer items (section [2.2.14.1.4.2](#)) that have no data are displayed for the OLAP level specified by the **stUniqueName** field of the **BrBeginSlicerCacheLevelData** record.

## 2.2.14.2 Slicer View

A slicer view specifies the display of a slicer (section [2.2.14](#)) on a worksheet. A slicer view is displayed as a list of slicer items (section [2.2.14.1.4](#)). A slicer view is specified by the sequence of records that conform to the **SLICER** rule (as defined in section [2.1.7.48](#)).

Each slicer view is associated with a slicer cache (section [2.2.14.1](#)) as specified in section [2.2.14.2.1](#). The filtering state of slicer items displayed in the slicer view is specified by the associated slicer cache.

Each slicer view is associated with a drawing ([\[ISO/IEC29500-1:2011\]](#) section 20.5), contained in the **drawing** part ([\[ISO/IEC29500-1:2011\]](#) section 12.3.8) associated with the worksheet with which the slicer view is associated. The associated drawing ([\[ISO/IEC29500-1:2011\]](#) section 20.5) contains a slicer element of type CT\_Slicer ([\[MS-XLSX\]](#) section 2.6.68) that contains a **name** attribute that matches the **stName** field of the **BrBeginSlicer** (section [2.4.191](#)) record that specifies the slicer view.

For information about slicer formatting see slicer styles (section [2.2.6.3.1](#)).

### 2.2.14.2.1 Slicer View Relationship to Slicer Cache

Each slicer view (section [2.2.14.2](#)) is associated with a slicer cache (section [2.2.14.1](#)). The slicer view is associated with a slicer cache through the **stName** field of the **BrBeginSlicerCacheDef** (section [2.4.193](#)) record in the slicer cache that matches the **stSlicerCacheName** field of the **BrBeginSlicer** (section [2.4.191](#)) record that specifies this slicer view.

If a slicer view is associated with an OLAP slicer cache, the slicer view also has an associated OLAP level, specified by the **dwLevel** field of the **BrBeginSlicer** record. In this case the slicer view displays OLAP Slicer Items (section [2.2.14.1.4.2](#)) of that OLAP level.

There can be multiple slicer views associated with a single slicer cache (section [2.2.14.1](#)), for the following two reasons:

- For a user-defined OLAP hierarchy with several OLAP levels (for example a Geography OLAP hierarchy with Country/Region, State, and City OLAP levels), each slicer view is associated with a single OLAP level, providing a mechanism for filtering different OLAP levels of the OLAP hierarchy.
- Multiple slicer views associated with either the same slicer cache (for a non-OLAP slicer cache) or the same OLAP level (for an OLAP slicer cache) provides a mechanism for displaying the filter state in more than one location in the workbook.

### 2.2.14.3 Slicers and Cube Functions

Each slicer cache (section [2.2.14.1](#)) has a defined name associated with it specified by the **stName** field of the **BrBeginSlicerCacheDef** (section [2.4.193](#)) record. The value of the **formula.rgce** field of each **BrName** (section [2.4.680](#)) record specifying a defined name associated with a slicer cache MUST consist of a single **PtgErr** (section [2.5.97.39](#)) with **err** equal to 0x2A (#N/A).

If the slicer source data (section [2.2.14.1.1](#)) type of a slicer cache (section [2.2.14.1](#)) is OLAP then cube functions can use the defined name of the slicer cache as a parameter to refer to selection state of the slicer cache.

## 2.2.15 Timelines

A Timeline is a mechanism for filtering data in PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) views, cube functions, and Charts ([\[ISO/IEC29500-1:2011\]](#) section 21.2) based on [Non-Worksheet](#)



[PivotTables](#). In the case of using OLAP Timeline source data (section [2.2.15.1.1](#)), a Timeline is based on a key **attribute (1)** of an OLAP hierarchy. In the case of using native Timeline source data (section [2.2.15.1.1](#)), a Timeline is based on **data table** column.

A Timeline has two major parts a [Timeline cache](#), and a [Timeline view](#). There can be more than one Timeline view based on a single Timeline cache.

### 2.2.15.1 Timeline Cache

A **Timeline cache** specifies the subset of **Timeline source data** (section [2.2.15.1.1](#)) that is cached for display in **Timeline views** (section [2.2.15.2](#)), as well as properties related to **Timeline** filtering (section [2.2.15](#)). A **Timeline cache** is specified by the **CT\_TimelineCacheDefinition** element ([\[MS-XLSX\]](#) section 2.6.112).

A **Timeline cache** has an associated **PivotTable** ([\[ISO/IEC29500-1:2011\]](#) section 18.10) **PivotCache** (section [2.2.5.2](#)).

If the **timeline source data** is an OLAP data source (1), the **sourceName** attribute of the **CT\_TimelineCacheDefinition** element specifies the key attribute (1) name of the associated OLAP hierarchy. If the **timeline source data** is a native data source (1), the **sourceName** attribute of the **CT\_TimelineCacheDefinition** element specifies the name of the associated data table column.

If the timeline is used to filter **PivotTable** views, the **Timeline cache** specifies the **PivotTable** views being filtered as specified in **Timeline Cache Relationship to PivotTable View** (section [2.2.15.1.3](#)).

#### 2.2.15.1.1 Timeline Source Data

The **source data** for a [Timeline](#) is specified by the associated PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCache as specified in [Timeline Cache Relationship to PivotCache](#).

#### 2.2.15.1.2 Timeline Cache Relationship to PivotCache

A [Timeline cache](#) is associated with a PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCache through the **pivotCacheId** attribute of the **CT\_TimelineState** ([\[MS-XLSX\]](#) section 2.6.116) element. If the Timeline cache has an associated PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCache, the **timelineData** attribute of the **CT\_TimelinePivotCacheDefinition** ([\[MS-XLSX\]](#) section 2.6.109) element MUST be "true".

Multiple Timeline caches can be associated with one PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCache.

If a Timeline cache (section [2.2.15.1](#)) is associated, as specified by Timeline Cache Relationship to PivotTable View (section [2.2.15.1.3](#)), with one or more PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) views, the PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCache that is associated with the Timeline cache (section [2.2.15.1](#)) and all PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCaches that are associated with the PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) views MUST be based on the same source – an OLAP connection ([\[ISO/IEC29500-1:2011\]](#) section 18.13.5) if the Timeline source data (section [2.2.15.1.1](#)) is OLAP and a data table if the Timeline source data (section [2.2.15.1.1](#)) is native, and the PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCaches associated with the PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) views MUST NOT be associated with any Timeline cache (section [2.2.15.1](#)). The **timelineData** attribute of the **CT\_TimelinePivotCacheDefinition** ([\[MS-XLSX\]](#) section 2.6.109) element for each PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) PivotCache associated with the PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) views MUST be "false".

### 2.2.15.1.3 Timeline Cache Relationship to PivotTable View

A [Timeline cache](#) can be associated with PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) views and Charts ([\[ISO/IEC29500-1:2011\]](#) section 21.2) based on [Non-Worksheet PivotTables](#), as specified by the **pivotTables** group element of the **CT\_TimelineCacheDefinition** ([\[MS-XLSX\]](#) section 2.6.112) element.

If the associated PivotTable **PivotCache** of a Timeline cache, as specified by the [Timeline Cache Relationship to PivotCache](#), is an OLAP PivotTable **PivotCache**, the [Timeline State](#) of the Timeline cache is used to apply PivotTable OLAP date filter to the PivotTable hierarchy which belongs to the same dimension (1) as the hierarchy associated with the **sourceName** attribute of the **CT\_TimelineState** ([\[MS-XLSX\]](#) section 2.6.116) element, in all associated PivotTable views and Charts based on Non-Worksheet PivotTables, of the Timeline cache. The **selected** date range in the Timeline cache is converted into selected PivotTable items in the PivotTable OLAP date filters by the application to apply the filter state of the Timeline cache to the associated PivotTable views and Charts based on Non-Worksheet PivotTables.

When an OLAP PivotTable view is associated with an OLAP Timeline cache (section [2.2.15.1](#)), there MUST NOT be more than one Timeline cache (section [2.2.15.1](#)) for each OLAP hierarchy. If the Timeline cache has at least one Chart based on Non-Worksheet PivotTables then the Timeline cache MUST be OLAP sourced. When a native PivotTable view is associated with a native Timeline cache, there MUST NOT be more than one Timeline cache for each data table column.

### 2.2.15.1.4 Timeline State

**Timeline state** specifies the information used for display in [Timeline view](#). The **Timeline state** contains two elements, selection and bounds, of type **CT\_TimelineRange** ([\[MS-XLSX\]](#) section 2.6.115). The selection element specifies the start and end dates of the selection in the Timeline and is used for filtering data in PivotTable ([\[ISO/IEC29500-1:2011\]](#) section 18.10) views and cube functions. The bounds element specifies the minimum and maximum dates that can be displayed by the Timeline view.

### 2.2.15.2 Timeline View

A Timeline view specifies the display of a [Timeline](#) on a worksheet. The Timeline view is specified by a **CT\_Timeline** ([\[MS-XLSX\]](#) section 2.6.111) element.

Each Timeline view is associated with a [Timeline cache](#) as specified in [Timeline View Relationship to Timeline Cache](#). The filtering state of Timeline displayed in the Timeline view is specified by the associated Timeline cache.

Each Timeline view is associated with a drawing ([\[ISO/IEC29500-1:2011\]](#) section 20.5), contained in the Drawings part ([\[ISO/IEC29500-1:2011\]](#) section 12.3.8).

#### 2.2.15.2.1 Timeline View Relationship to Timeline Cache

Each [Timeline view](#) is associated with a [Timeline cache](#). The Timeline view is associated with Timeline cache through the **name** attribute of the **CT\_TimelineCacheDefinition** ([\[MS-XLSX\]](#) section 2.6.112) element in the Timeline cache that matches the **cache** attribute of the **CT\_Timeline** ([\[MS-XLSX\]](#) section 2.6.111) element that specifies this Timeline view.

There can be multiple Timeline views associated with a single Timeline cache, providing a mechanism for displaying the filter state in more than one location in the workbook.



### 2.2.15.3 Timelines and Cube Functions

Each **Timeline cache** (section [2.1.7.53](#)) has a defined name associated with it as specified by the **name** attribute of the **CT\_TimelineCacheDefinition** ([\[MS-XLSX\]](#) section 2.6.112) element.

The value of the **CT\_DefinedName** ([\[ISO/IEC29500-1:2011\]](#) section 18.2.5) element specifying a defined name associated with a [Timeline cache](#) MUST be #N/A.

If the [Timeline source data](#) type of a Timeline cache is OLAP, cube functions can use the defined name of the Timeline cache as a parameter to refer to the selection state of the Timeline cache.

## 2.3 Record Enumeration

This section specifies the record name associated with a specified record type value [<4>](#). For more information about record types, see section [2.1.4](#).

These associations between record name and record type are listed by record name as well as by record type.

The type-specific meaning and fields for each record type are specified in the subsection of section [2.4](#) corresponding to the record name.

### 2.3.1 By Name

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtAbsPath15</b> (section <a href="#">2.4.1</a> )             | 2071                 |
| <b>BrtACBegin</b> (section <a href="#">2.4.2</a> )               | 37                   |
| <b>BrtACEnd</b> (section <a href="#">2.4.3</a> )                 | 38                   |
| <b>BrtActiveX</b> (section <a href="#">2.4.4</a> )               | 644                  |
| <b>BrtAFilterDateGroupItem</b> (section <a href="#">2.4.5</a> )  | 175                  |
| <b>BrtArrFmla</b> (section <a href="#">2.4.6</a> )               | 426                  |
| <b>BrtBeginActiveXControls</b> (section <a href="#">2.4.7</a> )  | 643                  |
| <b>BrtBeginAFilter</b> (section <a href="#">2.4.8</a> )          | 161                  |
| <b>BrtBeginAutoSortScope</b> (section <a href="#">2.4.9</a> )    | 459                  |
| <b>BrtBeginBook</b> (section <a href="#">2.4.10</a> )            | 131                  |
| <b>BrtBeginBookViews</b> (section <a href="#">2.4.11</a> )       | 135                  |
| <b>BrtBeginBorders</b> (section <a href="#">2.4.12</a> )         | 613                  |
| <b>BrtBeginBundleShs</b> (section <a href="#">2.4.13</a> )       | 143                  |
| <b>BrtBeginCellIgnoreECs</b> (section <a href="#">2.4.14</a> )   | 648                  |
| <b>BrtBeginCellIgnoreECs14</b> (section <a href="#">2.4.15</a> ) | 1169                 |
| <b>BrtBeginCellSmartTag</b> (section <a href="#">2.4.16</a> )    | 590                  |
| <b>BrtBeginCellSmartTags</b> (section <a href="#">2.4.17</a> )   | 592                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginCellStyleXFs</b> (section <a href="#">2.4.18</a> )            | 626                  |
| <b>BrtBeginCellWatches</b> (section <a href="#">2.4.19</a> )             | 605                  |
| <b>BrtBeginCellXFs</b> (section <a href="#">2.4.20</a> )                 | 617                  |
| <b>BrtBeginCFRule</b> (section <a href="#">2.4.21</a> )                  | 463                  |
| <b>BrtBeginCFRule14</b> (section <a href="#">2.4.22</a> )                | 1048                 |
| <b>BrtBeginColBrk</b> (section <a href="#">2.4.23</a> )                  | 394                  |
| <b>BrtBeginColInfos</b> (section <a href="#">2.4.24</a> )                | 390                  |
| <b>BrtBeginColorPalette</b> (section <a href="#">2.4.25</a> )            | 473                  |
| <b>BrtBeginColorScale</b> (section <a href="#">2.4.26</a> )              | 469                  |
| <b>BrtBeginColorScale14</b> (section <a href="#">2.4.27</a> )            | 1157                 |
| <b>BrtBeginComment</b> (section <a href="#">2.4.28</a> )                 | 635                  |
| <b>BrtBeginCommentAuthors</b> (section <a href="#">2.4.29</a> )          | 630                  |
| <b>BrtBeginCommentList</b> (section <a href="#">2.4.30</a> )             | 633                  |
| <b>BrtBeginComments</b> (section <a href="#">2.4.31</a> )                | 628                  |
| <b>BrtBeginConditionalFormatting</b> (section <a href="#">2.4.32</a> )   | 461                  |
| <b>BrtBeginConditionalFormatting14</b> (section <a href="#">2.4.33</a> ) | 1046                 |
| <b>BrtBeginConditionalFormattings</b> (section <a href="#">2.4.34</a> )  | 1135                 |
| <b>BrtBeginCERrs</b> (section <a href="#">2.4.35</a> )                   | 608                  |
| <b>BrtBeginCsView</b> (section <a href="#">2.4.36</a> )                  | 141                  |
| <b>BrtBeginCsViews</b> (section <a href="#">2.4.37</a> )                 | 139                  |
| <b>BrtBeginCustomFilters</b> (section <a href="#">2.4.38</a> )           | 172                  |
| <b>BrtBeginCustomFilters14</b> (section <a href="#">2.4.39</a> )         | 1178                 |
| <b>BrtBeginDatabar</b> (section <a href="#">2.4.40</a> )                 | 467                  |
| <b>BrtBeginDatabar14</b> (section <a href="#">2.4.41</a> )               | 1051                 |
| <b>BrtBeginDataFeedPr15</b> (section <a href="#">2.4.42</a> )            | 2113                 |
| <b>BrtBeginDataModel</b> (section <a href="#">2.4.43</a> )               | 2121                 |
| <b>BrtBeginDbTables15</b> (section <a href="#">2.4.44</a> )              | 2118                 |
| <b>BrtBeginDCon</b> (section <a href="#">2.4.45</a> )                    | 495                  |
| <b>BrtBeginDecoupledPivotCacheIDs</b> (section <a href="#">2.4.46</a> )  | 2048                 |
| <b>BrtBeginDeletedName</b> (section <a href="#">2.4.47</a> )             | 453                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginDeletedNames</b> (section <a href="#">2.4.48</a> )     | 451                  |
| <b>BrtBeginDim</b> (section <a href="#">2.4.49</a> )              | 275                  |
| <b>BrtBeginDims</b> (section <a href="#">2.4.50</a> )             | 273                  |
| <b>BrtBeginDRefs</b> (section <a href="#">2.4.51</a> )            | 497                  |
| <b>BrtBeginDVals</b> (section <a href="#">2.4.52</a> )            | 573                  |
| <b>BrtBeginDVals14</b> (section <a href="#">2.4.53</a> )          | 1054                 |
| <b>BrtBeginDxF14s</b> (section <a href="#">2.4.54</a> )           | 1172                 |
| <b>BrtBeginDXFs</b> (section <a href="#">2.4.55</a> )             | 505                  |
| <b>BrtBeginDXFs15</b> (section <a href="#">2.4.56</a> )           | 2103                 |
| <b>BrtBeginECdbProps</b> (section <a href="#">2.4.57</a> )        | 203                  |
| <b>BrtBeginEColapProps</b> (section <a href="#">2.4.58</a> )      | 205                  |
| <b>BrtBeginECPParam</b> (section <a href="#">2.4.59</a> )         | 267                  |
| <b>BrtBeginECPParams</b> (section <a href="#">2.4.60</a> )        | 265                  |
| <b>BrtBeginECTwFldInfo</b> (section <a href="#">2.4.61</a> )      | 542                  |
| <b>BrtBeginECTwFldInfo15</b> (section <a href="#">2.4.62</a> )    | 2133                 |
| <b>BrtBeginECTWFldInfoLst</b> (section <a href="#">2.4.63</a> )   | 540                  |
| <b>BrtBeginECTWFldInfoLst15</b> (section <a href="#">2.4.64</a> ) | 2131                 |
| <b>BrtBeginECTxtWiz</b> (section <a href="#">2.4.65</a> )         | 538                  |
| <b>BrtBeginECTxtWiz15</b> (section <a href="#">2.4.66</a> )       | 2129                 |
| <b>BrtBeginECWebProps</b> (section <a href="#">2.4.67</a> )       | 261                  |
| <b>BrtBeginEcWpTables</b> (section <a href="#">2.4.68</a> )       | 263                  |
| <b>BrtBeginEsfmd</b> (section <a href="#">2.4.69</a> )            | 339                  |
| <b>BrtBeginEsmdb</b> (section <a href="#">2.4.70</a> )            | 337                  |
| <b>BrtBeginEsmdtinfo</b> (section <a href="#">2.4.71</a> )        | 334                  |
| <b>BrtBeginEsmdx</b> (section <a href="#">2.4.72</a> )            | 372                  |
| <b>BrtBeginEsstr</b> (section <a href="#">2.4.73</a> )            | 380                  |
| <b>BrtBeginExtConn14</b> (section <a href="#">2.4.74</a> )        | 1068                 |
| <b>BrtBeginExtConn15</b> (section <a href="#">2.4.75</a> )        | 2109                 |
| <b>BrtBeginExtConnection</b> (section <a href="#">2.4.76</a> )    | 201                  |
| <b>BrtBeginExtConnections</b> (section <a href="#">2.4.77</a> )   | 429                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginExternals</b> (section <a href="#">2.4.78</a> )       | 353                  |
| <b>BrtBeginFills</b> (section <a href="#">2.4.79</a> )           | 603                  |
| <b>BrtBeginFilterColumn</b> (section <a href="#">2.4.80</a> )    | 163                  |
| <b>BrtBeginFilters</b> (section <a href="#">2.4.81</a> )         | 165                  |
| <b>BrtBeginFmd</b> (section <a href="#">2.4.82</a> )             | 52                   |
| <b>BrtBeginFmts</b> (section <a href="#">2.4.83</a> )            | 615                  |
| <b>BrtBeginFnGroup</b> (section <a href="#">2.4.84</a> )         | 664                  |
| <b>BrtBeginFonts</b> (section <a href="#">2.4.85</a> )           | 611                  |
| <b>BrtBeginHeaderFooter</b> (section <a href="#">2.4.86</a> )    | 479                  |
| <b>BrtBeginIconSet</b> (section <a href="#">2.4.87</a> )         | 465                  |
| <b>BrtBeginIconSet14</b> (section <a href="#">2.4.88</a> )       | 1052                 |
| <b>BrtBeginIndexedColors</b> (section <a href="#">2.4.89</a> )   | 565                  |
| <b>BrtBeginISXTHCols</b> (section <a href="#">2.4.90</a> )       | 322                  |
| <b>BrtBeginISXTHRws</b> (section <a href="#">2.4.91</a> )        | 320                  |
| <b>BrtBeginISXVDCols</b> (section <a href="#">2.4.92</a> )       | 311                  |
| <b>BrtBeginISXVDRws</b> (section <a href="#">2.4.93</a> )        | 309                  |
| <b>BrtBeginISXVIs</b> (section <a href="#">2.4.94</a> )          | 388                  |
| <b>BrtBeginItemUniqueNames</b> (section <a href="#">2.4.95</a> ) | 2106                 |
| <b>BrtBeginList</b> (section <a href="#">2.4.96</a> )            | 343                  |
| <b>BrtBeginListCol</b> (section <a href="#">2.4.97</a> )         | 347                  |
| <b>BrtBeginListCols</b> (section <a href="#">2.4.98</a> )        | 345                  |
| <b>BrtBeginListParts</b> (section <a href="#">2.4.99</a> )       | 660                  |
| <b>BrtBeginListXmlCPr</b> (section <a href="#">2.4.100</a> )     | 349                  |
| <b>BrtBeginMap</b> (section <a href="#">2.4.101</a> )            | 492                  |
| <b>BrtBeginMdx</b> (section <a href="#">2.4.102</a> )            | 54                   |
| <b>BrtBeginMdxKPI</b> (section <a href="#">2.4.103</a> )         | 378                  |
| <b>BrtBeginMdxMbrProp</b> (section <a href="#">2.4.104</a> )     | 376                  |
| <b>BrtBeginMdxSet</b> (section <a href="#">2.4.105</a> )         | 374                  |
| <b>BrtBeginMdxTuple</b> (section <a href="#">2.4.106</a> )       | 56                   |
| <b>BrtBeginMergeCells</b> (section <a href="#">2.4.107</a> )     | 177                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginMetadata</b> (section <a href="#">2.4.108</a> )           | 332                  |
| <b>BrtBeginMG</b> (section <a href="#">2.4.109</a> )                 | 490                  |
| <b>BrtBeginMGMaps</b> (section <a href="#">2.4.110</a> )             | 488                  |
| <b>BrtBeginMgs</b> (section <a href="#">2.4.111</a> )                | 486                  |
| <b>BrtBeginModelRelationships</b> (section <a href="#">2.4.112</a> ) | 2126                 |
| <b>BrtBeginModelTables</b> (section <a href="#">2.4.113</a> )        | 2123                 |
| <b>BrtBeginMRUColors</b> (section <a href="#">2.4.114</a> )          | 569                  |
| <b>BrtBeginOledbPr15</b> (section <a href="#">2.4.115</a> )          | 2111                 |
| <b>BrtBeginOleObjects</b> (section <a href="#">2.4.116</a> )         | 638                  |
| <b>BrtBeginPCD14</b> (section <a href="#">2.4.117</a> )              | 1066                 |
| <b>BrtBeginPCDCalcItem</b> (section <a href="#">2.4.118</a> )        | 245                  |
| <b>BrtBeginPCDCalcItems</b> (section <a href="#">2.4.119</a> )       | 243                  |
| <b>BrtBeginPCDCalcMem</b> (section <a href="#">2.4.120</a> )         | 433                  |
| <b>BrtBeginPCDCalcMem14</b> (section <a href="#">2.4.121</a> )       | 1038                 |
| <b>BrtBeginPCDCalcMemExt</b> (section <a href="#">2.4.122</a> )      | 1137                 |
| <b>BrtBeginPCDCalcMems</b> (section <a href="#">2.4.123</a> )        | 431                  |
| <b>BrtBeginPCDCalcMemsExt</b> (section <a href="#">2.4.124</a> )     | 1139                 |
| <b>BrtBeginPCDFAtbl</b> (section <a href="#">2.4.125</a> )           | 189                  |
| <b>BrtBeginPCDFGDiscrete</b> (section <a href="#">2.4.126</a> )      | 225                  |
| <b>BrtBeginPCDFGItems</b> (section <a href="#">2.4.127</a> )         | 221                  |
| <b>BrtBeginPCDFGRange</b> (section <a href="#">2.4.128</a> )         | 223                  |
| <b>BrtBeginPCDFGroup</b> (section <a href="#">2.4.129</a> )          | 219                  |
| <b>BrtBeginPCDFField</b> (section <a href="#">2.4.130</a> )          | 183                  |
| <b>BrtBeginPCDFFields</b> (section <a href="#">2.4.131</a> )         | 181                  |
| <b>BrtBeginPCDHFieldsUsage</b> (section <a href="#">2.4.132</a> )    | 199                  |
| <b>BrtBeginPCDHGLevel</b> (section <a href="#">2.4.133</a> )         | 437                  |
| <b>BrtBeginPCDHGLLevels</b> (section <a href="#">2.4.134</a> )       | 435                  |
| <b>BrtBeginPCDHGLGMember</b> (section <a href="#">2.4.135</a> )      | 445                  |
| <b>BrtBeginPCDHGLGMembers</b> (section <a href="#">2.4.136</a> )     | 443                  |
| <b>BrtBeginPCDHGLGroup</b> (section <a href="#">2.4.137</a> )        | 441                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginPCDHGLGroups</b> (section <a href="#">2.4.138</a> )         | 439                  |
| <b>BrtBeginPCDHierarchies</b> (section <a href="#">2.4.139</a> )       | 195                  |
| <b>BrtBeginPCDHierarchy</b> (section <a href="#">2.4.140</a> )         | 197                  |
| <b>BrtBeginPCDIRun</b> (section <a href="#">2.4.141</a> )              | 191                  |
| <b>BrtBeginPCDKPI</b> (section <a href="#">2.4.142</a> )               | 271                  |
| <b>BrtBeginPCDKPIs</b> (section <a href="#">2.4.143</a> )              | 269                  |
| <b>BrtBeginPCDSConsol</b> (section <a href="#">2.4.144</a> )           | 207                  |
| <b>BrtBeginPCDSCPage</b> (section <a href="#">2.4.145</a> )            | 211                  |
| <b>BrtBeginPCDSCPages</b> (section <a href="#">2.4.146</a> )           | 209                  |
| <b>BrtBeginPCDSCPIItem</b> (section <a href="#">2.4.147</a> )          | 213                  |
| <b>BrtBeginPCDSCSet</b> (section <a href="#">2.4.148</a> )             | 217                  |
| <b>BrtBeginPCDSCSets</b> (section <a href="#">2.4.149</a> )            | 215                  |
| <b>BrtBeginPCSDTCEMember</b> (section <a href="#">2.4.150</a> )        | 233                  |
| <b>BrtBeginPCSDTCEMembers</b> (section <a href="#">2.4.151</a> )       | 231                  |
| <b>BrtBeginPCSDTCEMembersSortBy</b> (section <a href="#">2.4.152</a> ) | 646                  |
| <b>BrtBeginPCSDTCEntries</b> (section <a href="#">2.4.153</a> )        | 229                  |
| <b>BrtBeginPCSDTCQueries</b> (section <a href="#">2.4.154</a> )        | 235                  |
| <b>BrtBeginPCSDTCQuery</b> (section <a href="#">2.4.155</a> )          | 237                  |
| <b>BrtBeginPCSDTCSet</b> (section <a href="#">2.4.156</a> )            | 241                  |
| <b>BrtBeginPCSDTCSets</b> (section <a href="#">2.4.157</a> )           | 239                  |
| <b>BrtBeginPCSDTupleCache</b> (section <a href="#">2.4.158</a> )       | 227                  |
| <b>BrtBeginPcdSFCIEntries</b> (section <a href="#">2.4.159</a> )       | 657                  |
| <b>BrtBeginPCDSsource</b> (section <a href="#">2.4.160</a> )           | 185                  |
| <b>BrtBeginPCDSRange</b> (section <a href="#">2.4.161</a> )            | 187                  |
| <b>BrtBeginPivotCacheDef</b> (section <a href="#">2.4.162</a> )        | 179                  |
| <b>BrtBeginPivotCacheID</b> (section <a href="#">2.4.163</a> )         | 386                  |
| <b>BrtBeginPivotCacheIDs</b> (section <a href="#">2.4.164</a> )        | 384                  |
| <b>BrtBeginPivotCacheRecords</b> (section <a href="#">2.4.165</a> )    | 193                  |
| <b>BrtBeginPivotTableRefs</b> (section <a href="#">2.4.166</a> )       | 2051                 |
| <b>BrtBeginPivotTableUISettings</b> (section <a href="#">2.4.167</a> ) | 2072                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginPName</b> (section <a href="#">2.4.168</a> )                 | 255                  |
| <b>BrtBeginPNames</b> (section <a href="#">2.4.169</a> )                | 253                  |
| <b>BrtBeginPNPair</b> (section <a href="#">2.4.170</a> )                | 259                  |
| <b>BrtBeginPNPairs</b> (section <a href="#">2.4.171</a> )               | 257                  |
| <b>BrtBeginPRFilter</b> (section <a href="#">2.4.172</a> )              | 251                  |
| <b>BrtBeginPRFilter14</b> (section <a href="#">2.4.173</a> )            | 1165                 |
| <b>BrtBeginPRFilters</b> (section <a href="#">2.4.174</a> )             | 249                  |
| <b>BrtBeginPRFilters14</b> (section <a href="#">2.4.175</a> )           | 1163                 |
| <b>BrtBeginPRFItem</b> (section <a href="#">2.4.176</a> )               | 382                  |
| <b>BrtBeginPRFItem14</b> (section <a href="#">2.4.177</a> )             | 1167                 |
| <b>BrtBeginPRRule</b> (section <a href="#">2.4.178</a> )                | 247                  |
| <b>BrtBeginPRRule14</b> (section <a href="#">2.4.179</a> )              | 1161                 |
| <b>BrtBeginQSI</b> (section <a href="#">2.4.180</a> )                   | 447                  |
| <b>BrtBeginQSIF</b> (section <a href="#">2.4.181</a> )                  | 457                  |
| <b>BrtBeginQSIFs</b> (section <a href="#">2.4.182</a> )                 | 455                  |
| <b>BrtBeginQSIR</b> (section <a href="#">2.4.183</a> )                  | 449                  |
| <b>BrtBeginRRSort</b> (section <a href="#">2.4.184</a> )                | 673                  |
| <b>BrtBeginRwBrk</b> (section <a href="#">2.4.185</a> )                 | 392                  |
| <b>BrtBeginScenMan</b> (section <a href="#">2.4.186</a> )               | 500                  |
| <b>BrtBeginSct</b> (section <a href="#">2.4.187</a> )                   | 502                  |
| <b>BrtBeginSheet</b> (section <a href="#">2.4.188</a> )                 | 129                  |
| <b>BrtBeginSheetData</b> (section <a href="#">2.4.189</a> )             | 145                  |
| <b>BrtBeginSingleCells</b> (section <a href="#">2.4.190</a> )           | 341                  |
| <b>BrtBeginSlicer</b> (section <a href="#">2.4.191</a> )                | 1083                 |
| <b>BrtBeginSlicerCache</b> (section <a href="#">2.4.192</a> )           | 1075                 |
| <b>BrtBeginSlicerCacheDef</b> (section <a href="#">2.4.193</a> )        | 1077                 |
| <b>BrtBeginSlicerCacheID</b> (section <a href="#">2.4.194</a> )         | 1072                 |
| <b>BrtBeginSlicerCacheIDs</b> (section <a href="#">2.4.195</a> )        | 1070                 |
| <b>BrtBeginSlicerCacheLevelData</b> (section <a href="#">2.4.196</a> )  | 1090                 |
| <b>BrtBeginSlicerCacheLevelsData</b> (section <a href="#">2.4.197</a> ) | 1088                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginSlicerCacheNative</b> (section <a href="#">2.4.198</a> )         | 1100                 |
| <b>BrtBeginSlicerCacheOlapImpl</b> (section <a href="#">2.4.199</a> )       | 1086                 |
| <b>BrtBeginSlicerCacheSelections</b> (section <a href="#">2.4.200</a> )     | 1097                 |
| <b>BrtBeginSlicerCacheSiRange</b> (section <a href="#">2.4.201</a> )        | 1094                 |
| <b>BrtBeginSlicerCacheSiRanges</b> (section <a href="#">2.4.202</a> )       | 1092                 |
| <b>BrtBeginSlicerCachesPivotCacheID</b> (section <a href="#">2.4.203</a> )  | 1133                 |
| <b>BrtBeginSlicerCachesPivotCacheIDs</b> (section <a href="#">2.4.204</a> ) | 1113                 |
| <b>BrtBeginSlicerEx</b> (section <a href="#">2.4.205</a> )                  | 1081                 |
| <b>BrtBeginSlicers</b> (section <a href="#">2.4.206</a> )                   | 1115                 |
| <b>BrtBeginSlicersEx</b> (section <a href="#">2.4.207</a> )                 | 1079                 |
| <b>BrtBeginSlicerStyle</b> (section <a href="#">2.4.208</a> )               | 1128                 |
| <b>BrtBeginSlicerStyleElements</b> (section <a href="#">2.4.209</a> )       | 1144                 |
| <b>BrtBeginSlicerStyles</b> (section <a href="#">2.4.210</a> )              | 1142                 |
| <b>BrtBeginSmartTags</b> (section <a href="#">2.4.211</a> )                 | 594                  |
| <b>BrtBeginSmartTagTypes</b> (section <a href="#">2.4.212</a> )             | 597                  |
| <b>BrtBeginSortCond</b> (section <a href="#">2.4.213</a> )                  | 532                  |
| <b>BrtBeginSortCond14</b> (section <a href="#">2.4.214</a> )                | 1152                 |
| <b>BrtBeginSortState</b> (section <a href="#">2.4.215</a> )                 | 530                  |
| <b>BrtBeginSparklineGroup</b> (section <a href="#">2.4.216</a> )            | 1041                 |
| <b>BrtBeginSparklineGroups</b> (section <a href="#">2.4.217</a> )           | 1058                 |
| <b>BrtBeginSparklines</b> (section <a href="#">2.4.218</a> )                | 1056                 |
| <b>BrtBeginSst</b> (section <a href="#">2.4.219</a> )                       | 159                  |
| <b>BrtBeginStyles</b> (section <a href="#">2.4.220</a> )                    | 619                  |
| <b>BrtBeginStyleSheet</b> (section <a href="#">2.4.221</a> )                | 278                  |
| <b>BrtBeginStyleSheetExt14</b> (section <a href="#">2.4.222</a> )           | 1131                 |
| <b>BrtBeginSupBook</b> (section <a href="#">2.4.223</a> )                   | 360                  |
| <b>BrtBeginSXChange</b> (section <a href="#">2.4.224</a> )                  | 1122                 |
| <b>BrtBeginSXChanges</b> (section <a href="#">2.4.225</a> )                 | 1124                 |
| <b>BrtBeginSXCondFmt</b> (section <a href="#">2.4.226</a> )                 | 558                  |
| <b>BrtBeginSXCondFmt14</b> (section <a href="#">2.4.227</a> )               | 1147                 |



| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginSXCondFmts</b> (section <a href="#">2.4.228</a> )     | 560                  |
| <b>BrtBeginSXCondFmts14</b> (section <a href="#">2.4.229</a> )   | 1149                 |
| <b>BrtBeginSXCrtFormat</b> (section <a href="#">2.4.230</a> )    | 481                  |
| <b>BrtBeginSXCrtFormats</b> (section <a href="#">2.4.231</a> )   | 483                  |
| <b>BrtBeginSXDI</b> (section <a href="#">2.4.232</a> )           | 293                  |
| <b>BrtBeginSXDI</b> s (section <a href="#">2.4.233</a> )         | 295                  |
| <b>BrtBeginSXEdit</b> (section <a href="#">2.4.234</a> )         | 1118                 |
| <b>BrtBeginSXEdits</b> (section <a href="#">2.4.235</a> )        | 1120                 |
| <b>BrtBeginSXFILTER</b> (section <a href="#">2.4.236</a> )       | 601                  |
| <b>BrtBeginSXFilters</b> (section <a href="#">2.4.237</a> )      | 599                  |
| <b>BrtBeginSXFormat</b> (section <a href="#">2.4.238</a> )       | 303                  |
| <b>BrtBeginSXFormats</b> (section <a href="#">2.4.239</a> )      | 305                  |
| <b>BrtBeginSXXLI</b> (section <a href="#">2.4.240</a> )          | 297                  |
| <b>BrtBeginSXXLICols</b> (section <a href="#">2.4.241</a> )      | 301                  |
| <b>BrtBeginSXXLIRws</b> (section <a href="#">2.4.242</a> )       | 299                  |
| <b>BrtBeginSXLocation</b> (section <a href="#">2.4.243</a> )     | 314                  |
| <b>BrtBeginSXPI</b> (section <a href="#">2.4.244</a> )           | 289                  |
| <b>BrtBeginSXPI</b> s (section <a href="#">2.4.245</a> )         | 291                  |
| <b>BrtBeginSxRow</b> (section <a href="#">2.4.246</a> )          | 2057                 |
| <b>BrtBeginSxrules</b> (section <a href="#">2.4.247</a> )        | 641                  |
| <b>BrtBeginSxrules14</b> (section <a href="#">2.4.248</a> )      | 1159                 |
| <b>BrtBeginSxSelect</b> (section <a href="#">2.4.249</a> )       | 307                  |
| <b>BrtBeginSXTDMP</b> (section <a href="#">2.4.250</a> )         | 326                  |
| <b>BrtBeginSXTDMPS</b> (section <a href="#">2.4.251</a> )        | 324                  |
| <b>BrtBeginSXTH</b> (section <a href="#">2.4.252</a> )           | 318                  |
| <b>BrtBeginSXTHItem</b> (section <a href="#">2.4.253</a> )       | 330                  |
| <b>BrtBeginSXTHItems</b> (section <a href="#">2.4.254</a> )      | 328                  |
| <b>BrtBeginSXTHs</b> (section <a href="#">2.4.255</a> )          | 316                  |
| <b>BrtBeginSXTupleSet</b> (section <a href="#">2.4.256</a> )     | 1026                 |
| <b>BrtBeginSXTupleSetData</b> (section <a href="#">2.4.257</a> ) | 1031                 |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginSXTupleSetHeader</b> (section <a href="#">2.4.258</a> )           | 1028                 |
| <b>BrtBeginSXTupleSetRow</b> (section <a href="#">2.4.259</a> )              | 1033                 |
| <b>BrtBeginSxvcells</b> (section <a href="#">2.4.260</a> )                   | 2055                 |
| <b>BrtBeginSXVD</b> (section <a href="#">2.4.261</a> )                       | 285                  |
| <b>BrtBeginSXVDs</b> (section <a href="#">2.4.262</a> )                      | 287                  |
| <b>BrtBeginSXVI</b> (section <a href="#">2.4.263</a> )                       | 282                  |
| <b>BrtBeginSXView</b> (section <a href="#">2.4.264</a> )                     | 280                  |
| <b>BrtBeginSxview14</b> (section <a href="#">2.4.265</a> )                   | 1062                 |
| <b>BrtBeginSXVIs</b> (section <a href="#">2.4.266</a> )                      | 283                  |
| <b>BrtBeginTableSlicerCache</b> (section <a href="#">2.4.267</a> )           | 2077                 |
| <b>BrtBeginTableStyle</b> (section <a href="#">2.4.268</a> )                 | 510                  |
| <b>BrtBeginTableStyles</b> (section <a href="#">2.4.269</a> )                | 508                  |
| <b>BrtBeginTimelineCacheID</b> (section <a href="#">2.4.270</a> )            | 2085                 |
| <b>BrtBeginTimelineCacheIDs</b> (section <a href="#">2.4.271</a> )           | 2083                 |
| <b>BrtBeginTimelineCachePivotCacheIDs</b> (section <a href="#">2.4.272</a> ) | 2080                 |
| <b>BrtBeginTimelineEx</b> (section <a href="#">2.4.273</a> )                 | 2089                 |
| <b>BrtBeginTimelinesEx</b> (section <a href="#">2.4.274</a> )                | 2087                 |
| <b>BrtBeginTimelineStyle</b> (section <a href="#">2.4.275</a> )              | 2093                 |
| <b>BrtBeginTimelineStyleElements</b> (section <a href="#">2.4.276</a> )      | 2100                 |
| <b>BrtBeginTimelineStyles</b> (section <a href="#">2.4.277</a> )             | 2098                 |
| <b>BrtBeginTimelineStylesheetExt15</b> (section <a href="#">2.4.278</a> )    | 2096                 |
| <b>BrtBeginUserCsView</b> (section <a href="#">2.4.279</a> )                 | 655                  |
| <b>BrtBeginUserCsViews</b> (section <a href="#">2.4.280</a> )                | 653                  |
| <b>BrtBeginUsers</b> (section <a href="#">2.4.281</a> )                      | 401                  |
| <b>BrtBeginUserShView</b> (section <a href="#">2.4.282</a> )                 | 423                  |
| <b>BrtBeginUserShViews</b> (section <a href="#">2.4.283</a> )                | 422                  |
| <b>BrtBeginVolDeps</b> (section <a href="#">2.4.284</a> )                    | 514                  |
| <b>BrtBeginVolMain</b> (section <a href="#">2.4.285</a> )                    | 518                  |
| <b>BrtBeginVolTopic</b> (section <a href="#">2.4.286</a> )                   | 520                  |
| <b>BrtBeginVolType</b> (section <a href="#">2.4.287</a> )                    | 516                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginWebExtensions</b> (section <a href="#">2.4.288</a> )   | 2068                 |
| <b>BrtBeginWebPubItem</b> (section <a href="#">2.4.289</a> )      | 556                  |
| <b>BrtBeginWebPubItems</b> (section <a href="#">2.4.290</a> )     | 554                  |
| <b>BrtBeginWsSortMap</b> (section <a href="#">2.4.291</a> )       | 671                  |
| <b>BrtBeginWsView</b> (section <a href="#">2.4.292</a> )          | 137                  |
| <b>BrtBeginWsViews</b> (section <a href="#">2.4.293</a> )         | 133                  |
| <b>BrtBigName</b> (section <a href="#">2.4.294</a> )              | 625                  |
| <b>BrtBkHim</b> (section <a href="#">2.4.295</a> )                | 562                  |
| <b>BrtBookProtection</b> (section <a href="#">2.4.296</a> )       | 534                  |
| <b>BrtBookProtectionIso</b> (section <a href="#">2.4.297</a> )    | 677                  |
| <b>BrtBookView</b> (section <a href="#">2.4.298</a> )             | 158                  |
| <b>BrtBorder</b> (section <a href="#">2.4.299</a> )               | 46                   |
| <b>BrtBrk</b> (section <a href="#">2.4.300</a> )                  | 396                  |
| <b>BrtBundleSh</b> (section <a href="#">2.4.301</a> )             | 156                  |
| <b>BrtCalcProp</b> (section <a href="#">2.4.302</a> )             | 157                  |
| <b>BrtCellBlank</b> (section <a href="#">2.4.303</a> )            | 1                    |
| <b>BrtCellBool</b> (section <a href="#">2.4.304</a> )             | 4                    |
| <b>BrtCellError</b> (section <a href="#">2.4.305</a> )            | 3                    |
| <b>BrtCellIgnoreEC</b> (section <a href="#">2.4.306</a> )         | 649                  |
| <b>BrtCellIgnoreEC14</b> (section <a href="#">2.4.307</a> )       | 1105                 |
| <b>BrtCellIsst</b> (section <a href="#">2.4.308</a> )             | 7                    |
| <b>BrtCellMeta</b> (section <a href="#">2.4.309</a> )             | 49                   |
| <b>BrtCellReal</b> (section <a href="#">2.4.310</a> )             | 5                    |
| <b>BrtCellRk</b> (section <a href="#">2.4.311</a> )               | 2                    |
| <b>BrtCellRString</b> (section <a href="#">2.4.312</a> )          | 62                   |
| <b>BrtCellSmartTagProperty</b> (section <a href="#">2.4.313</a> ) | 589                  |
| <b>BrtCellSt</b> (section <a href="#">2.4.314</a> )               | 6                    |
| <b>BrtCellWatch</b> (section <a href="#">2.4.315</a> )            | 607                  |
| <b>BrtCFIcon</b> (section <a href="#">2.4.316</a> )               | 1112                 |
| <b>BrtCFRuleExt</b> (section <a href="#">2.4.317</a> )            | 1146                 |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtCFVO</b> (section <a href="#">2.4.318</a> )                  | 471                  |
| <b>BrtCFVO14</b> (section <a href="#">2.4.319</a> )                | 1050                 |
| <b>BrtColInfo</b> (section <a href="#">2.4.320</a> )               | 60                   |
| <b>BrtColor</b> (section <a href="#">2.4.321</a> )                 | 564                  |
| <b>BrtColor14</b> (section <a href="#">2.4.322</a> )               | 1055                 |
| <b>BrtColorFilter</b> (section <a href="#">2.4.323</a> )           | 168                  |
| <b>BrtCommentAuthor</b> (section <a href="#">2.4.324</a> )         | 632                  |
| <b>BrtCommentText</b> (section <a href="#">2.4.325</a> )           | 637                  |
| <b>BrtCrashRecErr</b> (section <a href="#">2.4.326</a> )           | 610                  |
| <b>BrtCsPageSetup</b> (section <a href="#">2.4.327</a> )           | 652                  |
| <b>BrtCsProp</b> (section <a href="#">2.4.328</a> )                | 651                  |
| <b>BrtCsProtection</b> (section <a href="#">2.4.329</a> )          | 669                  |
| <b>BrtCsProtectionIso</b> (section <a href="#">2.4.330</a> )       | 679                  |
| <b>BrtCUsr</b> (section <a href="#">2.4.331</a> )                  | 399                  |
| <b>BrtCustomFilter</b> (section <a href="#">2.4.332</a> )          | 174                  |
| <b>BrtCustomFilter14</b> (section <a href="#">2.4.333</a> )        | 1180                 |
| <b>BrtDbCommand15</b> (section <a href="#">2.4.334</a> )           | 2117                 |
| <b>BrtDbTable15</b> (section <a href="#">2.4.335</a> )             | 2120                 |
| <b>BrtDecoupledPivotCacheID</b> (section <a href="#">2.4.336</a> ) | 2048                 |
| <b>BrtDrawing</b> (section <a href="#">2.4.337</a> )               | 550                  |
| <b>BrtDRef</b> (section <a href="#">2.4.338</a> )                  | 499                  |
| <b>BrtDVal</b> (section <a href="#">2.4.339</a> )                  | 64                   |
| <b>BrtDVal14</b> (section <a href="#">2.4.340</a> )                | 1053                 |
| <b>BrtDXF</b> (section <a href="#">2.4.342</a> )                   | 507                  |
| <b>BrtDXF14</b> (section <a href="#">2.4.343</a> )                 | 1171                 |
| <b>BrtDXF15</b> (section <a href="#">2.4.344</a> )                 | 2102                 |
| <b>BrtDynamicFilter</b> (section <a href="#">2.4.345</a> )         | 171                  |
| <b>BrtEndActiveXControls</b> (section <a href="#">2.4.346</a> )    | 645                  |
| <b>BrtEndAFilter</b> (section <a href="#">2.4.347</a> )            | 162                  |
| <b>BrtEndAutoSortScope</b> (section <a href="#">2.4.348</a> )      | 460                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndBook</b> (section <a href="#">2.4.349</a> )                    | 132                  |
| <b>BrtEndBookViews</b> (section <a href="#">2.4.350</a> )               | 136                  |
| <b>BrtEndBorders</b> (section <a href="#">2.4.351</a> )                 | 614                  |
| <b>BrtEndBundleShs</b> (section <a href="#">2.4.352</a> )               | 144                  |
| <b>BrtEndCellIgnoreECs</b> (section <a href="#">2.4.353</a> )           | 650                  |
| <b>BrtEndCellIgnoreECs14</b> (section <a href="#">2.4.354</a> )         | 1170                 |
| <b>BrtEndCellSmartTag</b> (section <a href="#">2.4.355</a> )            | 591                  |
| <b>BrtEndCellSmartTags</b> (section <a href="#">2.4.356</a> )           | 593                  |
| <b>BrtEndCellStyleXFs</b> (section <a href="#">2.4.357</a> )            | 627                  |
| <b>BrtEndCellWatches</b> (section <a href="#">2.4.358</a> )             | 606                  |
| <b>BrtEndCellXFs</b> (section <a href="#">2.4.359</a> )                 | 618                  |
| <b>BrtEndCFRule</b> (section <a href="#">2.4.360</a> )                  | 464                  |
| <b>BrtEndCFRule14</b> (section <a href="#">2.4.361</a> )                | 1049                 |
| <b>BrtEndColBrk</b> (section <a href="#">2.4.362</a> )                  | 395                  |
| <b>BrtEndColInfos</b> (section <a href="#">2.4.363</a> )                | 391                  |
| <b>BrtEndColorPalette</b> (section <a href="#">2.4.364</a> )            | 474                  |
| <b>BrtEndColorScale</b> (section <a href="#">2.4.365</a> )              | 470                  |
| <b>BrtEndColorScale14</b> (section <a href="#">2.4.366</a> )            | 1158                 |
| <b>BrtEndComment</b> (section <a href="#">2.4.367</a> )                 | 636                  |
| <b>BrtEndCommentAuthors</b> (section <a href="#">2.4.368</a> )          | 631                  |
| <b>BrtEndCommentList</b> (section <a href="#">2.4.369</a> )             | 634                  |
| <b>BrtEndComments</b> (section <a href="#">2.4.370</a> )                | 629                  |
| <b>BrtEndConditionalFormatting</b> (section <a href="#">2.4.371</a> )   | 462                  |
| <b>BrtEndConditionalFormatting14</b> (section <a href="#">2.4.372</a> ) | 1047                 |
| <b>BrtEndConditionalFormattings</b> (section <a href="#">2.4.373</a> )  | 1136                 |
| <b>BrtEndCERrs</b> (section <a href="#">2.4.374</a> )                   | 609                  |
| <b>BrtEndCsView</b> (section <a href="#">2.4.375</a> )                  | 142                  |
| <b>BrtEndCsViews</b> (section <a href="#">2.4.376</a> )                 | 140                  |
| <b>BrtEndCustomFilters</b> (section <a href="#">2.4.377</a> )           | 173                  |
| <b>BrtEndDatabar</b> (section <a href="#">2.4.378</a> )                 | 468                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndDatabar14</b> (section <a href="#">2.4.379</a> )              | 1156                 |
| <b>BrtEndDataFeedPr15</b> (section <a href="#">2.4.380</a> )           | 2114                 |
| <b>BrtEndDataModel</b> (section <a href="#">2.4.381</a> )              | 2122                 |
| <b>BrtEndDbTables15</b> (section <a href="#">2.4.382</a> )             | 2119                 |
| <b>BrtEndDCon</b> (section <a href="#">2.4.383</a> )                   | 496                  |
| <b>BrtEndDecoupledPivotCacheIDs</b> (section <a href="#">2.4.384</a> ) | 2049                 |
| <b>BrtEndDeletedName</b> (section <a href="#">2.4.385</a> )            | 454                  |
| <b>BrtEndDeletedNames</b> (section <a href="#">2.4.386</a> )           | 452                  |
| <b>BrtEndDim</b> (section <a href="#">2.4.387</a> )                    | 276                  |
| <b>BrtEndDims</b> (section <a href="#">2.4.388</a> )                   | 274                  |
| <b>BrtEndDRefs</b> (section <a href="#">2.4.389</a> )                  | 498                  |
| <b>BrtEndDVals</b> (section <a href="#">2.4.390</a> )                  | 574                  |
| <b>BrtEndDVals14</b> (section <a href="#">2.4.391</a> )                | 1154                 |
| <b>BrtEndDxf14s</b> (section <a href="#">2.4.392</a> )                 | 1173                 |
| <b>BrtEndDXFs</b> (section <a href="#">2.4.393</a> )                   | 506                  |
| <b>BrtEndDXFs15</b> (section <a href="#">2.4.394</a> )                 | 2104                 |
| <b>BrtEndECDbProps</b> (section <a href="#">2.4.395</a> )              | 204                  |
| <b>BrtEndECOlapProps</b> (section <a href="#">2.4.396</a> )            | 206                  |
| <b>BrtEndECPParam</b> (section <a href="#">2.4.397</a> )               | 268                  |
| <b>BrtEndECPParams</b> (section <a href="#">2.4.398</a> )              | 266                  |
| <b>BrtEndECTWFldInfoLst</b> (section <a href="#">2.4.399</a> )         | 541                  |
| <b>BrtEndECTWFldInfoLst15</b> (section <a href="#">2.4.400</a> )       | 2132                 |
| <b>BrtEndECTxtWiz</b> (section <a href="#">2.4.401</a> )               | 539                  |
| <b>BrtEndECTxtWiz15</b> (section <a href="#">2.4.402</a> )             | 2130                 |
| <b>BrtEndECWebProps</b> (section <a href="#">2.4.403</a> )             | 262                  |
| <b>BrtEndECWPTables</b> (section <a href="#">2.4.404</a> )             | 264                  |
| <b>BrtEndEsfmd</b> (section <a href="#">2.4.405</a> )                  | 340                  |
| <b>BrtEndEsmdb</b> (section <a href="#">2.4.406</a> )                  | 338                  |
| <b>BrtEndEsmdtinfo</b> (section <a href="#">2.4.407</a> )              | 336                  |
| <b>BrtEndEsmdx</b> (section <a href="#">2.4.408</a> )                  | 373                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndEsstr</b> (section <a href="#">2.4.409</a> )           | 381                  |
| <b>BrtEndExtConn14</b> (section <a href="#">2.4.410</a> )       | 1069                 |
| <b>BrtEndExtConn15</b> (section <a href="#">2.4.411</a> )       | 2110                 |
| <b>BrtEndExtConnection</b> (section <a href="#">2.4.412</a> )   | 202                  |
| <b>BrtEndExtConnections</b> (section <a href="#">2.4.413</a> )  | 430                  |
| <b>BrtEndExternals</b> (section <a href="#">2.4.414</a> )       | 354                  |
| <b>BrtEndFills</b> (section <a href="#">2.4.415</a> )           | 604                  |
| <b>BrtEndFilterColumn</b> (section <a href="#">2.4.416</a> )    | 164                  |
| <b>BrtEndFilters</b> (section <a href="#">2.4.417</a> )         | 166                  |
| <b>BrtEndFmd</b> (section <a href="#">2.4.418</a> )             | 53                   |
| <b>BrtEndFmts</b> (section <a href="#">2.4.419</a> )            | 616                  |
| <b>BrtEndFnGroup</b> (section <a href="#">2.4.420</a> )         | 666                  |
| <b>BrtEndFonts</b> (section <a href="#">2.4.421</a> )           | 612                  |
| <b>BrtEndHeaderFooter</b> (section <a href="#">2.4.422</a> )    | 480                  |
| <b>BrtEndIconSet</b> (section <a href="#">2.4.423</a> )         | 466                  |
| <b>BrtEndIconSet14</b> (section <a href="#">2.4.424</a> )       | 1155                 |
| <b>BrtEndIndexedColors</b> (section <a href="#">2.4.425</a> )   | 566                  |
| <b>BrtEndISXTHCols</b> (section <a href="#">2.4.426</a> )       | 323                  |
| <b>BrtEndISXTHRws</b> (section <a href="#">2.4.427</a> )        | 321                  |
| <b>BrtEndISXVDCols</b> (section <a href="#">2.4.428</a> )       | 312                  |
| <b>BrtEndISXVDRws</b> (section <a href="#">2.4.429</a> )        | 310                  |
| <b>BrtEndISXVIs</b> (section <a href="#">2.4.430</a> )          | 389                  |
| <b>BrtEndItemUniqueNames</b> (section <a href="#">2.4.431</a> ) | 2107                 |
| <b>BrtEndList</b> (section <a href="#">2.4.432</a> )            | 344                  |
| <b>BrtEndListCol</b> (section <a href="#">2.4.433</a> )         | 348                  |
| <b>BrtEndListCols</b> (section <a href="#">2.4.434</a> )        | 346                  |
| <b>BrtEndListParts</b> (section <a href="#">2.4.435</a> )       | 662                  |
| <b>BrtEndListXmlCPr</b> (section <a href="#">2.4.436</a> )      | 350                  |
| <b>BrtEndMap</b> (section <a href="#">2.4.437</a> )             | 493                  |
| <b>BrtEndMdx</b> (section <a href="#">2.4.438</a> )             | 55                   |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndMdxKPI</b> (section <a href="#">2.4.439</a> )             | 379                  |
| <b>BrtEndMdxMbrProp</b> (section <a href="#">2.4.440</a> )         | 377                  |
| <b>BrtEndMdxSet</b> (section <a href="#">2.4.441</a> )             | 375                  |
| <b>BrtEndMdxTuple</b> (section <a href="#">2.4.442</a> )           | 57                   |
| <b>BrtEndMergeCells</b> (section <a href="#">2.4.443</a> )         | 178                  |
| <b>BrtEndMetadata</b> (section <a href="#">2.4.444</a> )           | 333                  |
| <b>BrtEndMG</b> (section <a href="#">2.4.445</a> )                 | 491                  |
| <b>BrtEndMGMaps</b> (section <a href="#">2.4.446</a> )             | 489                  |
| <b>BrtEndMGs</b> (section <a href="#">2.4.447</a> )                | 487                  |
| <b>BrtEndModelRelationships</b> (section <a href="#">2.4.448</a> ) | 2127                 |
| <b>BrtEndModelTables</b> (section <a href="#">2.4.449</a> )        | 2124                 |
| <b>BrtEndMRUColors</b> (section <a href="#">2.4.450</a> )          | 570                  |
| <b>BrtEndOledbPr15</b> (section <a href="#">2.4.451</a> )          | 2112                 |
| <b>BrtEndOleObjects</b> (section <a href="#">2.4.452</a> )         | 640                  |
| <b>BrtEndPCD14</b> (section <a href="#">2.4.453</a> )              | 1067                 |
| <b>BrtEndPCDCalcItem</b> (section <a href="#">2.4.454</a> )        | 246                  |
| <b>BrtEndPCDCalcItems</b> (section <a href="#">2.4.455</a> )       | 244                  |
| <b>BrtEndPCDCalcMem</b> (section <a href="#">2.4.456</a> )         | 434                  |
| <b>BrtEndPCDCalcMem14</b> (section <a href="#">2.4.457</a> )       | 1039                 |
| <b>BrtEndPCDCalcMemExt</b> (section <a href="#">2.4.458</a> )      | 1138                 |
| <b>BrtEndPCDCalcMems</b> (section <a href="#">2.4.459</a> )        | 432                  |
| <b>BrtEndPCDCalcMemsExt</b> (section <a href="#">2.4.460</a> )     | 1140                 |
| <b>BrtEndPCDFatbl</b> (section <a href="#">2.4.461</a> )           | 190                  |
| <b>BrtEndPCDFGDiscrete</b> (section <a href="#">2.4.462</a> )      | 226                  |
| <b>BrtEndPCDFGItems</b> (section <a href="#">2.4.463</a> )         | 222                  |
| <b>BrtEndPCDFGRange</b> (section <a href="#">2.4.464</a> )         | 224                  |
| <b>BrtEndPCDFGroup</b> (section <a href="#">2.4.465</a> )          | 220                  |
| <b>BrtEndPCDField</b> (section <a href="#">2.4.466</a> )           | 184                  |
| <b>BrtEndPCDFields</b> (section <a href="#">2.4.467</a> )          | 182                  |
| <b>BrtEndPCDHFieldsUsage</b> (section <a href="#">2.4.468</a> )    | 200                  |



| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndPCDHGLLevel</b> (section <a href="#">2.4.469</a> )    | 438                  |
| <b>BrtEndPCDHGLLevels</b> (section <a href="#">2.4.470</a> )   | 436                  |
| <b>BrtEndPCDHGLGMember</b> (section <a href="#">2.4.471</a> )  | 446                  |
| <b>BrtEndPCDHGLGMembers</b> (section <a href="#">2.4.472</a> ) | 444                  |
| <b>BrtEndPCDHGLGroup</b> (section <a href="#">2.4.473</a> )    | 442                  |
| <b>BrtEndPCDHGLGroups</b> (section <a href="#">2.4.474</a> )   | 440                  |
| <b>BrtEndPCDHierarchies</b> (section <a href="#">2.4.475</a> ) | 196                  |
| <b>BrtEndPCDHierarchy</b> (section <a href="#">2.4.476</a> )   | 198                  |
| <b>BrtEndPCDIRun</b> (section <a href="#">2.4.477</a> )        | 192                  |
| <b>BrtEndPCDKPI</b> (section <a href="#">2.4.478</a> )         | 272                  |
| <b>BrtEndPCDKPIs</b> (section <a href="#">2.4.479</a> )        | 270                  |
| <b>BrtEndPCDSConsol</b> (section <a href="#">2.4.480</a> )     | 208                  |
| <b>BrtEndPCDSCPage</b> (section <a href="#">2.4.481</a> )      | 212                  |
| <b>BrtEndPCDSCPAGES</b> (section <a href="#">2.4.482</a> )     | 210                  |
| <b>BrtEndPCDSCPIItem</b> (section <a href="#">2.4.483</a> )    | 214                  |
| <b>BrtEndPCDSCSet</b> (section <a href="#">2.4.484</a> )       | 218                  |
| <b>BrtEndPCDSCSets</b> (section <a href="#">2.4.485</a> )      | 216                  |
| <b>BrtEndPCSDTCEMember</b> (section <a href="#">2.4.486</a> )  | 234                  |
| <b>BrtEndPCSDTCEMembers</b> (section <a href="#">2.4.487</a> ) | 232                  |
| <b>BrtEndPCSDTCEntries</b> (section <a href="#">2.4.488</a> )  | 230                  |
| <b>BrtEndPCSDTCQueries</b> (section <a href="#">2.4.489</a> )  | 236                  |
| <b>BrtEndPCSDTCQuery</b> (section <a href="#">2.4.490</a> )    | 238                  |
| <b>BrtEndPCSDTCSets</b> (section <a href="#">2.4.491</a> )     | 242                  |
| <b>BrtEndPCSDTCSets</b> (section <a href="#">2.4.492</a> )     | 240                  |
| <b>BrtEndPCSDTupleCache</b> (section <a href="#">2.4.493</a> ) | 228                  |
| <b>BrtEndPCDSFCIEntries</b> (section <a href="#">2.4.494</a> ) | 658                  |
| <b>BrtEndPCDSSource</b> (section <a href="#">2.4.495</a> )     | 186                  |
| <b>BrtEndPCDSRange</b> (section <a href="#">2.4.496</a> )      | 188                  |
| <b>BrtEndPivotCacheDef</b> (section <a href="#">2.4.497</a> )  | 180                  |
| <b>BrtEndPivotCacheID</b> (section <a href="#">2.4.498</a> )   | 387                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndPivotCacheIDs</b> (section <a href="#">2.4.499</a> )        | 385                  |
| <b>BrtEndPivotCacheRecords</b> (section <a href="#">2.4.500</a> )    | 194                  |
| <b>BrtEndPivotTableRefs</b> (section <a href="#">2.4.501</a> )       | 2052                 |
| <b>BrtEndPivotTableUISettings</b> (section <a href="#">2.4.502</a> ) | 2073                 |
| <b>BrtEndPName</b> (section <a href="#">2.4.503</a> )                | 256                  |
| <b>BrtEndPNames</b> (section <a href="#">2.4.504</a> )               | 254                  |
| <b>BrtEndPNPair</b> (section <a href="#">2.4.505</a> )               | 260                  |
| <b>BrtEndPNPairs</b> (section <a href="#">2.4.506</a> )              | 258                  |
| <b>BrtEndPRFilter</b> (section <a href="#">2.4.507</a> )             | 252                  |
| <b>BrtEndPRFilter14</b> (section <a href="#">2.4.508</a> )           | 1166                 |
| <b>BrtEndPRFilters</b> (section <a href="#">2.4.509</a> )            | 250                  |
| <b>BrtEndPRFilters14</b> (section <a href="#">2.4.510</a> )          | 1164                 |
| <b>BrtEndPRFItem</b> (section <a href="#">2.4.511</a> )              | 383                  |
| <b>BrtEndPRFItem14</b> (section <a href="#">2.4.512</a> )            | 1168                 |
| <b>BrtEndPRRule</b> (section <a href="#">2.4.513</a> )               | 248                  |
| <b>BrtEndPRRule14</b> (section <a href="#">2.4.514</a> )             | 1162                 |
| <b>BrtEndQSI</b> (section <a href="#">2.4.515</a> )                  | 448                  |
| <b>BrtEndQSIF</b> (section <a href="#">2.4.516</a> )                 | 458                  |
| <b>BrtEndQSIFs</b> (section <a href="#">2.4.517</a> )                | 456                  |
| <b>BrtEndQSIR</b> (section <a href="#">2.4.518</a> )                 | 450                  |
| <b>BrtEndRRSort</b> (section <a href="#">2.4.519</a> )               | 674                  |
| <b>BrtEndRwBrk</b> (section <a href="#">2.4.520</a> )                | 393                  |
| <b>BrtEndScenMan</b> (section <a href="#">2.4.521</a> )              | 501                  |
| <b>BrtEndSct</b> (section <a href="#">2.4.522</a> )                  | 503                  |
| <b>BrtEndSheet</b> (section <a href="#">2.4.523</a> )                | 130                  |
| <b>BrtEndSheetData</b> (section <a href="#">2.4.524</a> )            | 146                  |
| <b>BrtEndSingleCells</b> (section <a href="#">2.4.525</a> )          | 342                  |
| <b>BrtEndSlicer</b> (section <a href="#">2.4.526</a> )               | 1084                 |
| <b>BrtEndSlicerCache</b> (section <a href="#">2.4.527</a> )          | 1076                 |
| <b>BrtEndSlicerCacheDef</b> (section <a href="#">2.4.528</a> )       | 1078                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndSlicerCacheID</b> (section <a href="#">2.4.529</a> )             | 1073                 |
| <b>BrtEndSlicerCacheIDs</b> (section <a href="#">2.4.530</a> )            | 1071                 |
| <b>BrtEndSlicerCacheLevelData</b> (section <a href="#">2.4.531</a> )      | 1091                 |
| <b>BrtEndSlicerCacheLevelsData</b> (section <a href="#">2.4.532</a> )     | 1089                 |
| <b>BrtEndSlicerCacheNative</b> (section <a href="#">2.4.533</a> )         | 1101                 |
| <b>BrtEndSlicerCacheOlapImpl</b> (section <a href="#">2.4.534</a> )       | 1087                 |
| <b>BrtEndSlicerCacheSelections</b> (section <a href="#">2.4.535</a> )     | 1099                 |
| <b>BrtEndSlicerCacheSiRange</b> (section <a href="#">2.4.536</a> )        | 1095                 |
| <b>BrtEndSlicerCacheSiRanges</b> (section <a href="#">2.4.537</a> )       | 1093                 |
| <b>BrtEndSlicerCachesPivotCacheID</b> (section <a href="#">2.4.538</a> )  | 1134                 |
| <b>BrtEndSlicerCachesPivotCacheIDs</b> (section <a href="#">2.4.539</a> ) | 1114                 |
| <b>BrtEndSlicerEx</b> (section <a href="#">2.4.540</a> )                  | 1082                 |
| <b>BrtEndSlicers</b> (section <a href="#">2.4.541</a> )                   | 1116                 |
| <b>BrtEndSlicersEx</b> (section <a href="#">2.4.542</a> )                 | 1080                 |
| <b>BrtEndSlicerStyle</b> (section <a href="#">2.4.543</a> )               | 1129                 |
| <b>BrtEndSlicerStyleElements</b> (section <a href="#">2.4.544</a> )       | 1145                 |
| <b>BrtEndSlicerStyles</b> (section <a href="#">2.4.545</a> )              | 1143                 |
| <b>BrtEndSmartTags</b> (section <a href="#">2.4.546</a> )                 | 595                  |
| <b>BrtEndSmartTagTypes</b> (section <a href="#">2.4.547</a> )             | 598                  |
| <b>BrtEndSortCond</b> (section <a href="#">2.4.548</a> )                  | 533                  |
| <b>BrtEndSortCond14</b> (section <a href="#">2.4.549</a> )                | 1153                 |
| <b>BrtEndSortState</b> (section <a href="#">2.4.550</a> )                 | 531                  |
| <b>BrtEndSparklineGroup</b> (section <a href="#">2.4.551</a> )            | 1042                 |
| <b>BrtEndSparklineGroups</b> (section <a href="#">2.4.552</a> )           | 1059                 |
| <b>BrtEndSparklines</b> (section <a href="#">2.4.553</a> )                | 1057                 |
| <b>BrtEndSst</b> (section <a href="#">2.4.554</a> )                       | 160                  |
| <b>BrtEndStyles</b> (section <a href="#">2.4.555</a> )                    | 620                  |
| <b>BrtEndStyleSheet</b> (section <a href="#">2.4.556</a> )                | 279                  |
| <b>BrtEndStyleSheetExt14</b> (section <a href="#">2.4.557</a> )           | 1132                 |
| <b>BrtEndSupBook</b> (section <a href="#">2.4.558</a> )                   | 588                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndSXChange</b> (section <a href="#">2.4.559</a> )     | 1123                 |
| <b>BrtEndSXChanges</b> (section <a href="#">2.4.560</a> )    | 1125                 |
| <b>BrtEndSXCondFmt</b> (section <a href="#">2.4.561</a> )    | 559                  |
| <b>BrtEndSXCondFmt14</b> (section <a href="#">2.4.562</a> )  | 1148                 |
| <b>BrtEndSXCondFmts</b> (section <a href="#">2.4.563</a> )   | 561                  |
| <b>BrtEndSXCondFmts14</b> (section <a href="#">2.4.564</a> ) | 1150                 |
| <b>BrtEndSXCrtFormat</b> (section <a href="#">2.4.565</a> )  | 482                  |
| <b>BrtEndSXCrtFormats</b> (section <a href="#">2.4.566</a> ) | 484                  |
| <b>BrtEndSXDI</b> (section <a href="#">2.4.567</a> )         | 294                  |
| <b>BrtEndSXDIIs</b> (section <a href="#">2.4.568</a> )       | 296                  |
| <b>BrtEndSXEdit</b> (section <a href="#">2.4.569</a> )       | 1119                 |
| <b>BrtEndSXEdits</b> (section <a href="#">2.4.570</a> )      | 1121                 |
| <b>BrtEndSXFilter</b> (section <a href="#">2.4.571</a> )     | 602                  |
| <b>BrtEndSXFilters</b> (section <a href="#">2.4.572</a> )    | 600                  |
| <b>BrtEndSXFormat</b> (section <a href="#">2.4.573</a> )     | 304                  |
| <b>BrtEndSxFormats</b> (section <a href="#">2.4.574</a> )    | 306                  |
| <b>BrtEndSXLI</b> (section <a href="#">2.4.575</a> )         | 298                  |
| <b>BrtEndSXLICols</b> (section <a href="#">2.4.576</a> )     | 302                  |
| <b>BrtEndSXLIRws</b> (section <a href="#">2.4.577</a> )      | 300                  |
| <b>BrtEndSXLocation</b> (section <a href="#">2.4.578</a> )   | 313                  |
| <b>BrtEndSXPI</b> (section <a href="#">2.4.579</a> )         | 290                  |
| <b>BrtEndSXPIIs</b> (section <a href="#">2.4.580</a> )       | 292                  |
| <b>BrtEndSxRow</b> (section <a href="#">2.4.581</a> )        | 2058                 |
| <b>BrtEndSxRules</b> (section <a href="#">2.4.582</a> )      | 642                  |
| <b>BrtEndSxrules14</b> (section <a href="#">2.4.583</a> )    | 1160                 |
| <b>BrtEndSxSelect</b> (section <a href="#">2.4.584</a> )     | 308                  |
| <b>BrtEndSXTDMP</b> (section <a href="#">2.4.585</a> )       | 327                  |
| <b>BrtEndSXTDMPs</b> (section <a href="#">2.4.586</a> )      | 325                  |
| <b>BrtEndSXTH</b> (section <a href="#">2.4.587</a> )         | 319                  |
| <b>BrtEndSXTHItem</b> (section <a href="#">2.4.588</a> )     | 331                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndSXTItems</b> (section <a href="#">2.4.589</a> )                   | 329                  |
| <b>BrtEndSXTs</b> (section <a href="#">2.4.590</a> )                       | 317                  |
| <b>BrtEndSXTupleSet</b> (section <a href="#">2.4.591</a> )                 | 1027                 |
| <b>BrtEndSXTupleSetData</b> (section <a href="#">2.4.592</a> )             | 1032                 |
| <b>BrtEndSXTupleSetHeader</b> (section <a href="#">2.4.593</a> )           | 1029                 |
| <b>BrtEndSXTupleSetRow</b> (section <a href="#">2.4.594</a> )              | 1034                 |
| <b>BrtEndSxvcells</b> (section <a href="#">2.4.595</a> )                   | 2056                 |
| <b>BrtEndSXVD</b> (section <a href="#">2.4.596</a> )                       | 286                  |
| <b>BrtEndSXVDs</b> (section <a href="#">2.4.597</a> )                      | 288                  |
| <b>BrtEndSXVI</b> (section <a href="#">2.4.598</a> )                       | 281                  |
| <b>BrtEndSXView</b> (section <a href="#">2.4.599</a> )                     | 315                  |
| <b>BrtEndSxview14</b> (section <a href="#">2.4.600</a> )                   | 1063                 |
| <b>BrtEndSXVIs</b> (section <a href="#">2.4.601</a> )                      | 284                  |
| <b>BrtEndTableSlicerCache</b> (section <a href="#">2.4.602</a> )           | 2078                 |
| <b>BrtEndTableStyle</b> (section <a href="#">2.4.603</a> )                 | 511                  |
| <b>BrtEndTableStyles</b> (section <a href="#">2.4.604</a> )                | 509                  |
| <b>BrtEndTimelineCacheID</b> (section <a href="#">2.4.605</a> )            | 2086                 |
| <b>BrtEndTimelineCacheIDs</b> (section <a href="#">2.4.606</a> )           | 2084                 |
| <b>BrtEndTimelineCachePivotCacheIDs</b> (section <a href="#">2.4.607</a> ) | 2081                 |
| <b>BrtEndTimelineEx</b> (section <a href="#">2.4.608</a> )                 | 2090                 |
| <b>BrtEndTimelinesEx</b> (section <a href="#">2.4.609</a> )                | 2088                 |
| <b>BrtEndTimelineStyle</b> (section <a href="#">2.4.610</a> )              | 2094                 |
| <b>BrtEndTimelineStyleElements</b> (section <a href="#">2.4.611</a> )      | 2101                 |
| <b>BrtEndTimelineStyles</b> (section <a href="#">2.4.612</a> )             | 2099                 |
| <b>BrtEndTimelineStylesheetExt15</b> (section <a href="#">2.4.613</a> )    | 2097                 |
| <b>BrtEndUserCsView</b> (section <a href="#">2.4.614</a> )                 | 656                  |
| <b>BrtEndUserCsViews</b> (section <a href="#">2.4.615</a> )                | 654                  |
| <b>BrtEndUserShView</b> (section <a href="#">2.4.616</a> )                 | 424                  |
| <b>BrtEndUserShViews</b> (section <a href="#">2.4.617</a> )                | 425                  |
| <b>BrtEndVolDeps</b> (section <a href="#">2.4.618</a> )                    | 515                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndVolMain</b> (section <a href="#">2.4.619</a> )          | 519                  |
| <b>BrtEndVolTopic</b> (section <a href="#">2.4.620</a> )         | 521                  |
| <b>BrtEndVolType</b> (section <a href="#">2.4.621</a> )          | 517                  |
| <b>BrtEndWebExtensions</b> (section <a href="#">2.4.622</a> )    | 2069                 |
| <b>BrtEndWebPubItem</b> (section <a href="#">2.4.623</a> )       | 557                  |
| <b>BrtEndWebPubItems</b> (section <a href="#">2.4.624</a> )      | 555                  |
| <b>BrtEndWsSortMap</b> (section <a href="#">2.4.625</a> )        | 672                  |
| <b>BrtEndWsView</b> (section <a href="#">2.4.626</a> )           | 138                  |
| <b>BrtEndWsViews</b> (section <a href="#">2.4.627</a> )          | 134                  |
| <b>BrtEOF</b> (section <a href="#">2.4.628</a> )                 | 403                  |
| <b>BrtExternCellBlank</b> (section <a href="#">2.4.629</a> )     | 367                  |
| <b>BrtExternCellBool</b> (section <a href="#">2.4.630</a> )      | 369                  |
| <b>BrtExternCellError</b> (section <a href="#">2.4.631</a> )     | 370                  |
| <b>BrtExternCellReal</b> (section <a href="#">2.4.632</a> )      | 368                  |
| <b>BrtExternCellString</b> (section <a href="#">2.4.633</a> )    | 371                  |
| <b>BrtExternRowHdr</b> (section <a href="#">2.4.634</a> )        | 366                  |
| <b>BrtExternSheet</b> (section <a href="#">2.4.635</a> )         | 362                  |
| <b>BrtExternTableEnd</b> (section <a href="#">2.4.636</a> )      | 364                  |
| <b>BrtExternTableStart</b> (section <a href="#">2.4.637</a> )    | 363                  |
| <b>BrtExternValueMeta</b> (section <a href="#">2.4.638</a> )     | 472                  |
| <b>BrtFieldListActiveItem</b> (section <a href="#">2.4.639</a> ) | 2134                 |
| <b>BrtFileRecover</b> (section <a href="#">2.4.640</a> )         | 155                  |
| <b>BrtFileSharing</b> (section <a href="#">2.4.641</a> )         | 548                  |
| <b>BrtFileSharingIso</b> (section <a href="#">2.4.642</a> )      | 676                  |
| <b>BrtFileVersion</b> (section <a href="#">2.4.643</a> )         | 128                  |
| <b>BrtFill</b> (section <a href="#">2.4.644</a> )                | 45                   |
| <b>BrtFilter</b> (section <a href="#">2.4.645</a> )              | 167                  |
| <b>BrtFilter14</b> (section <a href="#">2.4.646</a> )            | 1177                 |
| <b>BrtFmlaBool</b> (section <a href="#">2.4.647</a> )            | 10                   |
| <b>BrtFmlaError</b> (section <a href="#">2.4.648</a> )           | 11                   |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtFmlaNum</b> (section <a href="#">2.4.649</a> )           | 9                    |
| <b>BrtFmlaString</b> (section <a href="#">2.4.650</a> )        | 8                    |
| <b>BrtFmt</b> (section <a href="#">2.4.651</a> )               | 44                   |
| <b>BrtFnGroup</b> (section <a href="#">2.4.652</a> )           | 665                  |
| <b>BrtFont</b> (section <a href="#">2.4.653</a> )              | 43                   |
| <b>BrtFRTBegin</b> (section <a href="#">2.4.654</a> )          | 35                   |
| <b>BrtFRTEnd</b> (section <a href="#">2.4.655</a> )            | 36                   |
| <b>BrtHLink</b> (section <a href="#">2.4.656</a> )             | 494                  |
| <b>BrtIconFilter</b> (section <a href="#">2.4.657</a> )        | 169                  |
| <b>BrtIconFilter14</b> (section <a href="#">2.4.658</a> )      | 1181                 |
| <b>BrtIndexBlock</b> (section <a href="#">2.4.659</a> )        | 42                   |
| <b>BrtIndexedColor</b> (section <a href="#">2.4.660</a> )      | 475                  |
| <b>BrtIndexPartEnd</b> (section <a href="#">2.4.661</a> )      | 277                  |
| <b>BrtIndexRowBlock</b> (section <a href="#">2.4.662</a> )     | 40                   |
| <b>BrtInfo</b> (section <a href="#">2.4.663</a> )              | 398                  |
| <b>BrtItemUniqueName</b> (section <a href="#">2.4.664</a> )    | 2108                 |
| <b>BrtKnownFonts</b> (section <a href="#">2.4.665</a> )        | 1025                 |
| <b>BrtLegacyDrawing</b> (section <a href="#">2.4.666</a> )     | 551                  |
| <b>BrtLegacyDrawingHF</b> (section <a href="#">2.4.667</a> )   | 552                  |
| <b>BrtList14</b> (section <a href="#">2.4.668</a> )            | 1111                 |
| <b>BrtListCCFmla</b> (section <a href="#">2.4.669</a> )        | 351                  |
| <b>BrtListPart</b> (section <a href="#">2.4.670</a> )          | 661                  |
| <b>BrtListTrFmla</b> (section <a href="#">2.4.671</a> )        | 352                  |
| <b>BrtMargins</b> (section <a href="#">2.4.672</a> )           | 476                  |
| <b>BrtMdb</b> (section <a href="#">2.4.673</a> )               | 51                   |
| <b>BrtMdtinfo</b> (section <a href="#">2.4.674</a> )           | 335                  |
| <b>BrtMdxMbrIstr</b> (section <a href="#">2.4.675</a> )        | 58                   |
| <b>BrtMergeCell</b> (section <a href="#">2.4.676</a> )         | 176                  |
| <b>BrtModelRelationship</b> (section <a href="#">2.4.677</a> ) | 2128                 |
| <b>BrtModelTable</b> (section <a href="#">2.4.678</a> )        | 2125                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtMRUColor</b> (section <a href="#">2.4.679</a> )                 | 572                  |
| <b>BrtName</b> (section <a href="#">2.4.680</a> )                     | 39                   |
| <b>BrtNameExt</b> (section <a href="#">2.4.681</a> )                  | 1036                 |
| <b>BrtOleObject</b> (section <a href="#">2.4.682</a> )                | 639                  |
| <b>BrtOleSize</b> (section <a href="#">2.4.683</a> )                  | 549                  |
| <b>BrtPageSetup</b> (section <a href="#">2.4.684</a> )                | 478                  |
| <b>BrtPane</b> (section <a href="#">2.4.685</a> )                     | 151                  |
| <b>BrtPCDCalcMem15</b> (section <a href="#">2.4.686</a> )             | 2060                 |
| <b>BrtPCDField14</b> (section <a href="#">2.4.687</a> )               | 1141                 |
| <b>BrtPCDH14</b> (section <a href="#">2.4.688</a> )                   | 1037                 |
| <b>BrtPCDH15</b> (section <a href="#">2.4.689</a> )                   | 2092                 |
| <b>BrtPCDIABoolean</b> (section <a href="#">2.4.690</a> )             | 29                   |
| <b>BrtPCDIADatetime</b> (section <a href="#">2.4.691</a> )            | 32                   |
| <b>BrtPCDIAError</b> (section <a href="#">2.4.692</a> )               | 30                   |
| <b>BrtPCDIAMissing</b> (section <a href="#">2.4.693</a> )             | 27                   |
| <b>BrtPCDIANumber</b> (section <a href="#">2.4.694</a> )              | 28                   |
| <b>BrtPCDIAStrng</b> (section <a href="#">2.4.695</a> )               | 31                   |
| <b>BrtPCDIBoolean</b> (section <a href="#">2.4.696</a> )              | 22                   |
| <b>BrtPCDIDatetime</b> (section <a href="#">2.4.697</a> )             | 25                   |
| <b>BrtPCDIError</b> (section <a href="#">2.4.698</a> )                | 23                   |
| <b>BrtPCDIIndex</b> (section <a href="#">2.4.699</a> )                | 26                   |
| <b>BrtPCDIMissing</b> (section <a href="#">2.4.700</a> )              | 20                   |
| <b>BrtPCDINumber</b> (section <a href="#">2.4.701</a> )               | 21                   |
| <b>BrtPCDIString</b> (section <a href="#">2.4.702</a> )               | 24                   |
| <b>BrtPCDSFCIEntry</b> (section <a href="#">2.4.703</a> )             | 659                  |
| <b>BrtPCRRecord</b> (section <a href="#">2.4.704</a> )                | 33                   |
| <b>BrtPCRRecordDt</b> (section <a href="#">2.4.705</a> )              | 34                   |
| <b>BrtPhoneticInfo</b> (section <a href="#">2.4.706</a> )             | 537                  |
| <b>BrtPivotCacheConnectionName</b> (section <a href="#">2.4.707</a> ) | 1182                 |
| <b>BrtPivotCacheIdVersion</b> (section <a href="#">2.4.708</a> )      | 2135                 |



| Name  | Record type (number) |
|---|----------------------|
| <b>BrtPivotTableRef</b> (section <a href="#">2.4.709</a> )        | 2053                 |
| <b>BrtPlaceholderName</b> (section <a href="#">2.4.710</a> )      | 361                  |
| <b>BrtPrintOptions</b> (section <a href="#">2.4.711</a> )         | 477                  |
| <b>BrtQsi15</b> (section <a href="#">2.4.712</a> )                | 2067                 |
| <b>BrtRangePr15</b> (section <a href="#">2.4.713</a> )            | 2116                 |
| <b>BrtRangeProtection</b> (section <a href="#">2.4.714</a> )      | 536                  |
| <b>BrtRangeProtection14</b> (section <a href="#">2.4.715</a> )    | 1103                 |
| <b>BrtRangeProtectionIso</b> (section <a href="#">2.4.716</a> )   | 680                  |
| <b>BrtRangeProtectionIso14</b> (section <a href="#">2.4.717</a> ) | 1104                 |
| <b>BrtRowHdr</b> (section <a href="#">2.4.718</a> )               | 0                    |
| <b>BrtRRAutoFmt</b> (section <a href="#">2.4.719</a> )            | 421                  |
| <b>BrtRRChgCell</b> (section <a href="#">2.4.720</a> )            | 409                  |
| <b>BrtRRConflict</b> (section <a href="#">2.4.721</a> )           | 417                  |
| <b>BrtRRDefName</b> (section <a href="#">2.4.722</a> )            | 415                  |
| <b>BrtRREndChgCell</b> (section <a href="#">2.4.723</a> )         | 410                  |
| <b>BrtRREndFormat</b> (section <a href="#">2.4.724</a> )          | 420                  |
| <b>BrtRREndInsDel</b> (section <a href="#">2.4.725</a> )          | 406                  |
| <b>BrtRREndMove</b> (section <a href="#">2.4.726</a> )            | 408                  |
| <b>BrtRRFormat</b> (section <a href="#">2.4.727</a> )             | 419                  |
| <b>BrtRRHeader</b> (section <a href="#">2.4.728</a> )             | 411                  |
| <b>BrtRRInsDel</b> (section <a href="#">2.4.729</a> )             | 405                  |
| <b>BrtRRInsertSh</b> (section <a href="#">2.4.730</a> )           | 414                  |
| <b>BrtRRMove</b> (section <a href="#">2.4.731</a> )               | 407                  |
| <b>BrtRRNote</b> (section <a href="#">2.4.732</a> )               | 416                  |
| <b>BrtRRRenSheet</b> (section <a href="#">2.4.733</a> )           | 413                  |
| <b>BrtRRSortItem</b> (section <a href="#">2.4.734</a> )           | 675                  |
| <b>BrtRRTQSIF</b> (section <a href="#">2.4.735</a> )              | 418                  |
| <b>BrtRRUserView</b> (section <a href="#">2.4.736</a> )           | 412                  |
| <b>BrtRwDescent</b> (section <a href="#">2.4.737</a> )            | 1024                 |
| <b>BrtSel</b> (section <a href="#">2.4.738</a> )                  | 152                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtSheetCalcProp</b> (section <a href="#">2.4.739</a> )                  | 663                  |
| <b>BrtSheetProtection</b> (section <a href="#">2.4.740</a> )                | 535                  |
| <b>BrtSheetProtectionIso</b> (section <a href="#">2.4.741</a> )             | 678                  |
| <b>BrtShrFmla</b> (section <a href="#">2.4.742</a> )                        | 427                  |
| <b>BrtSlc</b> (section <a href="#">2.4.743</a> )                            | 504                  |
| <b>BrtSlicerCacheBookPivotTables</b> (section <a href="#">2.4.744</a> )     | 2054                 |
| <b>BrtSlicerCacheHideItemsWithNoData</b> (section <a href="#">2.4.745</a> ) | 2105                 |
| <b>BrtSlicerCacheNativeItem</b> (section <a href="#">2.4.746</a> )          | 1102                 |
| <b>BrtSlicerCacheOlapItem</b> (section <a href="#">2.4.747</a> )            | 1096                 |
| <b>BrtSlicerCachePivotTables</b> (section <a href="#">2.4.748</a> )         | 1085                 |
| <b>BrtSlicerCacheSelection</b> (section <a href="#">2.4.749</a> )           | 1098                 |
| <b>BrtSlicerStyleElement</b> (section <a href="#">2.4.750</a> )             | 1130                 |
| <b>BrtSmartTagType</b> (section <a href="#">2.4.751</a> )                   | 596                  |
| <b>BrtSparkline</b> (section <a href="#">2.4.752</a> )                      | 1043                 |
| <b>BrtSSTItem</b> (section <a href="#">2.4.753</a> )                        | 19                   |
| <b>BrtStr</b> (section <a href="#">2.4.754</a> )                            | 59                   |
| <b>BrtStyle</b> (section <a href="#">2.4.755</a> )                          | 48                   |
| <b>BrtSupAddin</b> (section <a href="#">2.4.756</a> )                       | 667                  |
| <b>BrtSupBookSrc</b> (section <a href="#">2.4.757</a> )                     | 355                  |
| <b>BrtSupNameBits</b> (section <a href="#">2.4.758</a> )                    | 586                  |
| <b>BrtSupNameBool</b> (section <a href="#">2.4.759</a> )                    | 584                  |
| <b>BrtSupNameEnd</b> (section <a href="#">2.4.760</a> )                     | 587                  |
| <b>BrtSupNameErr</b> (section <a href="#">2.4.761</a> )                     | 581                  |
| <b>BrtSupNameFmla</b> (section <a href="#">2.4.762</a> )                    | 585                  |
| <b>BrtSupNameNil</b> (section <a href="#">2.4.763</a> )                     | 583                  |
| <b>BrtSupNameNum</b> (section <a href="#">2.4.764</a> )                     | 580                  |
| <b>BrtSupNameSt</b> (section <a href="#">2.4.765</a> )                      | 582                  |
| <b>BrtSupNameStart</b> (section <a href="#">2.4.766</a> )                   | 577                  |
| <b>BrtSupNameValueEnd</b> (section <a href="#">2.4.767</a> )                | 579                  |
| <b>BrtSupNameValueStart</b> (section <a href="#">2.4.768</a> )              | 578                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtSupSame</b> (section <a href="#">2.4.769</a> )                   | 358                  |
| <b>BrtSupSelf</b> (section <a href="#">2.4.770</a> )                   | 357                  |
| <b>BrtSupTabs</b> (section <a href="#">2.4.771</a> )                   | 359                  |
| <b>BrtSXDI14</b> (section <a href="#">2.4.772</a> )                    | 1044                 |
| <b>BrtSXDI15</b> (section <a href="#">2.4.773</a> )                    | 2136                 |
| <b>BrtSxFilter15</b> (section <a href="#">2.4.774</a> )                | 2079                 |
| <b>BrtSXTDMPOrder</b> (section <a href="#">2.4.775</a> )               | 668                  |
| <b>BrtSXTH14</b> (section <a href="#">2.4.776</a> )                    | 1040                 |
| <b>BrtSXTupleItems</b> (section <a href="#">2.4.777</a> )              | 1126                 |
| <b>BrtSXTupleSetHeaderItem</b> (section <a href="#">2.4.778</a> )      | 1030                 |
| <b>BrtSXTupleSetRowItem</b> (section <a href="#">2.4.779</a> )         | 1035                 |
| <b>BrtSxvcellBool</b> (section <a href="#">2.4.780</a> )               | 67                   |
| <b>BrtSxvcellDate</b> (section <a href="#">2.4.781</a> )               | 69                   |
| <b>BrtSxvcellErr</b> (section <a href="#">2.4.782</a> )                | 68                   |
| <b>BrtSxvcellNil</b> (section <a href="#">2.4.783</a> )                | 70                   |
| <b>BrtSxvcellNum</b> (section <a href="#">2.4.784</a> )                | 65                   |
| <b>BrtSxvcellStr</b> (section <a href="#">2.4.785</a> )                | 66                   |
| <b>BrtSXVD14</b> (section <a href="#">2.4.786</a> )                    | 1061                 |
| <b>BrtTable</b> (section <a href="#">2.4.787</a> )                     | 428                  |
| <b>BrtTableSlicerCacheID</b> (section <a href="#">2.4.788</a> )        | 2076                 |
| <b>BrtTableSlicerCacheIDs</b> (section <a href="#">2.4.789</a> )       | 2075                 |
| <b>BrtTableStyleClient</b> (section <a href="#">2.4.790</a> )          | 513                  |
| <b>BrtTableStyleElement</b> (section <a href="#">2.4.791</a> )         | 512                  |
| <b>BrtTextPr15</b> (section <a href="#">2.4.792</a> )                  | 2115                 |
| <b>BrtTimelineCachePivotCacheID</b> (section <a href="#">2.4.793</a> ) | 2082                 |
| <b>BrtTimelineStyleElement</b> (section <a href="#">2.4.794</a> )      | 2095                 |
| <b>BrtTop10Filter</b> (section <a href="#">2.4.795</a> )               | 170                  |
| <b>BrtUCR</b> (section <a href="#">2.4.796</a> )                       | 404                  |
| <b>BrtUserBookView</b> (section <a href="#">2.4.797</a> )              | 397                  |
| <b>BrtUsr</b> (section <a href="#">2.4.798</a> )                       | 400                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtValueMeta</b> (section <a href="#">2.4.799</a> )     | 50                   |
| <b>BrtVolBool</b> (section <a href="#">2.4.800</a> )       | 527                  |
| <b>BrtVolErr</b> (section <a href="#">2.4.801</a> )        | 525                  |
| <b>BrtVolNum</b> (section <a href="#">2.4.802</a> )        | 524                  |
| <b>BrtVolRef</b> (section <a href="#">2.4.803</a> )        | 523                  |
| <b>BrtVolStr</b> (section <a href="#">2.4.804</a> )        | 526                  |
| <b>BrtVolSubtopic</b> (section <a href="#">2.4.805</a> )   | 522                  |
| <b>BrtWbFactoid</b> (section <a href="#">2.4.806</a> )     | 154                  |
| <b>BrtWbProp</b> (section <a href="#">2.4.807</a> )        | 153                  |
| <b>BrtWbProp14</b> (section <a href="#">2.4.808</a> )      | 1117                 |
| <b>BrtWebExtension</b> (section <a href="#">2.4.809</a> )  | 2070                 |
| <b>BrtWebOpt</b> (section <a href="#">2.4.810</a> )        | 553                  |
| <b>BrtWorkBookPr15</b> (section <a href="#">2.4.811</a> )  | 2091                 |
| <b>BrtWsDim</b> (section <a href="#">2.4.812</a> )         | 148                  |
| <b>BrtWsFmtInfo</b> (section <a href="#">2.4.813</a> )     | 485                  |
| <b>BrtWsFmtInfoEx14</b> (section <a href="#">2.4.814</a> ) | 1045                 |
| <b>BrtWsProp</b> (section <a href="#">2.4.815</a> )        | 147                  |
| <b>BrtXF</b> (section <a href="#">2.4.816</a> )            | 47                   |

### 2.3.2 By Number

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtRowHdr</b> (section <a href="#">2.4.718</a> )     | 0                    |
| <b>BrtCellBlank</b> (section <a href="#">2.4.303</a> )  | 1                    |
| <b>BrtCellRk</b> (section <a href="#">2.4.311</a> )     | 2                    |
| <b>BrtCellError</b> (section <a href="#">2.4.305</a> )  | 3                    |
| <b>BrtCellBool</b> (section <a href="#">2.4.304</a> )   | 4                    |
| <b>BrtCellReal</b> (section <a href="#">2.4.310</a> )   | 5                    |
| <b>BrtCellSt</b> (section <a href="#">2.4.314</a> )     | 6                    |
| <b>BrtCellIsst</b> (section <a href="#">2.4.308</a> )   | 7                    |
| <b>BrtFmlaString</b> (section <a href="#">2.4.650</a> ) | 8                    |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtFmlaNum</b> (section <a href="#">2.4.649</a> )       | 9                    |
| <b>BrtFmlaBool</b> (section <a href="#">2.4.647</a> )      | 10                   |
| <b>BrtFmlaError</b> (section <a href="#">2.4.648</a> )     | 11                   |
| <b>BrtSSTItem</b> (section <a href="#">2.4.753</a> )       | 19                   |
| <b>BrtPCDIMissing</b> (section <a href="#">2.4.700</a> )   | 20                   |
| <b>BrtPCDINumber</b> (section <a href="#">2.4.701</a> )    | 21                   |
| <b>BrtPCDIBoolean</b> (section <a href="#">2.4.696</a> )   | 22                   |
| <b>BrtPCDIError</b> (section <a href="#">2.4.698</a> )     | 23                   |
| <b>BrtPCDIString</b> (section <a href="#">2.4.702</a> )    | 24                   |
| <b>BrtPCDIDatetime</b> (section <a href="#">2.4.697</a> )  | 25                   |
| <b>BrtPCDIIndex</b> (section <a href="#">2.4.699</a> )     | 26                   |
| <b>BrtPCDIAMissing</b> (section <a href="#">2.4.693</a> )  | 27                   |
| <b>BrtPCDIANumber</b> (section <a href="#">2.4.694</a> )   | 28                   |
| <b>BrtPCDIABoolean</b> (section <a href="#">2.4.690</a> )  | 29                   |
| <b>BrtPCDIAError</b> (section <a href="#">2.4.692</a> )    | 30                   |
| <b>BrtPCDIAStrng</b> (section <a href="#">2.4.695</a> )    | 31                   |
| <b>BrtPCDIADatetime</b> (section <a href="#">2.4.691</a> ) | 32                   |
| <b>BrtPCRRecord</b> (section <a href="#">2.4.704</a> )     | 33                   |
| <b>BrtPCRRecordDt</b> (section <a href="#">2.4.705</a> )   | 34                   |
| <b>BrtFRTBegin</b> (section <a href="#">2.4.654</a> )      | 35                   |
| <b>BrtFRTEnd</b> (section <a href="#">2.4.655</a> )        | 36                   |
| <b>BrtACBegin</b> (section <a href="#">2.4.2</a> )         | 37                   |
| <b>BrtACEnd</b> (section <a href="#">2.4.3</a> )           | 38                   |
| <b>BrtName</b> (section <a href="#">2.4.680</a> )          | 39                   |
| <b>BrtIndexRowBlock</b> (section <a href="#">2.4.662</a> ) | 40                   |
| <b>BrtIndexBlock</b> (section <a href="#">2.4.659</a> )    | 42                   |
| <b>BrtFont</b> (section <a href="#">2.4.653</a> )          | 43                   |
| <b>BrtFmt</b> (section <a href="#">2.4.651</a> )           | 44                   |
| <b>BrtFill</b> (section <a href="#">2.4.644</a> )          | 45                   |
| <b>BrtBorder</b> (section <a href="#">2.4.299</a> )        | 46                   |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtXF</b> (section <a href="#">2.4.816</a> )            | 47                   |
| <b>BrtStyle</b> (section <a href="#">2.4.755</a> )         | 48                   |
| <b>BrtCellMeta</b> (section <a href="#">2.4.309</a> )      | 49                   |
| <b>BrtValueMeta</b> (section <a href="#">2.4.799</a> )     | 50                   |
| <b>BrtMdb</b> (section <a href="#">2.4.673</a> )           | 51                   |
| <b>BrtBeginFmd</b> (section <a href="#">2.4.82</a> )       | 52                   |
| <b>BrtEndFmd</b> (section <a href="#">2.4.418</a> )        | 53                   |
| <b>BrtBeginMdx</b> (section <a href="#">2.4.102</a> )      | 54                   |
| <b>BrtEndMdx</b> (section <a href="#">2.4.438</a> )        | 55                   |
| <b>BrtBeginMdxTuple</b> (section <a href="#">2.4.106</a> ) | 56                   |
| <b>BrtEndMdxTuple</b> (section <a href="#">2.4.442</a> )   | 57                   |
| <b>BrtMdxMbrIstr</b> (section <a href="#">2.4.675</a> )    | 58                   |
| <b>BrtStr</b> (section <a href="#">2.4.754</a> )           | 59                   |
| <b>BrtColInfo</b> (section <a href="#">2.4.320</a> )       | 60                   |
| <b>BrtCellRString</b> (section <a href="#">2.4.312</a> )   | 62                   |
| <b>BrtDVal</b> (section <a href="#">2.4.339</a> )          | 64                   |
| <b>BrtSxvcellNum</b> (section <a href="#">2.4.784</a> )    | 65                   |
| <b>BrtSxvcellStr</b> (section <a href="#">2.4.785</a> )    | 66                   |
| <b>BrtSxvcellBool</b> (section <a href="#">2.4.780</a> )   | 67                   |
| <b>BrtSxvcellErr</b> (section <a href="#">2.4.782</a> )    | 68                   |
| <b>BrtSxvcellDate</b> (section <a href="#">2.4.781</a> )   | 69                   |
| <b>BrtSxvcellNil</b> (section <a href="#">2.4.783</a> )    | 70                   |
| <b>BrtFileVersion</b> (section <a href="#">2.4.643</a> )   | 128                  |
| <b>BrtBeginSheet</b> (section <a href="#">2.4.188</a> )    | 129                  |
| <b>BrtEndSheet</b> (section <a href="#">2.4.523</a> )      | 130                  |
| <b>BrtBeginBook</b> (section <a href="#">2.4.10</a> )      | 131                  |
| <b>BrtEndBook</b> (section <a href="#">2.4.349</a> )       | 132                  |
| <b>BrtBeginWsViews</b> (section <a href="#">2.4.293</a> )  | 133                  |
| <b>BrtEndWsViews</b> (section <a href="#">2.4.627</a> )    | 134                  |
| <b>BrtBeginBookViews</b> (section <a href="#">2.4.11</a> ) | 135                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndBookViews</b> (section <a href="#">2.4.350</a> )     | 136                  |
| <b>BrtBeginWsView</b> (section <a href="#">2.4.292</a> )      | 137                  |
| <b>BrtEndWsView</b> (section <a href="#">2.4.626</a> )        | 138                  |
| <b>BrtBeginCsViews</b> (section <a href="#">2.4.37</a> )      | 139                  |
| <b>BrtEndCsViews</b> (section <a href="#">2.4.376</a> )       | 140                  |
| <b>BrtBeginCsView</b> (section <a href="#">2.4.36</a> )       | 141                  |
| <b>BrtEndCsView</b> (section <a href="#">2.4.375</a> )        | 142                  |
| <b>BrtBeginBundleShs</b> (section <a href="#">2.4.13</a> )    | 143                  |
| <b>BrtEndBundleShs</b> (section <a href="#">2.4.352</a> )     | 144                  |
| <b>BrtBeginSheetData</b> (section <a href="#">2.4.189</a> )   | 145                  |
| <b>BrtEndSheetData</b> (section <a href="#">2.4.524</a> )     | 146                  |
| <b>BrtWsProp</b> (section <a href="#">2.4.815</a> )           | 147                  |
| <b>BrtWsDim</b> (section <a href="#">2.4.812</a> )            | 148                  |
| <b>BrtPane</b> (section <a href="#">2.4.685</a> )             | 151                  |
| <b>BrtSel</b> (section <a href="#">2.4.738</a> )              | 152                  |
| <b>BrtWbProp</b> (section <a href="#">2.4.807</a> )           | 153                  |
| <b>BrtWbFactoid</b> (section <a href="#">2.4.806</a> )        | 154                  |
| <b>BrtFileRecover</b> (section <a href="#">2.4.640</a> )      | 155                  |
| <b>BrtBundleSh</b> (section <a href="#">2.4.301</a> )         | 156                  |
| <b>BrtCalcProp</b> (section <a href="#">2.4.302</a> )         | 157                  |
| <b>BrtBookView</b> (section <a href="#">2.4.298</a> )         | 158                  |
| <b>BrtBeginSst</b> (section <a href="#">2.4.219</a> )         | 159                  |
| <b>BrtEndSst</b> (section <a href="#">2.4.554</a> )           | 160                  |
| <b>BrtBeginAFilter</b> (section <a href="#">2.4.8</a> )       | 161                  |
| <b>BrtEndAFilter</b> (section <a href="#">2.4.347</a> )       | 162                  |
| <b>BrtBeginFilterColumn</b> (section <a href="#">2.4.80</a> ) | 163                  |
| <b>BrtEndFilterColumn</b> (section <a href="#">2.4.416</a> )  | 164                  |
| <b>BrtBeginFilters</b> (section <a href="#">2.4.81</a> )      | 165                  |
| <b>BrtEndFilters</b> (section <a href="#">2.4.417</a> )       | 166                  |
| <b>BrtFilter</b> (section <a href="#">2.4.645</a> )           | 167                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtColorFilter</b> (section <a href="#">2.4.323</a> )            | 168                  |
| <b>BrtIconFilter</b> (section <a href="#">2.4.657</a> )             | 169                  |
| <b>BrtTop10Filter</b> (section <a href="#">2.4.795</a> )            | 170                  |
| <b>BrtDynamicFilter</b> (section <a href="#">2.4.345</a> )          | 171                  |
| <b>BrtBeginCustomFilters</b> (section <a href="#">2.4.38</a> )      | 172                  |
| <b>BrtEndCustomFilters</b> (section <a href="#">2.4.377</a> )       | 173                  |
| <b>BrtCustomFilter</b> (section <a href="#">2.4.332</a> )           | 174                  |
| <b>BrtAFilterDateGroupItem</b> (section <a href="#">2.4.5</a> )     | 175                  |
| <b>BrtMergeCell</b> (section <a href="#">2.4.676</a> )              | 176                  |
| <b>BrtBeginMergeCells</b> (section <a href="#">2.4.107</a> )        | 177                  |
| <b>BrtEndMergeCells</b> (section <a href="#">2.4.443</a> )          | 178                  |
| <b>BrtBeginPivotCacheDef</b> (section <a href="#">2.4.162</a> )     | 179                  |
| <b>BrtEndPivotCacheDef</b> (section <a href="#">2.4.497</a> )       | 180                  |
| <b>BrtBeginPCDFields</b> (section <a href="#">2.4.131</a> )         | 181                  |
| <b>BrtEndPCDFields</b> (section <a href="#">2.4.467</a> )           | 182                  |
| <b>BrtBeginPCDField</b> (section <a href="#">2.4.130</a> )          | 183                  |
| <b>BrtEndPCDField</b> (section <a href="#">2.4.466</a> )            | 184                  |
| <b>BrtBeginPCDSource</b> (section <a href="#">2.4.160</a> )         | 185                  |
| <b>BrtEndPCDSource</b> (section <a href="#">2.4.495</a> )           | 186                  |
| <b>BrtBeginPCDSRange</b> (section <a href="#">2.4.161</a> )         | 187                  |
| <b>BrtEndPCDSRange</b> (section <a href="#">2.4.496</a> )           | 188                  |
| <b>BrtBeginPCDFatbl</b> (section <a href="#">2.4.125</a> )          | 189                  |
| <b>BrtEndPCDFatbl</b> (section <a href="#">2.4.461</a> )            | 190                  |
| <b>BrtBeginPCDIRun</b> (section <a href="#">2.4.141</a> )           | 191                  |
| <b>BrtEndPCDIRun</b> (section <a href="#">2.4.477</a> )             | 192                  |
| <b>BrtBeginPivotCacheRecords</b> (section <a href="#">2.4.165</a> ) | 193                  |
| <b>BrtEndPivotCacheRecords</b> (section <a href="#">2.4.500</a> )   | 194                  |
| <b>BrtBeginPCDHierarchies</b> (section <a href="#">2.4.139</a> )    | 195                  |
| <b>BrtEndPCDHierarchies</b> (section <a href="#">2.4.475</a> )      | 196                  |
| <b>BrtBeginPCDHierarchy</b> (section <a href="#">2.4.140</a> )      | 197                  |



| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndPCDHierarchy</b> (section <a href="#">2.4.476</a> )      | 198                  |
| <b>BrtBeginPCDHFieldsUsage</b> (section <a href="#">2.4.132</a> ) | 199                  |
| <b>BrtEndPCDHFieldsUsage</b> (section <a href="#">2.4.468</a> )   | 200                  |
| <b>BrtBeginExtConnection</b> (section <a href="#">2.4.76</a> )    | 201                  |
| <b>BrtEndExtConnection</b> (section <a href="#">2.4.412</a> )     | 202                  |
| <b>BrtBeginECDbProps</b> (section <a href="#">2.4.57</a> )        | 203                  |
| <b>BrtEndECDbProps</b> (section <a href="#">2.4.395</a> )         | 204                  |
| <b>BrtBeginECOLapProps</b> (section <a href="#">2.4.58</a> )      | 205                  |
| <b>BrtEndECOLapProps</b> (section <a href="#">2.4.396</a> )       | 206                  |
| <b>BrtBeginPCDSConsol</b> (section <a href="#">2.4.144</a> )      | 207                  |
| <b>BrtEndPCDSConsol</b> (section <a href="#">2.4.480</a> )        | 208                  |
| <b>BrtBeginPCDSCPPages</b> (section <a href="#">2.4.146</a> )     | 209                  |
| <b>BrtEndPCDSCPPages</b> (section <a href="#">2.4.482</a> )       | 210                  |
| <b>BrtBeginPCDSCPPage</b> (section <a href="#">2.4.145</a> )      | 211                  |
| <b>BrtEndPCDSCPPage</b> (section <a href="#">2.4.481</a> )        | 212                  |
| <b>BrtBeginPCDSCPIItem</b> (section <a href="#">2.4.147</a> )     | 213                  |
| <b>BrtEndPCDSCPIItem</b> (section <a href="#">2.4.483</a> )       | 214                  |
| <b>BrtBeginPCDSCSets</b> (section <a href="#">2.4.149</a> )       | 215                  |
| <b>BrtEndPCDSCSets</b> (section <a href="#">2.4.485</a> )         | 216                  |
| <b>BrtBeginPCDSCSet</b> (section <a href="#">2.4.148</a> )        | 217                  |
| <b>BrtEndPCDSCSet</b> (section <a href="#">2.4.484</a> )          | 218                  |
| <b>BrtBeginPCDFGroup</b> (section <a href="#">2.4.129</a> )       | 219                  |
| <b>BrtEndPCDFGroup</b> (section <a href="#">2.4.465</a> )         | 220                  |
| <b>BrtBeginPCDFGItems</b> (section <a href="#">2.4.127</a> )      | 221                  |
| <b>BrtEndPCDFGItems</b> (section <a href="#">2.4.463</a> )        | 222                  |
| <b>BrtBeginPCDFGRange</b> (section <a href="#">2.4.128</a> )      | 223                  |
| <b>BrtEndPCDFGRange</b> (section <a href="#">2.4.464</a> )        | 224                  |
| <b>BrtBeginPCDFGDiscrete</b> (section <a href="#">2.4.126</a> )   | 225                  |
| <b>BrtEndPCDFGDiscrete</b> (section <a href="#">2.4.462</a> )     | 226                  |
| <b>BrtBeginPCDSDTupleCache</b> (section <a href="#">2.4.158</a> ) | 227                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndPCDSDTupleCache</b> (section <a href="#">2.4.493</a> )   | 228                  |
| <b>BrtBeginPCDSDTCEntries</b> (section <a href="#">2.4.153</a> )  | 229                  |
| <b>BrtEndPCDSDTCEntries</b> (section <a href="#">2.4.488</a> )    | 230                  |
| <b>BrtBeginPCDSDTCEMembers</b> (section <a href="#">2.4.151</a> ) | 231                  |
| <b>BrtEndPCDSDTCEMembers</b> (section <a href="#">2.4.487</a> )   | 232                  |
| <b>BrtBeginPCDSDTCEMember</b> (section <a href="#">2.4.150</a> )  | 233                  |
| <b>BrtEndPCDSDTCEMember</b> (section <a href="#">2.4.486</a> )    | 234                  |
| <b>BrtBeginPCDSDTCQueries</b> (section <a href="#">2.4.154</a> )  | 235                  |
| <b>BrtEndPCDSDTCQueries</b> (section <a href="#">2.4.489</a> )    | 236                  |
| <b>BrtBeginPCDSDTCQuery</b> (section <a href="#">2.4.155</a> )    | 237                  |
| <b>BrtEndPCDSDTCQuery</b> (section <a href="#">2.4.490</a> )      | 238                  |
| <b>BrtBeginPCDSDTCSets</b> (section <a href="#">2.4.157</a> )     | 239                  |
| <b>BrtEndPCDSDTCSets</b> (section <a href="#">2.4.492</a> )       | 240                  |
| <b>BrtBeginPCDSDTCSet</b> (section <a href="#">2.4.156</a> )      | 241                  |
| <b>BrtEndPCDSDTCSet</b> (section <a href="#">2.4.491</a> )        | 242                  |
| <b>BrtBeginPCDCalcItems</b> (section <a href="#">2.4.119</a> )    | 243                  |
| <b>BrtEndPCDCalcItems</b> (section <a href="#">2.4.455</a> )      | 244                  |
| <b>BrtBeginPCDCalcItem</b> (section <a href="#">2.4.118</a> )     | 245                  |
| <b>BrtEndPCDCalcItem</b> (section <a href="#">2.4.454</a> )       | 246                  |
| <b>BrtBeginPRule</b> (section <a href="#">2.4.178</a> )           | 247                  |
| <b>BrtEndPRule</b> (section <a href="#">2.4.513</a> )             | 248                  |
| <b>BrtBeginPRFilters</b> (section <a href="#">2.4.174</a> )       | 249                  |
| <b>BrtEndPRFilters</b> (section <a href="#">2.4.509</a> )         | 250                  |
| <b>BrtBeginPRFilter</b> (section <a href="#">2.4.172</a> )        | 251                  |
| <b>BrtEndPRFilter</b> (section <a href="#">2.4.507</a> )          | 252                  |
| <b>BrtBeginPNames</b> (section <a href="#">2.4.169</a> )          | 253                  |
| <b>BrtEndPNames</b> (section <a href="#">2.4.504</a> )            | 254                  |
| <b>BrtBeginPName</b> (section <a href="#">2.4.168</a> )           | 255                  |
| <b>BrtEndPName</b> (section <a href="#">2.4.503</a> )             | 256                  |
| <b>BrtBeginPNPairs</b> (section <a href="#">2.4.171</a> )         | 257                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndPNPairs</b> (section <a href="#">2.4.506</a> )      | 258                  |
| <b>BrtBeginPNPair</b> (section <a href="#">2.4.170</a> )     | 259                  |
| <b>BrtEndPNPair</b> (section <a href="#">2.4.505</a> )       | 260                  |
| <b>BrtBeginECWebProps</b> (section <a href="#">2.4.67</a> )  | 261                  |
| <b>BrtEndECWebProps</b> (section <a href="#">2.4.403</a> )   | 262                  |
| <b>BrtBeginEcWpTables</b> (section <a href="#">2.4.68</a> )  | 263                  |
| <b>BrtEndECWPTables</b> (section <a href="#">2.4.404</a> )   | 264                  |
| <b>BrtBeginECPParams</b> (section <a href="#">2.4.60</a> )   | 265                  |
| <b>BrtEndECPParams</b> (section <a href="#">2.4.398</a> )    | 266                  |
| <b>BrtBeginECPParam</b> (section <a href="#">2.4.59</a> )    | 267                  |
| <b>BrtEndECPParam</b> (section <a href="#">2.4.397</a> )     | 268                  |
| <b>BrtBeginPCDKPIs</b> (section <a href="#">2.4.143</a> )    | 269                  |
| <b>BrtEndPCDKPIs</b> (section <a href="#">2.4.479</a> )      | 270                  |
| <b>BrtBeginPCDKPI</b> (section <a href="#">2.4.142</a> )     | 271                  |
| <b>BrtEndPCDKPI</b> (section <a href="#">2.4.478</a> )       | 272                  |
| <b>BrtBeginDims</b> (section <a href="#">2.4.50</a> )        | 273                  |
| <b>BrtEndDims</b> (section <a href="#">2.4.388</a> )         | 274                  |
| <b>BrtBeginDim</b> (section <a href="#">2.4.49</a> )         | 275                  |
| <b>BrtEndDim</b> (section <a href="#">2.4.387</a> )          | 276                  |
| <b>BrtIndexPartEnd</b> (section <a href="#">2.4.661</a> )    | 277                  |
| <b>BrtBeginStyleSheet</b> (section <a href="#">2.4.221</a> ) | 278                  |
| <b>BrtEndStyleSheet</b> (section <a href="#">2.4.556</a> )   | 279                  |
| <b>BrtBeginSXView</b> (section <a href="#">2.4.264</a> )     | 280                  |
| <b>BrtEndSXVI</b> (section <a href="#">2.4.598</a> )         | 281                  |
| <b>BrtBeginSXVI</b> (section <a href="#">2.4.263</a> )       | 282                  |
| <b>BrtBeginSXVIs</b> (section <a href="#">2.4.266</a> )      | 283                  |
| <b>BrtEndSXVIs</b> (section <a href="#">2.4.601</a> )        | 284                  |
| <b>BrtBeginSXVD</b> (section <a href="#">2.4.261</a> )       | 285                  |
| <b>BrtEndSXVD</b> (section <a href="#">2.4.596</a> )         | 286                  |
| <b>BrtBeginSXVDs</b> (section <a href="#">2.4.262</a> )      | 287                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndSXVDs</b> (section <a href="#">2.4.597</a> )        | 288                  |
| <b>BrtBeginSXPI</b> (section <a href="#">2.4.244</a> )       | 289                  |
| <b>BrtEndSXPI</b> (section <a href="#">2.4.579</a> )         | 290                  |
| <b>BrtBeginSXPIs</b> (section <a href="#">2.4.245</a> )      | 291                  |
| <b>BrtEndSXPIs</b> (section <a href="#">2.4.580</a> )        | 292                  |
| <b>BrtBeginSXDI</b> (section <a href="#">2.4.232</a> )       | 293                  |
| <b>BrtEndSXDI</b> (section <a href="#">2.4.567</a> )         | 294                  |
| <b>BrtBeginSXDIIs</b> (section <a href="#">2.4.233</a> )     | 295                  |
| <b>BrtEndSXDIIs</b> (section <a href="#">2.4.568</a> )       | 296                  |
| <b>BrtBeginSXLI</b> (section <a href="#">2.4.240</a> )       | 297                  |
| <b>BrtEndSXLI</b> (section <a href="#">2.4.575</a> )         | 298                  |
| <b>BrtBeginSXLIrws</b> (section <a href="#">2.4.242</a> )    | 299                  |
| <b>BrtEndSXLIrws</b> (section <a href="#">2.4.577</a> )      | 300                  |
| <b>BrtBeginSXLIcols</b> (section <a href="#">2.4.241</a> )   | 301                  |
| <b>BrtEndSXLIcols</b> (section <a href="#">2.4.576</a> )     | 302                  |
| <b>BrtBeginSXFormat</b> (section <a href="#">2.4.238</a> )   | 303                  |
| <b>BrtEndSXFormat</b> (section <a href="#">2.4.573</a> )     | 304                  |
| <b>BrtBeginSXFormats</b> (section <a href="#">2.4.239</a> )  | 305                  |
| <b>BrtEndSxFormats</b> (section <a href="#">2.4.574</a> )    | 306                  |
| <b>BrtBeginSxSelect</b> (section <a href="#">2.4.249</a> )   | 307                  |
| <b>BrtEndSxSelect</b> (section <a href="#">2.4.584</a> )     | 308                  |
| <b>BrtBeginISXVDRws</b> (section <a href="#">2.4.93</a> )    | 309                  |
| <b>BrtEndISXVDRws</b> (section <a href="#">2.4.429</a> )     | 310                  |
| <b>BrtBeginISXVDCols</b> (section <a href="#">2.4.92</a> )   | 311                  |
| <b>BrtEndISXVDCols</b> (section <a href="#">2.4.428</a> )    | 312                  |
| <b>BrtEndSXLocation</b> (section <a href="#">2.4.578</a> )   | 313                  |
| <b>BrtBeginSXLocation</b> (section <a href="#">2.4.243</a> ) | 314                  |
| <b>BrtEndSXView</b> (section <a href="#">2.4.599</a> )       | 315                  |
| <b>BrtBeginSXTHs</b> (section <a href="#">2.4.255</a> )      | 316                  |
| <b>BrtEndSXTHs</b> (section <a href="#">2.4.590</a> )        | 317                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginSXTH</b> (section <a href="#">2.4.252</a> )        | 318                  |
| <b>BrtEndSXTH</b> (section <a href="#">2.4.587</a> )          | 319                  |
| <b>BrtBeginISXTHRws</b> (section <a href="#">2.4.91</a> )     | 320                  |
| <b>BrtEndISXTHRws</b> (section <a href="#">2.4.427</a> )      | 321                  |
| <b>BrtBeginISXTHCols</b> (section <a href="#">2.4.90</a> )    | 322                  |
| <b>BrtEndISXTHCols</b> (section <a href="#">2.4.426</a> )     | 323                  |
| <b>BrtBeginSXTDMPs</b> (section <a href="#">2.4.251</a> )     | 324                  |
| <b>BrtEndSXTDMPs</b> (section <a href="#">2.4.586</a> )       | 325                  |
| <b>BrtBeginSXTDMP</b> (section <a href="#">2.4.250</a> )      | 326                  |
| <b>BrtEndSXTDMP</b> (section <a href="#">2.4.585</a> )        | 327                  |
| <b>BrtBeginSXTHItems</b> (section <a href="#">2.4.254</a> )   | 328                  |
| <b>BrtEndSXTHItems</b> (section <a href="#">2.4.589</a> )     | 329                  |
| <b>BrtBeginSXTHItem</b> (section <a href="#">2.4.253</a> )    | 330                  |
| <b>BrtEndSXTHItem</b> (section <a href="#">2.4.588</a> )      | 331                  |
| <b>BrtBeginMetadata</b> (section <a href="#">2.4.108</a> )    | 332                  |
| <b>BrtEndMetadata</b> (section <a href="#">2.4.444</a> )      | 333                  |
| <b>BrtBeginEsmdinfo</b> (section <a href="#">2.4.71</a> )     | 334                  |
| <b>BrtMdtinfo</b> (section <a href="#">2.4.674</a> )          | 335                  |
| <b>BrtEndEsmdinfo</b> (section <a href="#">2.4.407</a> )      | 336                  |
| <b>BrtBeginEsmdb</b> (section <a href="#">2.4.70</a> )        | 337                  |
| <b>BrtEndEsmdb</b> (section <a href="#">2.4.406</a> )         | 338                  |
| <b>BrtBeginEsfmd</b> (section <a href="#">2.4.69</a> )        | 339                  |
| <b>BrtEndEsfmd</b> (section <a href="#">2.4.405</a> )         | 340                  |
| <b>BrtBeginSingleCells</b> (section <a href="#">2.4.190</a> ) | 341                  |
| <b>BrtEndSingleCells</b> (section <a href="#">2.4.525</a> )   | 342                  |
| <b>BrtBeginList</b> (section <a href="#">2.4.96</a> )         | 343                  |
| <b>BrtEndList</b> (section <a href="#">2.4.432</a> )          | 344                  |
| <b>BrtBeginListCols</b> (section <a href="#">2.4.98</a> )     | 345                  |
| <b>BrtEndListCols</b> (section <a href="#">2.4.434</a> )      | 346                  |
| <b>BrtBeginListCol</b> (section <a href="#">2.4.97</a> )      | 347                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndListCol</b> (section <a href="#">2.4.433</a> )       | 348                  |
| <b>BrtBeginListXmICPr</b> (section <a href="#">2.4.100</a> )  | 349                  |
| <b>BrtEndListXmICPr</b> (section <a href="#">2.4.436</a> )    | 350                  |
| <b>BrtListCCFmla</b> (section <a href="#">2.4.669</a> )       | 351                  |
| <b>BrtListTrFmla</b> (section <a href="#">2.4.671</a> )       | 352                  |
| <b>BrtBeginExternals</b> (section <a href="#">2.4.78</a> )    | 353                  |
| <b>BrtEndExternals</b> (section <a href="#">2.4.414</a> )     | 354                  |
| <b>BrtSupBookSrc</b> (section <a href="#">2.4.757</a> )       | 355                  |
| <b>BrtSupSelf</b> (section <a href="#">2.4.770</a> )          | 357                  |
| <b>BrtSupSame</b> (section <a href="#">2.4.769</a> )          | 358                  |
| <b>BrtSupTabs</b> (section <a href="#">2.4.771</a> )          | 359                  |
| <b>BrtBeginSupBook</b> (section <a href="#">2.4.223</a> )     | 360                  |
| <b>BrtPlaceholderName</b> (section <a href="#">2.4.710</a> )  | 361                  |
| <b>BrtExternSheet</b> (section <a href="#">2.4.635</a> )      | 362                  |
| <b>BrtExternTableStart</b> (section <a href="#">2.4.637</a> ) | 363                  |
| <b>BrtExternTableEnd</b> (section <a href="#">2.4.636</a> )   | 364                  |
| <b>BrtExternRowHdr</b> (section <a href="#">2.4.634</a> )     | 366                  |
| <b>BrtExternCellBlank</b> (section <a href="#">2.4.629</a> )  | 367                  |
| <b>BrtExternCellReal</b> (section <a href="#">2.4.632</a> )   | 368                  |
| <b>BrtExternCellBool</b> (section <a href="#">2.4.630</a> )   | 369                  |
| <b>BrtExternCellError</b> (section <a href="#">2.4.631</a> )  | 370                  |
| <b>BrtExternCellString</b> (section <a href="#">2.4.633</a> ) | 371                  |
| <b>BrtBeginEsmdx</b> (section <a href="#">2.4.72</a> )        | 372                  |
| <b>BrtEndEsmdx</b> (section <a href="#">2.4.408</a> )         | 373                  |
| <b>BrtBeginMdxSet</b> (section <a href="#">2.4.105</a> )      | 374                  |
| <b>BrtEndMdxSet</b> (section <a href="#">2.4.441</a> )        | 375                  |
| <b>BrtBeginMdxMbrProp</b> (section <a href="#">2.4.104</a> )  | 376                  |
| <b>BrtEndMdxMbrProp</b> (section <a href="#">2.4.440</a> )    | 377                  |
| <b>BrtBeginMdxKPI</b> (section <a href="#">2.4.103</a> )      | 378                  |
| <b>BrtEndMdxKPI</b> (section <a href="#">2.4.439</a> )        | 379                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginEsstr</b> (section <a href="#">2.4.73</a> )          | 380                  |
| <b>BrtEndEsstr</b> (section <a href="#">2.4.409</a> )           | 381                  |
| <b>BrtBeginPRFItem</b> (section <a href="#">2.4.176</a> )       | 382                  |
| <b>BrtEndPRFItem</b> (section <a href="#">2.4.511</a> )         | 383                  |
| <b>BrtBeginPivotCacheIDs</b> (section <a href="#">2.4.164</a> ) | 384                  |
| <b>BrtEndPivotCacheIDs</b> (section <a href="#">2.4.499</a> )   | 385                  |
| <b>BrtBeginPivotCacheID</b> (section <a href="#">2.4.163</a> )  | 386                  |
| <b>BrtEndPivotCacheID</b> (section <a href="#">2.4.498</a> )    | 387                  |
| <b>BrtBeginISXVIs</b> (section <a href="#">2.4.94</a> )         | 388                  |
| <b>BrtEndISXVIs</b> (section <a href="#">2.4.430</a> )          | 389                  |
| <b>BrtBeginColInfos</b> (section <a href="#">2.4.24</a> )       | 390                  |
| <b>BrtEndColInfos</b> (section <a href="#">2.4.363</a> )        | 391                  |
| <b>BrtBeginRwBrk</b> (section <a href="#">2.4.185</a> )         | 392                  |
| <b>BrtEndRwBrk</b> (section <a href="#">2.4.520</a> )           | 393                  |
| <b>BrtBeginColBrk</b> (section <a href="#">2.4.23</a> )         | 394                  |
| <b>BrtEndColBrk</b> (section <a href="#">2.4.362</a> )          | 395                  |
| <b>BrtBrk</b> (section <a href="#">2.4.300</a> )                | 396                  |
| <b>BrtUserBookView</b> (section <a href="#">2.4.797</a> )       | 397                  |
| <b>BrtInfo</b> (section <a href="#">2.4.663</a> )               | 398                  |
| <b>BrtCUsr</b> (section <a href="#">2.4.331</a> )               | 399                  |
| <b>BrtUsr</b> (section <a href="#">2.4.798</a> )                | 400                  |
| <b>BrtBeginUsers</b> (section <a href="#">2.4.281</a> )         | 401                  |
| <b>BrtEOF</b> (section <a href="#">2.4.628</a> )                | 403                  |
| <b>BrtUCR</b> (section <a href="#">2.4.796</a> )                | 404                  |
| <b>BrtRRInsDel</b> (section <a href="#">2.4.729</a> )           | 405                  |
| <b>BrtRREndInsDel</b> (section <a href="#">2.4.725</a> )        | 406                  |
| <b>BrtRRMove</b> (section <a href="#">2.4.731</a> )             | 407                  |
| <b>BrtRREndMove</b> (section <a href="#">2.4.726</a> )          | 408                  |
| <b>BrtRRChgCell</b> (section <a href="#">2.4.720</a> )          | 409                  |
| <b>BrtRREndChgCell</b> (section <a href="#">2.4.723</a> )       | 410                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtRRHeader</b> (section <a href="#">2.4.728</a> )           | 411                  |
| <b>BrtRRUserView</b> (section <a href="#">2.4.736</a> )         | 412                  |
| <b>BrtRRRenSheet</b> (section <a href="#">2.4.733</a> )         | 413                  |
| <b>BrtRRInsertSh</b> (section <a href="#">2.4.730</a> )         | 414                  |
| <b>BrtRRDefName</b> (section <a href="#">2.4.722</a> )          | 415                  |
| <b>BrtRRNote</b> (section <a href="#">2.4.732</a> )             | 416                  |
| <b>BrtRRConflict</b> (section <a href="#">2.4.721</a> )         | 417                  |
| <b>BrtRRTQSIF</b> (section <a href="#">2.4.735</a> )            | 418                  |
| <b>BrtRRFormat</b> (section <a href="#">2.4.727</a> )           | 419                  |
| <b>BrtRREndFormat</b> (section <a href="#">2.4.724</a> )        | 420                  |
| <b>BrtRRAutoFmt</b> (section <a href="#">2.4.719</a> )          | 421                  |
| <b>BrtBeginUserShViews</b> (section <a href="#">2.4.283</a> )   | 422                  |
| <b>BrtBeginUserShView</b> (section <a href="#">2.4.282</a> )    | 423                  |
| <b>BrtEndUserShView</b> (section <a href="#">2.4.616</a> )      | 424                  |
| <b>BrtEndUserShViews</b> (section <a href="#">2.4.617</a> )     | 425                  |
| <b>BrtArrFmla</b> (section <a href="#">2.4.6</a> )              | 426                  |
| <b>BrtShrFmla</b> (section <a href="#">2.4.742</a> )            | 427                  |
| <b>BrtTable</b> (section <a href="#">2.4.787</a> )              | 428                  |
| <b>BrtBeginExtConnections</b> (section <a href="#">2.4.77</a> ) | 429                  |
| <b>BrtEndExtConnections</b> (section <a href="#">2.4.413</a> )  | 430                  |
| <b>BrtBeginPCDCalcMems</b> (section <a href="#">2.4.123</a> )   | 431                  |
| <b>BrtEndPCDCalcMems</b> (section <a href="#">2.4.459</a> )     | 432                  |
| <b>BrtBeginPCDCalcMem</b> (section <a href="#">2.4.120</a> )    | 433                  |
| <b>BrtEndPCDCalcMem</b> (section <a href="#">2.4.456</a> )      | 434                  |
| <b>BrtBeginPCDHGLLevels</b> (section <a href="#">2.4.134</a> )  | 435                  |
| <b>BrtEndPCDHGLLevels</b> (section <a href="#">2.4.470</a> )    | 436                  |
| <b>BrtBeginPCDHGLLevel</b> (section <a href="#">2.4.133</a> )   | 437                  |
| <b>BrtEndPCDHGLLevel</b> (section <a href="#">2.4.469</a> )     | 438                  |
| <b>BrtBeginPCDHGLGroups</b> (section <a href="#">2.4.138</a> )  | 439                  |
| <b>BrtEndPCDHGLGroups</b> (section <a href="#">2.4.474</a> )    | 440                  |



| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginPCDHGLGroup</b> (section <a href="#">2.4.137</a> )          | 441                  |
| <b>BrtEndPCDHGLGroup</b> (section <a href="#">2.4.473</a> )            | 442                  |
| <b>BrtBeginPCDHGLGMembers</b> (section <a href="#">2.4.136</a> )       | 443                  |
| <b>BrtEndPCDHGLGMembers</b> (section <a href="#">2.4.472</a> )         | 444                  |
| <b>BrtBeginPCDHGLGMember</b> (section <a href="#">2.4.135</a> )        | 445                  |
| <b>BrtEndPCDHGLGMember</b> (section <a href="#">2.4.471</a> )          | 446                  |
| <b>BrtBeginQSI</b> (section <a href="#">2.4.180</a> )                  | 447                  |
| <b>BrtEndQSI</b> (section <a href="#">2.4.515</a> )                    | 448                  |
| <b>BrtBeginQSIR</b> (section <a href="#">2.4.183</a> )                 | 449                  |
| <b>BrtEndQSIR</b> (section <a href="#">2.4.518</a> )                   | 450                  |
| <b>BrtBeginDeletedNames</b> (section <a href="#">2.4.48</a> )          | 451                  |
| <b>BrtEndDeletedNames</b> (section <a href="#">2.4.386</a> )           | 452                  |
| <b>BrtBeginDeletedName</b> (section <a href="#">2.4.47</a> )           | 453                  |
| <b>BrtEndDeletedName</b> (section <a href="#">2.4.385</a> )            | 454                  |
| <b>BrtBeginQSIFs</b> (section <a href="#">2.4.182</a> )                | 455                  |
| <b>BrtEndQSIFs</b> (section <a href="#">2.4.517</a> )                  | 456                  |
| <b>BrtBeginQSIF</b> (section <a href="#">2.4.181</a> )                 | 457                  |
| <b>BrtEndQSIF</b> (section <a href="#">2.4.516</a> )                   | 458                  |
| <b>BrtBeginAutoSortScope</b> (section <a href="#">2.4.9</a> )          | 459                  |
| <b>BrtEndAutoSortScope</b> (section <a href="#">2.4.348</a> )          | 460                  |
| <b>BrtBeginConditionalFormatting</b> (section <a href="#">2.4.32</a> ) | 461                  |
| <b>BrtEndConditionalFormatting</b> (section <a href="#">2.4.371</a> )  | 462                  |
| <b>BrtBeginCFRule</b> (section <a href="#">2.4.21</a> )                | 463                  |
| <b>BrtEndCFRule</b> (section <a href="#">2.4.360</a> )                 | 464                  |
| <b>BrtBeginIconSet</b> (section <a href="#">2.4.87</a> )               | 465                  |
| <b>BrtEndIconSet</b> (section <a href="#">2.4.423</a> )                | 466                  |
| <b>BrtBeginDatabar</b> (section <a href="#">2.4.40</a> )               | 467                  |
| <b>BrtEndDatabar</b> (section <a href="#">2.4.378</a> )                | 468                  |
| <b>BrtBeginColorScale</b> (section <a href="#">2.4.26</a> )            | 469                  |
| <b>BrtEndColorScale</b> (section <a href="#">2.4.365</a> )             | 470                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtCFVO</b> (section <a href="#">2.4.318</a> )              | 471                  |
| <b>BrtExternValueMeta</b> (section <a href="#">2.4.638</a> )   | 472                  |
| <b>BrtBeginColorPalette</b> (section <a href="#">2.4.25</a> )  | 473                  |
| <b>BrtEndColorPalette</b> (section <a href="#">2.4.364</a> )   | 474                  |
| <b>BrtIndexedColor</b> (section <a href="#">2.4.660</a> )      | 475                  |
| <b>BrtMargins</b> (section <a href="#">2.4.672</a> )           | 476                  |
| <b>BrtPrintOptions</b> (section <a href="#">2.4.711</a> )      | 477                  |
| <b>BrtPageSetup</b> (section <a href="#">2.4.684</a> )         | 478                  |
| <b>BrtBeginHeaderFooter</b> (section <a href="#">2.4.86</a> )  | 479                  |
| <b>BrtEndHeaderFooter</b> (section <a href="#">2.4.422</a> )   | 480                  |
| <b>BrtBeginSXCrtFormat</b> (section <a href="#">2.4.230</a> )  | 481                  |
| <b>BrtEndSXCrtFormat</b> (section <a href="#">2.4.565</a> )    | 482                  |
| <b>BrtBeginSXCrtFormats</b> (section <a href="#">2.4.231</a> ) | 483                  |
| <b>BrtEndSXCrtFormats</b> (section <a href="#">2.4.566</a> )   | 484                  |
| <b>BrtWsFmtInfo</b> (section <a href="#">2.4.813</a> )         | 485                  |
| <b>BrtBeginMgs</b> (section <a href="#">2.4.111</a> )          | 486                  |
| <b>BrtEndMGs</b> (section <a href="#">2.4.447</a> )            | 487                  |
| <b>BrtBeginMGMaps</b> (section <a href="#">2.4.110</a> )       | 488                  |
| <b>BrtEndMGMaps</b> (section <a href="#">2.4.446</a> )         | 489                  |
| <b>BrtBeginMG</b> (section <a href="#">2.4.109</a> )           | 490                  |
| <b>BrtEndMG</b> (section <a href="#">2.4.445</a> )             | 491                  |
| <b>BrtBeginMap</b> (section <a href="#">2.4.101</a> )          | 492                  |
| <b>BrtEndMap</b> (section <a href="#">2.4.437</a> )            | 493                  |
| <b>BrtHLink</b> (section <a href="#">2.4.656</a> )             | 494                  |
| <b>BrtBeginDCon</b> (section <a href="#">2.4.45</a> )          | 495                  |
| <b>BrtEndDCon</b> (section <a href="#">2.4.383</a> )           | 496                  |
| <b>BrtBeginDRefs</b> (section <a href="#">2.4.51</a> )         | 497                  |
| <b>BrtEndDRefs</b> (section <a href="#">2.4.389</a> )          | 498                  |
| <b>BrtDRef</b> (section <a href="#">2.4.338</a> )              | 499                  |
| <b>BrtBeginScenMan</b> (section <a href="#">2.4.186</a> )      | 500                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtEndScenMan</b> (section <a href="#">2.4.521</a> )        | 501                  |
| <b>BrtBeginSct</b> (section <a href="#">2.4.187</a> )          | 502                  |
| <b>BrtEndSct</b> (section <a href="#">2.4.522</a> )            | 503                  |
| <b>BrtSlc</b> (section <a href="#">2.4.743</a> )               | 504                  |
| <b>BrtBeginDXFs</b> (section <a href="#">2.4.55</a> )          | 505                  |
| <b>BrtEndDXFs</b> (section <a href="#">2.4.393</a> )           | 506                  |
| <b>BrtDXF</b> (section <a href="#">2.4.342</a> )               | 507                  |
| <b>BrtBeginTableStyles</b> (section <a href="#">2.4.269</a> )  | 508                  |
| <b>BrtEndTableStyles</b> (section <a href="#">2.4.604</a> )    | 509                  |
| <b>BrtBeginTableStyle</b> (section <a href="#">2.4.268</a> )   | 510                  |
| <b>BrtEndTableStyle</b> (section <a href="#">2.4.603</a> )     | 511                  |
| <b>BrtTableStyleElement</b> (section <a href="#">2.4.791</a> ) | 512                  |
| <b>BrtTableStyleClient</b> (section <a href="#">2.4.790</a> )  | 513                  |
| <b>BrtBeginVolDeps</b> (section <a href="#">2.4.284</a> )      | 514                  |
| <b>BrtEndVolDeps</b> (section <a href="#">2.4.618</a> )        | 515                  |
| <b>BrtBeginVolType</b> (section <a href="#">2.4.287</a> )      | 516                  |
| <b>BrtEndVolType</b> (section <a href="#">2.4.621</a> )        | 517                  |
| <b>BrtBeginVolMain</b> (section <a href="#">2.4.285</a> )      | 518                  |
| <b>BrtEndVolMain</b> (section <a href="#">2.4.619</a> )        | 519                  |
| <b>BrtBeginVolTopic</b> (section <a href="#">2.4.286</a> )     | 520                  |
| <b>BrtEndVolTopic</b> (section <a href="#">2.4.620</a> )       | 521                  |
| <b>BrtVolSubtopic</b> (section <a href="#">2.4.805</a> )       | 522                  |
| <b>BrtVolRef</b> (section <a href="#">2.4.803</a> )            | 523                  |
| <b>BrtVolNum</b> (section <a href="#">2.4.802</a> )            | 524                  |
| <b>BrtVolErr</b> (section <a href="#">2.4.801</a> )            | 525                  |
| <b>BrtVolStr</b> (section <a href="#">2.4.804</a> )            | 526                  |
| <b>BrtVolBool</b> (section <a href="#">2.4.800</a> )           | 527                  |
| <b>BrtBeginSortState</b> (section <a href="#">2.4.215</a> )    | 530                  |
| <b>BrtEndSortState</b> (section <a href="#">2.4.550</a> )      | 531                  |
| <b>BrtBeginSortCond</b> (section <a href="#">2.4.213</a> )     | 532                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndSortCond</b> (section <a href="#">2.4.548</a> )        | 533                  |
| <b>BrtBookProtection</b> (section <a href="#">2.4.296</a> )     | 534                  |
| <b>BrtSheetProtection</b> (section <a href="#">2.4.740</a> )    | 535                  |
| <b>BrtRangeProtection</b> (section <a href="#">2.4.714</a> )    | 536                  |
| <b>BrtPhoneticInfo</b> (section <a href="#">2.4.706</a> )       | 537                  |
| <b>BrtBeginECTxtWiz</b> (section <a href="#">2.4.65</a> )       | 538                  |
| <b>BrtEndECTxtWiz</b> (section <a href="#">2.4.401</a> )        | 539                  |
| <b>BrtBeginECTWFldInfoLst</b> (section <a href="#">2.4.63</a> ) | 540                  |
| <b>BrtEndECTWFldInfoLst</b> (section <a href="#">2.4.399</a> )  | 541                  |
| <b>BrtBeginECTwFldInfo</b> (section <a href="#">2.4.61</a> )    | 542                  |
| <b>BrtFileSharing</b> (section <a href="#">2.4.641</a> )        | 548                  |
| <b>BrtOleSize</b> (section <a href="#">2.4.683</a> )            | 549                  |
| <b>BrtDrawing</b> (section <a href="#">2.4.337</a> )            | 550                  |
| <b>BrtLegacyDrawing</b> (section <a href="#">2.4.666</a> )      | 551                  |
| <b>BrtLegacyDrawingHF</b> (section <a href="#">2.4.667</a> )    | 552                  |
| <b>BrtWebOpt</b> (section <a href="#">2.4.810</a> )             | 553                  |
| <b>BrtBeginWebPubItems</b> (section <a href="#">2.4.290</a> )   | 554                  |
| <b>BrtEndWebPubItems</b> (section <a href="#">2.4.624</a> )     | 555                  |
| <b>BrtBeginWebPubItem</b> (section <a href="#">2.4.289</a> )    | 556                  |
| <b>BrtEndWebPubItem</b> (section <a href="#">2.4.623</a> )      | 557                  |
| <b>BrtBeginSXCondFmt</b> (section <a href="#">2.4.226</a> )     | 558                  |
| <b>BrtEndSXCondFmt</b> (section <a href="#">2.4.561</a> )       | 559                  |
| <b>BrtBeginSXCondFmts</b> (section <a href="#">2.4.228</a> )    | 560                  |
| <b>BrtEndSXCondFmts</b> (section <a href="#">2.4.563</a> )      | 561                  |
| <b>BrtBkHim</b> (section <a href="#">2.4.295</a> )              | 562                  |
| <b>BrtColor</b> (section <a href="#">2.4.321</a> )              | 564                  |
| <b>BrtBeginIndexedColors</b> (section <a href="#">2.4.89</a> )  | 565                  |
| <b>BrtEndIndexedColors</b> (section <a href="#">2.4.425</a> )   | 566                  |
| <b>BrtBeginMRUColors</b> (section <a href="#">2.4.114</a> )     | 569                  |
| <b>BrtEndMRUColors</b> (section <a href="#">2.4.450</a> )       | 570                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtMRUColor</b> (section <a href="#">2.4.679</a> )             | 572                  |
| <b>BrtBeginDVals</b> (section <a href="#">2.4.52</a> )            | 573                  |
| <b>BrtEndDVals</b> (section <a href="#">2.4.390</a> )             | 574                  |
| <b>BrtSupNameStart</b> (section <a href="#">2.4.766</a> )         | 577                  |
| <b>BrtSupNameValueStart</b> (section <a href="#">2.4.768</a> )    | 578                  |
| <b>BrtSupNameValueEnd</b> (section <a href="#">2.4.767</a> )      | 579                  |
| <b>BrtSupNameNum</b> (section <a href="#">2.4.764</a> )           | 580                  |
| <b>BrtSupNameErr</b> (section <a href="#">2.4.761</a> )           | 581                  |
| <b>BrtSupNameSt</b> (section <a href="#">2.4.765</a> )            | 582                  |
| <b>BrtSupNameNil</b> (section <a href="#">2.4.763</a> )           | 583                  |
| <b>BrtSupNameBool</b> (section <a href="#">2.4.759</a> )          | 584                  |
| <b>BrtSupNameFmla</b> (section <a href="#">2.4.762</a> )          | 585                  |
| <b>BrtSupNameBits</b> (section <a href="#">2.4.758</a> )          | 586                  |
| <b>BrtSupNameEnd</b> (section <a href="#">2.4.760</a> )           | 587                  |
| <b>BrtEndSupBook</b> (section <a href="#">2.4.558</a> )           | 588                  |
| <b>BrtCellSmartTagProperty</b> (section <a href="#">2.4.313</a> ) | 589                  |
| <b>BrtBeginCellSmartTag</b> (section <a href="#">2.4.16</a> )     | 590                  |
| <b>BrtEndCellSmartTag</b> (section <a href="#">2.4.355</a> )      | 591                  |
| <b>BrtBeginCellSmartTags</b> (section <a href="#">2.4.17</a> )    | 592                  |
| <b>BrtEndCellSmartTags</b> (section <a href="#">2.4.356</a> )     | 593                  |
| <b>BrtBeginSmartTags</b> (section <a href="#">2.4.211</a> )       | 594                  |
| <b>BrtEndSmartTags</b> (section <a href="#">2.4.546</a> )         | 595                  |
| <b>BrtSmartTagType</b> (section <a href="#">2.4.751</a> )         | 596                  |
| <b>BrtBeginSmartTagTypes</b> (section <a href="#">2.4.212</a> )   | 597                  |
| <b>BrtEndSmartTagTypes</b> (section <a href="#">2.4.547</a> )     | 598                  |
| <b>BrtBeginSXFilters</b> (section <a href="#">2.4.237</a> )       | 599                  |
| <b>BrtEndSXFilters</b> (section <a href="#">2.4.572</a> )         | 600                  |
| <b>BrtBeginSXFILTER</b> (section <a href="#">2.4.236</a> )        | 601                  |
| <b>BrtEndSXFilter</b> (section <a href="#">2.4.571</a> )          | 602                  |
| <b>BrtBeginFills</b> (section <a href="#">2.4.79</a> )            | 603                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndFills</b> (section <a href="#">2.4.415</a> )           | 604                  |
| <b>BrtBeginCellWatches</b> (section <a href="#">2.4.19</a> )    | 605                  |
| <b>BrtEndCellWatches</b> (section <a href="#">2.4.358</a> )     | 606                  |
| <b>BrtCellWatch</b> (section <a href="#">2.4.315</a> )          | 607                  |
| <b>BrtBeginCERrs</b> (section <a href="#">2.4.35</a> )          | 608                  |
| <b>BrtEndCERrs</b> (section <a href="#">2.4.374</a> )           | 609                  |
| <b>BrtCrashRecErr</b> (section <a href="#">2.4.326</a> )        | 610                  |
| <b>BrtBeginFonts</b> (section <a href="#">2.4.85</a> )          | 611                  |
| <b>BrtEndFonts</b> (section <a href="#">2.4.421</a> )           | 612                  |
| <b>BrtBeginBorders</b> (section <a href="#">2.4.12</a> )        | 613                  |
| <b>BrtEndBorders</b> (section <a href="#">2.4.351</a> )         | 614                  |
| <b>BrtBeginFmts</b> (section <a href="#">2.4.83</a> )           | 615                  |
| <b>BrtEndFmts</b> (section <a href="#">2.4.419</a> )            | 616                  |
| <b>BrtBeginCellXFs</b> (section <a href="#">2.4.20</a> )        | 617                  |
| <b>BrtEndCellXFs</b> (section <a href="#">2.4.359</a> )         | 618                  |
| <b>BrtBeginStyles</b> (section <a href="#">2.4.220</a> )        | 619                  |
| <b>BrtEndStyles</b> (section <a href="#">2.4.555</a> )          | 620                  |
| <b>BrtBigName</b> (section <a href="#">2.4.294</a> )            | 625                  |
| <b>BrtBeginCellStyleXFs</b> (section <a href="#">2.4.18</a> )   | 626                  |
| <b>BrtEndCellStyleXFs</b> (section <a href="#">2.4.357</a> )    | 627                  |
| <b>BrtBeginComments</b> (section <a href="#">2.4.31</a> )       | 628                  |
| <b>BrtEndComments</b> (section <a href="#">2.4.370</a> )        | 629                  |
| <b>BrtBeginCommentAuthors</b> (section <a href="#">2.4.29</a> ) | 630                  |
| <b>BrtEndCommentAuthors</b> (section <a href="#">2.4.368</a> )  | 631                  |
| <b>BrtCommentAuthor</b> (section <a href="#">2.4.324</a> )      | 632                  |
| <b>BrtBeginCommentList</b> (section <a href="#">2.4.30</a> )    | 633                  |
| <b>BrtEndCommentList</b> (section <a href="#">2.4.369</a> )     | 634                  |
| <b>BrtBeginComment</b> (section <a href="#">2.4.28</a> )        | 635                  |
| <b>BrtEndComment</b> (section <a href="#">2.4.367</a> )         | 636                  |
| <b>BrtCommentText</b> (section <a href="#">2.4.325</a> )        | 637                  |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginOleObjects</b> (section <a href="#">2.4.116</a> )            | 638                  |
| <b>BrtOleObject</b> (section <a href="#">2.4.682</a> )                  | 639                  |
| <b>BrtEndOleObjects</b> (section <a href="#">2.4.452</a> )              | 640                  |
| <b>BrtBeginSxrules</b> (section <a href="#">2.4.247</a> )               | 641                  |
| <b>BrtEndSxRules</b> (section <a href="#">2.4.582</a> )                 | 642                  |
| <b>BrtBeginActiveXControls</b> (section <a href="#">2.4.7</a> )         | 643                  |
| <b>BrtActiveX</b> (section <a href="#">2.4.4</a> )                      | 644                  |
| <b>BrtEndActiveXControls</b> (section <a href="#">2.4.346</a> )         | 645                  |
| <b>BrtBeginPCSDTCCEMembersSortBy</b> (section <a href="#">2.4.152</a> ) | 646                  |
| <b>BrtBeginCellIgnoreECs</b> (section <a href="#">2.4.14</a> )          | 648                  |
| <b>BrtCellIgnoreEC</b> (section <a href="#">2.4.306</a> )               | 649                  |
| <b>BrtEndCellIgnoreECs</b> (section <a href="#">2.4.353</a> )           | 650                  |
| <b>BrtCsProp</b> (section <a href="#">2.4.328</a> )                     | 651                  |
| <b>BrtCsPageSetup</b> (section <a href="#">2.4.327</a> )                | 652                  |
| <b>BrtBeginUserCsViews</b> (section <a href="#">2.4.280</a> )           | 653                  |
| <b>BrtEndUserCsViews</b> (section <a href="#">2.4.615</a> )             | 654                  |
| <b>BrtBeginUserCsView</b> (section <a href="#">2.4.279</a> )            | 655                  |
| <b>BrtEndUserCsView</b> (section <a href="#">2.4.614</a> )              | 656                  |
| <b>BrtBeginPcdSFCIEntries</b> (section <a href="#">2.4.159</a> )        | 657                  |
| <b>BrtEndPCDSFCIEntries</b> (section <a href="#">2.4.494</a> )          | 658                  |
| <b>BrtPCDSFCIEntry</b> (section <a href="#">2.4.703</a> )               | 659                  |
| <b>BrtBeginListParts</b> (section <a href="#">2.4.99</a> )              | 660                  |
| <b>BrtListPart</b> (section <a href="#">2.4.670</a> )                   | 661                  |
| <b>BrtEndListParts</b> (section <a href="#">2.4.435</a> )               | 662                  |
| <b>BrtSheetCalcProp</b> (section <a href="#">2.4.739</a> )              | 663                  |
| <b>BrtBeginFnGroup</b> (section <a href="#">2.4.84</a> )                | 664                  |
| <b>BrtFnGroup</b> (section <a href="#">2.4.652</a> )                    | 665                  |
| <b>BrtEndFnGroup</b> (section <a href="#">2.4.420</a> )                 | 666                  |
| <b>BrtSupAddin</b> (section <a href="#">2.4.756</a> )                   | 667                  |
| <b>BrtSXTDMPOrder</b> (section <a href="#">2.4.775</a> )                | 668                  |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtCsProtection</b> (section <a href="#">2.4.329</a> )          | 669                  |
| <b>BrtBeginWsSortMap</b> (section <a href="#">2.4.291</a> )        | 671                  |
| <b>BrtEndWsSortMap</b> (section <a href="#">2.4.625</a> )          | 672                  |
| <b>BrtBeginRRSort</b> (section <a href="#">2.4.184</a> )           | 673                  |
| <b>BrtEndRRSort</b> (section <a href="#">2.4.519</a> )             | 674                  |
| <b>BrtRRSortItem</b> (section <a href="#">2.4.734</a> )            | 675                  |
| <b>BrtFileSharingIso</b> (section <a href="#">2.4.642</a> )        | 676                  |
| <b>BrtBookProtectionIso</b> (section <a href="#">2.4.297</a> )     | 677                  |
| <b>BrtSheetProtectionIso</b> (section <a href="#">2.4.741</a> )    | 678                  |
| <b>BrtCsProtectionIso</b> (section <a href="#">2.4.330</a> )       | 679                  |
| <b>BrtRangeProtectionIso</b> (section <a href="#">2.4.716</a> )    | 680                  |
| <b>BrtRwDescent</b> (section <a href="#">2.4.737</a> )             | 1024                 |
| <b>BrtKnownFonts</b> (section <a href="#">2.4.665</a> )            | 1025                 |
| <b>BrtBeginSXTupleSet</b> (section <a href="#">2.4.256</a> )       | 1026                 |
| <b>BrtEndSXTupleSet</b> (section <a href="#">2.4.591</a> )         | 1027                 |
| <b>BrtBeginSXTupleSetHeader</b> (section <a href="#">2.4.258</a> ) | 1028                 |
| <b>BrtEndSXTupleSetHeader</b> (section <a href="#">2.4.593</a> )   | 1029                 |
| <b>BrtSXTupleSetHeaderItem</b> (section <a href="#">2.4.778</a> )  | 1030                 |
| <b>BrtBeginSXTupleSetData</b> (section <a href="#">2.4.257</a> )   | 1031                 |
| <b>BrtEndSXTupleSetData</b> (section <a href="#">2.4.592</a> )     | 1032                 |
| <b>BrtBeginSXTupleSetRow</b> (section <a href="#">2.4.259</a> )    | 1033                 |
| <b>BrtEndSXTupleSetRow</b> (section <a href="#">2.4.594</a> )      | 1034                 |
| <b>BrtSXTupleSetRowItem</b> (section <a href="#">2.4.779</a> )     | 1035                 |
| <b>BrtNameExt</b> (section <a href="#">2.4.681</a> )               | 1036                 |
| <b>BrtPCDH14</b> (section <a href="#">2.4.688</a> )                | 1037                 |
| <b>BrtBeginPCDCalcMem14</b> (section <a href="#">2.4.121</a> )     | 1038                 |
| <b>BrtEndPCDCalcMem14</b> (section <a href="#">2.4.457</a> )       | 1039                 |
| <b>BrtSXTH14</b> (section <a href="#">2.4.776</a> )                | 1040                 |
| <b>BrtBeginSparklineGroup</b> (section <a href="#">2.4.216</a> )   | 1041                 |
| <b>BrtEndSparklineGroup</b> (section <a href="#">2.4.551</a> )     | 1042                 |



| Name   | Record type (number) |
|--|----------------------|
| <b>BrtSparkline</b> (section <a href="#">2.4.752</a> )                   | 1043                 |
| <b>BrtSXDI14</b> (section <a href="#">2.4.772</a> )                      | 1044                 |
| <b>BrtWsFmtInfoEx14</b> (section <a href="#">2.4.814</a> )               | 1045                 |
| <b>BrtBeginConditionalFormatting14</b> (section <a href="#">2.4.33</a> ) | 1046                 |
| <b>BrtEndConditionalFormatting14</b> (section <a href="#">2.4.372</a> )  | 1047                 |
| <b>BrtBeginCFRule14</b> (section <a href="#">2.4.22</a> )                | 1048                 |
| <b>BrtEndCFRule14</b> (section <a href="#">2.4.361</a> )                 | 1049                 |
| <b>BrtCFVO14</b> (section <a href="#">2.4.319</a> )                      | 1050                 |
| <b>BrtBeginDatabar14</b> (section <a href="#">2.4.41</a> )               | 1051                 |
| <b>BrtBeginIconSet14</b> (section <a href="#">2.4.88</a> )               | 1052                 |
| <b>BrtDVal14</b> (section <a href="#">2.4.340</a> )                      | 1053                 |
| <b>BrtBeginDVals14</b> (section <a href="#">2.4.53</a> )                 | 1054                 |
| <b>BrtColor14</b> (section <a href="#">2.4.322</a> )                     | 1055                 |
| <b>BrtBeginSparklines</b> (section <a href="#">2.4.218</a> )             | 1056                 |
| <b>BrtEndSparklines</b> (section <a href="#">2.4.553</a> )               | 1057                 |
| <b>BrtBeginSparklineGroups</b> (section <a href="#">2.4.217</a> )        | 1058                 |
| <b>BrtEndSparklineGroups</b> (section <a href="#">2.4.552</a> )          | 1059                 |
| <b>BrtSXVD14</b> (section <a href="#">2.4.786</a> )                      | 1061                 |
| <b>BrtBeginSxview14</b> (section <a href="#">2.4.265</a> )               | 1062                 |
| <b>BrtEndSxview14</b> (section <a href="#">2.4.600</a> )                 | 1063                 |
| <b>BrtBeginPCD14</b> (section <a href="#">2.4.117</a> )                  | 1066                 |
| <b>BrtEndPCD14</b> (section <a href="#">2.4.453</a> )                    | 1067                 |
| <b>BrtBeginExtConn14</b> (section <a href="#">2.4.74</a> )               | 1068                 |
| <b>BrtEndExtConn14</b> (section <a href="#">2.4.410</a> )                | 1069                 |
| <b>BrtBeginSlicerCacheIDs</b> (section <a href="#">2.4.195</a> )         | 1070                 |
| <b>BrtEndSlicerCacheIDs</b> (section <a href="#">2.4.530</a> )           | 1071                 |
| <b>BrtBeginSlicerCacheID</b> (section <a href="#">2.4.194</a> )          | 1072                 |
| <b>BrtEndSlicerCacheID</b> (section <a href="#">2.4.529</a> )            | 1073                 |
| <b>BrtBeginSlicerCache</b> (section <a href="#">2.4.192</a> )            | 1075                 |
| <b>BrtEndSlicerCache</b> (section <a href="#">2.4.527</a> )              | 1076                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtBeginSlicerCacheDef</b> (section <a href="#">2.4.193</a> )        | 1077                 |
| <b>BrtEndSlicerCacheDef</b> (section <a href="#">2.4.528</a> )          | 1078                 |
| <b>BrtBeginSlicersEx</b> (section <a href="#">2.4.207</a> )             | 1079                 |
| <b>BrtEndSlicersEx</b> (section <a href="#">2.4.542</a> )               | 1080                 |
| <b>BrtBeginSlicerEx</b> (section <a href="#">2.4.205</a> )              | 1081                 |
| <b>BrtEndSlicerEx</b> (section <a href="#">2.4.540</a> )                | 1082                 |
| <b>BrtBeginSlicer</b> (section <a href="#">2.4.191</a> )                | 1083                 |
| <b>BrtEndSlicer</b> (section <a href="#">2.4.526</a> )                  | 1084                 |
| <b>BrtSlicerCachePivotTables</b> (section <a href="#">2.4.748</a> )     | 1085                 |
| <b>BrtBeginSlicerCacheOlapImpl</b> (section <a href="#">2.4.199</a> )   | 1086                 |
| <b>BrtEndSlicerCacheOlapImpl</b> (section <a href="#">2.4.534</a> )     | 1087                 |
| <b>BrtBeginSlicerCacheLevelsData</b> (section <a href="#">2.4.197</a> ) | 1088                 |
| <b>BrtEndSlicerCacheLevelsData</b> (section <a href="#">2.4.532</a> )   | 1089                 |
| <b>BrtBeginSlicerCacheLevelData</b> (section <a href="#">2.4.196</a> )  | 1090                 |
| <b>BrtEndSlicerCacheLevelData</b> (section <a href="#">2.4.531</a> )    | 1091                 |
| <b>BrtBeginSlicerCacheSiRanges</b> (section <a href="#">2.4.202</a> )   | 1092                 |
| <b>BrtEndSlicerCacheSiRanges</b> (section <a href="#">2.4.537</a> )     | 1093                 |
| <b>BrtBeginSlicerCacheSiRange</b> (section <a href="#">2.4.201</a> )    | 1094                 |
| <b>BrtEndSlicerCacheSiRange</b> (section <a href="#">2.4.536</a> )      | 1095                 |
| <b>BrtSlicerCacheOlapItem</b> (section <a href="#">2.4.747</a> )        | 1096                 |
| <b>BrtBeginSlicerCacheSelections</b> (section <a href="#">2.4.200</a> ) | 1097                 |
| <b>BrtSlicerCacheSelection</b> (section <a href="#">2.4.749</a> )       | 1098                 |
| <b>BrtEndSlicerCacheSelections</b> (section <a href="#">2.4.535</a> )   | 1099                 |
| <b>BrtBeginSlicerCacheNative</b> (section <a href="#">2.4.198</a> )     | 1100                 |
| <b>BrtEndSlicerCacheNative</b> (section <a href="#">2.4.533</a> )       | 1101                 |
| <b>BrtSlicerCacheNativeItem</b> (section <a href="#">2.4.746</a> )      | 1102                 |
| <b>BrtRangeProtection14</b> (section <a href="#">2.4.715</a> )          | 1103                 |
| <b>BrtRangeProtectionIso14</b> (section <a href="#">2.4.717</a> )       | 1104                 |
| <b>BrtCellIgnoreEC14</b> (section <a href="#">2.4.307</a> )             | 1105                 |
| <b>BrtList14</b> (section <a href="#">2.4.668</a> )                     | 1111                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtCFIcon</b> (section <a href="#">2.4.316</a> )                         | 1112                 |
| <b>BrtBeginSlicerCachesPivotCacheIDs</b> (section <a href="#">2.4.204</a> ) | 1113                 |
| <b>BrtEndSlicerCachesPivotCacheIDs</b> (section <a href="#">2.4.539</a> )   | 1114                 |
| <b>BrtBeginSlicers</b> (section <a href="#">2.4.206</a> )                   | 1115                 |
| <b>BrtEndSlicers</b> (section <a href="#">2.4.541</a> )                     | 1116                 |
| <b>BrtWbProp14</b> (section <a href="#">2.4.808</a> )                       | 1117                 |
| <b>BrtBeginSXEdit</b> (section <a href="#">2.4.234</a> )                    | 1118                 |
| <b>BrtEndSXEdit</b> (section <a href="#">2.4.569</a> )                      | 1119                 |
| <b>BrtBeginSXEdits</b> (section <a href="#">2.4.235</a> )                   | 1120                 |
| <b>BrtEndSXEdits</b> (section <a href="#">2.4.570</a> )                     | 1121                 |
| <b>BrtBeginSXChange</b> (section <a href="#">2.4.224</a> )                  | 1122                 |
| <b>BrtEndSXChange</b> (section <a href="#">2.4.559</a> )                    | 1123                 |
| <b>BrtBeginSXChanges</b> (section <a href="#">2.4.225</a> )                 | 1124                 |
| <b>BrtEndSXChanges</b> (section <a href="#">2.4.560</a> )                   | 1125                 |
| <b>BrtSXTupleItems</b> (section <a href="#">2.4.777</a> )                   | 1126                 |
| <b>BrtBeginSlicerStyle</b> (section <a href="#">2.4.208</a> )               | 1128                 |
| <b>BrtEndSlicerStyle</b> (section <a href="#">2.4.543</a> )                 | 1129                 |
| <b>BrtSlicerStyleElement</b> (section <a href="#">2.4.750</a> )             | 1130                 |
| <b>BrtBeginStyleSheetExt14</b> (section <a href="#">2.4.222</a> )           | 1131                 |
| <b>BrtEndStyleSheetExt14</b> (section <a href="#">2.4.557</a> )             | 1132                 |
| <b>BrtBeginSlicerCachesPivotCacheID</b> (section <a href="#">2.4.203</a> )  | 1133                 |
| <b>BrtEndSlicerCachesPivotCacheID</b> (section <a href="#">2.4.538</a> )    | 1134                 |
| <b>BrtBeginConditionalFormattings</b> (section <a href="#">2.4.34</a> )     | 1135                 |
| <b>BrtEndConditionalFormattings</b> (section <a href="#">2.4.373</a> )      | 1136                 |
| <b>BrtBeginPCDCalcMemExt</b> (section <a href="#">2.4.122</a> )             | 1137                 |
| <b>BrtEndPCDCalcMemExt</b> (section <a href="#">2.4.458</a> )               | 1138                 |
| <b>BrtBeginPCDCalcMemsExt</b> (section <a href="#">2.4.124</a> )            | 1139                 |
| <b>BrtEndPCDCalcMemsExt</b> (section <a href="#">2.4.460</a> )              | 1140                 |
| <b>BrtPCDField14</b> (section <a href="#">2.4.687</a> )                     | 1141                 |
| <b>BrtBeginSlicerStyles</b> (section <a href="#">2.4.210</a> )              | 1142                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndSlicerStyles</b> (section <a href="#">2.4.545</a> )          | 1143                 |
| <b>BrtBeginSlicerStyleElements</b> (section <a href="#">2.4.209</a> ) | 1144                 |
| <b>BrtEndSlicerStyleElements</b> (section <a href="#">2.4.544</a> )   | 1145                 |
| <b>BrtCFRuleExt</b> (section <a href="#">2.4.317</a> )                | 1146                 |
| <b>BrtBeginSXCondFmt14</b> (section <a href="#">2.4.227</a> )         | 1147                 |
| <b>BrtEndSXCondFmt14</b> (section <a href="#">2.4.562</a> )           | 1148                 |
| <b>BrtBeginSXCondFmts14</b> (section <a href="#">2.4.229</a> )        | 1149                 |
| <b>BrtEndSXCondFmts14</b> (section <a href="#">2.4.564</a> )          | 1150                 |
| <b>BrtBeginSortCond14</b> (section <a href="#">2.4.214</a> )          | 1152                 |
| <b>BrtEndSortCond14</b> (section <a href="#">2.4.549</a> )            | 1153                 |
| <b>BrtEndDVals14</b> (section <a href="#">2.4.391</a> )               | 1154                 |
| <b>BrtEndIconSet14</b> (section <a href="#">2.4.424</a> )             | 1155                 |
| <b>BrtEndDatabar14</b> (section <a href="#">2.4.379</a> )             | 1156                 |
| <b>BrtBeginColorScale14</b> (section <a href="#">2.4.27</a> )         | 1157                 |
| <b>BrtEndColorScale14</b> (section <a href="#">2.4.366</a> )          | 1158                 |
| <b>BrtBeginSxrules14</b> (section <a href="#">2.4.248</a> )           | 1159                 |
| <b>BrtEndSxrules14</b> (section <a href="#">2.4.583</a> )             | 1160                 |
| <b>BrtBeginPRule14</b> (section <a href="#">2.4.179</a> )             | 1161                 |
| <b>BrtEndPRule14</b> (section <a href="#">2.4.514</a> )               | 1162                 |
| <b>BrtBeginPRFilters14</b> (section <a href="#">2.4.175</a> )         | 1163                 |
| <b>BrtEndPRFilters14</b> (section <a href="#">2.4.510</a> )           | 1164                 |
| <b>BrtBeginPRFilter14</b> (section <a href="#">2.4.173</a> )          | 1165                 |
| <b>BrtEndPRFilter14</b> (section <a href="#">2.4.508</a> )            | 1166                 |
| <b>BrtBeginPRFItem14</b> (section <a href="#">2.4.177</a> )           | 1167                 |
| <b>BrtEndPRFItem14</b> (section <a href="#">2.4.512</a> )             | 1168                 |
| <b>BrtBeginCellIgnoreECs14</b> (section <a href="#">2.4.15</a> )      | 1169                 |
| <b>BrtEndCellIgnoreECs14</b> (section <a href="#">2.4.354</a> )       | 1170                 |
| <b>BrtDxf14</b> (section <a href="#">2.4.343</a> )                    | 1171                 |
| <b>BrtBeginDxF14s</b> (section <a href="#">2.4.54</a> )               | 1172                 |
| <b>BrtEndDxf14s</b> (section <a href="#">2.4.392</a> )                | 1173                 |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtFilter14</b> (section <a href="#">2.4.646</a> )                        | 1177                 |
| <b>BrtBeginCustomFilters14</b> (section <a href="#">2.4.39</a> )             | 1178                 |
| <b>BrtCustomFilter14</b> (section <a href="#">2.4.333</a> )                  | 1180                 |
| <b>BrtIconFilter14</b> (section <a href="#">2.4.658</a> )                    | 1181                 |
| <b>BrtPivotCacheConnectionName</b> (section <a href="#">2.4.707</a> )        | 1182                 |
| <b>BrtBeginDecoupledPivotCacheIDs</b> (section <a href="#">2.4.46</a> )      | 2048                 |
| <b>BrtEndDecoupledPivotCacheIDs</b> (section <a href="#">2.4.384</a> )       | 2049                 |
| <b>BrtDecoupledPivotCacheID</b> (section <a href="#">2.4.336</a> )           | 2050                 |
| <b>BrtBeginPivotTableRefs</b> (section <a href="#">2.4.166</a> )             | 2051                 |
| <b>BrtEndPivotTableRefs</b> (section <a href="#">2.4.501</a> )               | 2052                 |
| <b>BrtPivotTableRef</b> (section <a href="#">2.4.709</a> )                   | 2053                 |
| <b>BrtSlicerCacheBookPivotTables</b> (section <a href="#">2.4.744</a> )      | 2054                 |
| <b>BrtBeginSxvcells</b> (section <a href="#">2.4.260</a> )                   | 2055                 |
| <b>BrtEndSxvcells</b> (section <a href="#">2.4.595</a> )                     | 2056                 |
| <b>BrtBeginSxRow</b> (section <a href="#">2.4.246</a> )                      | 2057                 |
| <b>BrtEndSxRow</b> (section <a href="#">2.4.581</a> )                        | 2058                 |
| <b>BrtPcdCalcMem15</b> (section <a href="#">2.4.686</a> )                    | 2060                 |
| <b>BrtQsi15</b> (section <a href="#">2.4.712</a> )                           | 2067                 |
| <b>BrtBeginWebExtensions</b> (section <a href="#">2.4.288</a> )              | 2068                 |
| <b>BrtEndWebExtensions</b> (section <a href="#">2.4.622</a> )                | 2069                 |
| <b>BrtWebExtension</b> (section <a href="#">2.4.809</a> )                    | 2070                 |
| <b>BrtAbsPath15</b> (section <a href="#">2.4.1</a> )                         | 2071                 |
| <b>BrtBeginPivotTableUISettings</b> (section <a href="#">2.4.167</a> )       | 2072                 |
| <b>BrtEndPivotTableUISettings</b> (section <a href="#">2.4.502</a> )         | 2073                 |
| <b>BrtTableSlicerCacheIDs</b> (section <a href="#">2.4.789</a> )             | 2075                 |
| <b>BrtTableSlicerCacheID</b> (section <a href="#">2.4.788</a> )              | 2076                 |
| <b>BrtBeginTableSlicerCache</b> (section <a href="#">2.4.267</a> )           | 2077                 |
| <b>BrtEndTableSlicerCache</b> (section <a href="#">2.4.602</a> )             | 2078                 |
| <b>BrtSxFilter15</b> (section <a href="#">2.4.774</a> )                      | 2079                 |
| <b>BrtBeginTimelineCachePivotCacheIDs</b> (section <a href="#">2.4.272</a> ) | 2080                 |

| Name  | Record type (number) |
|---|----------------------|
| <b>BrtEndTimelineCachePivotCacheIDs</b> (section <a href="#">2.4.607</a> )  | 2081                 |
| <b>BrtTimelineCachePivotCacheID</b> (section <a href="#">2.4.793</a> )      | 2082                 |
| <b>BrtBeginTimelineCacheIDs</b> (section <a href="#">2.4.271</a> )          | 2083                 |
| <b>BrtEndTimelineCacheIDs</b> (section <a href="#">2.4.606</a> )            | 2084                 |
| <b>BrtBeginTimelineCacheID</b> (section <a href="#">2.4.270</a> )           | 2085                 |
| <b>BrtEndTimelineCacheID</b> (section <a href="#">2.4.605</a> )             | 2086                 |
| <b>BrtBeginTimelinesEx</b> (section <a href="#">2.4.274</a> )               | 2087                 |
| <b>BrtEndTimelinesEx</b> (section <a href="#">2.4.609</a> )                 | 2088                 |
| <b>BrtBeginTimelineEx</b> (section <a href="#">2.4.273</a> )                | 2089                 |
| <b>BrtEndTimelineEx</b> (section <a href="#">2.4.608</a> )                  | 2090                 |
| <b>BrtWorkBookPr15</b> (section <a href="#">2.4.811</a> )                   | 2091                 |
| <b>BrtPCDH15</b> (section <a href="#">2.4.689</a> )                         | 2092                 |
| <b>BrtBeginTimelineStyle</b> (section <a href="#">2.4.275</a> )             | 2093                 |
| <b>BrtEndTimelineStyle</b> (section <a href="#">2.4.610</a> )               | 2094                 |
| <b>BrtTimelineStyleElement</b> (section <a href="#">2.4.794</a> )           | 2095                 |
| <b>BrtBeginTimelineStylesheetExt15</b> (section <a href="#">2.4.278</a> )   | 2096                 |
| <b>BrtEndTimelineStylesheetExt15</b> (section <a href="#">2.4.613</a> )     | 2097                 |
| <b>BrtBeginTimelineStyles</b> (section <a href="#">2.4.277</a> )            | 2098                 |
| <b>BrtEndTimelineStyles</b> (section <a href="#">2.4.612</a> )              | 2099                 |
| <b>BrtBeginTimelineStyleElements</b> (section <a href="#">2.4.276</a> )     | 2100                 |
| <b>BrtEndTimelineStyleElements</b> (section <a href="#">2.4.611</a> )       | 2101                 |
| <b>BrtDxf15</b> (section <a href="#">2.4.344</a> )                          | 2102                 |
| <b>BrtBeginDxf15</b> (section <a href="#">2.4.56</a> )                      | 2103                 |
| <b>brtEndDxf15</b> (section <a href="#">2.4.394</a> )                       | 2104                 |
| <b>BrtSlicerCacheHideItemsWithNoData</b> (section <a href="#">2.4.745</a> ) | 2105                 |
| <b>BrtBeginItemUniqueNames</b> (section <a href="#">2.4.95</a> )            | 2106                 |
| <b>BrtEndItemUniqueNames</b> (section <a href="#">2.4.431</a> )             | 2107                 |
| <b>BrtItemUniqueName</b> (section <a href="#">2.4.664</a> )                 | 2108                 |
| <b>BrtBeginExtConn15</b> (section <a href="#">2.4.75</a> )                  | 2109                 |
| <b>BrtEndExtConn15</b> (section <a href="#">2.4.411</a> )                   | 2110                 |

| Name   | Record type (number) |
|--|----------------------|
| <b>BrtBeginOleDbPr15</b> (section <a href="#">2.4.115</a> )          | 2111                 |
| <b>BrtEndOleDbPr15</b> (section <a href="#">2.4.451</a> )            | 2112                 |
| <b>BrtBeginDataFeedPr15</b> (section <a href="#">2.4.42</a> )        | 2113                 |
| <b>BrtEndDataFeedPr15</b> (section <a href="#">2.4.380</a> )         | 2114                 |
| <b>BrtTextPr15</b> (section <a href="#">2.4.792</a> )                | 2115                 |
| <b>BrtRangePr15</b> (section <a href="#">2.4.713</a> )               | 2116                 |
| <b>BrtDbCommand15</b> (section <a href="#">2.4.334</a> )             | 2117                 |
| <b>BrtBeginDbTables15</b> (section <a href="#">2.4.44</a> )          | 2118                 |
| <b>BrtEndDbTables15</b> (section <a href="#">2.4.382</a> )           | 2119                 |
| <b>BrtDbTable15</b> (section <a href="#">2.4.335</a> )               | 2120                 |
| <b>BrtBeginDataModel</b> (section <a href="#">2.4.43</a> )           | 2121                 |
| <b>BrtEndDataModel</b> (section <a href="#">2.4.381</a> )            | 2122                 |
| <b>BrtBeginModelTables</b> (section <a href="#">2.4.113</a> )        | 2123                 |
| <b>BrtEndModelTables</b> (section <a href="#">2.4.449</a> )          | 2124                 |
| <b>BrtModelTable</b> (section <a href="#">2.4.678</a> )              | 2125                 |
| <b>BrtBeginModelRelationships</b> (section <a href="#">2.4.112</a> ) | 2126                 |
| <b>BrtEndModelRelationships</b> (section <a href="#">2.4.448</a> )   | 2127                 |
| <b>BrtModelRelationship</b> (section <a href="#">2.4.677</a> )       | 2128                 |
| <b>BrtBeginECTxtWiz15</b> (section <a href="#">2.4.66</a> )          | 2129                 |
| <b>BrtEndECTxtWiz15</b> (section <a href="#">2.4.402</a> )           | 2130                 |
| <b>BrtBeginECTWFldInfoLst15</b> (section <a href="#">2.4.64</a> )    | 2131                 |
| <b>BrtEndECTWFldInfoLst15</b> (section <a href="#">2.4.400</a> )     | 2132                 |
| <b>BrtBeginECTWFldInfo15</b> (section <a href="#">2.4.64</a> )       | 2133                 |
| <b>BrtFieldListActiveItem</b> (section <a href="#">2.4.639</a> )     | 2134                 |
| <b>BrtPivotCacheIdVersion</b> (section <a href="#">2.4.708</a> )     | 2135                 |
| <b>BrtSXDI15</b> (section <a href="#">2.4.773</a> )                  | 2136                 |

## 2.4 Records

### 2.4.1 BrtAbsPath15

The **BrtAbsPath15** record specifies the location of the workbook.

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| stAbsPath (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stAbsPath (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the location of the workbook as **absolute path** or **absolute URL**, not including the file name and extension.

### 2.4.2 BrtACBegin

The **BrtACBegin** record specifies the beginning of an alternate content block as specified by future record (section [2.1.6](#)).

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cver |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | RgACVer (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cver (2 bytes):** An unsigned integer that specifies the count of **ACProductVersion** (section [2.5.1](#)) structures in **RgACVer**. MUST be greater than or equal to 1.

**RgACVer (variable):** An array of **ACProductVersion** (section [2.5.1](#)) structures that specifies the applications and versions that can process the alternate content block. The count of items in this array MUST be equal to **cver**.

### 2.4.3 BrtACEnd

The **BrtACEnd** record specifies the end of an alternate content block as specified by future record (section [2.1.6](#)).

### 2.4.4 BrtActiveX

The **BrtActiveX** record specifies an ActiveX control.

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| shapeId             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| strRelID (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| strName (variable)  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |



...

**shapeId (4 bytes):** An unsigned integer that corresponds to the **spid** attribute of a shape element in the **VML Drawings** (section [2.1.7.58](#)) part as specified in [\[ISO/IEC29500-1:2011\]](#) section 18.2.29. This value MUST be greater than or equal to 0x00000001 and less than or equal to 0x03FFD7FF. The value of the **ObjectType** attribute of the **ClientData child element** (specified in [\[ISO/IEC29500-4:2011\]](#) section 14.4.2.12) of the shape element MUST be "Pict" as specified in [\[ISO/IEC29500-4:2011\]](#) Section 14.1.2.19. The total number of unique identifiers specified by all **shapeId** fields in **BrActiveX** records and **shapeId** fields in **BrOleObject** (section [2.4.682](#)) records in the worksheet (section [2.1.7.61](#)) MUST NOT exceed 65535.

**strRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies a relationship that specifies an **ActiveX** (section [2.1.7.1](#)) part containing control-specific properties and state information for the ActiveX control.

**strName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies a name for the ActiveX control. The length of this string MUST NOT exceed 32 characters. The name of the shape MUST correspond to the **id** attribute of a shape element in the **VML Drawings** (section [2.1.7.58](#)) part as specified in [\[ISO/IEC29500-1:2011\]](#) section 14.1.2.19. This name MUST be unique among all shape names specified in the **VML Drawings** part of the worksheet (section [2.1.7.61](#)).

## 2.4.5 BrtAFILTERDateGroupItem

The **BrTAFILTERDateGroupItem** record specifies information about a criterion for a date AutoFilter.

|            |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|-----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10  | 11 | 12 | 13 | 14 | 15 | 16      | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| yr         |   |   |   |   |   |   |   |   |   | mon |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dom        |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| hour       |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    | min     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sec        |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    | unused1 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused2    |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dntChecked |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**yr (2 bytes):** An unsigned integer that specifies the year for the AutoFilter. This value MUST be greater than or equal to 1000 and less than or equal to 9999.

**mon (2 bytes):** An unsigned integer that specifies the month for the AutoFilter. If **dntChecked** is greater than or equal to 0x00000001, this value MUST be greater than or equal to 1 and less than or equal to 12.

**dom (4 bytes):** An unsigned integer that specifies the day of the month for the AutoFilter. If **dntChecked** is greater than or equal to 0x00000002, this value MUST be greater than or equal to 1 and less than or equal to 31.

**hour (2 bytes):** An unsigned integer that specifies the hour for the AutoFilter. If **dntChecked** is greater than or equal to 0x00000003, this value MUST be less than or equal to 23.

**min (2 bytes):** An unsigned integer that specifies the minute for the AutoFilter. If **dntChecked** is greater than or equal to 0x00000004, this value MUST be less than or equal to 59.

**sec (2 bytes):** An unsigned integer that specifies the second for the AutoFilter. If **dntChecked** is equal to 0x00000005, this value MUST be less than or equal to 59.

**unused1 (2 bytes):** Undefined, and MUST be ignored.

**unused2 (4 bytes):** Undefined, and MUST be ignored.

**dntChecked (4 bytes):** An unsigned integer that specifies what comparisons are made to determine if a cell is displayed. For example, if this value is equal to DNTMONTH, only cells with the same year and month specified in this record are displayed. **dntChecked** MUST be equal to a value from the following table.

| Name      | Value      | Meaning   |
|-----------|------------|---|
| DNTYEAR   | 0x00000000 | Group by year                                       |
| DNTMONTH  | 0x00000001 | Group by month and year                             |
| DNTDAY    | 0x00000002 | Group by day, month, and year                       |
| DNTHOUR   | 0x00000003 | Group by hour, day, month, and year                 |
| DNTMINUTE | 0x00000004 | Group by minute, hour, day, month, and year         |
| DNTSECOND | 0x00000005 | Group by second, minute, hour, day, month, and year |

## 2.4.6 BrtArrFmla

The **BrtArrFmla** record type specifies an array formula (section 2.2.2) for a range of cells, as specified in **Worksheet** (section 2.1.7.61) part ABNF and **Macro Sheet** (section 2.1.7.32) part ABNF, that performs calculations on one or more sets of values, and then returns either a single result or multiple results across a continuous range of cells. This record is preceded by a single **BrtFmlaString** (section 2.4.650), **BrtFmlaNum** (section 2.4.649), **BrtFmlaBool** (section 2.4.647), or **BrtFmlaError** (section 2.4.648) record that represents the logical top-left cell in the range that uses this array formula. Other **BrtFmlaString**, **BrtFmlaNum**, **BrtFmlaBool**, or **BrtFmlaError** records that use this array formula follow after the **BrtArrFmla** record in the file, and are not necessarily in a contiguous sequence. The **BrtFmlaString**, **BrtFmlaNum**, **BrtFmlaBool**, or **BrtFmlaError** records that use this array formula MUST have a **cell** field that is within the range specified in the **ref** field of this record and MUST have their **formula** begin with **PtgExp** (section 2.5.97.40).

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |
| rfx (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

|     |        |                    |
|-----|--------|--------------------|
| ... |        |                    |
| A   | unused | formula (variable) |
| ... |        |                    |

**rfx (16 bytes):** An **RfX** (section [2.5.117](#)) that specifies the row (2) and column (2) bounds of the array formula (section [2.2.2](#)). Every cell specified by **rfx** MUST use the array formula.

**A - fAlwaysCalc (1 bit):** A bit that specifies if the array formula (section [2.2.2](#)) needs to be calculated as part of the next recalculation.

| Value | Meaning   |
|-------|---|
| 0     | Formula does not need to be calculated as part of the next recalculation. |
| 1     | Formula needs to be calculated as part of the next recalculation.         |

**unused (7 bits):** Undefined and MUST be ignored.

**formula (variable):** An **ArrayParsedFormula** (section [2.5.97.1](#)) that contains this formula (section [2.2.2](#)).

#### 2.4.7 BrtBeginActiveXControls

The **BrtBeginActiveXControls** record specifies the beginning of a collection of **BrtActiveX** (section [2.4.4](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtActiveX** records specifies ActiveX controls embedded in the sheet.

#### 2.4.8 BrtBeginAFilter

The **BrtBeginAFilter** record specifies the range of cells the AutoFilter applies to and specifies the beginning of a collection of records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies an AutoFilter.

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rfx (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rfx (16 bytes):** An **UncheckedRfX** (section [2.5.153](#)) that specifies the range of cells the AutoFilter applies to. If this filter is applied to a PivotTable (section [2.2.5](#)), **rwFirst**, **rwLast**, **colFirst**, and **colLast** MUST all be equal to 0.

#### 2.4.9 BrtBeginAutoSortScope

The **BrtBeginAutoSortScope** record specifies the beginning of a collection of records as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection specifies pivot field sorting (section [2.2.5.3.2.1](#)) properties.

If the value of the **PRFilter.isxvd** field in the first **BrtBeginPRFilter** (section [2.4.172](#)) record followed by this record is -2, then sorting is specified to be by values, otherwise sorting is specified to be by member (3) property captions.

When sorting by values, the collection of records specifies the row (2) or column (2) that contains the values by which the pivot items (section [2.2.5.3.3](#)) of this pivot field (section [2.2.5.3.2](#)) are sorted.

When sorting by member (3) property captions, the collection of records specifies a member (3) property pivot field on the row (2) axis or the column (2) axis of the PivotTable view (section [2.2.5.3](#)). The pivot items of this pivot field are sorted by the pivot item captions of the specified member (3) property pivot field.

The **BrtBeginPRFilters** (section [2.4.174](#)) collection followed by this record MUST be sorted by the **PRFilter.isxvd** field in the **BrtBeginPRFilter** (section [2.4.172](#)) in ascending order.

If this record exists, the **fAutoSort** field of the **BrtBeginSXVD** (section [2.4.261](#)) record immediately preceding this record MUST be 1.

## 2.4.10 BrtBeginBook

The **BrtBeginBook** record specifies the beginning of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies properties of a workbook.

## 2.4.11 BrtBeginBookViews

The **BrtBeginBookViews** record specifies the beginning of a collection of **BrtBookView** (section [2.4.298](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtBookView** records specifies **workbook views**.

## 2.4.12 BrtBeginBorders

The **BrtBeginBorders** record specifies a count of **BrtBorder** (section [2.4.299](#)) records and specifies the beginning of a collection of **BrtBorder** records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtBorder** records specifies cell **border style**.

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |
| cborders |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

**cborders (4 bytes):** An unsigned integer that specifies the number of **BrtBorder**. MUST be less than or equal to 0x0000FF96.

## 2.4.13 BrtBeginBundleShs

The **BrtBeginBundleShs** record specifies the beginning of a collection of **BrtBundleSh** (section [2.4.301](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtBundleSh** records specifies the sheets in the workbook.

#### 2.4.14 BrtBeginCellIgnoreECs

The **BrtBeginCellIgnoreECs** record specifies the beginning of a collection of **BrtCellIgnoreEC** (section [2.4.306](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtCellIgnoreEC** records specifies the types of cell errors that are to be ignored for specific cell ranges.

#### 2.4.15 BrtBeginCellIgnoreECs14

The **BrtBeginCellIgnoreECs14** record specifies the beginning of a collection of **BrtCellIgnoreEC14** (section [2.4.307](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtCellIgnoreEC14** records specifies the types of cell errors that are to be ignored for specific cell ranges.

#### 2.4.16 BrtBeginCellSmartTag

The **BrtBeginCellSmartTag** record specifies **smart tag** properties and specifies the beginning of a collection of **BrtCellSmartTagProperty** (section [2.4.313](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtCellSmartTagProperty** (section [2.4.313](#)) records specifies a smart tag associated with a cell. [<5>](#)

|      |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0    | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| type |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A    | B | reserved |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**type (4 bytes):** An unsigned integer that specifies a zero-based index of a **BrtSmartTagType** record (section [2.4.751](#)) in the collection of all records directly following **BrtBeginSmartTagTypes** (section [2.4.212](#)) in the **Workbook** part (section [2.1.7.60](#)). This value MUST be less than the total number of **BrtSmartTagType** (section [2.4.751](#)) records.

**A - fDeleted (1 bit):** A bit that specifies that the application does not display the smart tag because of explicit user choice.

**B - fXMLBased (1 bit):** A bit that specifies that smart tag recognition is triggered because the cell is associated with an XML map, where the element in the XML map has the same XML namespace and name as the **smart tag recognizer**.

**reserved (14 bits):** This value MUST be 0, and MUST be ignored.

#### 2.4.17 BrtBeginCellSmartTags

The **BrtBeginCellSmartTags** record specifies the row (2) and column (2) properties of a cell with a smart tag and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies smart tag properties of a cell. [<6>](#)

|    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| rw |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|     |
|-----|
| col |
|-----|

**rw (4 bytes):** A **Rw** (section [2.5.125](#)) that specifies the row (2) of the cell.

**col (4 bytes):** A **Col** (section [2.5.22](#)) that specifies the column (2) of the cell.

### 2.4.18 BrtBeginCellStyleXFs

The **BrtBeginCellStyleXFs** record specifies a count of **BrtXF** (section [2.4.816](#)) records and specifies the beginning of a collection of **BrtXF** records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. This collection specifies all cell style XFs (section [2.2.6.1.2.1](#)) in the workbook. The collection MUST contain at least 0x0001 and no more than 0xFF96 **BrtXF** records.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cxfs |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cxfs (4 bytes):** An unsigned integer that specifies the number of **BrtXF** (section [2.4.816](#)) records in this collection. MUST be at least 0x0001 and no more than 0xFF96.

### 2.4.19 BrtBeginCellWatches

The **BrtBeginCellWatches** record specifies the beginning of a collection of **BrtCellWatch** (section [2.4.315](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtCellWatch** records specifies a set of references to **watched cells**.

### 2.4.20 BrtBeginCellXFs

The **BrtBeginCellXFs** record specifies a count of **BrtXF** (section [2.4.816](#)) records and specifies the beginning of a collection of **BrtXF** records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. This collection specifies all cell XFs (section [2.2.6.1.1](#)) in the workbook. The collection MUST contain at least 0x0001 and no more than 0xFF96 **BrtXF** records.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cxfs |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cxfs (4 bytes):** An unsigned integer that specifies the number of **BrtXF** (section [2.4.816](#)) records in this collection. MUST be at least 0x0001 and no more than 0xFF96.

### 2.4.21 BrtBeginCFRule

The **BrtBeginCFRule** record specifies the properties of a conditional formatting rule and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a conditional formatting rule for a range.

|                  |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
|------------------|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---------------------|---------|---|---|---|---|---|---|---|---|---|---|--|--|--|--|
| 0                | 1 | 2 | 3 | 4 | 5         | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0                   | 1       | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |  |  |
| iType            |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| iTemplate        |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| dxflD            |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| iPri             |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| iParam           |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| reserved1        |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| reserved2        |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| A                | B | C | D | E | reserved4 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     | cbFmla1 |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| ...              |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   | cbFmla2             |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| ...              |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   | cbFmla3             |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| ...              |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   | strParam (variable) |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| ...              |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| rgce1 (variable) |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| ...              |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| rgce2 (variable) |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| ...              |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| rgce3 (variable) |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |
| ...              |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |         |   |   |   |   |   |   |   |   |   |   |  |  |  |  |

**iType (4 bytes):** A **CFTYPE** (section [2.5.17](#)) that specifies the way conditional formatting is displayed in the range.

When **iType** is CF\_TYPE\_GRADIENT, there MUST be one **BrtBeginColorScale** (section [2.4.26](#)) record in the collection of conditional formatting records following this record.

When **iType** is CF\_TYPE\_DATABAR, there MUST be one **BrtBeginDatabar** (section [2.4.40](#)) record in the collection of conditional formatting records following this record.

When **iType** is CF\_TYPE\_MULTISTATE, there MUST be one **BrtBeginIconSet** (section [2.4.87](#)) record in the collection of conditional formatting records following this record.

**iTemplate (4 bytes):** A **CFTemp** (section [2.5.15](#)) that specifies the type of logical condition that determines when conditional formatting is shown. The following table specifies the allowable combinations of **iType** and **iTemplate**. Other combinations MUST NOT be used.

| Value of iType   | Value of iTemplate              |
|------------------|---------------------------------|
| CF_TYPE_CELLIS   | CF_TEMPLATE_EXPR                |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_FMLA                |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_UNIQUEVALUES        |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_CONTAINSTEXT        |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_CONTAINSBLANKS      |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_CONTAINSNOBLANKS    |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_CONTAINSERRORS      |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_CONTAINSNOERRORS    |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODTODAY     |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODTOMORROW  |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODYESTERDAY |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODLAST7DAYS |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODLASTMONTH |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODNEXTMONTH |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODTHISWEEK  |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODNEXTWEEK  |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODLASTWEEK  |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_TIMEPERIODTHISMONTH |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_ABOVEAVERAGE        |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_BELOWAVERAGE        |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_DUPLICATEVALUES     |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_EQUALABOVEAVERAGE   |
| CF_TYPE_EXPRIS   | CF_TEMPLATE_EQUALBELOWAVERAGE   |
| CF_TYPE_GRADIENT | CF_TEMPLATE_GRADIENT            |
| CF_TYPE_DATABAR  | CF_TEMPLATE_DATABAR             |
| CF_TYPE_FILTER   | CF_TEMPLATE_FILTER              |



| Value of <b>iType</b> | Value of <b>iTemplate</b> |
|-----------------------|---------------------------|
| CF_TYPE_MULTISTATE    | CF_TEMPLATE_MULTISTATE    |

**dxfId (4 bytes):** A **DXFId** (section [2.5.37](#)) that specifies the differential formatting (section [2.2.6.2](#)) applied to the range. If **iType** is CF\_TYPE\_GRADIENT, CF\_TYPE\_DATABAR, or CF\_TYPE\_MULTISTATE, **dxfId** MUST be 0xFFFFFFFF and MUST be ignored.

**iPri (4 bytes):** A signed integer that specifies the relative priority of this rule compared to the other rules in this sheet. Rules are applied in order from the smallest **iPri** to the largest **iPri**. This value MUST be greater than 0 and MUST NOT duplicate an **iPri** value in any other **BrtBeginCFRule** (section [2.4.21](#)) or **BrtBeginCFRule14** (section [2.4.22](#)) record that exists in the same **worksheet** (section [2.1.7.61](#)) or **macro sheet** (section [2.1.7.32](#)) part.

**iParam (4 bytes):** This structure specifies a parameter for the conditional formatting rule. The value, type, and meaning of **iParam** depend on the value of **iType** and **iTemplate**, as specified in the following table.

| Value of <b>iType</b> | Value of <b>iTemplate</b>       | Meaning of <b>iParam</b>   |
|-----------------------|---------------------------------|--|
| CF_TYPE_CELLIS        | CF_TEMPLATE_EXPR                | A <b>CFOper</b> (section <a href="#">2.5.14</a> ) that specifies the type of value comparison used.              |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_CONTAINSTEXT        | A <b>CFTextOper</b> (section <a href="#">2.5.16</a> ) that specifies the type of text comparison operation used. |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTODAY     | A <b>CFDateOper</b> (section <a href="#">2.5.11</a> ) that MUST be CF_TIMEPERIOD_TODAY.                          |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTOMORROW  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_TOMORROW.   |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODYESTERDAY | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_YESTERDAY.  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODLAST7DAYS | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_LAST7DAYS.  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODLASTMONTH | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_LASTMONTH.  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODNEXTMONTH | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_NEXTMONTH.  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTHISWEEK  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_THISWEEK.   |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODNEXTWEEK  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_NEXTWEEK.   |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODLASTWEEK  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_LASTWEEK.   |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTHISMONTH | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_THISMONTH.  |

| Value of <b>iType</b> | Value of <b>iTemplate</b>     | Meaning of <b>iParam</b>   |
|-----------------------|-------------------------------|--|
| CF_TYPE_EXPRIS        | CF_TEMPLATE_ABOVEAVERAGE      | An unsigned integer that specifies the number of standard deviations above the average to format. The value of <b>iParam</b> MUST be greater than or equal to 0 and less than 4. If <b>iParam</b> is 0, conditional formatting applies to all values greater than the average.   |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_BELOWAVERAGE      | An unsigned integer that specifies the number of standard deviations below the average to format. The value of <b>iParam</b> MUST be greater than or equal to 0 and less than 4. If <b>iParam</b> is 0, conditional formatting applies to all values below the average.  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_EQUALABOVEAVERAGE | MUST be 0x00000000.  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_EQUALBELOWAVERAGE | MUST be 0x00000000.  |
| CF_TYPE_FILTER        | CF_TEMPLATE_FILTER            | An unsigned integer that specifies how many cells are formatted by this rule. The value of <b>fPercent</b> specifies whether <b>iParam</b> is a percentage or a quantity of cells. When <b>fPercent</b> is 1, <b>iParam</b> MUST be greater than or equal to 0 and less than or equal to 100. Otherwise <b>iParam</b> MUST be greater than or equal to 1 and less than or equal to 1000. |

For all combinations of **iType** and **iTemplate** that are not specified in this table, **iParam** MUST be 0x00000000.

**reserved1 (4 bytes):** This value MUST be 0 and MUST be ignored.

**reserved2 (4 bytes):** This value MUST be 0 and MUST be ignored.

**A - reserved3 (1 bit):** This value MUST be 0 and MUST be ignored.

**B - fStopTrue (1 bit):** A bit that specifies whether evaluation of additional conditional formatting rules is skipped for a cell if the rule evaluates to TRUE for that cell. This value MUST be 0 when **iType** is CF\_TYPE\_DATABAR, CF\_TYPE\_GRADIENT, or CF\_TYPE\_MULTISTATE.

| Value | Meaning   |
|-------|---|
| 0     | After this rule has been evaluated, the rule with the next largest <b>iPri</b> value is evaluated normally.   |
| 1     | If this rule evaluates to TRUE for a cell, rules with a larger <b>iPri</b> value are not evaluated for that cell. If this rule evaluates to FALSE for a cell, the rule with the next largest <b>iPri</b> value is evaluated normally. |

**C - fAbove (1 bit):** A bit that specifies whether conditional formatting is applied to cells with values above or below the average value of other cells in the range. If **iTemplate** is CF\_TEMPLATE\_ABOVEAVERAGE or CF\_TEMPLATE\_EQUALABOVEAVERAGE, **fAbove** MUST be 1. Otherwise, **fAbove** MUST be 0.

**D - fBottom (1 bit):** A bit that specifies how cells are formatted as specified by the following table.

| Value | Meaning   |
|-------|---|
| 0     | Conditional formatting is applied to cells whose value is in the top end of the range specified by <b>iParam</b> and <b>fPercent</b> .    |
| 1     | Conditional formatting is applied to cells whose value is in the bottom end of the range specified by <b>iParam</b> and <b>fPercent</b> . |

If **iType** is not CF\_TYPE\_FILTER, **fBottom** is unused and MUST be 0.

**E - fPercent (1 bit):** A bit that specifies how cells are formatted as specified by the following table.

| Value | Meaning  |
|-------|--|
| 0     | Conditional formatting is applied to the number of cells specified by <b>iParam</b> .                    |
| 1     | <b>iParam</b> specifies the percentage of cells in the range to which conditional formatting is applied. |

If **iType** is not CF\_TYPE\_FILTER, **fPercent** is unused and MUST be 0.

**reserved4 (11 bits):** This value MUST be 0 and MUST be ignored.

**cbFmla1 (4 bytes):** An unsigned integer. If this value is equal to 0x00000000, **rgce1** MUST NOT exist. If this value is nonzero, **rgce1** MUST exist and the value of **cbFmla1** MUST be ignored.

**cbFmla2 (4 bytes):** An unsigned integer. If this value is equal to 0x00000000, **rgce2** MUST NOT exist. If nonzero, **rgce2** MUST exist and the value of **cbFmla2** MUST be ignored.

**cbFmla3 (4 bytes):** An unsigned integer. If this value is equal to 0x00000000, **rgce3** MUST NOT exist. If nonzero, **rgce3** MUST exist and the value of **cbFmla3** MUST be ignored.

**strParam (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies a value used in this conditional formatting rule. If **iTemplate** is not CF\_TEMPLATE\_CONTAINTEXT, **strParam** MUST be NULL and MUST be ignored. Otherwise, **strParam** MUST contain a string that specifies the value that is searched for, and **strParam** MUST be greater than 0 and less than 256 characters long.

**rgce1 (variable):** A **CFParsedFormula** (section [2.5.97.6](#)) that specifies the first formula (section [2.2.2](#)) used in this rule. The following table specifies the conditions for which **rgce1** MUST contain a formula. For any conditions not specified in the following table, **cbFmla1** MUST be 0x00000000 and **rgce1** MUST be omitted.

| Condition                     | Formula in rgce1                                    |
|-------------------------------|---|
| <b>iType</b> = CF_TYPE_CELLIS | A <b>CFParsedFormula</b> that specifies the formula |

| Condition  | Formula in rgce1   |
|--|--|
|  | (section 2.2.2), numeric value, or cell reference that specifies the first operand for the <b>CFOper</b> specified by <b>iParam</b> .  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> =CF_TEMPLATE_FMLA   | A <b>CFParsedFormula</b> . When the formula (section 2.2.2) returns 0, conditional formatting is not displayed. When the formula returns a nonzero value, conditional formatting is displayed. |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSTEXT                                    | A <b>CFParsedFormula</b> that implements the text comparison operation specified by <b>iParam</b> .  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSBLANKS                                  | A <b>CFParsedFormula</b> that returns a nonzero value when the cell is blank.  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSNOBLANKS                                | A <b>CFParsedFormula</b> that returns a nonzero value when the cell is not blank.  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSERRORS                                  | A <b>CFParsedFormula</b> that returns a nonzero value when the cell contains an error.   |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSNOERRORS                                | A <b>CFParsedFormula</b> that returns a nonzero value when the cell does not contain an error.   |
| <b>iType</b> = CF_TYPE_EXPRIS, and <b>iTemplate</b> greater than or equal to 0x0F and less than or equal to 0x18 | A <b>CFParsedFormula</b> that implements the date comparison operation specified by <b>iParam</b> .  |

**rgce2 (variable):** A **CFParsedFormula** that specifies the second formula (section 2.2.2) used in this rule. The following table specifies the conditions for which **rgce2** MUST contain a formula. For any conditions not specified in the following table, **cbFmla2** MUST be 0x00000000 and **rgce2** MUST be omitted.

| Condition  | Formula in rgce2   |
|--|--|
| <b>iType</b> = CF_TYPE_CELLIS, and <b>iParam</b> =CF_OPER_BN or CF_OPER_NB | A <b>CFParsedFormula</b> that specifies the formula (section 2.2.2), numeric value, or cell reference that specifies the second operand for the <b>CFOper</b> specified by <b>iParam</b> . |

**rgce3 (variable):** A **CFParsedFormula** that specifies the third formula (section 2.2.2) used in this rule. If **iType** is not CF\_TYPE\_GRADIENT, CF\_TYPE\_DATABAR, or CF\_TYPE\_MULTISTATE, **cbFmla3** MUST be 0x00000000 and **rgce3** MUST be omitted. Otherwise, **rgce3** can contain a **CFParsedFormula**. When this formula returns zero, conditional formatting is not displayed. When the formula returns a nonzero value, or when **rgce3** is omitted, conditional formatting is displayed.

## 2.4.22 BrtBeginCFRule14

The **BrtBeginCFRule14** record specifies the properties of a conditional formatting rule and specifies the beginning of a collection of records as defined by the **Worksheet** (section 2.1.7.61) part ABNF. The collection of records specifies a conditional formatting rule for a range. This record is equivalent to **BrtBeginCFRule** (section 2.4.21) but this record allows a **GUID** to be specified for the associated **BrtCFRuleExt** (section 2.4.317) record.

|                       |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|-----------------------|---|---|---|---|-----------|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|---------------------|----|----|----|----|----|----|----|----|----|----|--|--|--|--|
| 0                     | 1 | 2 | 3 | 4 | 5         | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21                  | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |
| FRTHHeader (variable) |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...                   |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| iType                 |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| iTemplate             |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| dxflId                |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| iPri                  |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| iParam                |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| reserved1             |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| reserved2             |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| A                     | B | C | D | E | reserved4 |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    | cbFmla1             |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|                       |   |   |   |   | ...       |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    | cbFmla2             |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|                       |   |   |   |   | ...       |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    | cbFmla3             |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|                       |   |   |   |   | ...       |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    | unused1             |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|                       |   |   |   |   | ...       |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    | guid (16 bytes)     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...                   |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|                       |   |   |   |   | ...       |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    | fGuid               |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|                       |   |   |   |   | ...       |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    | strParam (variable) |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...                   |   |   |   |   |           |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |  |  |  |  |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record. The **FRTHHeader** fields MUST have the values listed in the following table.

| Field                    | Value |
|--------------------------|-------|
| <b>FRTHHeader.fRef</b>   | 0     |
| <b>FRTHHeader.fSqref</b> | 0     |

| Field                      | Value  |
|----------------------------|--------|
| <b>FRTHeader.fFormulas</b> | 0 or 1 |
| <b>FRTHeader.fRelID</b>    | 0      |

**FRTHeader.fFormulas** MUST be 1 if any of the fields **cbFmla1**, **cbFmla2**, or **cbFmla3** are nonzero. Otherwise, it MUST be 0.

**FRTHeader.rgFormulas** contains an array of one or two formulas (section [2.2.2](#)) in the conditional formatting rule. The number of formulas in this array MUST be equal to the number of fields (**cbFmla1**, **cbFmla2**, and **cbFmla3**) that are nonzero. **cbFmla1**, **cbFmla2**, and **cbFmla3** MUST NOT all be nonzero.

The following table explains how to interpret the first formula in the array, if it is present.

| Condition  | Interpretation of first formula in <b>FRTHeader.rgFormulas</b>  |
|--|---|
| <b>iType</b> = CF_TYPE_CELLIS  | A <b>FRTCFParsedFormula14</b> (section <a href="#">2.5.55</a> ) that specifies the formula (section <a href="#">2.2.2</a> ), numeric value, or cell reference that specifies the first operand for the <b>CFOper</b> (section <a href="#">2.5.14</a> ) specified by <b>iParam</b> .                 |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> =CF_TEMPLATE_FMLA   | A <b>FRTCFParsedFormula14</b> . When the formula (section <a href="#">2.2.2</a> ) returns 0, conditional formatting is not displayed. When the formula returns a nonzero value, conditional formatting is displayed.  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSTEXT                                    | A <b>FRTCFParsedFormula14</b> that implements the text comparison operation specified by <b>iParam</b> .  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSBLANKS                                  | A <b>FRTCFParsedFormula14</b> that returns a nonzero value when the cell is blank.  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSNOBLANKS                                | A <b>FRTCFParsedFormula14</b> that returns a nonzero value when the cell is not blank.  |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSERRORS                                  | A <b>FRTCFParsedFormula14</b> that returns a nonzero value when the cell contains an error.   |
| <b>iType</b> = CF_TYPE_EXPRIS and <b>iTemplate</b> = CF_TEMPLATE_CONTAINSNOERRORS                                | A <b>FRTCFParsedFormula14</b> that returns a nonzero value when the cell does not contain an error.   |
| <b>iType</b> = CF_TYPE_EXPRIS, and <b>iTemplate</b> greater than or equal to 0x0F and less than or equal to 0x18 | A <b>FRTCFParsedFormula14</b> that implements the date comparison operation specified by <b>iParam</b> .  |
| <b>iType</b> = CF_TYPE_GRADIENT, CF_TYPE_DATABAR, or CF_TYPE_MULTISTATE  | A <b>FRTCFParsedFormula14</b> that specifies whether to display conditional formatting. When this formula (section <a href="#">2.2.2</a> ) returns zero, conditional formatting is not displayed. When the formula returns a nonzero value, or is not present, conditional formatting is displayed. |

If none of the preceding conditions hold, **FRTHeader.fFormulas** MUST be 0.

The following table explains how to interpret the second formula (section [2.2.2](#)) in the array, if it is present.

| Condition  | Interpretation of second formula in <b>FRTHeader.rgFormulas</b>  |
|--|--|
| <b>iType</b> = CF_TYPE_CELLIS, and <b>iParam</b> =CF_OPER_BN or CF_OPER_NB | A <b>FRTCFParsedFormula14</b> (section <a href="#">2.5.55</a> ) that specifies the formula (section <a href="#">2.2.2</a> ), numeric value, or cell reference that specifies the second operand for the <b>CFOper</b> specified by <b>iParam</b> . |

If the preceding condition does not hold, **FRTHeader.rgFormulas** MUST contain fewer than two formulas.

**iType (4 bytes):** A **CType** (section [2.5.17](#)) that specifies the way conditional formatting is displayed in the range.

When **iType** is CF\_TYPE\_GRADIENT, there MUST be one **BrtBeginColorScale14** (section [2.4.27](#)) record in the collection of conditional formatting records following this record.

When **iType** is CF\_TYPE\_DATABAR, there MUST be one **BrtBeginDatabar14** (section [2.4.41](#)) record in the collection of conditional formatting records following this record.

When **iType** is CF\_TYPE\_MULTISTATE, there MUST be one **BrtBeginIconSet14** (section [2.4.88](#)) record in the collection of conditional formatting records following this record.

**iTemplate (4 bytes):** A **CTemp** (section [2.5.15](#)) that specifies the type of logical condition that determines when conditional formatting is shown. The following table specifies the allowable combinations of **iType** and **iTemplate**. Other combinations MUST NOT be used.

| Value of <b>iType</b> | Value of <b>iTemplate</b>       |
|-----------------------|---------------------------------|
| CF_TYPE_CELLIS        | CF_TEMPLATE_EXPR                |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_FMLA                |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_UNIQUEVALUES        |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_CONTAINSTEXT        |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_CONTAINSBLANKS      |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_CONTAINSNOBLANKS    |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_CONTAINSERRORS      |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_CONTAINSNOERRORS    |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTODAY     |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTOMORROW  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODYESTERDAY |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODLAST7DAYS |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODLASTMONTH |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODNEXTMONTH |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTHISWEEK  |

| Value of <b>iType</b> | Value of <b>iTemplate</b>       |
|-----------------------|---------------------------------|
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODNEXTWEEK  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODLASTWEEK  |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_TIMEPERIODTHISMONTH |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_ABOVEAVERAGE        |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_BELOWAVERAGE        |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_DUPLICATEVALUES     |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_EQUALABOVEAVERAGE   |
| CF_TYPE_EXPRIS        | CF_TEMPLATE_EQUALBELOWAVERAGE   |
| CF_TYPE_GRADIENT      | CF_TEMPLATE_GRADIENT            |
| CF_TYPE_DATABAR       | CF_TEMPLATE_DATABAR             |
| CF_TYPE_DATABAR       | CF_TEMPLATE_EXPR                |
| CF_TYPE_FILTER        | CF_TEMPLATE_FILTER              |
| CF_TYPE_MULTISTATE    | CF_TEMPLATE_MULTISTATE          |

**dxfid (4 bytes):** A **DXFid14<7>** (section [2.5.38](#)) that specifies the differential formatting (section [2.2.6.2](#)) applied to the range. If **iType** is CF\_TYPE\_GRADIENT, CF\_TYPE\_DATABAR, or CF\_TYPE\_MULTISTATE, and **iPri** is greater than 0, **dxfid** MUST be 0xFFFFFFFF and MUST be ignored.

If **iPri** is equal to -1, this field MUST be 0, and MUST be ignored.

**iPri (4 bytes):** A signed integer that specifies the relative priority of this rule compared to the other rules in the sheet, or whether this **BrtBeginCFRule14** (section [2.4.22](#)) specifies extension information for a conditional formatting **data bar** rule specified by a **BrtBeginCFRule** (section [2.4.21](#)) record. MUST be greater than 0 or equal to -1.

Rules with **iPri** field greater than -1 are applied in order from the smallest **iPri** to the largest **iPri**. If **iPri** is greater than 0, it MUST NOT duplicate an **iPri** value in any other **BrtBeginCFRule** or **BrtBeginCFRule14** record that exists in the same **worksheet** (section [2.1.7.61](#)) part.

If **iPri** is equal to -1, this record specifies extension information for a conditional formatting data bar rule, and MUST be followed by a **BrtBeginDatabar14** (section [2.4.41](#)) record describing this additional information. The value of the **guid** field MUST equal the value of the **guid** field of the associated **BrtCFRuleExt** (section [2.4.317](#)) record. The **iPri** field of the **BrtBeginCFRule** record associated with this **BrtCFRuleExt** record specifies the relative priority of this rule. If **iPri** is equal to -1 and **fGuid** is 0x00, or if **fGuid** is 0x01 but there exists no **BrtCFRuleExt** record containing a matching GUID, then this record and the succeeding **BrtBeginDatabar14** (section [2.4.41](#)) record MUST be ignored. If **iPri** is not equal to -1 **fGuid** and **guid** MUST be ignored.

**iParam (4 bytes):** This structure specifies a parameter for this conditional formatting rule. The value, type, and meaning of **iParam** depend on the value of **iType** and **iTemplate**, as specified in the following table:



| Value of iType | Value of iTemplate              | Meaning of iParam   |
|----------------|---------------------------------|---|
| CF_TYPE_CELLIS | CF_TEMPLATE_EXPR                | A <b>CFOper</b> that specifies the type of value comparison used.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_CONTAINSTEXT        | A <b>CFTextOper</b> (section <a href="#">2.5.16</a> ) that specifies the type of text comparison operation used.  |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODTODAY     | A <b>CFDateOper</b> (section <a href="#">2.5.11</a> ) that MUST be CF_TIMEPERIOD_TODAY.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODTOMORROW  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_TOMORROW.  |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODYESTERDAY | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_YESTERDAY.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODLAST7DAYS | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_LAST7DAYS.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODLASTMONTH | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_LASTMONTH.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODNEXTMONTH | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_NEXTMONTH.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODTHISWEEK  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_THISWEEK.  |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODNEXTWEEK  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_NEXTWEEK.  |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODLASTWEEK  | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_LASTWEEK.  |
| CF_TYPE_EXPRIS | CF_TEMPLATE_TIMEPERIODTHISMONTH | A <b>CFDateOper</b> that MUST be CF_TIMEPERIOD_THISMONTH.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_ABOVEAVERAGE        | An unsigned integer that specifies the number of standard deviations above the average to format. <b>iParam</b> MUST be greater than or equal to 0 and less than 4. If <b>iParam</b> is 0, conditional formatting applies to all values greater than the average. |
| CF_TYPE_EXPRIS | CF_TEMPLATE_BELOWAVERAGE        | An unsigned integer that specifies the number of standard deviations below the average to format. <b>iParam</b> MUST be greater than or equal to 0 and less than 4. If <b>iParam</b> is 0, conditional formatting applies to all values below the average.        |
| CF_TYPE_EXPRIS | CF_TEMPLATE_EQUALABOVEAVERAGE   | MUST be 0x00000000.   |
| CF_TYPE_EXPRIS | CF_TEMPLATE_EQUALBELOWAVERAGE   | MUST be 0x00000000.   |

| Value of <b>iType</b> | Value of <b>iTemplate</b> | Meaning of <b>iParam</b>   |
|-----------------------|---------------------------|--|
| CF_TYPE_FILTER        | CF_TEMPLATE_FILTER        | An unsigned integer that specifies how many cells are formatted by this rule. The value of <b>fPercent</b> specifies whether <b>iParam</b> is a percentage or a quantity of cells. When <b>fPercent</b> is 1, <b>iParam</b> MUST be greater than or equal to 0 and less than or equal to 100. Otherwise <b>iParam</b> MUST be greater than or equal to 1 and less than or equal to 1000. |

For all combinations of **iType** and **iTemplate** that are not specified in this table, **iParam** MUST be 0x00000000.

**reserved1 (4 bytes):** This value MUST be 0 and MUST be ignored.

**reserved2 (4 bytes):** This value MUST be 0 and MUST be ignored.

**A - reserved3 (1 bit):** This value MUST be 0 and MUST be ignored.

**B - fStopTrue (1 bit):** A bit that specifies whether evaluation of additional conditional formatting rules is skipped for a cell if this rule evaluates to TRUE for that cell. The value MUST be 0 when **iType** is CF\_TYPE\_DATABAR, CF\_TYPE\_GRADIENT, or CF\_TYPE\_MULTISTATE. The following table explains the meanings of each value for **fStopTrue**.

| Value | Meaning   |
|-------|---|
| 0     | After this rule has been evaluated, the rule with the next largest <b>iPri</b> value is evaluated normally.   |
| 1     | If this rule evaluates to TRUE for a cell, rules with a larger <b>iPri</b> value are not evaluated for that cell. If this rule evaluates to FALSE for a cell, the rule with the next largest <b>iPri</b> value is evaluated normally. |

**C - fAbove (1 bit):** A bit that specifies whether conditional formatting is applied to cells with values above or below the average value of other cells in the range. If **iTemplate** is CF\_TEMPLATE\_ABOVEAVERAGE or CF\_TEMPLATE\_EQUALABOVEAVERAGE, **fAbove** MUST be 1. Otherwise, **fAbove** MUST be 0.

**D - fBottom (1 bit):** A bit that specifies how cells are formatted as specified by the following table.

| Value | Meaning   |
|-------|---|
| 0     | Conditional formatting is applied to cells whose value is in the top end of the range specified by <b>iParam</b> and <b>fPercent</b> .    |
| 1     | Conditional formatting is applied to cells whose value is in the bottom end of the range specified by <b>iParam</b> and <b>fPercent</b> . |

If **iType** is not CF\_TYPE\_FILTER, **fBottom** is unused and MUST be 0.

**E - fPercent (1 bit):** A bit that specifies how cells are formatted as specified by the following table.

| Value | Meaning  |
|-------|--|
| 0     | Conditional formatting is applied to the number of cells specified by <b>iParam</b> .                    |
| 1     | <b>iParam</b> specifies the percentage of cells in the range to which conditional formatting is applied. |

If **iType** is not CF\_TYPE\_FILTER, **fPercent** is unused and MUST be 0.

**reserved4 (11 bits):** This value MUST be 0 and MUST be ignored.

**cbFmla1 (4 bytes):** An unsigned integer that MUST equal either the **cce** of the first formula (section 2.2.2) in **FRTHeader.rgFormulas** or 0x00000000. If **iType** is CF\_TYPE\_GRADIENT, CF\_TYPE\_DATABAR, or CF\_TYPE\_MULTISTATE, **cbFmla1** MUST be 0x00000000. If **cbFmla1** is nonzero, **cbFmla3** MUST be 0x00000000.

**cbFmla2 (4 bytes):** If **cbFmla1** is nonzero, this value is an unsigned integer that MUST equal the **cce** of the second formula (section 2.2.2) in **FRTHeader.rgFormulas**, or 0x00000000. When **cbFmla1** is 0x00000000, **cbFmla2** MUST be 0x00000000. If **cbFmla2** is nonzero, **cbFmla3** MUST be 0x00000000.

**cbFmla3 (4 bytes):** An unsigned integer that MUST equal either the **cce** of the first formula (section 2.2.2) in **FRTHeader.rgFormulas** or 0x00000000. If **cbFmla3** is nonzero, both **cbFmla1** and **cbFmla2** MUST be 0x00000000. If **iType** is not equal to CF\_TYPE\_GRADIENT, CF\_TYPE\_DATABAR, or CF\_TYPE\_MULTISTATE, **cbFmla3** MUST be 0x00000000.

**unused1 (4 bytes):** Undefined, and MUST be ignored.

**guid (16 bytes):** If **fGuid** is 1, this value is a GUID as specified in [MS-DTYP] section 2.3.2 that identifies the conditional formatting rule. If **fGuid** is 0, this field is unused and MUST be ignored.

**fGuid (4 bytes):** A Boolean (section 2.5.97.3) that specifies whether the conditional formatting rule contains a GUID. This value MUST be a value from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | The conditional formatting rule does not contain a GUID. <b>guid</b> is unused and MUST be ignored. |
| 0x00000001 | The conditional formatting rule contains a GUID.  |

If **iPri** is -1 and **fGuid** is 0x00000001, the value of the **guid** field MUST equal the value of the **guid** field of the associated **BrtCFRuleExt** (section 2.4.317) record. If **iPri** is -1 and **fGuid** is 0x00000000, this **BrtBeginCFRule14** (section 2.4.22) and the succeeding **BrtBeginDatabar14** (section 2.4.41) record MUST be ignored.

**strParam (variable):** An **XLNullableWideString** (section 2.5.166) that specifies a value used in the conditional formatting rule. If **iTemplate** is not CF\_TEMPLATE\_CONTAINSTEXT, **strParam** MUST be NULL and MUST be ignored. Otherwise, **strParam** MUST contain a string that specifies the value that is searched for, and **strParam** MUST be greater than 0 and less than 256 characters long.

### 2.4.23 BrtBeginColBrk

The **BrtBeginColBrk** record specifies vertical **page break (2)** properties and specifies the beginning of a collection of **BrtBrk** (section [2.4.300](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtBrk** records specifies vertical page breaks (2).

|            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| ibrkMac    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ibrkManMac |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**ibrkMac (4 bytes):** An unsigned integer that specifies the number of vertical page breaks (2) in the workbook. MUST be less than or equal to 1023.

**ibrkManMac (4 bytes):** An unsigned integer that specifies the number of manual vertical page breaks (2) that occur at locations specified by the user. This value MUST be equal to **ibrkMac**.

### 2.4.24 BrtBeginColInfos

The **BrtBeginColInfos** record specifies the beginning of a collection of **BrtColInfo** (section [2.4.320](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtColInfo** records specifies the column (2) width and formatting for one or more columns (2) of a sheet.

### 2.4.25 BrtBeginColorPalette

The **BrtBeginColorPalette** record specifies the beginning of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies the color information associated with this workbook.

When the color palette is modified, the **BrtIndexedColor** (section [2.4.660](#)) collection is updated. When a custom color has been selected, the **BrtMRUColor** (section [2.4.679](#)) collection is updated.

### 2.4.26 BrtBeginColorScale

The **BrtBeginColorScale** record specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a **color scale** used in conditional formatting.

If this record is followed by two **BrtCFVO** (section [2.4.318](#)) records and two **BrtColor** (section [2.4.321](#)) records, this record specifies a two-color color scale. The first **BrtCFVO** specifies the cell value for the beginning of the color scale, and the second **BrtCFVO** specifies the cell value for the end of the color scale. The first **BrtColor** specifies the color for the beginning of the color scale, and the second **BrtColor** specifies the color for the end of the color scale.

If this record is followed by three **BrtCFVO** records and three **BrtColor** records, this record specifies a three-color color scale. The first **BrtCFVO** specifies the cell value for the beginning of the color scale, the second **BrtCFVO** specifies the cell value for the midpoint of the color scale, and the third **BrtCFVO** specifies the cell value for the end of the color scale. The first **BrtColor** specifies the color for the beginning of the color scale, the second **BrtColor** specifies the color for the midpoint of the color scale, and the third **BrtColor** specifies the color for the end of the color scale.

## 2.4.27 BrtBeginColorScale14

The **BrtBeginColorScale14** record specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies a color scale used in conditional formatting.

If this record is followed by two **BrtCFVO14** (section [2.4.319](#)) records and two **BrtColor14** (section [2.4.322](#)) records, this record specifies a two-color color scale. The first BrtCFVO14 specifies the cell value for the beginning of the color scale, and the second BrtCFVO14 specifies the cell value for the end of the color scale. The first **BrtColor14** specifies the color for the beginning of the color scale, and the second **BrtColor14** specifies the color for the end of the color scale.

If this record is followed by three BrtCFVO14 records and three **BrtColor14** records, this record specifies a three-color color scale. The first BrtCFVO14 specifies the cell value for the beginning of the color scale, the second **BrtCFVO14** specifies the cell value for the midpoint of the color scale, and the third BrtCFVO14 specifies the cell value for the end of the color scale. The first **BrtColor14** specifies the color for the beginning of the color scale, the second **BrtColor14** specifies the color for the midpoint of the color scale, and the third **BrtColor14** specifies the color for the end of the color scale.

## 2.4.28 BrtBeginComment

The **BrtBeginComment** record specifies the beginning of a **BrtCommentText** (section [2.4.325](#)) record as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. The **BrtCommentText** record specifies the text of a comment.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| iauthor         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rfx (16 bytes)  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| guid (16 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iauthor (4 bytes):** A signed integer that specifies a zero-based index of a **BrtCommentAuthor** (section [2.4.324](#)) record in the collection of all records directly following **BrtBeginCommentAuthors** (section [2.4.29](#)). The referenced **BrtCommentAuthor** specifies a comment author for this comment.

**rfx (16 bytes):** An **UncheckedRFX** (section [2.5.153](#)) that specifies the cell the comment is associated with. **rfx.rwFirst** MUST be equal to **rfx.rwLast**. **rfx.colFirst** MUST be equal to **rfx.colLast**.

**guid (16 bytes):** A GUID as specified in [\[MS-DTYP\]](#) section 2.3.2 that identifies this comment. If the workbook is not a shared workbook (section [2.2.12](#)), this field is undefined and MUST be ignored.

### 2.4.29 BrtBeginCommentAuthors

The **BrtBeginCommentAuthors** record specifies the beginning of a collection of **BrtCommentAuthor** (section [2.4.324](#)) records as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. The collection of **BrtCommentAuthor** records specifies a list of authors of comments.

### 2.4.30 BrtBeginCommentList

The **BrtBeginCommentList** record specifies the beginning of a collection of records as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. The collection specifies a list of comments.

### 2.4.31 BrtBeginComments

The **BrtBeginComments** record specifies the beginning of a collection of records as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. The collection of records specifies lists of authors and their comments.

### 2.4.32 BrtBeginConditionalFormatting

The **BrtBeginConditionalFormatting** record specifies conditional formatting properties for a range and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies conditional formatting information for a range.

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ccf              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fPivot           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sqrfx (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ccf (4 bytes):** An unsigned integer that equals the count of **BrtBeginCFRule** (section [2.4.21](#)) records contained in the collection.

**fPivot (4 bytes):** A Boolean (section [2.5.97.3](#)) that specifies whether the conditional formatting is applied only to a **PivotTable** (section [2.1.7.40](#)). This value MUST be a value from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | The area specified by <b>sqrfx</b> includes some cells that are not part of a <b>PivotTable</b> data area (section <a href="#">2.2.5.3.8.1.4</a> ). |
| 0x00000001 | The area specified by <b>sqrfx</b> only includes cells that are part of a <b>PivotTable</b> data area (section <a href="#">2.2.5.3.8.1.4</a> ).     |

**sqrfx (variable):** An **UncheckedSqRfX** (section [2.5.155](#)) that specifies the range the conditional formatting applies to.

### 2.4.33 BrtBeginConditionalFormatting14

The **BrtBeginConditionalFormatting14** record specifies conditional formatting properties for a range and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies conditional formatting information for a range. This record is equivalent to **BrtBeginConditionalFormatting** (section [2.4.32](#)) but allows for more than 8192 ranges to which this conditional formatting is applied.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ccf                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fPivot                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the Future Record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table.

| Field                       | Value |
|-----------------------------|-------|
| <b>FRTHHeader.fRef</b>      | 0     |
| <b>FRTHHeader.fSqref</b>    | 1     |
| <b>FRTHHeader.fFormulas</b> | 0     |
| <b>FRTHHeader.fRelID</b>    | 0     |

The **FRTHHeader.rgSqrefs** specifies the range this conditional formatting applies to. The **FRTHHeader.rgSqrefs.csqref** field MUST equal 1. The **sqrfx.crfx** field of the single **FRTSqref** (section [2.5.65](#)) comprising the array of the **FRTHHeader.rgSqrefs** field MUST be greater than or equal to 1.

**ccf (4 bytes):** An unsigned integer that specifies the count of **BrtBeginCFRule14** (section [2.4.22](#)) records contained in this collection.

**fPivot (4 bytes):** A Boolean (section [2.5.97.3](#)) that specifies whether this conditional formatting is applied only to a **PivotTable** (section [2.1.7.40](#)). This value MUST be a value from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | The range specified within <b>FRTHHeader.rgSqrefs</b> includes some cells that are not part of a PivotTable data area (section <a href="#">2.2.5.3.8.1.4</a> ). |
| 0x00000001 | The range specified within <b>FRTHHeader.rgSqrefs</b> only includes cells that are part of a PivotTable data area (section <a href="#">2.2.5.3.8.1.4</a> ).     |

## 2.4.34 BrtBeginConditionalFormattings

The **BrtBeginConditionalFormattings** record specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies conditional formatting information for the **Worksheet**.

## 2.4.35 BrtBeginCERrs

The **BrtBeginCERrs** record specifies the file type of the document and specifies the beginning of a collection of **BrtCrashRecErr** (section [2.4.326](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtCrashRecErr** records specify the errors that occurred during an application fault.

|    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| ft |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**ft (4 bytes):** A signed integer that specifies the file type of the document before the application failure. This value MUST be a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000001 | SYLK (Symbolic Link) (*.slk)                       |
| 0x00000002 | Text (Tab delimited) (*.txt)                       |
| 0x00000005 | CSV (Comma delimited) (*.csv)                      |
| 0x00000008 | DIF (Data Interchange Format) (*.dif)              |
| 0x00000010 | Excel 97-2003 Template (*.xlt)                     |
| 0x00000011 | Excel 97-2003 Add-In (*.xla)                       |
| 0x00000012 | Text (Macintosh) (*.txt)                           |
| 0x00000013 | Text (MS-DOS) (*.txt)                              |
| 0x00000015 | CSV (Macintosh) (*.csv)                            |
| 0x00000016 | CSV (MS-DOS) (*.csv)                               |
| 0x0000001C | Microsoft Excel 3.0 Worksheet (*.xls)              |
| 0x00000020 | Microsoft Excel 4.0 Worksheet (*.xls)              |
| 0x00000023 | Formatted Text (Space delimited) (*.prn)           |
| 0x00000026 | Microsoft Excel 5.0/95 Workbook (*.xls)            |
| 0x00000029 | Unicode Text (*.txt)                               |
| 0x0000002A | Microsoft Excel 97-2003 \& 5.0/95 Workbook (*.xls) |
| 0x0000002B | Web Page (*.htm, *.html)                           |
| 0x0000002C | Single File Web Page (*.mht, *.mhtml)              |



| Value      | Meaning                               |
|------------|---------------------------------------|
| 0x0000002D | XML Spreadsheet 2003 (*.xml)          |
| 0x00000030 | XML Data (*.xml)                      |
| 0x00000031 | Excel Binary Workbook (*.xlsb)        |
| 0x00000032 | Excel Workbook (*.xlsx)               |
| 0x00000033 | Excel Macro-Enabled Workbook (*.xlsm) |
| 0x00000034 | Excel Macro-Enabled Template (*.xltm) |
| 0x00000035 | Excel Template (*.xltx)               |
| 0x00000036 | Excel Add-In (*.xlam)                 |
| 0x00000037 | Excel 97-2003 Workbook (*.xls)        |

### 2.4.36 BrtBeginCsView

The **BrtBeginCsView** record specifies **chart sheet view** settings for the current chart sheet. It also specifies the beginning of a collection of records as specified by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF. This collection specifies additional chart sheet view settings for the current chart sheet. Chart sheet view settings and workbook view settings for the associated workbook view (specified by **iwbview**) together define the display of a chart sheet.

| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10     | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20      | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|---|---|---|---|---|---|---|---|---|---|--------|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|
| A |   |   |   |   |   |   |   |   |   | unused |    |    |    |    |    |    |    |    |    | wScale  |    |    |    |    |    |    |    |    |    |    |    |
|   |   |   |   |   |   |   |   |   |   | ...    |    |    |    |    |    |    |    |    |    | iwbview |    |    |    |    |    |    |    |    |    |    |    |
|   |   |   |   |   |   |   |   |   |   | ...    |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |

**A - fSelected (1 bit):** A bit that specifies that the chart sheet is currently selected.

**unused (15 bits):** Undefined and MUST be ignored.

**wScale (4 bytes):** An unsigned integer that specifies the window **zoom level** as a percentage value. The value MUST be greater than or equal to 10 and less than or equal to 400, or equal to 0. A value of 0 specifies that there is no zoom level set.

**iwbview (4 bytes):** An unsigned integer that specifies the zero-based index of a **BrtBookView** (section [2.4.298](#)) record in the collection of all records directly following **BrtBeginBookViews** (section [2.4.11](#)) in the **Workbook** (section [2.1.7.60](#)) part. The referenced **BrtBookView** specifies the workbook view the chart sheet view is associated with.

### 2.4.37 BrtBeginCsViews

The **BrtBeginCsViews** record specifies the beginning of a collection of records as defined by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies the chart sheet views of the chart sheet.

### 2.4.38 BrtBeginCustomFilters

The **BrtBeginCustomFilters** record specifies a property of a filter and specifies the beginning of a collection of **BrtCustomFilter** (section [2.4.332](#)) records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtCustomFilter** records specifies custom filter criteria to be applied to a filter.

|      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| fAnd |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**fAnd (4 bytes):** A Boolean (section [2.5.97.3](#)) that specifies whether the criteria specified by the **BrtCustomFilter** records in this collection have an "AND" relationship if there are two criteria. This value MUST be one of the values specified in the following table.

| Value      | Meaning                        |
|------------|--------------------------------|
| 0x00000000 | AND relationship will be used. |
| 0x00000001 | OR relationship will be used.  |

### 2.4.39 BrtBeginCustomFilters14

The **BrtBeginCustomFilter14** record specifies a property of a filter and specifies the beginning of a collection of **BrtCustomFilter14** (section [2.4.333](#)) records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtCustomFilter14** records specifies custom filter criteria to be applied to a filter.

|      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| fAnd |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**fAnd (4 bytes):** A Boolean (section [2.5.97.3](#)) that specifies whether the criteria specified by the **BrtCustomFilter14** (section [2.4.333](#)) records in this collection have an "AND" relationship if there are two criteria. This value MUST be one of the values specified in the following table.

| Value      | Meaning                        |
|------------|--------------------------------|
| 0x00000000 | AND relationship will be used. |
| 0x00000001 | OR relationship will be used.  |

### 2.4.40 BrtBeginDatabar

The **BrtBeginDatabar** record specifies data bar properties and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a data bar used in conditional formatting.

In the collection of records following this record, the first **BrtCFVO** (section [2.4.318](#)) record specifies the minimum cell value used for the data bars in this conditional formatting range. The second **BrtCFVO** record specifies the maximum cell value used for the data bars in this conditional formatting range. The **BrtColor** (section [2.4.321](#)) record specifies the color of the data bar.

|         |   |   |   |   |   |   |   |   |   |         |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|---------|----|----|----|----|----|----|----|----|----|------------|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10      | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20         | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| bLenMin |   |   |   |   |   |   |   |   |   | bLenMax |    |    |    |    |    |    |    |    |    | fShowValue |    |    |    |    |    |    |    |    |    |    |    |

**bLenMin (1 byte):** An unsigned integer that specifies the minimum cell width occupied by the data bars in this conditional formatting range, expressed as a percentage of the width of the cell being formatted. This value **MUST** be greater than or equal to 0 and less than or equal to **bLenMax**.

**bLenMax (1 byte):** An unsigned integer that specifies the maximum cell width occupied by the data bars in this conditional formatting range, expressed as a percentage of the width of the cell being formatted. This value **MUST** be greater than or equal to **bLenMin** and less than or equal to 100.

**fShowValue (1 byte):** A Boolean (section [2.5.97.3](#)) that specifies whether the cells in the conditional formatting range display both the data bar and the numeric value or only the data bar. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0x00  | Only the data bar is displayed in the cell.                        |
| 0x01  | Both the data bar and the numeric value are displayed in the cell. |

#### 2.4.41 BrtBeginDatabar14

The **BrtBeginDatabar14** record specifies data bar properties and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies a data bar used in conditional formatting.

In the collection of records following this record, the first **BrtCFVO14** (section [2.4.319](#)) record specifies the minimum cell value used for the data bars in the conditional formatting range. The second **BrtCFVO14** record specifies the maximum cell value used for the data bars in the conditional formatting range.

In the collection of records following this record, there are five optional **BrtColor14** (section [2.4.322](#)) records. They specify, in order, if they exist, the data bar positive bar color, data bar border color, data bar negative bar color, data bar negative border color, and data bar axis color.

The first optional **BrtColor14** (section [2.4.322](#)) record specifies the data bar positive bar color and **MUST** exist if and only if the **iPri** field of the **BrtBeginCFRule14** (section [2.4.22](#)) record specified by the **CFRULE14** rule (as defined in section [2.1.8](#)) that contains this record does not equal -1.

The second optional **BrtColor14** record specifies the data bar border color and **MUST** exist if and only if the **fBorder** attribute equals 1.

The third optional **BrtColor14** record specifies the data bar negative bar color and **MUST** exist if and only if the **fCustomNegativeFillColor** attribute equals 1.

The fourth optional **BrtColor14** record specifies the data bar negative border color and MUST exist if and only if the **fCustomNegativeBorderColor** attribute equals 1 and the **fBorder** attribute equals 1.

The fifth optional **BrtColor14** record specifies the data bar axis color and MUST exist if and only if **bAxisPosType** does not equal 0x02.

|              |   |   |   |   |   |   |   |         |   |   |   |        |   |   |   |            |   |   |   |   |   |   |   |            |   |   |   |   |   |   |   |  |  |  |  |
|--------------|---|---|---|---|---|---|---|---------|---|---|---|--------|---|---|---|------------|---|---|---|---|---|---|---|------------|---|---|---|---|---|---|---|--|--|--|--|
| 0            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8       | 9 | 0 | 1 | 2      | 3 | 4 | 5 | 6          | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4          | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |  |  |
| FRTHeader    |   |   |   |   |   |   |   |         |   |   |   |        |   |   |   |            |   |   |   |   |   |   |   |            |   |   |   |   |   |   |   |  |  |  |  |
| bLenMin      |   |   |   |   |   |   |   | bLenMax |   |   |   |        |   |   |   | fShowValue |   |   |   |   |   |   |   | bDirection |   |   |   |   |   |   |   |  |  |  |  |
| bAxisPosType |   |   |   |   |   |   |   | A       | B | C | D | unused |   |   |   |            |   |   |   |   |   |   |   |            |   |   |   |   |   |   |   |  |  |  |  |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the Future Record (section [2.1.6](#)) information for this record.

**bLenMin (1 byte):** An unsigned integer that specifies the minimum cell width occupied by the data bars in the conditional formatting range, expressed as a percentage of the width of the cell being formatted. This value MUST be greater than or equal to 0 and less than or equal to **bLenMax**. If there exists a **BrtCFRuleExt** (section [2.4.317](#)) record with a **guid** field in the sheet equal to the **guid** field of the **BrtBeginCFRule14** (section [2.4.22](#)) that begins the collection of records that contains this record, and this record's **bLenMin** is 0 and this record's **bLenMax** is 100, then the **bLenMin** field of the **BrtBeginDataBar** (section [2.4.40](#)) record contained in the collection of records that begins with the **BrtBeginConditionalFormatting** (section [2.4.32](#)) record that contains the **BrtCFRuleExt** record with the same **guid** field MUST be 10. If there exists a **BrtCFRuleExt** record with a **guid** field in this sheet equal to the **guid** field of the **BrtBeginCFRule14** (section [2.4.22](#)) that begins the collection of records that contains this record, and this record's **bLenMin** is not 0 or this record's **bLenMax** is not 100, then the **bLenMin** field of the **BrtBeginDataBar** record contained in the collection of records that begins with the **BrtBeginConditionalFormatting** record that contains the **BrtCFRuleExt** record with the same **guid** field MUST be equal to this record's **bLenMin**.

**bLenMax (1 byte):** An unsigned integer that specifies the maximum cell width occupied by the data bars in the conditional formatting range, expressed as a percentage of the width of the cell being formatted. This value MUST be greater than or equal to **bLenMin** and less than or equal to 100. If there exists a **BrtCFRuleExt** (section [2.4.317](#)) record with a **guid** field in the sheet equal to the **guid** field of the **BrtBeginCFRule14** (section [2.4.22](#)) that begins the collection of records that contains this record, and this record's **bLenMin** is 0 and this record's **bLenMax** is 100, then the **bLenMax** field of the **BrtBeginDataBar** (section [2.4.40](#)) record contained in the collection of records that begins with the **BrtBeginConditionalFormatting** (section [2.4.32](#)) record that contains the **BrtCFRuleExt** (section [2.4.317](#)) record with the same **guid** field MUST be 90. If there exists a **BrtCFRuleExt** record with a **guid** field in the sheet equal to the **guid** field of the **BrtBeginCFRule14** (section [2.4.22](#)) that begins the collection of records that contains this record, and this record's **bLenMin** is not 0 or this record's **bLenMax** is not 100, then the **bLenMax** field of the **BrtBeginDataBar** record contained in the collection of records that begins with the **BrtBeginConditionalFormatting** record that contains the **BrtCFRuleExt** record with the same **guid** field MUST be equal to this record's **bLenMax**.

**fShowValue (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the cells in the conditional formatting range display both the data bar and the numeric value or only the data bar. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0x00  | Only the data bar is displayed in the cell.                        |
| 0x01  | Both the data bar and the numeric value are displayed in the cell. |

**bDirection (1 byte):** An unsigned integer that specifies the direction of the data bar. This value **MUST** be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | The direction of the data bar is determined by context.     |
| 0x01  | The data bar is displayed in a <b>left-to-right</b> manner. |
| 0x02  | The data bar is displayed in a <b>right-to-left</b> manner. |

**bAxisPosType (1 byte):** An unsigned integer that specifies the axis position for the data bar. This value **MUST** be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | The axis position for the data bar is calculated automatically. |
| 0x01  | The axis position for the data bar is the midpoint of the cell. |
| 0x02  | There is no axis for the data bar.                              |

**A - fBorder (1 bit):** A bit that specifies whether the data bar has a border.

**B - fGradient (1 bit):** A bit that specifies whether the data bar fill is a gradient. The following table specifies the meaning of each value.

| Value | Meaning                             |
|-------|-------------------------------------|
| 0     | The data bar fill is a solid color. |
| 1     | The data bar fill is a gradient.    |

**C - fCustomNegativeFillColor (1 bit):** A bit that specifies whether the negative bar color of the data bar is different from the positive bar color.

**D - fCustomNegativeBorderColor (1 bit):** A bit that specifies whether the negative border color of the data bar is different from the positive border color.

**unused (12 bits):** Undefined and **MUST** be ignored.

#### 2.4.42 BrtBeginDataFeedPr15

The **BrtBeginDataFeedPr15** record specifies properties of a **model data source data feed connection** (section [2.2.8.9.2](#)) and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF.

|                           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| irstConnection (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**irstConnection (variable):** An **XLWideString** section [2.5.168](#)) that specifies the connection string for this connection.

### 2.4.43 BrtBeginDataModel

The **BrtBeginDataModel** record specifies the beginning of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies properties of the **spreadsheet data model**.

|                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| bVerLoadModelMin |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**bVerLoadModelMin (1 byte):** A byte which specifies the minimum application version required to load the spreadsheet data model in this workbook. This MUST be greater than or equal to 5.

### 2.4.44 BrtBeginDbTables15

The **BrtBeginDbTables15** record specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the list of database tables used by this **model data source OLE DB connection** (section [2.2.8.9.1](#)) or **model data source data feed connection** (section [2.2.8.9.2](#)).

### 2.4.45 BrtBeginDCon

The **BrtBeginDCon** record specifies **data consolidation** properties and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies data consolidation information.

|         |   |   |   |   |   |   |   |   |   |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13     | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iifstab |   |   |   |   |   |   |   |   |   | A  | B  | C  | unused |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iifstab (1 byte):** An **IIFstab** (section [2.5.78](#)) that specifies the data consolidation function that is used.

**A - fLeftCat (1 bit):** A bit that specifies whether the values in the left column (2) of the data consolidation range will be treated as labels or data. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0     | Treat the left column (2) of the data consolidation range as data that will be operated on by the data consolidation function specified by <b>iifstab</b> .    |
| 1     | Treat the left column (2) of the data consolidation range as labels that will be used to identify the rows (2) operated on by the data consolidation function. |

**B - fTopCat (1 bit):** A bit that specifies whether the values in the top row (2) of the data consolidation range will be treated as labels or data. The following table specifies the meaning of each value.

| Value | Meaning   |
|-------|---|
| 0     | Treat the top row (2) of the data consolidation range as data that will be operated on by the data consolidation function specified by <b>iifstab</b> .       |
| 1     | Treat the top row (2) of the data consolidation range as labels that will be used to identify the columns (2) operated on by the data consolidation function. |

**C - fLinkConsol (1 bit):** A bit that specifies whether data consolidation will create references to the source data. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0     | References are not created to the source data. |
| 1     | References are created to the source data.     |

**unused (5 bits):** Undefined and MUST be ignored.

## 2.4.46 BrtBeginDecoupledPivotCacheIDs

The **BrtBeginDecoupledPivotCacheIDs** record specifies the beginning of a collection of **PivotCache** identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF rules. The collection of records specifies the **PivotCache** structures that are associated with Non-Worksheet PivotTables (section [2.2.5.5](#)).

### 2.4.47 BrtBeginDeletedName

The **BrtBeginDeletedName** record specifies the name of a **query** field that has been deleted from a query table and specifies the beginning of an empty collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF.

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rgb (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rgb (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the deleted query field. The length of **rgb** MUST be greater than or equal to 1 character and less than or equal to 255 characters.

### 2.4.48 BrtBeginDeletedNames

The **BrtBeginDeletedNames** record specifies properties of query fields that have been deleted from a query table and specifies the beginning of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies query fields that have been deleted from the query table.

|       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| nCols |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**nCols (4 bytes):** A **DCol** (section [2.5.31](#)) that specifies how many deleted query fields there are. This value MUST equal the number of **BrtBeginDeletedName** (section [2.4.47](#)) records in the collection.

### 2.4.49 BrtBeginDim

The **BrtBeginDim** record specifies a **PivotCache** (section [2.2.5.2](#)) OLAP dimension (1) and the beginning of an empty collection as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

|                     |          |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------|----------|---|---|---|---|---|---|---|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                   | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9                 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| A                   | reserved |   |   |   |   |   |   |   | stName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                 |          |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stUnique (variable) |          |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                 |          |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |



|                      |
|----------------------|
| stDisplay (variable) |
| ...                  |

**A - fMeasure (1 bit):** A bit that that indicates whether this is a **measure** dimension (1).

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the dimension (1). The length of this value MUST be greater than 0.

**stUnique (variable):** An **XLWideString** that specifies the unique name of the dimension (1). The length of this value MUST be greater than 0 and less than 32768 characters.

**stDisplay (variable):** An **XLWideString** that specifies the display name of the dimension (1). The length of this value MUST be greater than 0.

### 2.4.50 BrtBeginDims

The **BrtBeginDims** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies **PivotTable** (section [2.2.5](#)) OLAP dimensions (1). MUST exist if and only if this record is an OLAP **PivotCache** (section [2.2.5.2](#)).

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cDims |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cDims (4 bytes):** An unsigned integer that specifies the number of OLAP dimensions (1) in the **PivotTable** (section [2.2.5](#)). This value MUST match the number of **BrtBeginDim** (section [2.4.49](#)) records in the collection.

### 2.4.51 BrtBeginDRefs

The **BrtBeginDRefs** record specifies a count of **BrtDRef** (section [2.4.338](#)) records in the collection and specifies the beginning of a collection of **BrtDRef** records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtDRef** records specifies the references used by data consolidation.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cdref |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cdref (4 bytes):** An unsigned integer that specifies the number of **BrtDRef** (section [2.4.338](#)) records contained in the collection.

## 2.4.52 BrtBeginDVals

The **BrtBeginDVals** record specifies the beginning of a collection of **BrtDVal** (section [2.4.339](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. This record also specifies **data validation** properties of a worksheet that are used by the application's user interface (UI).

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| DVals (18 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**DVals (18 bytes):** A **DVals** (section [2.5.35](#)) that specifies data validation properties of a worksheet that are used by the application's UI.

## 2.4.53 BrtBeginDVals14

The **BrtBeginDVals14** record specifies the beginning of a collection of **BrtDVal14** (section [2.4.340](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. This record also specifies data validation properties of a worksheet that are used by the application's UI.


|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHdr           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| DVals (18 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHdr (4 bytes):** An **FRTHdr** (section [2.5.54](#)) that specifies the Future Record (section [2.1.6](#)) information for this record.

**DVals (18 bytes):** A **DVals** (section [2.5.35](#)) that specifies data validation properties of a worksheet that are used by the application's UI.

## 2.4.54 BrtBeginDXF14s

The **BrtBeginDXF14s** record specifies a count of **BrtDXF14** records (section [2.4.343](#)) and specifies the beginning of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies a set of differential formatting (section [2.2.6.2](#)).

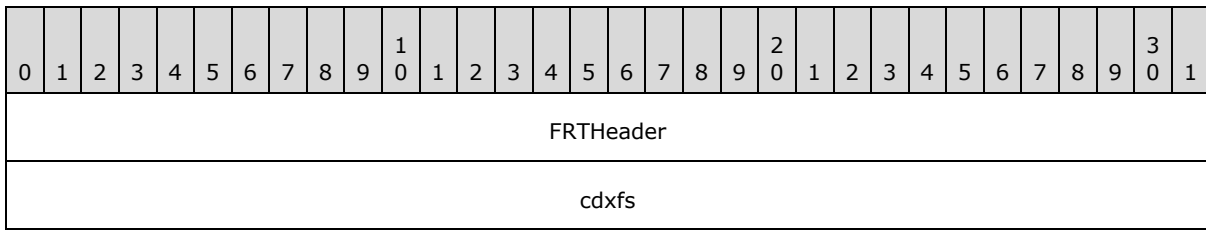


**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**cdxfs (4 bytes):** An unsigned integer that specifies the number of **BrtdXF14** (section [2.4.343](#)) records in the collection. This value MUST be less than or equal to 0x7FFFFFFF.

### 2.4.55 BrtBeginDXFs


The **BrtBeginDXFs** record specifies a count of **BrtdXF** (section [2.4.342](#)) records and specifies the beginning of a collection of **BrtdXF** records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF and the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtdXF** records specifies a set of differential formatting (section [2.2.6.2](#)).

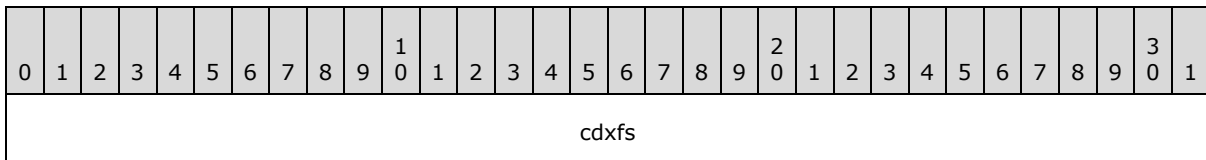

**cdxfs (4 bytes):** An unsigned integer that specifies the number of differential formatting records (**BrtdXF**). This value MUST be less than or equal to 0x7FFFFFFF.

### 2.4.56 BrtBeginDXFs15

The **BrtBeginDXFs15** record specifies a count of **BrtdXF15** records (section [2.4.344](#)) and specifies the beginning of a collection of records as defined by the **Styles** part ABNF. The collection of records specifies a set of [Differential Formatting](#).

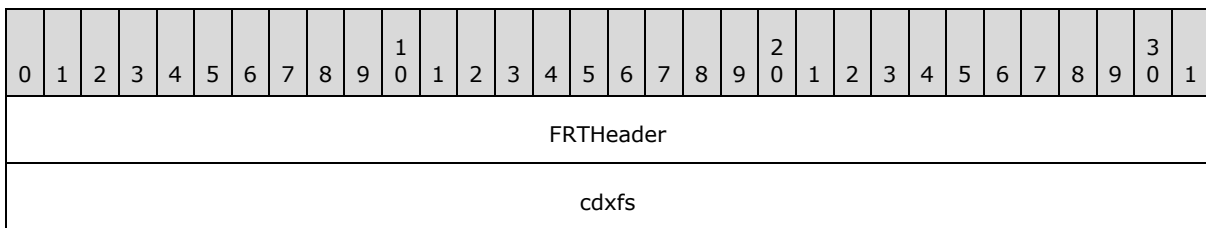

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**cdxfs (4 bytes):** An unsigned integer that specifies the number of **BRTDXF15** records (section [2.4.344](#)) in the collection. This value MUST be less than or equal to 0x7FFFFFFF.

## 2.4.57 BrtBeginECDBProps

The **BrtBeginECDBProps** record specifies the properties associated with an ODBC or OLE DB external connection (section [2.2.8](#)) and specifies the beginning of an empty collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF.

|                     |   |          |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|---------------------|---|----------|---|---|---|---|---|-------------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0                   | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8                 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
| icmdtype            |   |          |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| A                   | B | reserved |   |   |   |   |   | stConn (variable) |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...                 |   |          |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| stCmd (variable)    |   |          |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...                 |   |          |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| stCmdSvr (variable) |   |          |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...                 |   |          |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |

**icmdtype (4 bytes):** A **CmdType** (section [2.5.20](#)) that specifies the OLE DB or ODBC command type. This value MUST be **CMDSQL** (section [2.5.20](#)) if this record is an ODBC data connection, as specified in section [2.2.8.4](#).

**A - fLoadCmdSvr (1 bit):** A bit that specifies whether **stCmdSvr** exists after the fixed-size portion of this record. This value MUST be 0 if this record is an OLE DB data connection, as specified in section [2.2.8.3](#).

**B - fLoadCmd (1 bit):** A bit that specifies whether **stCmd** exists after the fixed-size portion of this record.

**reserved (6 bits):** This value MUST be 0, and MUST be ignored.

**stConn (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the **connection string** used to connect to an OLE DB or ODBC data source (1). The length of this value MUST be less than 65536 characters. The length of this value MUST be 0 if the **fDeleted** field of the preceding **BrtBeginExtConnection** (section [2.4.76](#)) record is 1.

**stCmd (variable):** An optional **XLWideString** that specifies the database command to pass to the data provider. This field MUST exist if and only if **fLoadCmd** is 1.

**stCmdSvr (variable):** An optional **XLWideString** that specifies the database command to use instead of **stCmd** if the cache field that is used as a server-based page field, as specified in Source Data (section [2.2.5.2.1](#)), is removed from the page axis (section [2.2.5.3.7.1](#)) or made into a page field that is not a server-based page field. This field MUST exist if and only if **fLoadCmdSvr** is 1.

## 2.4.58 BrtBeginECOlapprops

The **BrtBeginECOlapprops** record specifies the properties of an OLAP connection (section [2.2.8.3.1](#)) and specifies the beginning of an empty collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The properties that specify server formatting options are used to specify whether server formatting retrieved from the OLAP data source (1) is applied to the cells used by **PivotTables** (section [2.2.5](#)) or cube functions associated with the **PivotCache** (section [2.2.5.2](#)) that is associated with the external connection (section [2.2.8](#)), as specified in section [2.2.5.2.1](#). In the case of **PivotTables**, the formatting is applied to the cells in data area (section [2.2.5.3.8.1.4](#)) of the **PivotTable** report. In the case of cube functions, the formatting is applied to the cells that contain the result of the cube function. When a local cube file is used, as specified by **fLocalConn**, the OLE DB for OLAP data provider is used to connect to a file, which is a cache of the OLAP data source (1).

|     |   |   |   |   |   |   |   |                   |           |   |   |   |   |   |   |                        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|---|---|-------------------|-----------|---|---|---|---|---|---|------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8                 | 9         | 0 | 1 | 2 | 3 | 4 | 5 | 6                      | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| A   | B | C | D | E | F | G | H | nDrillthroughRows |           |   |   |   |   |   |   |                        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |   | I                 | reserved2 |   |   |   |   |   |   | stConnLocal (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |   |                   |           |   |   |   |   |   |   |                        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**A - fLocalConn (1 bit):** A bit that specifies whether data is retrieved from a local cube file. This value MUST be one of the values in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The data is retrieved using the connection string specified by the <b>stConn</b> field of the <b>BrtBeginECDbProps</b> (section <a href="#">2.4.57</a> ) record preceding this record. |
| 1     | The data is retrieved from the connection string specified by <b>stConnLocal</b> .   |

**B - fNoRefreshCube (1 bit):** A bit that specifies whether the OLE DB for OLAP data provider is requested to rebuild the local cube file. This value is applicable only when **fLocalConn** is equal to 1. This value MUST be one of the values in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The OLE DB for OLAP data provider is requested to rebuild the local cube file on refresh.        |
| 1     | The OLE DB for OLAP data provider is requested to query the existing local cube file on refresh. |

**C - fSrvFmtBack (1 bit):** A bit that specifies whether the background color retrieved from the OLAP data source (1) is used for cell formatting. This value MUST be one of the values in the following table.

| Value | Meaning   |
|-------|---|
| 0     | <b>Fill colors</b> retrieved from the OLAP data source (1) are ignored.           |
| 1     | Fill colors retrieved from the OLAP data source (1) are used for cell formatting. |

**D - fSrvFmtFore (1 bit):** A bit that specifies whether the **font face color** retrieved from the OLAP data source (1) is used for cell formatting. This value MUST be one of the values in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Font colors retrieved from the OLAP data source (1) are ignored.                  |
| 1     | Font colors retrieved from the OLAP data source (1) are used for cell formatting. |

**E - fSrvFmtFlags (1 bit):** A bit that specifies whether the **font family** name retrieved from the OLAP data source (1) is used for cell formatting. This value MUST be one of the values in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Font family names retrieved from the OLAP data source (1) are ignored.                  |
| 1     | Font family names retrieved from the OLAP data source (1) are used for cell formatting. |

**F - fSrvFmtNum (1 bit):** A bit that specifies whether the format string retrieved from the OLAP data source (1) is used for cell formatting. This value MUST be one of the values in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Formats strings retrieved from the OLAP data source (1) are ignored.                  |
| 1     | Formats strings retrieved from the OLAP data source (1) are used for cell formatting. |

**G - fUseOfficeLcid (1 bit):** A bit that specifies whether the **language code identifier (LCID)** is sent to the OLE DB for OLAP data provider to retrieve data in a localized manner.

**H - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**nDrillthroughRows (4 bytes):** A **DRw** (section [2.5.34](#)) that specifies the maximum number of **drillthrough** rows (2) to return when the user drills through an aggregate value in a **PivotTable** (section [2.2.5](#)). This value MUST be greater than 0 and less than 1048577.

**I - bLoadConnLocal (1 bit):** A bit that specifies whether **stConnLocal** exists after the fixed size portion of the record. This value MUST be 1 if **fLocalConn** is 1.

**reserved2 (7 bits):** This value MUST be 0, and MUST be ignored.

**stConnLocal (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies a connection string to use when a local cube file is available. This field MUST exist if and only if **bLoadConnLocal** is 1. The length of this value MUST be less than 65536.

## 2.4.59 BrtBeginECPParam

The **BrtBeginECPParam** record specifies parameters of an external connection (section [2.2.8](#)) and specifies the beginning of an empty collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF.

|                        |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------------|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|-----------------|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                      | 1 | 2 | 3 | 4        | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6               | 7        | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| pbt                    |   |   | A | reserved |   |   |   |   |   |   |   |   |   |   |   |                 | wTypeSql |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| dataType (optional)    |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| fLoadPrompt (optional) |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stName (variable)      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                    |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stPrompt (variable)    |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                    |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stVal (variable)       |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                    |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| xnumVal (optional)     |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                    |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| boolVal (optional)     |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   | fmla (variable) |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                    |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                 |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**pbt (3 bits):** An unsigned integer that specifies the type of the parameter. This value MUST be one of the values from the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | Prompt. An application collects the parameter value from the user.  |
| 0x1   | Value. This record contains the value in one of the fields: <b>stVal</b> , <b>xnumVal</b> , or <b>boolVal</b> . |
| 0x2   | Cell reference. <b>fmla</b> specifies the sheet cell that contains the value.                                   |

**A - fAutoRefresh (1 bit):** A bit that specifies whether the external data is automatically refreshed when the content of a cell containing the parameter's value changes. This value MUST be 0 if **pbt** is not 0x2. The following table specifies the meaning of each value.

| Value | Meaning   |
|-------|---|
| 0     | External data is refreshed only when requested by the user or when triggered by some other event (for example, the workbook is opened). |
| 1     | External data is refreshed whenever the content of a cell containing the parameter's value  |

| Value | Meaning  |
|-------|----------|
|       | changes. |

**reserved (12 bits):** This value MUST be 0, and MUST be ignored.

**wTypeSql (2 bytes):** A **TypeSql** (section [2.5.151](#)) that specifies the **SQL** data type of the parameter. This value MUST be ignored when the external connection is not an ODBC data source (1).

**dataType (4 bytes):** An optional unsigned integer that specifies the data type of the parameter value. This field MUST exist if and only if **pbt** is not 0x0 and MUST be ignored if **pbt** is 0x2. This value MUST be one of the values in the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000001 | Double. The parameter value is specified by the <b>xnumVal</b> field.  |
| 0x00000002 | String. The parameter value is specified by the <b>stVal</b> field.    |
| 0x00000004 | Boolean. The parameter value is specified by the <b>boolVal</b> field. |
| 0x00000800 | Integer. The parameter value is specified by the <b>xnumVal</b> field. |

**fLoadPrompt (4 bytes):** An optional **Boolean** (section [2.5.97.3](#)) that specifies whether **stPrompt** exists after the fixed size portion of the record. If the value is 1, **stPrompt** exists. **fLoadPrompt** MUST exist if and only if **pbt** is 0x0.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the parameter. The length of this value MUST be less than 256 characters.

**stPrompt (variable):** An optional **XLWideString** that specifies the prompt string for the parameter. The length of this value MUST be less than 65536 characters. This field MUST exist if and only if **pbt** is 0x0 and **fLoadPrompt** is 0x00000001.

**stVal (variable):** An optional **XLWideString** that specifies the string value of the parameter. The length of this value MUST be less than 256 characters. This field MUST exist if and only if **pbt** is 0x1 and **dataType** is 0x00000002.

**xnumVal (8 bytes):** An optional **Xnum** (section [2.5.171](#)) that specifies the value of the parameter. This field MUST exist if and only if **pbt** is 0x1 and **dataType** is 0x00000001 or 0x00000800. If **dataType** is 0x00000800, the integer value specified by this field MUST be less than or equal to 0x7FFFFFFF and greater than or equal to 0x80000000.

**boolVal (1 byte):** An optional **BYTE** that specifies the **Boolean** value of the parameter. This field MUST exist if and only if **pbt** is 0x1 and **dataType** is 0x00000004.

**fmla (variable):** An optional **ParameterParsedFormula** (section [2.5.97.14](#)) that specifies the formula (section [2.2.2](#)) that MUST evaluate to the range containing the value or values to use for the parameter. If this is an ODBC connection (section [2.2.8.4](#)), the cell range MUST specify a single cell. If this is a Web connection (section [2.2.8.5](#)), the cell range MUST specify a single row (2) or a single column (2) of cells; each cell of the range can contain one of the parameter values. This field MUST exist if and only if **pbt** is 2.



## 2.4.60 BrtBeginECPARAMS

The **BrtBeginECPARAMS** record specifies properties of connection parameters and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies connection parameters for an ODBC connection (section [2.2.8.4](#)) or for a Web connection (section [2.2.8.5](#)). If this record exists for an ODBC connection, it MUST follow the **BrtBeginECDBPROPS** (section [2.4.57](#)) record. If this record exists for a Web connection, it MUST follow the **BrtBeginECWEBPROPS** (section [2.4.67](#)) record.

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cParams |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cParams (4 bytes):** An unsigned integer that specifies the number of connection parameters. This value MUST match the number of **BrtBeginECPARAM** (section [2.4.59](#)) records in this collection.

## 2.4.61 BrtBeginECTwFldInfo

The **BrtBeginECTwFldInfo** record specifies field settings for text importation and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies field settings for text importation.

A field in the context of text importation is a column (2) of data that is imported into a range in a sheet.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| data |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**data (8 bytes):** An **ECTwFldInfoData** structure (section [2.5.39](#)) which specifies field settings.

## 2.4.62 BrtBeginECTwFldInfo15

The **BrtBeginECTwFldInfo15** record specifies field settings for **model data source text importation connection** (section [2.2.8.9.4](#)) and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies field settings for text importation.

A field in the context of text importation is a column (2) of data that is imported into a range in a sheet.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| data |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

...

**data (8 bytes):** A **ECTwFldInfoData** structure (section [2.5.39](#)), which specifies field settings.

### 2.4.63 BrtBeginECTWFldInfoLst

The **BrtBeginECTWFldInfoLst** record specifies the number of columns (2) of data in a text file and specifies the beginning of a collection of **BrtBeginECTwFldInfo** (section [2.4.61](#)) records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies a collection of columns (2) of data in a text file.

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cFields |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cFields (4 bytes):** An unsigned integer that specifies the number of columns (2) of data in the text file. This value MUST equal the number of **BrtBeginECTwFldInfo** records in the collection.

### 2.4.64 BrtBeginECTWFldInfoLst15

The **BrtBeginECTWFldInfoLst15** record specifies the number of columns (2) of data in a text file and specifies the beginning of a collection of **BrtBeginECTwFldInfo15** (section [2.4.62](#)) records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies a collection of columns (2) of data in a text file.

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cFields |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cFields (4 bytes):** An unsigned integer that specifies the number of columns (2) of data in the text file. This value MUST equal the number of **BrtBeginECTwFldInfo15** records in the collection.

### 2.4.65 BrtBeginECTxtWiz

The **BrtBeginECTxtWiz** record specifies text importation properties and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies text importation properties.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| data |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                   |
|-------------------|
| ...               |
| stFile (variable) |
| ...               |

**data (12 bytes):** An **ECTxtWizData** structure (section [2.5.40](#)) which specifies text importation properties.

**stFile (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the path to the text file to use to import external data. The length of the string **MUST** be greater than or equal to 0 characters and less than 219 characters.

#### 2.4.66 BrtBeginECTxtWiz15

The **BrtBeginECTxtWiz15** record specifies the **model data source text importation connection** properties (section [2.2.8.9.4](#)), and the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| data              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stFile (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**data (12 bytes):** An **ECTxtWizData** structure (section [2.5.40](#)) which specifies **model data source text importation connection** properties.

**stFile (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the path to the text file to use to import external data. The length of the string **MUST** be greater than or equal to zero characters and less than 219 characters.

#### 2.4.67 BrtBeginECWebProps

The **BrtBeginECWebProps** record specifies the properties of a Web connection (section [2.2.8.5](#)) and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the properties of a Web connection.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18        | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |
| wHTMLFmt |   |   |   |   |   |   |   |   | A | B  | C  | D  | E  | F  | G  | H  | I  | reserved1 |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |

|                          |   |   |           |                  |
|--------------------------|---|---|-----------|------------------|
| J                        | K | L | reserved2 | stURL (variable) |
| ...                      |   |   |           |                  |
| stWebPost (variable)     |   |   |           |                  |
| ...                      |   |   |           |                  |
| stEditWebPage (variable) |   |   |           |                  |
| ...                      |   |   |           |                  |

**wHTMLFmt (8 bits):** An unsigned integer that specifies how to handle formatting from the HTML source when bringing Web connection (section [2.2.8.5](#)) data into the sheet. This value MUST be one of the values in the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | None. There is no formatting.                       |
| 0x01  | RTF. Handle the formatting as rich text formatting. |
| 0x02  | All. Handle the formatting as all HTML formatting.  |

**A - fSrcIsXML (1 bit):** A bit that specifies whether the Web connection (section [2.2.8.5](#)) source is XML. The following table specifies the meaning of each value.

| Value | Meaning                            |
|-------|------------------------------------|
| 0     | The Web connection source is HTML. |
| 1     | The Web connection source is XML.  |

**B - fImportSourceData (1 bit):** A bit that specifies whether the source data is imported from a specified **Uniform Resource Locator (URL)** instead of the HTML table itself. This value is used when a Web connection (section [2.2.8.5](#)) connects to an HTML table with the following attribute.

```
<TABLE ... o:WebQuerySourceHRef="http://..." ... > ... </TABLE>
```

The value of the **WebQuerySourceHRef** attribute specifies the URL to obtain the source data from. The following table specifies the meaning of each value.

| Value | Meaning                                     |
|-------|---|
| 0     | Specifies that source data is not imported. |
| 1     | Specifies that source data is imported.     |

**C - fParsePreFormatted (1 bit):** A bit that specifies whether the data contained within HTML `<PRE>` tags in the web page is parsed into columns (2) when the page is imported into a query table. The following table specifies the meaning of each value.

| Value | Meaning                                   |
|-------|---|
| 0     | Specifies that <PRE> tags are not parsed. |
| 1     | Specifies that <PRE> tags are parsed.     |

**D - fConsecDelim (1 bit):** A bit that specifies whether consecutive delimiters are treated as just one delimiter. The following table specifies the meaning of each value.

| Value | Meaning   |
|-------|---|
| 0     | Each delimiter is treated as a separate delimiter.        |
| 1     | Consecutive delimiters are treated as just one delimiter. |

**E - fSameSettings (1 bit):** A bit that specifies whether all tables inside a <PRE> block are parsed with the same width settings as the first row (2).

**F - fXL97Format (1 bit):** A bit that specifies whether this Web connection (section [2.2.8.5](#)) was created using a specific version of the application <8>.

**G - fNoDateRecog (1 bit):** A bit that specifies whether dates are imported into cells in the sheet as text rather than dates. The following table specifies the meaning of each value.

| Value | Meaning                            |
|-------|------------------------------------|
| 0     | Dates are imported as date values. |
| 1     | Dates are imported as text.        |

**H - fRefreshedInXL9 (1 bit):** A bit that specifies whether this Web connection (section [2.2.8.5](#)) was refreshed using a version of the application newer than a specific version <9>.

**I - fTablesOnlyHTML (1 bit):** A bit that specifies whether this Web connection (section [2.2.8.5](#)) only works on HTML tables. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0     | The Web connection only works on the whole Web page. |
| 1     | The Web connection only works on HTML tables.        |

**reserved1 (15 bits):** This value MUST be 0, and MUST be ignored.

**J - fLoadWebPost (1 bit):** A bit that specifies whether the **stWebPost** field exists after the fixed size portion of this record.

**K - fLoadEditWebPage (1 bit):** A bit that specifies whether the **stEditWebPage** field exists after the fixed size portion of this record.

**L - fLoadURL (1 bit):** A bit that specifies whether the **stURL** field exists after the fixed size portion of the record. If the **fDeleted** field in the preceding **BrBeginExtConnection** (section [2.4.76](#)) record is 0, this value MUST be 1. If the **fDeleted** field in the preceding **BrBeginExtConnection** record is 1 and the **fSrcIsXML** field is 0, this value MUST be 0.

**reserved2 (5 bits):** This value MUST be 0, and MUST be ignored.

**stURL (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies the URL to use to refresh external data. The length of this string **MUST** be greater than 0. This field **MUST** exist if and only if **fLoadURL** is 1.

**stWebPost (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies the string used with the HTTP post method of sending data to a Web server. This field **MUST** exist if and only if **fLoadWebPost** is 1.

**stEditWebPage (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies the URL of the user-facing Web page displaying the Web connection (section [2.2.8.5](#)) data. This URL is persisted if **fImportSourceData** is 1 and **stURL** contains the URL specified by the **o:WebQuerySourceHref** attribute in the selected HTML table. This field **MUST** exist if and only if **fLoadEditWebPage** is 1.

## 2.4.68 BrtBeginEcWpTables

The **BrtBeginEcWpTables** record specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies a collection of tables to be returned via a **Web query** data connection. The collection of tables is specified by **BrtPCDIIndex** (section [2.4.699](#)), **BrtPCDIString** (section [2.4.702](#)), or **BrtPCDIMissing** (section [2.4.700](#)) records. The **BrtPCDIString** record specifies the HTML table by its ID attribute and the **BrtPCDIIndex** record specifies the HTML table by its index (in order of the <Table> tags in the HTML page). The **BrtPCDIMissing** record is used when the user has specified an invalid reference to an HTML page.

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cTables |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cTables (4 bytes):** An unsigned integer that specifies the number of tables to pull data from when refreshing from a Web query. This value **MUST** match the number of records in the collection.

## 2.4.69 BrtBeginEsfmd

The **BrtBeginEsfmd** record specifies the name of the metadata type (section [2.2.4.1](#)) and specifies the beginning of a collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records specifies a future metadata store (section [2.2.4.4](#)).

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cFmd              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cFmd (4 bytes):** A signed integer that specifies the number of records in the collection. This number **MUST** be greater than or equal to 1, and **MUST** be equal to the number of records in the collection.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the metadata type (section [2.2.4.1](#)). This name MUST be equal to the **stName** of one of the **BrMdtinfo** (section [2.4.674](#)) records in the collection of metadata types specified by the **BrBeginEsmdtinfo** (section [2.4.71](#)) and **BrEndEsmdtinfo** (section [2.4.407](#)) records. The names of future metadata types MUST be unique within the collection of metadata types and MUST NOT be equal to "XLMDX".

## 2.4.70 BrtBeginEsmdb

The **BrtBeginEsmdb** record specifies the type of metadata block (section [2.2.4.5](#)) records and specifies the beginning of a collection of **BrMdb** (section [2.4.673](#)) records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records MUST contain metadata block records of the same kind: either only cell metadata (section [2.2.4.2](#)) records or only value metadata (section [2.2.4.3](#)) records.

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cMdb      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fCellMeta |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cMdb (4 bytes):** A signed integer that specifies the number of records in the collection. This number MUST be greater than or equal to 1, and MUST be equal to the number of records in the collection.

**fCellMeta (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether **BrMdb** (section [2.4.673](#)) records of a cell metadata (section [2.2.4.2](#)) or value metadata (section [2.2.4.3](#)) type directly follow this record. This value MUST be one of the values in the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | The collection contains value metadata records. |
| 0x00000001 | The collection contains cell metadata records.  |

## 2.4.71 BrtBeginEsmdtinfo


The **BrtBeginEsmdtinfo** record specifies the beginning of the collection of **BrMdtinfo** (section [2.4.674](#)) records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records specifies the list of metadata types (section [2.2.4.1](#)).

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cMdtinfo |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cMdtinfo (4 bytes):** A signed integer that specifies the number of records in the collection. This number MUST be greater than or equal to 1, and MUST be equal to the number of records in the collection.

## 2.4.72 BrtBeginEsmdx


The **BrtBeginEsmdx** record specifies the beginning of a collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records specifies the MDX metadata store (section [2.2.4.4](#)).

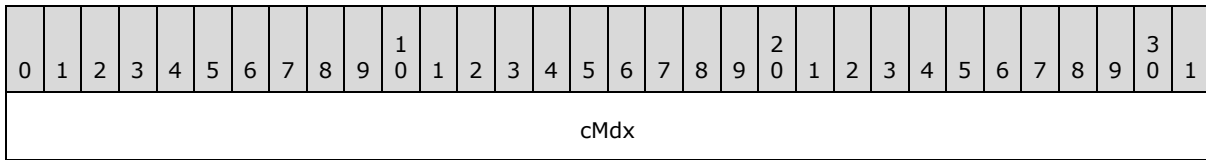

**cMdx (4 bytes):** A signed integer that specifies the number of records in the collection. This number MUST be greater than or equal to 1, and MUST be equal to the number of records in the collection.

## 2.4.73 BrtBeginEsstr

The **BrtBeginEsstr** record specifies the beginning of a collection of **BrtStr** (section [2.4.754](#)) records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF.

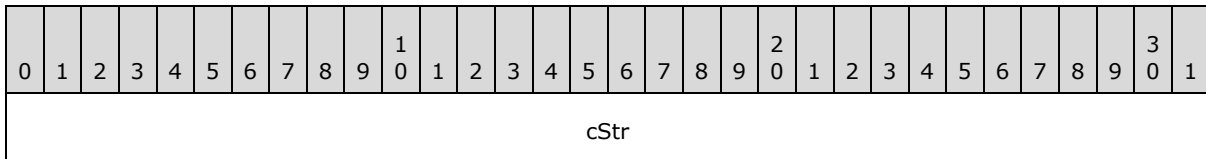


**cStr (4 bytes):** A signed integer that specifies the number of **BrtStr** records in the collection. This number MUST be greater than or equal to 1, and MUST be equal to the number of records in the collection.

## 2.4.74 BrtBeginExtConn14

The **BrtBeginExtConn14** record specifies the extended properties of an external connection (section [2.2.8](#)) and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the OLAP calculated members (3) that are associated with this external connection. If this external connection is associated with a **PivotCache** (section [2.2.5.2](#)), the collection MUST be empty.

The **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record that precedes this record MUST be **DBTOLEDB** (section [2.5.30](#)). If this collection is not empty, **icmdtype** field of the **BrtBeginECDBProps** (section [2.4.57](#)) record that immediately precedes this record MUST be **CMDCUBE** (section [2.5.20](#)).

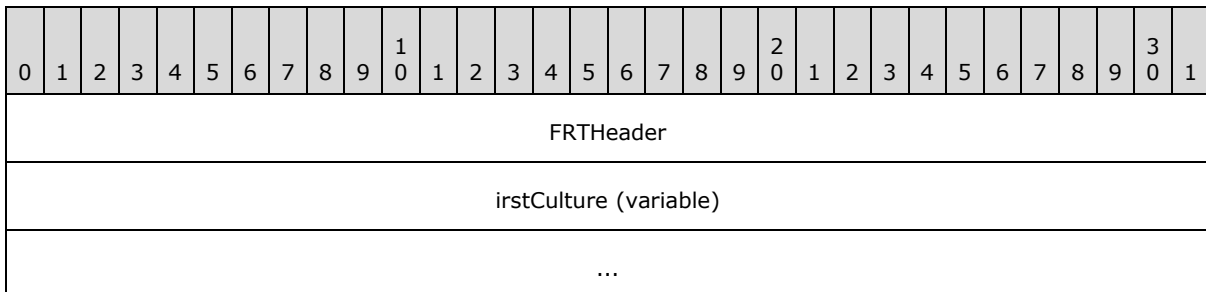



|                              |
|------------------------------|
| irstClientCubeUrn (variable) |
| ...                          |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the Future Record (section [2.1.6](#)) information for this record.

**irstCulture (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the language associated with this connection. The length of this string MUST be less than 85 characters. If the length of this string is greater than 0, the contents of this string MUST [<10>](#) be a language tag as specified in [\[RFC3066\]](#). If this field is not present, the data connection is using the server language.

**irstClientCubeUrn (variable):** An **XLWideString** that specifies an embedded **Custom Data** (section [2.1.7.10](#)) part. The length of this value MUST be less than 65536 characters. If the length of this string is greater than 0, the contents of this string MUST be equal to the **id** attribute of a **datastoreItem** element, as specified in [\[MS-XLSX\]](#) section 2.4.35, in a [Custom Data Properties](#) (section [2.1.7.11](#)) part in this package (section [2.1.1](#)).

### 2.4.75 BrtBeginExtConn15

The **BrtBeginExtConn15** record specifies the extended properties of an external connection (section [2.2.8](#)).

|           |   |   |   |   |   |                   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|-------------------|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6                 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader |   |   |   |   |   |                   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A         | B | C | D | E | F | irstId (variable) |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...       |   |   |   |   |   |                   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the Future Record (section [2.1.6](#)) information for this record.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - fSandbox (1 bit):** A bit that specifies whether this is a connection to the spreadsheet data model. The following table specifies the meaning of each value.

| Value | Meaning   |
|-------|---|
| 0     | This is a not connection to the spreadsheet data model. |
| 1     | This is a connection to the spreadsheet data model.     |

If this value equals 1, the **idbtype** field of the **BrtBeginExtConnection** (section [2.4.76](#)) record that precedes this record MUST be equal to **DBTOLEDB** (section [2.5.30](#)).

**C - fExcludeFromRefreshAll (1 bit):** A bit that specifies whether this connection is excluded from Refresh All operation. The following table specifies the meaning of each value.

| Value | Meaning   |
|-------|---|
| 0     | This connection is not excluded from Refresh All operation. |
| 1     | This connection is excluded from Refresh All operation.     |

**D - fAutoDelete (1 bit):** A bit that specifies whether this connection is automatically deleted when all data features that use it are deleted. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0     | This connection is not automatically deleted when all data features that use it are deleted. |
| 1     | This connection is automatically deleted when all data features that use it are deleted.     |

**F - reserved2 (3 bits):** This value MUST be 0 and MUST be ignored.

**irstId (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the string identifier of spreadsheet data model (see [MS-XLDM](#)) data source. The string length MUST be less than or equal to 65535 characters. If the **fSandbox** field is equal to 1, the string length MUST be NULL and MUST be ignored.

## 2.4.76 BrtBeginExtConnection

The **BrtBeginExtConnection** record specifies the properties of an external connection (section [2.2.8](#)) and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies properties of an external connection; the records that this collection contains are specified by the connection type, as specified in section [2.2.8](#).

| 0                           | 1 | 2 | 3 | 4 | 5         | 6 | 7 | 8 | 9 | 10                 | 11 | 12 | 13 | 14 | 15 | 16          | 17 | 18 | 19 | 20 | 21 | 22        | 23                    | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------------------|---|---|---|---|-----------|---|---|---|---|--------------------|----|----|----|----|----|-------------|----|----|----|----|----|-----------|-----------------------|----|----|----|----|----|----|----|----|
| bVerRefreshed               |   |   |   |   |           |   |   |   |   | bVerRefreshableMin |    |    |    |    | pc |             |    |    |    |    |    | reserved1 |                       |    |    |    |    |    |    |    |    |
| wInterval                   |   |   |   |   |           |   |   |   |   |                    |    |    |    |    |    | A           | B  | C  | D  | E  | F  | G         | reserved2             |    |    |    |    |    |    |    |    |
| H                           | I | J | K | L | reserved4 |   |   |   |   |                    |    |    |    |    |    | idbtype     |    |    |    |    |    |           |                       |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |           |   |   |   |   |                    |    |    |    |    |    | irecontype  |    |    |    |    |    |           |                       |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |           |   |   |   |   |                    |    |    |    |    |    | dwConnID    |    |    |    |    |    |           |                       |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |           |   |   |   |   |                    |    |    |    |    |    | iCredMethod |    |    |    |    |    |           | stDataFile (variable) |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |           |   |   |   |   |                    |    |    |    |    |    |             |    |    |    |    |    |           |                       |    |    |    |    |    |    |    |    |
| stConnectionFile (variable) |   |   |   |   |           |   |   |   |   |                    |    |    |    |    |    |             |    |    |    |    |    |           |                       |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |           |   |   |   |   |                    |    |    |    |    |    |             |    |    |    |    |    |           |                       |    |    |    |    |    |    |    |    |

|                       |
|-----------------------|
| stConnDesc (variable) |
| ...                   |
| stConnName (variable) |
| ...                   |
| stSso (variable)      |
| ...                   |

**bVerRefreshed (1 byte):** A **DataFunctionalityLevel** (section [2.5.28](#)) structure that specifies the data functionality level (section [2.2.5.1](#)) that the external connection was last refreshed with.

**bVerRefreshableMin (1 byte):** A **DataFunctionalityLevel** (section [2.5.28](#)) structure that specifies the minimum data functionality level (section [2.2.5.1](#)) that the application is required to support to correctly refresh the external connection.

**pc (8 bits):** An unsigned integer that specifies whether the password is saved as part of the connection string. This value MUST be ignored if the value of the **idbtype** field is not **DBTOLEDB** (section [2.5.30](#)) or **DBTODBC** (section [2.5.30](#)); otherwise this value MUST be one of the values in the following table.

| Value | Meaning   |
|-------|---|
| 0x01  | The password is saved in the connection string.     |
| 0x02  | The password is not saved in the connection string. |

**reserved1 (8 bits):** This value MUST be 0, and MUST be ignored.

**wInterval (16 bits):** An unsigned integer that specifies the number of minutes between automatic refreshes of the external connection. This value MUST be less than 32768. If the value is 0, the external connection is not automatically refreshed.

**A - fMaintain (1 bit):** A bit that specifies whether the external connection is maintained after the refresh. This value MUST be ignored if the value of **idbtype** is not **DBTOLEDB** (section [2.5.30](#)).

**B - fNewQuery (1 bit):** A bit that specifies whether the external connection has been refreshed for the first time. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0     | The external connection has been refreshed at least once.          |
| 1     | The external connection has not been refreshed for the first time. |

**C - fDeleted (1 bit):** A bit that specifies whether the external connection has been deleted. A deleted external connection MUST contain **stConnName**.

**D - fAlwaysUseConnectionFile (1 bit):** A bit that specifies whether the external connection information in the external connection file (section [2.2.8.2](#)) specified in the **stConnectionFile** field is always used when the external connection is refreshed. This value MUST be ignored if **idbtype** is not **DBTOLEDB** (section [2.5.30](#)) or **DBTODBC** (section [2.5.30](#)). The following table specifies the meaning of each value.

| Value | Meaning   |
|-------|---|
| 0     | The procedure specified by the <b>irecontype</b> field is used.   |
| 1     | The connection information in the external connection file specified by the <b>stSourceConnectionFile</b> field is always used. |

**E - fBackgroundQuery (1 bit):** A bit that specifies whether the preferred usage of the external connection is to refresh asynchronously in the background. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0     | The preferred usage of the external connection is to refresh synchronously in the foreground.  |
| 1     | The preferred usage of the external connection is to refresh asynchronously in the background. |

If this external connection is associated with a **PivotCache** (section [2.2.5.2](#)), this value MUST be equal to the **fBackgroundQuery** field in the **BrBeginPivotCacheDef** (section [2.4.162](#)) record. If this external connection is associated with a query table, this value MUST be equal to the value in the **fAsync** field in the **BrBeginQSI** (section [2.4.180](#)) record.

**F - fRefreshOnLoad (1 bit):** A bit that specifies whether this external connection is refreshed when the workbook is opened.

**G - fSaveData (1 bit):** A bit that specifies whether the data retrieved from the external connection is saved within the workbook. If this external connection is associated with a query table, this value MUST be equal to the value in the **fSaveData** field in the **BrBeginQSI** (section [2.4.180](#)) record.

**reserved2 (9 bits):** This value MUST be 0, and MUST be ignored.

**H - fLoadSourceDataFile (1 bit):** A bit that specifies whether **stDataFile** exists after the fixed-size portion of the record.

**I - fLoadSourceConnectionFile (1 bit):** A bit that specifies whether **stConnectionFile** exists after the fixed-size portion of the record.

**J - fLoadConnectionDesc (1 bit):** A bit that specifies whether **stConnDesc** exists after the fixed-size portion of the record.

**K - reserved3 (1 bit):** A bit that MUST have a value of 1, and MUST be ignored.

**L - fLoadSSOApplicationID (1 bit):** A bit that specifies whether **stSso** exists after the fixed-size portion of the record. This value MUST be 0 if **idbtype** is not **DBTOLEDB** (section [2.5.30](#)) or **DBTODBC** (section [2.5.30](#)).

**reserved4 (11 bits):** This value MUST be 0, and MUST be ignored.

**idbtype (4 bytes):** A **DBType** (section [2.5.30](#)) that specifies the data source (1) type.

**irecontype (4 bytes):** An unsigned integer that specifies when external connection information is retrieved from the external connection file (section [2.2.8.2](#)). This value MUST be ignored when the value for **fAlwaysUseConnectionFile** is 1 and MUST be ignored if **idbtype** is not **DBTOLEDB** (section [2.5.30](#)); otherwise the value in this field MUST be one of the values in the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000001 | Retrieve external connection information as required. When external data has to be refreshed from the external connection, use the existing external connection information; otherwise if the external data refresh from the external connection fails then retrieve updated external connection information, if available, from the external connection file.                                 |
| 0x00000002 | Always retrieve external connection information. When external data has to be refreshed from the external connection, retrieve updated external connection information from the external connection file, if available, and use that instead of the existing external connection information. In this case the external data refresh will fail if the external connection file is unavailable. |
| 0x00000003 | Never retrieve external connection information. Never get updated external connection information from the external connection file even if it is available and even if the existing external connection information is invalid.   |

**dwConnID (4 bytes):** An unsigned integer that specifies the unique identifier of this external connection. This value MUST be greater than 0.

**iCredMethod (1 byte):** An unsigned integer that specifies the authentication method that is used when establishing or reestablishing the external connection. This value MUST be 0 and MUST be ignored if **idbtype** is not **DBTOLEDB** (section [2.5.30](#)) or **DBTODBC** (section [2.5.30](#)); otherwise this value MUST be one of the values listed in the following table.

| Value | Meaning  |
|-------|--|
| 0x00  | Integrated authentication.   |
| 0x01  | No credentials.  |
| 0x02  | Use credentials that are stored as part of a <b>single sign-on (SSO)</b> repository. |

**stDataFile (variable):** An optional **XLWideString** (section [2.5.168](#)) value that specifies the path to the file containing the data to import. The length of the string MUST be less than 256 characters. This field MUST exist if and only if **fLoadSourceDataFile** is 1.

**stConnectionFile (variable):** An optional **XLWideString** value that specifies the path to the external connection file (section [2.2.8.2](#)) from which this external connection was created. As specified by **fAlwaysUseConnectionFile** and **irecontype**, the information in the external connection file can be used in place of information specified by this collection of records. The length of the string MUST be less than 256 characters. This field MUST exist if and only if **fLoadSourceConnectionFile** is 1.

**stConnDesc (variable):** An optional **XLWideString** value that specifies the description for this external connection. The length of the string MUST be less than 256 characters. This field MUST exist if and only if **fLoadConnectionDesc** is 1.

**stConnName (variable):** An **XLWideString** value that specifies the name of the external connection. The external connection name **MUST** be unique within a workbook. The length of the string **MUST** be greater than 0 and less than 256 characters.

**stSso (variable):** An optional **XLWideString** value that specifies the identifier for single sign-on (SSO) used for authentication between a multi-tier application and the external data. The length of the string **MUST** be less than 256 characters. This field **MUST** exist if and only if **fLoadSSOApplicationID** is 1.

## 2.4.77 BrtBeginExtConnections

The **BrtBeginExtConnections** record specifies the beginning of a collection of **BrtBeginExtConnection** (section [2.4.76](#)) records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies external connections (section [2.2.8](#)).

## 2.4.78 BrtBeginExternals

The **BrtBeginExternals** record specifies the beginning of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies a collection of supporting links (section [2.2.7.2](#)) and a collection of **Xti** (section [2.5.172](#)) structures.

## 2.4.79 BrtBeginFills

The **BrtBeginFills** record specifies a count of **BrtFill** (section [2.4.644](#)) records and specifies the beginning of a collection of **BrtFill** records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtFill** records specifies cell **fill pattern**.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cfills |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cfills (4 bytes):** An unsigned integer that specifies the number of **BrtFill** (section [2.4.644](#)) records between **BrtBeginFills** record and the subsequent **BrtEndFills** (section [2.4.415](#)) record. This value **MUST** be greater than or equal 1 and less than or equal to 0xFF97.

## 2.4.80 BrtBeginFilterColumn

The **BrtBeginFilterColumn** record specifies properties of an AutoFilter column (2) and specifies the beginning of a collection of records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies an AutoFilter column (2).

|       |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|----------|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dwCol |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A     | B | reserved |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**dwCol (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies a zero-based index to the column (2) in the AutoFilter range to which this filter information applies. This value MUST be greater than or equal to 0 and less than or equal to the number of columns (2) in the region described by the **rfx** value in the **BrBeginAFilter** (section [2.4.8](#)) record associated with this **BrBeginFilterColumn** record.

**A - fHideArrow (1 bit):** A bit that specifies whether the AutoFilter button for this column (2) is hidden.

**B - fNoBtn (1 bit):** A bit that specifies whether the AutoFilter button for this column (2) will appear in the next column (2) after this one. This value MUST be one of the values listed in the following table:

| Value | Meaning  |
|-------|--|
| 0     | The AutoFilter button for this column (2) will not appear in the next column (2) after this one  |
| 1     | The AutoFilter button for this column (2) will appear in the next column (2) after this one, replacing any filter button in that cell. If the value in the <b>fHideArrow</b> field is equal to 1, the button will appear in the next column (2) but the user will not be able to interact with it. |

**reserved (14 bits):** This value MUST be 0, and MUST be ignored.

### 2.4.81 BrtBeginFilters

The **BrtBeginFilters** record specifies the beginning of a collection of records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies information about the filter.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fBlank |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**fBlank (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether to display blank values.

**unused (4 bytes):** This value is undefined and MUST be ignored.

### 2.4.82 BrtBeginFmd

The **BrtBeginFmd** record specifies the beginning of a collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records specifies future records (section [2.1.6](#)).

### 2.4.83 BrtBeginFmts

The **BrtBeginFmts** record specifies a count of **BrtFmt** (section [2.4.651](#)) records and specifies the beginning of a collection of **BrtFmt** records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF.

The collection of **BrFmt** records specifies the properties of the number formats that indicate how to format and render the numeric value of the cells.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cfmts |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cfmts (4 bytes):** An unsigned integer that specifies the number of **BrFmt** (section [2.4.651](#)) records in this collection. The value in this field MUST be less than or equal to 0x000000CE. [<11>](#)

#### 2.4.84 BrtBeginFnGroup

The **BrtBeginFnGroup** record specifies the number of built-in **function categories** and specifies the beginning of a collection of **BrtFnGroup** (section [2.4.652](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtFnGroup** records specifies properties of a function category.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iMac |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iMac (1 byte):** An unsigned integer that specifies the number of built-in function categories in the current workbook. The value in this field plus the count of **BrtFnGroup** (section [2.4.652](#)) records MUST be less than or equal to 255.

#### 2.4.85 BrtBeginFonts

The **BrtBeginFonts** record specifies a count of **BrtFont** (section [2.4.653](#)) records and specifies the beginning of a collection of **BrtFont** records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtFont** records specifies the fonts for the workbook.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cfonts |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cfonts (4 bytes):** An unsigned integer that specifies the number of **BrtFont** (section [2.4.653](#)) records in this collection. This value MUST be less than or equal to 0x0000FFD3.

#### 2.4.86 BrtBeginHeaderFooter

The **BrtBeginHeaderFooter** record specifies the header and footer information for a sheet and specifies the beginning of an empty collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF, the **Chart Sheet** (section [2.1.7.7](#)) part ABNF, the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF.



|                          |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------------|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                        | 1 | 2 | 3 | 4        | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6                   | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| A                        | B | C | D | reserved |   |   |   |   |   |   |   |   |   |   |   | stHeader (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stFooter (variable)      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stHeaderEven (variable)  |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stFooterEven (variable)  |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stHeaderFirst (variable) |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stFooterFirst (variable) |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                      |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**A - fHFDiffOddEven (1 bit):** A bit that specifies that the header and footer used on even-numbered printed pages are different from those used on odd-numbered printed pages.

**B - fHFDiffFirst (1 bit):** A bit that specifies that the header and footer used on the first printed page are different from those used on subsequent pages.

**C - fHFScaleWithDoc (1 bit):** A bit that specifies that the headers and footers scale with the **print scale**.

**D - fHFAlignMargins (1 bit):** A bit that specifies that the headers and footers align with the **page margins**.

**reserved (12 bits):** This value MUST be 0 and MUST be ignored.

**stHeader (variable):** A **HeaderFooterString** (section [2.5.72](#)) that specifies the contents of the header. This header is used for odd-numbered pages except for the first page. If **fHFDiffOddEven** is 0, this header also is used for even-numbered pages. If **fHFDiffFirst** is 0, this header also is used for the first page.

**stFooter (variable):** A **HeaderFooterString** that specifies the contents of the footer. This footer is used for odd-numbered pages except for the first page. If **fHFDiffOddEven** is 0, this footer also is used for even-numbered pages. If **fHFDiffFirst** is 0 this footer also is used for the first page.

**stHeaderEven (variable):** A **HeaderFooterString** that specifies the contents of the header for even-numbered printed pages. This field MUST be ignored if **fHFDiffOddEven** is 0.

**stFooterEven (variable):** A **HeaderFooterString** that specifies the contents of the footer for even-numbered printed pages. This field MUST be ignored if **fHFDiffOddEven** is 0.

**stHeaderFirst (variable):** A **HeaderFooterString** (section 2.5.72) that specifies the contents of the header for the first printed page. This field MUST be ignored if **fHFDiffFirst** is 0.

**stFooterFirst (variable):** A **HeaderFooterString** that specifies the contents of the footer for the first printed page. This field MUST be ignored if **fHFDiffFirst** is 0.

## 2.4.87 BrtBeginIconSet

The **BrtBeginIconSet** record specifies properties of a conditional formatting rule that uses an **icon set** and specifies the beginning of a collection of **BrtCFVO** (section 2.4.318) records as defined by the **Worksheet** (section 2.1.7.61) part ABNF and the **Macro Sheet** (section 2.1.7.32) part ABNF. The collection of **BrtCFVO** records specifies the set of values that specify the thresholds used by the conditional formatting rule to determine which **icons** to display in the applied range. Each **BrtCFVO** record following this record specifies the minimum value associated with the corresponding icon from the icon set. The first **BrtCFVO** record following this record MUST be ignored.

|      |   |   |   |   |   |   |           |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|-----------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7         | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iSet |   |   |   |   |   |   |           |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A    | B | C | D | E | F | G | reserved2 |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iSet (4 bytes):** A **KPISets** (section 2.5.85) integer that specifies the icon set used in the collection of **BrtCFVO** (section 2.4.318) records.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - fIcon (1 bit):** A bit that specifies whether the cells in the applied range display the icon and cell value, or the icon only.

| Value | Meaning  |
|-------|--|
| 0     | The icon and cell value are shown in the cell. |
| 1     | Only the icon is shown in the cell.            |

**C - fReverse (1 bit):** A bit that specifies whether the icons in the icon set specified in **iSet** are shown in reverse order.

| Value | Meaning  |
|-------|--|
| 0     | The icons specified in <b>iSet</b> are shown in reverse order.                     |
| 1     | The icons specified in <b>iSet</b> are shown in the order defined by the icon set. |

**D - unused1 (1 bit):** This value is undefined and MUST be ignored.

**E - unused2 (1 bit):** This value is undefined and MUST be ignored.

**F - unused3 (1 bit):** This value is undefined and MUST be ignored.

**G - unused4 (1 bit):** This value is undefined and MUST be ignored.

**reserved2 (9 bits):** This value MUST be 0, and MUST be ignored.

## 2.4.88 BrtBeginIconSet14

The **BrtBeginIconSet14** record specifies properties of a conditional formatting rule that uses an icon set and specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtCFVO14** (section [2.4.319](#)) records specifies the set of values that specify the thresholds used by the conditional formatting rule to determine which icons to display in the applied range. The collection of **BrtCFIcon** (section [2.4.316](#)) records specifies a custom set of icons if the **fCustom** value is 1. The first **BrtCFVO14** record following this record MUST be ignored.

|            |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7        | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iSet       |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A          | B | C | D | E | F | G | reserved |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) value that specifies the future record (section [2.1.6](#)) information for this record.

**iSet (4 bytes):** A **KPIsets14** (section [2.5.86](#)) value that specifies the icon set used in the collection of **BrtCFVO14** (section [2.4.319](#)) records.

**A - fCustom (1 bit):** A bit that specifies whether a custom set of icons is used. If the value equals 1, then there MUST be the same number of **BrtCFIcon** (section [2.4.316](#)) records as **BrtCFVO14** records and the icons specified by the **BrtCFIcon** records are used rather than those specified by the **iSet** field. If the value equals 0, then there MUST be 0 **BrtCFIcon** records.

| Value | Meaning                         |
|-------|---------------------------------|
| 0     | No custom set of icons is used. |
| 1     | A custom set of icons is used.  |

**B - fIcon (1 bit):** A bit that specifies whether the cells in the applied range display the icon and cell value, or the icon only.

| Value | Meaning  |
|-------|--|
| 0     | The icon and cell value are shown in the cell. |
| 1     | Only the icon is shown in the cell.            |

**C - fReverse (1 bit):** A bit that specifies whether the icons in the icon set specified in **iSet** are shown in reverse order. If **fCustom** equals one, this value MUST be ignored.

| Value | Meaning  |
|-------|--|
| 0     | The icons specified in <b>iSet</b> are shown in reverse order.                     |
| 1     | The icons specified in <b>iSet</b> are shown in the order defined by the icon set. |

**D - unused1 (1 bit):** This value is undefined, and MUST be ignored.

**E - unused2 (1 bit):** This value is undefined, and MUST be ignored.

**F - unused3 (1 bit):** This value is undefined, and MUST be ignored.

**G - unused4 (1 bit):** This value is undefined, and MUST be ignored.

**reserved (9 bits):** This value MUST be 0, and MUST be ignored.

## 2.4.89 BrtBeginIndexedColors

The **BrtBeginIndexedColors** record specifies the beginning of a collection of **BrtIndexedColor** (section [2.4.660](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtIndexedColor** records specifies indexed colors. The number of **BrtIndexedColor** records MUST be less than or equal to 64.

## 2.4.90 BrtBeginISXTHCols

The **BrtBeginISXTHCols** record specifies a collection of references to pivot hierarchies (section [2.2.5.3.4](#)) and any data fields (section [2.2.5.3.7.5.2](#)) that appear on the column (2) axis of a **PivotTable** view (section [2.2.5.3](#)), and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. If this record is present, the **PivotTable** view MUST be an OLAP **PivotTable** view.

| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cisxth             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgisxth (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cisxth (4 bytes):** An unsigned integer that specifies the count of items in the **rgisxth** array.

**rgisxth (variable):** An array of **ISXTH** (section [2.5.82](#)) structures that specifies the collection of references to pivot hierarchies (section [2.2.5.3.4](#)) and any data field (section [2.2.5.3.7.5.2](#)) that appear on the column (2) axis of a **PivotTable** view (section [2.2.5.3](#)). The count of items in this array MUST be equal to **cisxth**.

Each item MUST NOT equal -1. Each item MUST have a unique value. This array MUST specify pivot hierarchies and any data field reference in the same order as the pivot hierarchies associated with the pivot fields (section [2.2.5.3.2](#)), omitting duplicates, and any data field reference specified by the **BrtBeginISXVDCols** (section [2.4.92](#)) record.

## 2.4.91 BrtBeginISXTHRws

The **BrtBeginISXTHRws** record specifies a collection of references to pivot hierarchies (section [2.2.5.3.4](#)) and any data field (section [2.2.5.3.7.5.2](#)) that appear on the row (2) axis of a PivotTable view (section [2.2.5.3](#)), and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. If this record is present, the PivotTable view MUST be an OLAP PivotTable view.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cisxth             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgisxth (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cisxth (4 bytes):** An unsigned integer that specifies the count of items in the **rgisxth** array.

**rgisxth (variable):** An array of **ISXTH** (section [2.5.82](#)) structures that specifies the collection of references to pivot hierarchies (section [2.2.5.3.4](#)) and any data field (section [2.2.5.3.7.5.2](#)) that appear on the row (2) axis of a PivotTable view (section [2.2.5.3](#)). The count of items in this array MUST be equal to the value in the **cisxth** field.

Each item MUST NOT equal -1. Each item MUST have a unique value. This array MUST specify pivot hierarchies and any data field reference in the same order as the pivot hierarchies associated with the pivot fields (section [2.2.5.3.2](#)), omitting duplicates, and any data field reference specified by the **BrtBeginISXVDRws** (section [2.4.93](#)) record.

## 2.4.92 BrtBeginISXVDCols

The **BrtBeginISXVDCols** record specifies the pivot fields (section [2.2.5.3.2](#)) that appear on the column (2) axis of this PivotTable view (section [2.2.5.3](#)), and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cisxvd                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgisxvdcols (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cisxvd (4 bytes):** An unsigned integer that specifies the count of pivot fields (section [2.2.5.3.2](#)), and any instance of the data field (section [2.2.5.3.7.5.2](#)), that appear on the column (2) axis of this PivotTable view (section [2.2.5.3](#)).

**rgisxvdcols (variable):** An array of **ISXVD** (section [2.5.83](#)) structures that specifies the pivot fields (section [2.2.5.3.2](#)) that appear on the column (2) axis of this PivotTable view and whether the data field (section [2.2.5.3.7.5.2](#)) appears on the column (2) axis. Pivot fields will appear on the column (2) axis in the order they are specified in this array.

Each item MUST NOT be equal to -1. The count of items in this array MUST be equal to the value in the **cisxvd** field. Each item in this array MUST have a unique value.

If an item in this array has a value equal to -2, the value in the **sxaxis4Data** field of the **BrBeginSXView** (section [2.4.264](#)) record of this PivotTable view MUST be equal to 0x02.

Any **BrBeginSXVD** (section [2.4.261](#)) record of a pivot field specified by an item in this array MUST have its **sxaxisCol** attribute equal to 1.

### 2.4.93 BrtBeginISXVDRws

The **BrtBeginISXVDRws** record specifies the pivot fields (section [2.2.5.3.2](#)) that appear on the row (2) axis of this PivotTable view (section [2.2.5.3](#)), and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cisxvd                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgisxvdrws (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cisxvd (4 bytes):** An unsigned integer that specifies the count of pivot fields, and any instance of the data field (section [2.2.5.3.7.5.2](#)), that appear on the row (2) axis of this PivotTable view.

**rgisxvdrws (variable):** An array of **ISXVD** (section [2.5.83](#)) structures that specifies the pivot fields that appear on the row (2) axis of this **PivotTable** view and whether the data field appears on the row (2) axis. Pivot fields will appear on the row (2) axis in the order they are specified in this array.

Each item MUST NOT be equal to -1. The count of items in this array MUST be equal to the value in the **cisxvd** field. Each item in this array MUST have a unique value.

If an item in this array has a value equal to -2, the **sxaxis4Data** field of the **BrBeginSXView** (section [2.4.264](#)) record of this **PivotTable** view MUST be equal to 0x01.

Any **BrBeginSXVD** (section [2.4.261](#)) record of a pivot field specified by an item in this array MUST have its **sxaxisRw** attribute equal to 1.

### 2.4.94 BrtBeginISXVIs

The **BrtBeginISXVIs** record specifies the pivot line entries (section [2.2.5.3.8.4](#)) that occur on a pivot line (section [2.2.5.3.8.3](#)) and specifies the beginning of an empty collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF.

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rgisxvis (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

...

**rgisxvis (variable):** An array of 4-byte unsigned integers, each of which specifies a pivot line entry (section [2.2.5.3.8.4](#)). The number of elements in this array MUST be equal to the value in the **cisxvis** field of the **BrtBeginSXLI** (section [2.4.240](#)) record that begins this collection. If the value in the **itmtype** field in the **BrtBeginSXLI** record that begins this collection is **PITGRAND** (section [2.5.104](#)), then any pivot line entries specified by this field MUST be ignored.

### 2.4.95 BrtBeginItemUniqueNames

The **BrtBeginItemUniqueNames** record specifies the MDX unique names for cache items (section [2.2.5.2.3](#)) in this cache field (section [2.2.5.2.2](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

MUST NOT exist if **fSandbox** of **BrtBeginExtConn15** (section [2.4.75](#)) of the external connection (section [2.2.8](#)) associated with this pivot cache (section [2.2.5.2](#)) is not equal to 1.

### 2.4.96 BrtBeginList

The **BrtBeginList** record specifies the properties of a table and specifies the beginning of a collection of records as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies a table.

|                    |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|----------|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5        | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rflList (16 bytes) |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| It                 |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| idList             |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| crwHeader          |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| crwTotals          |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A                  | B | C | D | E | reserved |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| nDxfHeader         |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| nDxfData           |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| nDxfAgg            |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| nDxfBorder         |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                          |
|--------------------------|
| nDxfHeaderBorder         |
| nDxfAggBorder            |
| dwConnID                 |
| stName (variable)        |
| ...                      |
| stDisplayName (variable) |
| ...                      |
| stComment (variable)     |
| ...                      |
| stStyleHeader (variable) |
| ...                      |
| stStyleData (variable)   |
| ...                      |
| stStyleAgg (variable)    |
| ...                      |

**rfxList (16 bytes):** An **RfX** (section [2.5.117](#)) that specifies the range of cells the table occupies. The range specified by the **RfX** value MUST NOT overlap with another table or AutoFilter on the same sheet. The **RfX** height MUST be greater than the sum of the values of the **crwHeader** and **crwTotals** fields. If **fSingleCell** is 1, **rfxList** MUST occupy exactly 1 cell.

**It (4 bytes):** A **ListType** (section [2.5.88](#)) that specifies the table type.

**idList (4 bytes):** An unsigned integer that specifies the numeric identifier of the table. This value MUST be unique within the containing workbook, MUST be greater than or equal to 1 and MUST be less than or equal to 4294967294 (0xFFFFFFFF).

**crwHeader (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the **table header** row (2) is displayed at the top of the table. The possible values for this field are listed in the following table.

| Value      | Meaning                         |
|------------|---------------------------------|
| 0x00000000 | Table header row (2) is hidden. |



| Value      | Meaning                            |
|------------|------------------------------------|
| 0x00000001 | Table header row (2) is displayed. |

**crwTotals (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the table **total row** is displayed at the bottom of the table. The possible values for this field are listed in the following table.

| Value      | Meaning                 |
|------------|-------------------------|
| 0x00000000 | Total row is hidden.    |
| 0x00000001 | Total row is displayed. |

**A - fShownTotalRow (1 bit):** A bit that specifies whether the table total row has ever been displayed for this table.

**B - fSingleCell (1 bit):** A bit that specifies whether the table is a single cell table. If this value equals 1, then **It** MUST be equal to **LTXML** (section [2.5.88](#)).

**C - fForceInsertToBeVisible (1 bit):** A bit that specifies whether the table **insert row** is displayed.

**D - fInsertRowInsCells (1 bit):** A bit that specifies whether cells in the sheet were automatically inserted when the table insert row was displayed for this table.

**E - fPublished (1 bit):** A bit that specifies the **publish to server** state of this table.

**reserved (27 bits):** This value MUST be 0 and MUST be ignored.

**nDxfHeader (4 bytes):** A **DXFId** (section [2.5.37](#)) that specifies the differential formatting (section [2.2.6.2](#)) applied to the table header row (2) of this table. If **fSingleCell** is 1, the value MUST be 0xFFFFFFFF.

**nDxfData (4 bytes):** A **DXFId** that specifies the differential formatting applied to the table data region of this table. If **fSingleCell** is 1, the value MUST be 0xFFFFFFFF.

**nDxfAgg (4 bytes):** A **DXFId** that specifies the differential formatting applied to the table total row of this table. If **fSingleCell** is 1, the value MUST be 0xFFFFFFFF.

**nDxfBorder (4 bytes):** A **DXFId** that specifies the differential formatting applied to the borders of the table data region of this table. If **fSingleCell** is 1, the value MUST be 0xFFFFFFFF.

**nDxfHeaderBorder (4 bytes):** A **DXFId** that specifies the differential formatting applied to the borders of the table header row (2) of this table. If **fSingleCell** is 1, the value MUST be 0xFFFFFFFF.

**nDxfAggBorder (4 bytes):** A **DXFId** (section [2.5.37](#)) that specifies the differential formatting (section [2.2.6.2](#)) applied to the borders of the table total row of this table. If **fSingleCell** is 1, the value MUST be 0xFFFFFFFF.

**dwConnID (4 bytes):** An unsigned integer that specifies the identifier of an external connection (section [2.2.8](#)) used by this table. The value in **dwConnID** MUST be 0 when the value of **It** is not LTXML. The value MUST be 0 or be equal to the **dwConnID** value in one of the **BrtBeginExtConnection** (section [2.4.76](#)) records in the **BrtBeginExtConnections** (section [2.4.77](#)) collection.

**stName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the string identifier of the table used for programmatic purposes. The string MUST be NULL or unique per **Table** (section [2.1.7.51](#)) per sheet, MUST have less than or equal to 255 characters, and MUST be NULL if **fSingleCell** is 1. If this field is NULL, the string identifier used for programmatic purposes is specified by **stDisplayName**.

**stDisplayName (variable):** An **XLNullableWideString** that specifies the string identifier of the table for use within the displayed string for formulas (section [2.2.2](#)). The value of **stDisplayName** MUST have a maximum length and format specified by **XLNameWideString** (section [2.5.165](#)), MUST be unique per workbook, and MUST NOT have the prefix "\_xl". If **fSingleCell** is 1, the string MUST be NULL.

**stComment (variable):** An **XLNullableWideString** that specifies a comment about the table. The string MUST contain less than or equal to 255 characters. If **fSingleCell** is 1, the string MUST be NULL.

**stStyleHeader (variable):** A **CellStyleName** (section [2.5.10](#)) that specifies the name of the cell style (section [2.2.6.1.2](#)) that is applied to the table header row (2) of the table. If **fSingleCell** is 1, the value MUST be a NULL string.

**stStyleData (variable):** A **CellStyleName** that specifies the name of the cell style that is applied to the table data region of the table. If **fSingleCell** is 1, the value MUST be a NULL string.

**stStyleAgg (variable):** A **CellStyleName** that specifies the name of the cell style that is applied to the table total row of the table. If **fSingleCell** is 1, the value MUST be a NULL string.

## 2.4.97 BrtBeginListCol

The **BrtBeginListCol** record specifies properties of a column (2) in a table and specifies the beginning of a collection of records, as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies a table column (2).

| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| idField           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ilta              |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| nDxfHdr           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| nDxfInsertRow     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| nDxfAgg           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| idqsif            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| stName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

|                             |
|-----------------------------|
| ...                         |
| stCaption (variable)        |
| ...                         |
| stTotal (variable)          |
| ...                         |
| stStyleHeader (variable)    |
| ...                         |
| stStyleInsertRow (variable) |
| ...                         |
| stStyleAgg (variable)       |
| ...                         |

**idField (4 bytes):** An unsigned integer that specifies the numeric identifier of the table column (2). The value MUST be unique for all **BrtBeginListCol** records following the preceding **BrtBeginList** (section [2.4.96](#)) record. The value MUST be greater than or equal to 1.

**ilta (4 bytes):** A **ListTotalRowFunction** (section [2.5.87](#)) that specifies the table total row aggregation function for this table column (2). If the **crwTotals** field in the **BrtBeginList** (section [2.4.96](#)) record is equal to 1, then the formula (section [2.2.2](#)) specified by the value of **ilta** MUST be equal to the formula of the cell intersected by the table total row and this table column (2).

**nDxfHdr (4 bytes):** A **DXFId** (section [2.5.37](#)) that specifies the [differential formatting](#) (section [2.2.6.2](#)) applied to the table header of this table column (2). If the **fSingleCell** field or **crwHeader** field of the preceding **BrtBeginList** record is equal to 1, the value MUST be 0xFFFFFFFF.

**nDxfInsertRow (4 bytes):** A **DXFId** that specifies the differential formatting (section [2.2.6.2](#)) applied to the table insert row of this table column (2). If the **fSingleCell** field of the preceding **BrtBeginList** record is equal to 1, the value MUST be 0xFFFFFFFF.

**nDxfAgg (4 bytes):** A **DXFId** that specifies the differential formatting applied to the table total row of this table column (2). If the **fSingleCell** field of the preceding **BrtBeginList** record is equal to 1, the value MUST be 0xFFFFFFFF.

**idqsif (4 bytes):** A **QsiFieldId** (section [2.5.111](#)) that specifies the numeric identifier of the query table column (2) that corresponds to this column (2). The value MUST be 0 or unique for all **BrtBeginListCol** records following the preceding **BrtBeginList** record. If the **It** field of the preceding **BrtBeginList** record is equal to **LTEXTDATA**, the value MUST be greater than or equal to 1; otherwise, the value MUST be 0.

**stName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies a textual identifier of this table column (2). The string in this field MUST be NULL or unique for all **BrtBeginListCol** records following the preceding **BrtBeginList** (section [2.4.96](#)) record. If the **fSingleCell** field of the preceding **BrtBeginList** record is equal to 1 or the **It** field of the preceding **BrtBeginList** record is equal to **LTRANGE**, the string MUST be NULL; otherwise, the string length MUST be greater than or equal to 1 and less than or equal to 255.

**stCaption (variable):** An **XLNullableWideString** that specifies the caption of this table column (2) to be displayed in the sheet. The string MUST be NULL or unique for all **BrtBeginListCol** records following the preceding **BrtBeginList** (section [2.4.96](#)) record. If the **fSingleCell** field of the preceding **BrtBeginList** record is equal to 1, the string MUST be NULL; otherwise, the string length MUST be greater than or equal to 1 and less than or equal to 255. If the **crwHeader** field of the preceding **BrtBeginList** record is equal to 1, then the string MUST be equal to the string of the cell intersected by the table header row (2) and this table column (2).

**stTotal (variable):** An **XLNullableWideString** that specifies the text to be displayed in the table total row of this table column (2). The string length MUST be less than or equal to 8189. The string MUST be NULL if **ilta** is equal to **ILTA\_CUSTOM**. If the **crwTotals** field of the preceding **BrtBeginList** record is equal to 1, then the string MUST be equal to the string of the cell intersected by the table total row and this table column (2).

**stStyleHeader (variable):** A **CellStyleName** (section [2.5.10](#)) that specifies the name of the cell style (section [2.2.6.1.2](#)) that is applied to the table header row (2) of this table column (2). If the **fSingleCell** field or **crwHeader** field of the preceding **BrtBeginList** record is equal to 1, the string MUST be NULL.

**stStyleInsertRow (variable):** A **CellStyleName** that specifies the name of the cell style that is applied to the table insert row of this table column (2). If the **fSingleCell** field of the preceding **BrtBeginList** record is equal to 1, the string MUST be NULL.

**stStyleAgg (variable):** A **CellStyleName** that specifies the name of the cell style (section [2.2.6.1.2](#)) that is applied to the total row of this table column (2) [<12>](#). If the **fSingleCell** field of the preceding **BrtBeginList** record is equal to 1, the string MUST be NULL.

## 2.4.98 BrtBeginListCols

The **BrtBeginListCols** record specifies a count of table columns (2) and specifies the beginning of a collection of records, as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies the set of table columns (2) for a single table.

|       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| nCols |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**nCols (4 bytes):** A **DCol** that specifies the count of items in the collection of table columns (2).

## 2.4.99 BrtBeginListParts

The **BrtBeginListParts** record specifies the beginning of a collection of **BrtListPart** (section [2.4.670](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtListPart** records specifies tables defined in the workbook.

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cParts |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cParts (4 bytes):** An unsigned integer that specifies the number of **BredListPart** records in this collection.

#### 2.4.100 BrtBeginListXmlCPr

The **BrtBeginListXmlCPr** record specifies properties of a table column's (2) XML map and specifies the beginning of an empty collection of records as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF.

|                  |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| dwMapId          |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A                | B | reserved |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| IfxidtDisk       |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| xpath (variable) |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...              |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**dwMapId (4 bytes):** An unsigned integer that specifies the XML map associated with this table column (2). The value **MUST** be equal to the value of the **ID** attribute of a **Map** element contained within the **Custom XML Maps** (section [2.1.7.15](#)) part.

**A - unused (1 bit):** This value is undefined and **MUST** be ignored.

**B - fCanBeSingle (1 bit):** A bit that specifies whether **xpath** resolves to a single **XML node** or a collection of XML nodes. When the **fCanBeSingle** record is contained in a **Table** (section [2.1.7.51](#)) part, this value **MUST** be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that <b>xpath</b> resolves to a collection of XML nodes. |
| 1     | Specifies that <b>xpath</b> resolves to a single XML node.         |

When this record is contained in a **Single Cell Tables** (section [2.1.7.46](#)) part, the value **MUST** be 1.

**reserved (30 bits):** The value in this field **MUST** be 0 and **MUST** be ignored.

**IfxidtDisk (4 bytes):** An **XmlDataType** (section [2.5.169](#)) that specifies the data type of the XML nodes obtained by applying the **XPath** (specified by the value of **xpath**) to the XML map (specified by the value of **dwMapId**).

**xpath (variable):** An **XmlMappedXPath** (section [2.5.170](#)) that specifies the XPath of this XML map.

### 2.4.101 BrtBeginMap

The **BrtBeginMap** record specifies the mapping between **BrtBeginDim** (section [2.4.49](#)) and **BrtBeginMG** (section [2.4.109](#)) records and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

|       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| img   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| isxdh |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**img (4 bytes):** An unsigned integer that specifies the zero-based index of a **BrtBeginMG** (section [2.4.109](#)) record that directly follows the **BrtBeginMgs** (section [2.4.111](#)) record in this part. The referenced **BrtBeginMG** (section [2.4.109](#)) record specifies **measure group**.

**isxdh (4 bytes):** An unsigned integer that specifies the zero-based index of a **BrtBeginDim** (section [2.4.49](#)) that directly follows the **BrtBeginDims** (section [2.4.50](#)) record in this part. The referenced **BrtBeginDim** record specifies OLAP dimension (1).

### 2.4.102 BrtBeginMdx

The **BrtBeginMdx** record specifies properties of MDX metadata (section [2.2.4.8](#)) and specifies the beginning of a collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records specifies additional properties for MDX metadata.

|              |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| istrConnName |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| tfnSrc       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**istrConnName (4 bytes):** An **Istr** (section [2.5.80](#)) that specifies the connection name.

**tfnSrc (4 bytes):** A **TagFnMdx** (section [2.5.148](#)) that specifies the type of cube function that generated the metadata.

### 2.4.103 BrtBeginMdxKPI

The **BrtBeginMdxKPI** record specifies the properties of MDX KPI metadata (section [2.2.4.8.4](#)) and specifies the beginning of an empty collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The preceding **BrtBeginMdx** (section [2.4.102](#)) record MUST have the value of **tfnSrc** equal to **TFNCUBEKPIPROPERTY**, as specified by **TagFnMdx** (section [2.5.148](#)).

|             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| istrKPIName |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| kpiprop     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| istrMbrKPI  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**istrKPIName (4 bytes):** An **Istr** (section [2.5.80](#)) that specifies the KPI name.

**kpiprop (4 bytes):** A **KPIProp** (section [2.5.84](#)) that specifies the KPI type <13>.

**istrMbrKPI (4 bytes):** An **Istr** that specifies the MDX unique name of a KPI member (3).

#### 2.4.104 BrtBeginMdxMbrProp

The **BrtBeginMdxMbrProp** record specifies the properties of an OLAP member and specifies the beginning of an empty collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The preceding **BrtBeginMdx** (section [2.4.102](#)) record MUST have **tfnSrc** equal to **TFNCUBEMEMBERPROPERTY**, as specified by **TagFnMdx** (section [2.5.148](#)).

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| istrMbr  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| istrProp |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**istrMbr (4 bytes):** An **Istr** (section [2.5.80](#)) that specifies the MDX unique name of the OLAP member.

**istrProp (4 bytes):** An **Istr** that specifies the MDX unique name of the OLAP member property.

#### 2.4.105 BrtBeginMdxSet

The **BrtBeginMdxSet** record specifies properties of MDX set metadata (section [2.2.4.8.2](#)) and specifies the beginning of a collection of **BrtMdxMbrIstr** (section [2.4.675](#)) records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of **BrtMdxMbrIstr** records specifies MDX unique names and their properties. The preceding **BrtBeginMdx** (section [2.4.102](#)) record MUST have **tfnSrc** equal to **TFNCUBESET** or **TFNCUBESETCOUNT**, as specified by **TagFnMdx** (section [2.5.148](#)).

|            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| istrSetDef |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| sso        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|             |
|-------------|
| cMbrsSortBy |
|-------------|

**istrSetDef (4 bytes):** An **Istr** (section [2.5.80](#)) that specifies the set definition.

**sso (4 bytes):** An **SdSetSortOrder** (section [2.5.131](#)) that specifies the sorting order of the set. If this field is equal to **SSOASC** or **SSODESC**, the sort order (1) is specified by the collection of **BrTMdxMbrIstr** (section [2.4.675](#)) records that immediately follow this record.

**cMbrsSortBy (4 bytes):** A signed integer that specifies the number of coordinates in the OLAP cube that the set is sorted on. This number **MUST** be greater than or equal to 0.

### 2.4.106 BrtBeginMdxTuple

The **BrtBeginMdxTuple** record specifies formatting properties for MDX tuple metadata (section [2.2.4.8.1](#)) and specifies the beginning of a collection of **BrTMdxMbrIstr** (section [2.4.675](#)) records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of **BrTMdxMbrIstr** records specifies MDX unique names and their properties. The preceding **BrtBeginMdx** (section [2.4.102](#)) record **MUST** have **tfnSrc** equal to **TFNCUBEMEMBER**, **TFNCUBEVALUE**, or **TFNCUBERANKEDMEMBER**, as specified by **TagFnMdx** (section [2.5.148](#)).

|              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16               | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cMbrs        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwSrvFmtBack |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwSrvFmtFore |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sff          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | sfnum (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cMbrs (4 bytes):** A signed integer that specifies the number of member (3) expressions in the tuple. It **MUST** be greater than or equal to 0.

**dwSrvFmtBack (4 bytes):** A **SrvFmtCV** (section [2.5.138](#)) that specifies the background color. When **sff.fSrvFmtBack** equals 1, the background color is applied.

**dwSrvFmtFore (4 bytes):** A **SrvFmtCV** that specifies the **foreground color**. When **sff.fSrvFmtFore** equals 1, the foreground color is applied.

**sff (2 bytes):** A **SrvFmtFlags** (section [2.5.140](#)) that specifies the properties of applied server-specified formatting.

**sfnum (variable):** A **SrvFmtNum** (section [2.5.141](#)) that specifies the number or currency formatting. This field is optional and **MUST** exist if and only if **sff.fSrvFmtNum** is set to 1.



### 2.4.107 BrtBeginMergeCells

The **BrtBeginMergeCells** record specifies the beginning of a collection of **BrtMergeCell** (section [2.4.676](#)) records as defined in the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of **BrtMergeCell** records specifies the **merged cells** for the sheet.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cmcs |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cmcs (4 bytes):** An unsigned integer that specifies the number of merged cells.

### 2.4.108 BrtBeginMetadata

The **BrtBeginMetadata** record specifies the beginning of a collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records specifies the metadata (section [2.2.4](#)) associated with the book.

### 2.4.109 BrtBeginMG

The **BrtBeginMG** record specifies a measure group for a pivot cache (section [2.2.5.2](#)) and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

|                    |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10              | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| reserved           |   |   |   |   |   |   |   |   |   | name (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| caption (variable) |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**reserved (1 byte):** This value MUST be 0 and MUST be ignored.

**name (variable):** An **XLWideString** (section [2.5.168](#)) value that specifies the name of the measure group. The length of this string MUST be between 1 and 65,535.

**caption (variable):** An **XLWideString** value that specifies the display name of the measure group. The length of this string MUST be between 1 and 65,535.

### 2.4.110 BrtBeginMGMaps

The **BrtBeginMGMaps** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the mappings between OLAP dimensions (1) and the OLAP measure groups that each OLAP dimension (1) is related to.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cmaps |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cmaps (4 bytes):** An unsigned integer that specifies the number of mappings between OLAP dimensions (1) and the OLAP measure groups. This value MUST be equal to number of **BrTBeginMap** (section [2.4.101](#)) elements following this record.

#### 2.4.111 BrTBeginMgs

The **BrTBeginMgs** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies **PivotTable** (section [2.2.5](#)) OLAP measure groups.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cmgs |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cmgs (4 bytes):** An unsigned integer that specifies the number of measure groups in the **PivotTable** (section [2.2.5](#)) OLAP measure group collection. MUST be equal to the number of **BrTBeginMG** (section [2.4.109](#)) records following this record.

#### 2.4.112 brtBeginModelRelationships

The **BrTBeginModelRelationships** record specifies the beginning of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies relationships in a spreadsheet data model.

#### 2.4.113 BrTBeginModelTables

The **BrTBeginModelTables** record specifies the beginning of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies properties of tables in spreadsheet data model.

#### 2.4.114 BrTBeginMRUColors

The **BrTBeginMRUColors** record specifies the beginning of a collection of **BrTMRUColor** (section [2.4.679](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrTMRUColor** records specifies the collection of most recently used colors selected by the user for this workbook.

#### 2.4.115 BrTBeginOleDbPr15

The **BrTBeginOleDbPr15** record specifies properties of a **model data source OLE DB connection** (section [2.2.8.9.1](#)) and specifies the beginning of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF.

|                           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHeader                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| irstConnection (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**irstConnection (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the OLE DB connection string for this connection.

#### 2.4.116 BrtBeginOleObjects

The **BrtBeginOleObjects** record specifies the beginning of a collection of **BrtOleObject** (section [2.4.682](#)) records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF, the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtOleObject** records specifies information about OLE objects that are embedded in the workbook.

#### 2.4.117 BrtBeginPCD14

The **BrtBeginPCD14** record specifies the extended properties of a **PivotCache Definition** (section [2.1.7.38](#)) and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** part ABNF.

At least one of the values in the following fields MUST NOT be 0: **fSlicerData**, **fSrvSupportSubQueryCalcMem**, **fSrvSupportSubQueryNonVisual**, **fSrvSupportAddCalcMems**, **icacheId**.

|           |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0         | 1 | 2 | 3 | 4        | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHeader |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A         | B | C | D | icacheId |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...       |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fSlicerData (1 bit):** A bit that specifies whether the containing OLAP **PivotCache Definition** (section [2.1.7.38](#)) part is being referenced by a slicer cache (section [2.2.14.1](#)). This value MUST be 0 if this **PivotCache** (section [2.2.5.2](#)) is non-OLAP.

**B - fSrvSupportSubQueryCalcMem (1 bit):** A bit that specifies whether the OLAP source data (section [2.2.5.2.1](#)) of the **PivotCache** supports calculated members (3) in an **OLAP subselect** for filtering.

**C - fSrvSupportSubQueryNonVisual (1 bit):** A bit that specifies whether the OLAP source data of the **PivotCache** supports hidden pivot items (section [2.2.5.3.3](#)).

**D - fSrvSupportAddCalcMems (1 bit):** A bit that specifies whether calculated members (3) are shown for filtering.

**E - reserved (4 bits):** This value MUST be 0, and MUST be ignored.

**icacheId (4 bytes):** A signed integer that uniquely identifies this **PivotCache** (section [2.2.5.2](#)). This value MUST be 0 if there is no slicer cache (section [2.2.14.1](#)) that uses this **PivotCache** as a data source (1). This value MUST be greater than or equal to 0.

#### 2.4.118 BrtBeginPCDCalcItem

The **BrtBeginPCDCalcItem** record specifies the formula (section [2.2.2](#)) of a calculated item (section [2.2.5.2.6](#)) within this **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the locations in the PivotTable view (section [2.2.5.3](#)) to which the calculated item applies, and a reference to the cache fields (section [2.2.5.2.2](#)) and cache items (section [2.2.5.2.3](#)) that the formula of the calculated item uses.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| reserved        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fmla (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**reserved (4 bytes):** This value MUST be -1 and MUST be ignored.

**fmla (variable):** A **PivotParsedFormula** (section [2.5.97.15](#)) that specifies the formula (section [2.2.2](#)) of the calculated item (section [2.2.5.2.6](#)).

#### 2.4.119 BrtBeginPCDCalcItems

The **BrtBeginPCDCalcItems** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of calculated items (section [2.2.5.2.6](#)) in the **PivotCache** (section [2.2.5.2](#)).

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cCalcItems |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cCalcItems (4 bytes):** An unsigned integer that specifies the number of calculated items in the **PivotCache**. This value MUST be equal to the number of **BrtBeginPCDCalcItem** (section [2.4.118](#)) records in this collection.

## 2.4.120 BrtBeginPCDCalcMem

The **BrtBeginPCDCalcMem** record specifies an OLAP calculated member (3) or a named set (section [2.2.5.2.7.3](#)) in a **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

|                             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| pcdCalcMemCommon (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**pcdCalcMemCommon (variable):** A **PCDCalcMemCommon** (section [2.5.98](#)) that specifies an OLAP calculated member (3) in a **PivotCache**.

## 2.4.121 BrtBeginPCDCalcMem14

The **BrtBeginPCDCalcMem14** (section [2.4.121](#)) record specifies extended properties of an OLAP calculated member (3) specified by **BrtBeginPCDCalcMem** (section [2.4.120](#)) or **BrtBeginPCDCalcMemExt** (section [2.4.122](#)) that immediately precedes this record and specifies the beginning of a collection of records as defined by the **Common Productions** part (section [2.1.8](#)) ABNF.

|                               |   |   |        |   |   |   |                              |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|-------------------------------|---|---|--------|---|---|---|------------------------------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0                             | 1 | 2 | 3      | 4 | 5 | 6 | 7                            | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
| FRTHHeader                    |   |   |        |   |   |   |                              |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| A                             | B | C | unused |   |   |   | irstDisplayFolder (variable) |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...                           |   |   |        |   |   |   |                              |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| irstMDXFormulaLong (variable) |   |   |        |   |   |   |                              |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...                           |   |   |        |   |   |   |                              |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fFlattenHierarchies (1 bit):** A bit that specifies whether to display members (3) from different levels of the same cache hierarchy (section [2.2.5.2.7](#)) of this named set (section [2.2.5.2.7.3](#)) in the same pivot field (section [2.2.5](#)). This field MUST be ignored if the **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** or the **BrtBeginPCDCalcMemExt** record that immediately precedes this record is 0. If the **BrtPCDH14** (section [2.4.688](#)) record that corresponds to the named set (section [2.2.5.2.7.3](#)) exists, this value MUST be equal to the value in the **fFlattenHierarchies** field of the **BrtPCDH14** record. The possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Each member (3) from a different level of the same cache hierarchy of this named set is displayed in a separate pivot field (section <a href="#">2.2.5</a> ). |
| 1     | All members (3) from different levels of the same cache hierarchy of this named set are displayed in the same pivot field.                                    |

**B - fDynamicSet (1 bit):** A bit that specifies whether this named set is a dynamic OLAP named set. This field MUST be ignored if the **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** or **BrtBeginPCDCalcMemExt** record that immediately precedes this record is 0. The possible values for this field are listed in the following table.

| Value | Meaning                                     |
|-------|---|
| 0     | This named set is a static OLAP named set.  |
| 1     | This named set is a dynamic OLAP named set. |

**C - fHierarchizeDistinct (1 bit):** A bit that specifies whether to automatically order and remove duplicates from this named set. This field MUST be ignored if the **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** or **BrtBeginPCDCalcMemExt** record that immediately precedes this record is 0. If the **BrtPCDH14** record that corresponds to the named set exists, this value MUST be equal to the value in the **fHierarchizeDistinct** field of the **BrtPCDH14** record. The possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Do not automatically order and remove duplicates from this named set. |
| 1     | Automatically order and remove duplicates from this named set.        |

**unused (5 bits):** This field is unused and MUST be ignored.

**irstDisplayFolder (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the display folder of this named set. The length of this value MUST be less than 65,536 characters. This field MUST be ignored if the **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** or **BrtBeginPCDCalcMemExt** record that immediately precedes this record is 0.

**irstMDXFormulaLong (variable):** An **XLWideString** that specifies the multidimensional expression (MDX) of the OLAP calculated member (3). The length of this value MUST be 0 or it MUST be greater than 32,767 characters and less than 1,073,741,824 characters. If this value is greater than 32,767 characters, the length of the **pcdCalcMemCommon.stMdx** field in the **BrtBeginPCDCalcMem** or **BrtBeginPCDCalcMemExt** record that immediately precedes this record MUST be 1 and the first character of the **pcdCalcMemCommon.stMdx** field MUST be equal to 0x0020.

#### 2.4.122 BrtBeginPCDCalcMemExt

The **BrtBeginPCDCalcMemExt** record specifies an OLAP calculated member (3) and specifies the beginning of a collection of records as defined by the Common Productions part ABNF (section [2.1.8](#)). The collection of records specifies the OLAP calculated member (3) that is associated with an external connection (section [2.2.8](#)) that is not associated with a **PivotCache** (section [2.2.5.2](#)).

|                             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| pcdCalcMemCommon (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**pcdCalcMemCommon (variable):** A **PCDCalcMemCommon** (section [2.5.98](#)) that specifies an OLAP calculated member (3).

### 2.4.123 BrtBeginPCDCalcMems

The **BrtBeginPCDCalcMems** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the OLAP calculated members (3) in a **PivotCache** (section [2.2.5.2](#)).

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cCalcMems |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cCalcMems (4 bytes):** An unsigned integer that specifies the number of OLAP calculated members (3) in the **PivotCache**. This value MUST be equal to the number of **BrtBeginPCDCalcMem** (section [2.4.120](#)) records in this collection.

### 2.4.124 BrtBeginPCDCalcMemsExt

The **BrtBeginPCDCalcMemsExt** record specifies the beginning of a collection of records as defined by the **Common Productions** part ABNF (section [2.1.8](#)). The collection of records specifies the OLAP calculated members (3) that are associated with an external connection (section [2.2.8](#)) that is not associated with a **PivotCache**.

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cCalcMems |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record information (section [2.1.6](#)) for this record.

**cCalcMems (4 bytes):** An unsigned integer that specifies the number of OLAP calculated members (3). This value MUST be equal to the number of **BrtBeginPCDCalcMemExt** records in this collection.

## 2.4.125 BrtBeginPCDFatbl

The **BrtBeginPCDFatbl** record specifies properties of a cache field (section [2.2.5.2.2](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records following this record specifies a collection of cache items (section [2.2.5.2.3](#)).

| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10                 | 11 | 12 | 13 | 14 | 15    | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----|---|---|---|---|---|---|---|---|---|--------------------|----|----|----|----|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| A   | B | C | D | E | F | G | H | I | J | reserved           |    |    |    |    | citem |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   | xnumMin (optional) |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |                    |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   | xnumMax (optional) |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |                    |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |                    |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fTextEtcField (1 bit):** A bit that specifies whether this cache field contains at least one cache items (section [2.2.5.2.3](#)) that contains a text, blank, Boolean, or error value. This value MUST be equal to 1 if this collection contains at least one **BrtPCDIMissing** (section [2.4.700](#)), **BrtPCDIString** (section [2.4.702](#)), **BrtPCDIBoolean** (section [2.4.696](#)), **BrtPCDIError** (section [2.4.698](#)), **BrtPCDIAMissing** (section [2.4.693](#)), **BrtPCDIAStrng** (section [2.4.695](#)), **BrtPCDIABoolean** (section [2.4.690](#)) nor **BrtPCDIAError** (section [2.4.692](#)) record, or a **BrtBeginPCDIRun** (section [2.4.141](#)) record with a **mdSxoper** field equal to 0x0002 or 0x0010.

**B - fNonDates (1 bit):** A bit that specifies whether this cache field contains at least one cache item that contains a non-date value. This value MUST be equal to 1 if this collection contains at least one **BrtPCDIMissing**, **BrtPCDIString**, **BrtPCDIBoolean**, **BrtPCDIInteger** (section [2.4.701](#)), **BrtPCDIError**, **BrtPCDIAMissing**, **BrtPCDIAStrng**, **BrtPCDIABoolean**, **BrtPCDIANumber** (section [2.4.694](#)) or **BrtPCDIAError** record, or a **BrtBeginPCDIRun** record with a **mdSxoper** field equal to 0x0001, 0x0002, or 0x0010.

**C - fDateInField (1 bit):** A bit that specifies whether this cache field contains at least one cache item that contains a date value. This value MUST be equal to 1 if this collection contains at least one **BrtPCDIDatetime** (section [2.4.697](#)) or **BrtPCDIADatetime** (section [2.4.691](#)) record, or a **BrtBeginPCDIRun** record with a **mdSxoper** field equal to 0x0020.

**D - fHasTextItem (1 bit):** A bit that specifies whether this cache field contains a cache item that contains a text, Boolean, or error value. This value MUST be equal to 1 if this collection contains at least one **BrtPCDIString** (section [2.4.702](#)), **BrtPCDIBoolean**, **BrtPCDIError**, **BrtPCDIAStrng**, **BrtPCDIABoolean** or **BrtPCDIAError** record, or a **BrtBeginPCDIRun** record with a **mdSxoper** field equal to 0x0002 or 0x0010.

**E - fHasBlankItem (1 bit):** A bit that specifies whether this cache field contains a cache item that contains a blank value. This value MUST be equal to 1 if this collection contains at least one **BrtPCDIMissing** or **BrtPCDIAMissing** record.



**F - fMixedTypesIgnoringBlanks (1 bit):** A bit that specifies whether this cache field contains cache items of more than one type of value when blank values are ignored.

This field MUST be equal to 1 if any of the following three statements are true:

- This field contains at least one of the following: a **BrtpCDINumber** record, a **BrtpCDIANumber** record, or a **BrtpBeginPCDIRun** record with a **mdSxoper** field that equals 0x0001.–And–This field contains at least one of the following: a **BrtpCDIString** record, a **BrtpCDIBoolean** record, a **BrtpCDIError** record, a **BrtpCDIAString** record, a **BrtpCDIABoolean** record, a **BrtpCDIAError** record, or a **BrtpBeginPCDIRun** record with a **mdSxoper** field that equals 0x0002 or 0x0010.
- This field contains at least one of the following: a **BrtpCDIDatetime** record, a **BrtpCDIADatetime** record, or a **BrtpBeginPCDIRun** record with a **mdSxoper** field that equals 0x0020.–And–This field contains at least one of the following: a **BrtpCDINumber** record, a **BrtpCDIANumber** record, or a **BrtpBeginPCDIRun** record with a **mdSxoper** field that equals 0x0001.
- This field contains at least one of the following: a **BrtpCDIDatetime** record, a **BrtpCDIADatetime** record, or a **BrtpBeginPCDIRun** record with a **mdSxoper** field that equals 0x0020.–And–This field contains at least one of the following: a **BrtpCDIString** record, a **BrtpCDIBoolean** record, a **BrtpCDIError** record, a **BrtpCDIAString** record, a **BrtpCDIABoolean** record, a **BrtpCDIAError** record, or a **BrtpBeginPCDIRun** record with a **mdSxoper** field that equals 0x0002 or 0x0010.

**G - fNumField (1 bit):** A bit that specifies whether this cache field contains at least one cache item that contains a numeric value, but contains no cache items that contain date values. This value MUST be equal to 1 if this collection contains at least one **BrtpCDINumber** or **BrtpCDIANumber** record or **BrtpBeginPCDIRun** record with a **mdSxoper** field equal to 0x0001, and **fDateInField** is equal to 0.

**H - fIntField (1 bit):** A bit that specifies whether this cache field contains at least one cache item that contains an integer value, but contains no cache items that contain date values. This value MUST be equal to 1 if this collection contains at least one **BrtpCDINumber** or **BrtpCDIANumber** record or **BrtpBeginPCDIRun** record with a **mdSxoper** field equal to 0x0001, and all **xnum** fields of the **BrtpCDINumber** records specify integer values, and all **xnum** fields of the **BrtpCDIANumber** records specify integer values, and all **xnum** fields of the **rgPCDINumber** field of the **BrtpBeginPCDIRun** records specify integer values, and **fDateInField** is equal to 0.

**I - fNumMinMaxValid (1 bit):** A bit that specifies whether **xnumMin** and **xnumMax** exist. This value MUST be equal to 0 if **fDateInField** is equal to 0 and **fNumField** is equal to 0.

**J - fHasLongTextItem (1 bit):** A bit that specifies whether this cache field contains a cache item that contains a string longer than 255 characters. This value MUST be equal to 1 if this collection contains at least one **BrtpCDIString** record or a **BrtpCDIAString** record with an **st** field greater than 255 characters; or a **BrtpBeginPCDIRun** with a **mdsxoper** field equal to 0x0002 and a **rgPCDIString** field containing a **XLWideString** (section [2.5.168](#)) longer than 255 characters.

**reserved (6 bits):** This value MUST be 0, and MUST be ignored.

**citems (4 bytes):** An unsigned integer that specifies the number of cache items in this collection as defined by the **PivotCache Definition** part ABNF. This value MUST be less than or equal to 1048576 if the data functionality level (section [2.2.5.1](#)) is greater than or equal to 3; otherwise this value MUST be less than or equal to 32,500.

**xnumMin (8 bytes):** An **Xnum** (section [2.5.171](#)) or **DateAsXnum** (section [2.5.29](#)) that specifies the minimum value of this PivotCache field (section [2.2.5.2](#)). This field MUST exist if and only if **fNumMinMaxValid** is equal to 1. If **fDateInField** is equal to 1 and **fMixedTypesIgnoringBlanks** is equal to 0, this value MUST be a **DateAsXnum** equal to the earliest date specified among all the **BrtpCDIDatetime** records in this collection. If **fNumField** is equal to 1, this value MUST be an **Xnum** equal to the smallest value specified among all the **BrtpCDINumber** records in this collection. Otherwise, **xnumMin** is undefined and MUST be ignored.

**xnumMax (8 bytes):** An **Xnum** (section [2.5.171](#)) or **DateAsXnum** that specifies the maximum value of this PivotCache field. This field MUST exist if and only if **fNumMinMaxValid** is equal to 1. If **fDateInField** is equal to 1 and **fMixedTypesIgnoringBlanks** is equal to 0, this value MUST be a **DateAsXnum** equal to the latest date specified among all the **BrtpCDIDatetime** records in this collection. If **fNumField** is equal to 1, this value MUST be an **Xnum** equal to the largest value specified amongst all the **BrtpCDINumber** records in this collection. Otherwise, **xnumMax** is undefined and MUST be ignored.

#### 2.4.126 BrtBeginPCDFGDiscrete

The **BrtBeginPCDFGDiscrete** record specifies the beginning of a collection of **BrtpCDIIndex** (section [2.4.699](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of **BrtpCDIIndex** records specifies a mapping from a cache item (section [2.2.5.2.3](#)) in the **BrtBeginPCDFAtbl** (section [2.4.125](#)) collection of the base field of this grouping field to a cache item in the **BrtpCDFGItems** (section [2.4.127](#)) collection of the grouping field. The base field and grouping field are specified in section [2.2.5.2.4](#).

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cItems |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cItems (4 bytes):** An unsigned integer that specifies the number of mapping indexes for this grouping field. This value MUST match the number of **BrtpCDIIndex** records in the collection and MUST match the number of cache items in the **BrtBeginPCDFAtbl** collection of the base field of the grouping field.

#### 2.4.127 BrtBeginPCDFGItems

The **BrtBeginPCDFGItems** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of cache items for a grouping field (section [2.2.5.2.4](#)).

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cItems |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cItems (4 bytes):** An unsigned integer that specifies the number of cache items in this collection. This value MUST be equal to the number cache items in this collection.

## 2.4.128 BrtBeginPCDFGRange

The **BrtBeginPCDFGRange** record specifies the grouping (section [2.2.5.2.4](#)) properties of a cache field (section [2.2.5.2.2](#)) and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

|         |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---|----------|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1        | 2 | 3 | 4 | 5 | 6         | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| iByType |   |   |   |   |   |   |   | A | B | C | reserved |   |   |   |   | xnumStart |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   | xnumEnd   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   | xnumBy    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**iByType (8 bits):** An unsigned integer that specifies the type of grouping. This value MUST be a value from the following table.

| iByType | Meaning           |
|---------|-------------------|
| 0x00    | By numeric range. |
| 0x01    | By seconds.       |
| 0x02    | By minutes.       |
| 0x03    | By hours.         |
| 0x04    | By days.          |
| 0x05    | By months.        |
| 0x06    | By quarters.      |
| 0x07    | By years.         |

If the **BrtBeginPCDFGroup** (section [2.4.129](#)) record immediately preceding this record has an **ifdbParent** field that is not equal to -1, the **iByType** field of the **BrtBeginPCDFGRange** record directly following the **BrtBeginPCDFGroup** record that is directly following the **BrtBeginPCDFField** (section [2.4.130](#)) record specified by the **ifdbParent** field in the immediately preceding **BrtBeginPCDFGroup** record MUST have a value that is greater than this value.

If the value is greater than 0x00 and the **fSrcField** field of the preceding **BrtBeginPCDFField** record is 1, then the **BrtBeginPCDFAtbl** (section [2.4.125](#)) record of this cache field MUST have **fDateInField** field equal to 1 and **fNumField** field equal to 0. Also, the preceding

**BrBeginPCDF** record MUST have **fTextEtcField** equal to 0; otherwise, it MUST have **fMixedTypesIgnoringBlanks** equal to 0 and **fHasBlankItem** equal to 0.

If this value is greater than 0x00, the **BrBeginPCDFAtbl** record of this cache field MUST have **fHasTextItem** equal to 0 and **fMixedTypesIgnoringBlanks** equal to 0. <14>

**A - fAutoStart (1 bit):** A bit that specifies whether the source data (section 2.2.5.2.1) is used to set the starting range value. Possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The starting range value is set from the value specified in <b>xnumStart</b> . |
| 1     | The starting range value is set from the source data.                          |

**B - fAutoEnd (1 bit):** A bit that specifies whether the source data is used to set the ending range value. Possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The ending range value is set from the value specified in <b>xnumEnd</b> . |
| 1     | The ending range value is set from the source data.                        |

**C - fDates (1 bit):** A bit that specifies that **xnumStart** and **xnumEnd** are dates rather than numbers. The value in this field MUST be 1 if **iByType** is greater than 0x00, and MUST be 0 otherwise. Possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | <b>xnumStart</b> and <b>xnumEnd</b> are numbers. |
| 1     | <b>xnumStart</b> and <b>xnumEnd</b> are dates.   |

**reserved (5 bits):** This value MUST be zero and MUST be ignored.

**xnumStart (8 bytes):** An **Xnum** (section 2.5.171) or **DateAsXnum** (section 2.5.29) that specifies the starting value used for numeric or date grouping when **fAutoStart** is 0. If **fDates** is 1, this value is a **DateAsXnum**, otherwise it is an **Xnum**.

**xnumEnd (8 bytes):** An **Xnum** or **DateAsXnum** that specifies the ending value used for numeric or date grouping when **fAutoEnd** is 0. If **fDates** is 1, this value is a **DateAsXnum**, otherwise it is an **Xnum**. MUST be greater than or equal to **xnumStart**.

**xnumBy (8 bytes):** An **Xnum** that specifies the grouping interval for numeric range grouping. Specifies the number of days to group by in date range grouping. This value MUST be greater than zero. If **iByType** is not 0x00, it MUST be an integer less than 32,768.

#### 2.4.129 BrtBeginPCDFGroup

The **BrtBeginPCDFGroup** record specifies the relation of this cache field (section 2.2.5.2.2) and other cache fields with respect to grouping (section 2.2.5.2.4). This record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section 2.1.7.38) part ABNF. If this cache field is a parent of another grouping cache field as specified in grouping, then the collection of records MUST NOT be empty.

If this collection includes a **BrtBeginPCDFGRange** (section [2.4.128](#)) or **BrtBeginPCDFGDiscrete** (section [2.4.126](#)) record, a collection beginning with a **BrtBeginPCDFGItems** (section [2.4.127](#)) record MUST immediately follow, and it MUST contain at least one item.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ifdbParent |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ifdbBase   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ifdbParent (4 bytes):** A signed integer that specifies the cache field that is the grouping parent for the cache field containing this record. Each cache item (section [2.2.5.2.3](#)) in the grouping parent cache field corresponds to a group of cache items in the cache field containing this record. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| -1    | The cache field containing this record has no grouping parent cache field.  |
| 0+    | Specifies a cache field index. The referenced instance of the sequence of records that conforms to the <b>PCDFIELD</b> rule (defined in section <a href="#">2.1.7</a> ) specifies the grouping parent cache field for the cache field containing this record. The value of <b>ifdbParent</b> MUST be less than the count of elements in the <b>BrtBeginPCDFields</b> (section <a href="#">2.4.131</a> ) collection that contains the referenced instance of the <b>PCDFIELD</b> rule. |

If this collection contains a **BrtBeginPCDFGRange** record, the **BrtBeginPCDFField** (section [2.4.130](#)) record in the instance of the **PCDFIELD** rule specified by this value MUST be followed by a **BrtBeginPCDFGroup** record, and the collection beginning with that **BrtBeginPCDFGroup** record MUST contain a **BrtBeginPCDFGRange** record; the value in the **ifdbBase** field of that **BrtBeginPCDFGroup** record MUST be equal to **ifdbBase**. If the **iByType** field of the **BrtBeginPCDFGRange** record is 0, **ifdbParent** MUST be -1.

If this collection contains a **BrtBeginPCDFGDiscrete** record, the **BrtBeginPCDFField** record in the instance of the **PCDFIELD** rule specified by this value MUST be followed by a **BrtBeginPCDFGroup** record, and the collection beginning with that **BrtBeginPCDFGroup** record MUST contain a **BrtBeginPCDFGDiscrete** record; the value in the **ifdbBase** field of that **BrtBeginPCDFGroup** record MUST be equal to **ifdbBase**.

If this cache field has **fSrcField** field in the **BrtBeginPCDFField** record equal to 1 and the **BrtBeginPCDFField** record in the instance of the **PCDFIELD** rule specified by this value is followed by **BrtBeginPCDFGDiscrete** record, the value in the **ifdbBase** field of the **BrtBeginPCDFGroup** record preceding that **BrtBeginPCDFGDiscrete** record MUST be equal to this cache field index, as specified by Cache Fields.

**ifdbBase (4 bytes):** A signed integer that specifies the cache field that is the grouping base for the cache field containing this record. Each cache item in the **PCDFGITEMS** (defined in section [2.1.7.38](#)) collection of this record corresponds to a group of cache items in the **PCDFATBL** (defined in section [2.1.7.38](#)) collection of the grouping base cache field. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| -1    | The cache field containing this record has no grouping base cache field. |

| Value | Meaning   |
|-------|---|
| 0+    | Specifies a cache field index. The referenced instance of the <b>PCDFIELD</b> rule specifies the grouping base cache field for the cache field containing this record. The value of <b>ifdbBase</b> MUST be less than the count of elements in the <b>BrtBeginPCDFields</b> collection that contains the referenced instance of the <b>PCDFIELD</b> rule. The <b>fSrcField</b> field in the <b>BrtBeginPCDField</b> record of the referenced instance of the <b>PCDFIELD</b> rule MUST be equal to 1. |

#### 2.4.130 BrtBeginPCDField

The **BrtBeginPCDField** record specifies properties of a single cache field (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a single cache field in the **PivotCache**.

| 0                        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9         | 10       | 11 | 12 | 13 | 14 | 15 | 16   | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|--------------------------|---|---|---|---|---|---|---|---|-----------|----------|----|----|----|----|----|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| A                        | B | C | D | E | F |   | G | H | reserved2 |          |    |    |    |    |    | ifmt |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |   |   |   |   |   |           | wTypeSql |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ihdb                     |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| isxtl                    |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cIsxtmps                 |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stFldName (variable)     |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stFldCaption (variable)  |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fldFmla (variable)       |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cbRgisxtmp (optional)    |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgisxtmp (variable)      |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stMemPropName (variable) |   |   |   |   |   |   |   |   |           |          |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

...

**A - fServerBased (1 bit):** A bit that specifies whether this cache field is a server-based page field when the corresponding pivot field (section [2.2.5](#)) is on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view (section [2.2.5.3](#)).

This value applies to an ODBC **PivotCache** only. This value MUST NOT be equal to 1 if the value in the **fCantGetUniqueItems** field is equal to 1.

This value MUST be equal to 0 for a cache field in a non-ODBC **PivotCache**.

**B - fCantGetUniqueItems (1 bit):** A bit that specifies whether a list of unique values from the source data (section [2.2.5.2.1](#)) for the cache field was not available while refreshing the **PivotCache**. This value applies only to a **PivotCache** that uses ODBC and is intended to be used in conjunction with optimization features. For example, the application can optimize memory usage when populating cache records (section [2.2.5.2.10](#)) if it has a list of unique values for a cache field before all the cache records are retrieved from the ODBC connection (section [2.2.8.4](#)). Alternately, the application can determine the appropriate setting of the **fServerBased** field based on this value.

This value MUST be equal to 0 for fields in a non-ODBC **PivotCache**.

**C - fSrcField (1 bit):** A bit that specifies whether this cache field corresponds to source data entity, as specified in Cache Fields.

This value MUST be equal to 1 for a cache field in an OLAP **PivotCache**.

This value MUST be equal to 1 for the first **BrBeginPCDField** record in the sequence of records that conform to the **PCDFIELDS** rule (defined in section [2.1.7.38](#)). All cache fields with this value equal to 0 MUST be at the end of the **PCDFIELDS** rule.

**D - fCaption (1 bit):** A bit that specifies whether the **stFldCaption** field exists after the fixed-sized portion of the record.

This value MUST be equal to 0 if the value of the **bVerCacheCreated** field of the preceding **BrBeginPivotCacheDef** (section [2.4.162](#)) record is less than 3.

**E - fOlapMemPropField (1 bit):** A bit that specifies whether this cache field is associated with an OLAP member (3) property.

This value MUST be 0 for a cache field in a non-OLAP **PivotCache**.

**F - reserved1 (3 bits):** This value MUST be zero, and MUST be ignored.

**G - fLoadFmla (1 bit):** A bit that specifies whether the **fldFmla** field exists after the fixed-sized portion of the record. This value MUST be 0 for an OLAP **PivotCache** and MUST be equal to 0 if the **fSrcField** field is equal to 1.

**H - fLoadPropName (1 bit):** A bit that specifies whether the **stMemPropName** field exists after the fixed-sized portion of the record.

This value MUST be 0 if the **fOlapMemPropField** field is equal to 0.

**reserved2 (6 bits):** This value MUST be zero, and MUST be ignored.

**ifmt (4 bytes):** A **PivotNumFmtExt** (section [2.5.106](#)) that specifies the number format that is used by all source data values that correspond to this cache field.

**wTypeSql (2 bytes):** A **TypeSql** (section [2.5.151](#)) that specifies the SQL data type of the cache field. This value stores an ODBC data type and only applies to an ODBC **PivotCache**. This value is provided by the source database.

**ihdb (4 bytes):** An unsigned integer that specifies a cache hierarchy index, as specified in section [2.2.5.2.7](#). The referenced cache hierarchy is associated with this cache field. For an OLAP **PivotCache**, this value MUST be less than the count of instances of the sequence of records that conforms to the **PCDHIERARCHY** rule (defined in section [2.1.7.38](#)) in the **BrtBeginPCDHierarchies** collection (section [2.4.139](#)). For a non-OLAP **PivotCache**, this value MUST be zero and MUST be ignored.

**isxtl (4 bytes):** An unsigned integer that specifies the zero-based ordinal of the cache hierarchy **level** that this cache field is associated with. This value is only used for fields in an OLAP **PivotCache**. For a non-OLAP **PivotCache**, this value MUST be zero and MUST be ignored. If the **fOlapMemPropField** field is equal to 0, this value MUST be equal to 0x00007FFF, or it MUST be less than the **cItems** field in the **BrtBeginPCDHFieldsUsage** (section [2.4.132](#)) record of the cache hierarchy this cache field is associated with. If this value is equal to 0x00007FFF, this cache field applies to the whole cache hierarchy specified by **ihdb** rather than to one level of this cache hierarchy. This value MUST be equal to 0x00007FFF if the **fMeasure** field of the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record specified by the **ihdb** field is 1.

**cIsxtmps (4 bytes):** An unsigned integer that specifies the number of elements in the array specified by **rgisxtmp**; this value MUST be zero for a non-OLAP **PivotCache**.

This value MUST be less than the number of cache fields in this **PivotCache** as specified by the **cFields** field in the **BrtBeginPCDFields** (section [2.4.131](#)) record preceding this record.

**stFldName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the cache field. This value MUST be unique (using case insensitive comparison) in the scope of all cache fields in the current **PivotCache** unless this cache field is a grouping cache field and **fSrcField** is 0. For more information about grouping, see section [2.2.5.2.4](#).

The length of this string MUST be greater than 0. If the value of the **bVerCacheCreated** field of the preceding **BrtBeginPivotCacheDef** record of this **PivotCache** is less than 3, the length of this string MUST be less than 256 characters; otherwise it MUST be less than 32,768 characters.

**stFldCaption (variable):** An optional **XLWideString** that specifies the caption of the cache field. This value MUST exist if and only if **fCaption** is equal to 1.

The length of the string MUST be less than 32,768 characters.

**fldFmla (variable):** A **PivotParsedFormula** (section [2.5.97.15](#)) that specifies the formula (section [2.2.2](#)) for this calculated field (section [2.2.5.2.5](#)) This formula MUST exist if and only if **fLoadFmla** is equal to 1.

**cbRgisxtmp (4 bytes):** An unsigned integer that specifies the number of bytes used by the **rgisxtmp** field. This value MUST be equal to the following formula:

$$\mathbf{cIsxtmps} * 4$$

This value exists if and only if the value of **cIsxtmps** is greater than 0.



**rgisxtmp (variable):** An array of 4-byte unsigned integers. Each element in the array specifies a cache field index. Each referenced cache field is a member (3) property cache field, which is associated with this cache field. The **isxtl** field of the **BrtBeginPCDField** record of the referenced cache field MUST be equal to 0x00007FFF or equal to **isxtl**. The **fOlapMemPropField** field of the **BrtBeginPCDField** record of the referenced cache field MUST be equal to 1. The **ihdb** field of the **BrtBeginPCDField** record of the referenced cache field MUST be equal to **ihdb**. This field MUST exist if and only if **cIsxtmps** is greater than 0.

The value of each element in the array MUST be less than the number of cache fields in this **PivotCache** as specified by the **cFields** field in the **BrtBeginPCDFields** record preceding this record.

**stMemPropName (variable):** An optional **XLWideString** that specifies the name of the member (3) property this cache field associated with. This value MUST exist if and only if the **fLoadPropName** field is equal to 1.

The length of the string MUST be greater than 0 and less than 32,768 characters.

### 2.4.131 BrtBeginPCDFields

The **BrtBeginPCDFields** record specifies a count of cache fields and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section 2.1.7.38) part ABNF. The collection of records specifies a collection of cache fields in the **PivotCache** (section 2.2.5.2).

|         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cFields |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cFields (4 bytes):** An unsigned integer that specifies the number of cache fields in the **PivotCache** (section 2.2.5.2). This value MUST be equal to the number of **BrtBeginPCDField** (section 2.4.130) records in this collection. If value of **bVerCacheCreated** field in the **BrtBeginPivotCacheDef** (section 2.4.162) record is less than 3, this value MUST be less than 1,025, otherwise it MUST be less than 16,385. If this is an OLAP **PivotCache**, this value MUST be greater than or equal to 0, otherwise it MUST be greater than 0.

### 2.4.132 BrtBeginPCDHFieldsUsage

The **BrtBeginPCDHFieldsUsage** record specifies the cache fields (section 2.2.5.2.2) in the **PivotCache** that are associated with the cache hierarchy (section 2.2.5.2.7) that contains this record, and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** (section 2.1.7.38) part ABNF.

|                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cItems            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| rgifdb (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cItems (4 bytes):** An unsigned integer that specifies the number of elements in **rgifdb**. This value MUST match the number of elements in **rgifdb**. This value MUST be 1 if the **fMeasure** field of the preceding **BrtBeginPCDHierarchy** (section [2.4.140](#)) record is equal to 1.

**rgifdb (variable):** An array of 4-byte signed integers that specifies cache fields (section [2.2.5.2.2](#)) that are associated with the cache hierarchy that contains this record. Each element in the array MUST be a value from the following table.

| Value                                 | Meaning  |
|---------------------------------------|--|
| -1                                    | The zero-based ordinal of the level specified by the zero-based index of this element in <b>rgifdb</b> is not used by this cache hierarchy and is not associated with any cache field.<br><br>This element with index 0 MUST be -1 if the <b>fOnlyOneField</b> field of the preceding <b>BrtBeginPCDHierarchy</b> (section <a href="#">2.4.140</a> ) record is equal to 0 and the <b>stAllUnq</b> field of the preceding <b>BrtBeginPCDHierarchy</b> record exists and contains at least one character.  |
| A value greater than or equal to zero | This array element specifies a cache field index. The referenced cache field is associated with the zero-based ordinal of the level specified by the zero-based index of this element in <b>rgifdb</b> .<br><br>The <b>ihdb</b> field of the <b>BrtBeginPCDField</b> (section <a href="#">2.4.130</a> ) record of the specified cache field MUST reference the cache hierarchy this record is within. If the <b>fOnlyOneField</b> field of the preceding <b>BrtBeginPCDHierarchy</b> record is equal to 0, then the <b>isxtl</b> field of the <b>BrtBeginPCDField</b> record of the specified cache field MUST be equal to the zero-based index of this element in <b>rgifdb</b> . |

### 2.4.133 BrtBeginPCDHGLevel

The **BrtBeginPCDHGLevel** record specifies properties of an OLAP grouping level, as specified in OLAP Grouping (section [2.2.5.2.8](#)), and the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies an OLAP grouping level in a **PivotCache**, as specified in OLAP Grouping (section [2.2.5.2.8](#)).

|                        |   |           |   |   |   |   |   |   |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|------------------------|---|-----------|---|---|---|---|---|---|---------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0                      | 1 | 2         | 3 | 4 | 5 | 6 | 7 | 8 | 9                   | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
| A                      | B | reserved2 |   |   |   |   |   |   | stUnique (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...                    |   |           |   |   |   |   |   |   |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| stLevelName (variable) |   |           |   |   |   |   |   |   |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...                    |   |           |   |   |   |   |   |   |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |

**A - fGroupLevel (1 bit):** A bit that specifies whether this is a user-defined group level. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | The record specifies a group level that corresponds to the source cube level. |
| 1     | The record specifies a user-defined group level.                              |

**B - reserved1 (1 bit):** This value MUST be zero, and MUST be ignored.

**reserved2 (6 bits):** This value MUST be zero, and MUST be ignored.

**stUnique (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of this grouping level. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record is greater than or equal to 3, then the length of this value MUST be less than 32,768 characters; otherwise it MUST be less than 256 characters.

**stLevelName (variable):** An **XLWideString** that specifies the caption of this grouping level. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this value MUST be less than 32,768 characters, otherwise it MUST be less than 256 characters.

#### 2.4.134 BrtBeginPCDHGLLevels

The **BrtBeginPCDHGLLevels** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of OLAP grouping levels, as specified in section [2.2.5.2.8](#).

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cLevels |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cLevels (4 bytes):** An unsigned integer that specifies the number of OLAP Grouping levels in the **PivotCache**. This value MUST be equal to the number of **BrtBeginPCDHGLLevel** (section [2.4.133](#)) records in the collection.

#### 2.4.135 BrtBeginPCDHGLGMember

The **BrtBeginPCDHGLGMember** record specifies an OLAP member or name of a group in the subsequent OLAP level that is part of the associated OLAP grouping (section [2.2.5.2.8](#)), and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fGroup              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stUnique (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**fGroup (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether this record specifies the name of a group in the subsequent OLAP level. The possible values for this field are listed in the following table.

| Value      | Meaning                               |
|------------|---------------------------------------|
| 0x00000000 | This record specifies an OLAP member. |

| Value      | Meaning   |
|------------|---|
| 0x00000001 | This record specifies the name of a group in the subsequent OLAP level. |

**stUnique (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the unique name of an OLAP member or name of a group in the subsequent OLAP level of the OLAP grouping (section [2.2.5.2.8](#)) that contains this record. If the value of **fGroup** is 0, this is a MDX unique name of an OLAP member. If the value of **fGroup** is 1, this is a group name and it MUST match the **stName** field in one of the **BrtBeginPCDHGLGroup** (section [2.4.137](#)) records of the **PCDHGLGROUPS** rule (defined in section [2.1.7.38](#)) in the subsequent OLAP level that is part of the associated OLAP grouping. The length of this value MUST be greater than zero. If the **bVerCacheCreated** field of the preceding **BrtBeginPivotCacheDef** (section [2.4.162](#)) record is greater than or equal to 3, then the length of this value MUST be less than 32,768 characters, otherwise it MUST be less than 256 characters.

### 2.4.136 BrtBeginPCDHGLGMembers

The **BrtBeginPCDHGLGMembers** (section [2.4.135](#)) record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. This collection of records specifies the OLAP members that are part of an OLAP grouping (section [2.2.5.2.8](#)).

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cMembers |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cMembers (4 bytes):** An unsigned integer that specifies the number of OLAP members in this OLAP grouping. This value MUST be equal to the number of **BrtBeginPCDHGLGMember** records in the collection.

### 2.4.137 BrtBeginPCDHGLGroup

The **BrtBeginPCDHGLGroup** record specifies an OLAP group, as specified in OLAP Grouping (section [2.2.5.2.8](#)), and specifies the beginning of a collection as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the OLAP members that make up the group specified by this record.

|                         |          |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------------------|----------|---|---|---|---|---|---|---|---|---|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                       | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| iGrpNum                 |          |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A                       | reserved |   |   |   |   |   |   |   |   |   | stName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                     |          |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stUniqueName (variable) |          |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                     |          |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|                               |
|-------------------------------|
| stCaption (variable)          |
| ...                           |
| stParentUniqueName (variable) |
| ...                           |

**iGrpNum (4 bytes):** A signed integer that specifies the unique identifier of this group within the level of the OLAP hierarchy. This value **MUST** be greater than zero.

**A - fLoadParent (1 bit):** A bit that specifies whether **stParentUniqueName** exists after the fixed-size portion of the record.

**reserved (7 bits):** This value **MUST** be zero, and **MUST** be ignored.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of this group. The length of this string **MUST** be greater than zero. If the **bVerCacheCreated** field of the preceding **BrtBeginPivotCacheDef** (section [2.4.162](#)) record is greater than or equal to 3, then the length of this string **MUST** be less than 32,768 characters; otherwise it **MUST** be less than 256 characters.

**stUniqueName (variable):** An **XLWideString** that specifies the MDX unique name of the OLAP member in the parent grouping level, as specified in OLAP Grouping, associated with the group specified by this record. The length of this string **MUST** be greater than zero. If the **bVerCacheCreated** field of the preceding **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string **MUST** be less than 32,768 characters; otherwise it **MUST** be less than 256 characters.

**stCaption (variable):** An **XLWideString** that specifies the caption of this group. The length of this string **MUST** be greater than zero. If the **bVerCacheCreated** field of the preceding **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string **MUST** be less than 32,768 characters, otherwise it **MUST** be less than 256 characters.

**stParentUniqueName (variable):** An optional **XLWideString** that specifies an MDX unique name of the OLAP member that is the parent of the members (3) of this group in the OLAP cube. If the **bVerCacheCreated** field of the preceding **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string **MUST** be less than 32,768 characters; otherwise it **MUST** be less than 256 characters. **MUST** exist if and only if **fLoadParent** is 1. If this value is not specified, it means that the members (3) of this group have no parent in the OLAP cube.

#### 2.4.138 BrtBeginPCDHGLGroups

The **BrtBeginPCDHGLGroups** record specifies the beginning of a collection of records, as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies groups, as specified in OLAP Grouping (section [2.2.5.2.8](#)), within the preceding cache hierarchy (section [2.2.5.2.7](#)).

|         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cgroups |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cgroups (4 bytes):** An unsigned integer that specifies the number of groups within the preceding cache hierarchy. This value MUST match the number of **BrBeginPCDHGLGroup** (section [2.4.137](#)) records in the collection.

#### 2.4.139 BrtBeginPCDHierarchies

The **BrBeginPCDHierarchies** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of cache hierarchies (section [2.2.5.2.7](#)) in the **PivotCache**. This value MUST exist if and only if this is an OLAP **PivotCache**.

|       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cHier |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cHier (4 bytes):** An unsigned integer that specifies the number of cache hierarchies in the **PivotCache**. This value MUST be equal to the number of **BrBeginPCDHierarchy** (section [2.4.140](#)) records in this collection.

#### 2.4.140 BrtBeginPCDHierarchy

The **BrBeginPCDHierarchy** record specifies properties of a cache hierarchy (section [2.2.5.2.7](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a cache hierarchy in the **PivotCache** (section [2.2.5.2](#)).

No more than one of the following fields of this record MUST be 1: **fMeasure**, **fSet**, **fMeasureHierarchy** and **fTimeHierarchy**.

|     |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |                            |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---------------------|---|---|---|---|---|---|----------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3                   | 4 | 5 | 6 | 7 | 8 | 9 | 2                          | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| A   | B | C | D | E | F | G | H | I | J | K | L | M | N | cLevels             |   |   |   |   |   |   |                            |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |   |   |   |   |   |   |   | isetParent          |   |   |   |   |   |   |                            |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |   |   |   |   |   |   |   | iconSet             |   |   |   |   |   |   |                            |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |   |   |   |   |   |   |   | O                   | P | Q | R | S | T | U | wAttributeMemberValue<br>e |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |   |   |   |   |   |   |   | stUnique (variable) |   |   |   |   |   |   |                            |   |   |   |   |   |   |   |   |   |   |   |   |   |

|                         |
|-------------------------|
| ...                     |
| stCaption (variable)    |
| ...                     |
| stDimUnq (variable)     |
| ...                     |
| stDefaultUnq (variable) |
| ...                     |
| stAllUnq (variable)     |
| ...                     |
| stAllDisp (variable)    |
| ...                     |
| stDispFld (variable)    |
| ...                     |
| stMeasGrp (variable)    |
| ...                     |

**A - fMeasure (1 bit):** A bit that specifies whether this cache hierarchy is a measure (section [2.2.5.2.7.1](#)).

If this value is 1, the **fMeasure** field of at least one of the **BrtBeginDim** (section [2.4.49](#)) records in the **BrtBeginDims** collection MUST be equal to 1. If this value is 0, the **BrtBeginDim** record where the **stUnique** field case-insensitively matches the **stDimUnq** field in this record MUST NOT have **fMeasure** equal to 1.

This value MUST be 0 if **fUnbalancedRealKnown** is 1 and **fUnbalancedReal** is 1.

This value MUST be 0 if **fUnbalancedGroupKnown** is 1 and **fUnbalancedGroup** is 1.

This value MUST be 0 if **fAttributeHierarchy** is 1 or **fKeyAttributeHierarchy** is 1.

This value MUST be 0 if **fSet**, **fMeasureHierarchy** or **fTimeHierarchy** is 1.

**B - fSet (1 bit):** A bit that specifies whether this cache hierarchy is a named set (section [2.2.5.2.7.3](#)). This value MUST be 0 if **fUnbalancedRealKnown** is 1 and **fUnbalancedReal** is 1, or if **fUnbalancedGroupKnown** is 1 and **fUnbalancedGroup** is 1. This value MUST be 0 if

**fAttributeHierarchy** is 1 or **fKeyAttributeHierarchy** is 1. This value MUST be 0 if **fMeasure**, **fMeasureHierarchy**, or **fTimeHierarchy** is 1.

- C - fAttributeHierarchy (1 bit):** A bit that specifies whether this cache hierarchy is an **attribute hierarchy**.
- D - fMeasureHierarchy (1 bit):** A bit that specifies whether this cache hierarchy is the measure's OLAP hierarchy. This value MUST be 0 if **fMeasure**, **fSet**, or **fTimeHierarchy** is 1.
- E - fOnlyOneField (1 bit):** A bit that specifies whether this cache hierarchy is associated with only one cache field (section [2.2.5.2.2](#)). This value MUST be 1 if **fMeasure** is 1.
- F - fTimeHierarchy (1 bit):** A bit that specifies whether this cache hierarchy is a **time hierarchy**. This value MUST be 1 if **fAttributeMemberValueTypeKnown** is 1 and **wAttributeMemberValueType** is equal to 0x0007. This value MUST be 0 if **fMeasure**, **fSet** or **fMeasureHierarchy** is 1.
- G - fKeyAttributeHierarchy (1 bit):** A bit that specifies whether this cache hierarchy is a key attribute hierarchy. This value MUST be 1 if **fAttributeMemberValueTypeKnown** is 1.
- H - fAttributeMemberValueTypeKnown (1 bit):** A bit that specifies whether **wAttributeMemberValueType** contains the data type of an attribute. The possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The value of the <b>wAttributeMemberValueType</b> field is ignored.                |
| 1     | The <b>wAttributeMemberValueType</b> field contains the data type of an attribute. |

- I - fUnbalancedRealKnown (1 bit):** A bit that specifies whether it is known if this cache hierarchy is an unbalanced OLAP hierarchy when no OLAP grouping (section [2.2.5.2.8](#)) has been applied. The possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The value of <b>fUnbalancedReal</b> is ignored.  |
| 1     | <b>fUnbalancedReal</b> specifies whether this cache hierarchy is an unbalanced OLAP hierarchy. |

- J - fUnbalancedReal (1 bit):** A bit that specifies whether this cache hierarchy is an unbalanced OLAP hierarchy when no OLAP grouping has been applied. MUST be ignored if **fUnbalancedRealKnown** is 0.

- K - fUnbalancedGroupKnown (1 bit):** A bit that specifies whether it is known if this cache hierarchy is an unbalanced OLAP hierarchy when OLAP grouping has been applied to any OLAP members belonging to this **PivotCache**. The possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The value of <b>fUnbalancedGroup</b> is ignored.   |
| 1     | The value of <b>fUnbalancedGroup</b> specifies whether this cache hierarchy is an unbalanced OLAP hierarchy when OLAP members belonging to this <b>PivotCache</b> have been grouped. |



**L - fUnbalancedGroup (1 bit):** A bit that specifies whether this cache hierarchy is an unbalanced OLAP hierarchy when OLAP members belonging to this **PivotCache** have been grouped. This value MUST be ignored if **fUnbalancedGroupKnown** is 0.

**M - fHidden (1 bit):** A bit that specifies whether this cache hierarchy is hidden.

**N - reserved1 (3 bits):** This value MUST be zero, and MUST be ignored.

**cLevels (4 bytes):** An unsigned integer that specifies the number of OLAP levels associated with the OLAP hierarchy associated with this cache hierarchy.

**isetParent (4 bytes):** A signed integer that specifies the cache hierarchy that all the OLAP members of this cache hierarchy belong to. This value MUST be ignored if **fSet** is 0. This value MUST be less than the number of **BrtBeginPCDHierarchy** records in the **BrtBeginPCDHierarchies** collection (section [2.4.139](#)). This value MUST be a value from the following table.

| Value                                 | Meaning   |
|---------------------------------------|---|
| -1                                    | The cache hierarchy that the OLAP members of this cache hierarchy belong to is unknown or does not exist in the <b>PivotCache</b> . |
| A value greater than or equal to zero | Specifies a cache hierarchy index that specifies the cache hierarchy that all the OLAP members of this cache hierarchy belong to.   |

**iconSet (4 bytes):** A **KPISets** (section [2.5.85](#)) that specifies the icon set to use to visualize a key performance indicator (KPI) trend or status expression. This value MUST NOT be equal to 0xFFFFFFFF.

**O - fLoadDimUnq (1 bit):** A bit that specifies whether **stDimUnq** exists.

**P - fLoadDefaultUnq (1 bit):** A bit that specifies whether **stDefaultUnq** exists.

**Q - fLoadAllUnq (1 bit):** A bit that specifies whether **stAllUnq** exists.

**R - fLoadAllDisp (1 bit):** A bit that specifies whether **stAllDisp** exists.

**S - fLoadDispFld (1 bit):** A bit that specifies whether **stDispFld** exists.

**T - fLoadMeasGrp (1 bit):** A bit that specifies whether **stMeasGrp** exists. This value MUST be 0 if **fMeasure** is 0.

**U - reserved2 (2 bits):** This value MUST be zero, and MUST be ignored.

**wAttributeMemberValueType (2 bytes):** An unsigned integer that specifies the data type of an OLAP dimension (1) attribute returned by the OLAP provider. If the attribute is 0x0007, the attribute is treated as a date attribute; otherwise, it is not treated as a date attribute.

**stUnique (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of this cache hierarchy. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this value MUST be less than 32,768 characters; otherwise, it MUST be less than 256 characters.

**stCaption (variable):** An **XLWideString** that specifies a display name of this cache hierarchy. The length of this value MUST be greater than or equal to zero. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of

this value MUST be less than 32,768 characters; otherwise, it MUST be less than 256 characters.

**stDimUnq (variable):** An optional **XLWideString** that specifies a unique name of the OLAP dimension (1) to which this cache hierarchy belongs. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this value MUST be less than 32,768 characters; otherwise, it MUST be less than 256 characters. This value MUST be specified if **fSet** is 0 and **fMeasure** is 0 and **fHidden** is 0. This value MUST match **stUnique** (using a case-insensitive comparison) in **BrtBeginDim** record in the **BrtBeginDims** collection. This value MUST exist if and only if **fLoadDimUnq** is 1.

**stDefaultUnq (variable):** An optional **XLWideString** that specifies the MDX unique name of the default OLAP member of this cache hierarchy. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this value MUST be less than 32,768 characters; otherwise, it MUST be less than 256 characters. This value MUST exist if and only if **fLoadDefaultUnq** is 1.

**stAllUnq (variable):** An optional **XLWideString** that specifies the unique name of the **ALL** member (3) of this cache hierarchy. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this value MUST be less than 32,768 characters; otherwise, it MUST be less than 256 characters. This value MUST exist if and only if **fLoadAllUnq** is 1.

**stAllDisp (variable):** An optional **XLWideString** that specifies the display name of the ALL member (3) of this cache hierarchy. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this value MUST be less than 32768 characters; otherwise, it MUST be less than 256 characters. This value MUST exist if and only if **fLoadAllDisp** is 1.

**stDispFld (variable):** An optional **XLWideString** that specifies the display folder of this cache hierarchy. The length of this value MUST be less than 65,536 characters. This value MUST exist if and only if **fLoadDispFld** is 1.

**stMeasGrp (variable):** An optional **XLWideString** that specifies the name of the measure (section [2.2.5.2.7.1](#)) group to which this cache hierarchy belongs. The length of this value MUST be less than 65,536 characters. This value MUST exist if and only if **fLoadMeasGrp** is 1.

#### 2.4.141 BrtBeginPCDIRun

The **BrtBeginPCDIRun** record specifies a sequence of cache items (section [2.2.5.2.3](#)) all of the same data type and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6                       | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| mdSxoper |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | cItems                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | rgPCDINumber (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

|                           |
|---------------------------|
| rgPCDIString (variable)   |
| ...                       |
| rgPCDIError (variable)    |
| ...                       |
| rgPCDIDatetime (variable) |
| ...                       |

**mdSxoper (2 bytes):** An unsigned integer that specifies which field is used to store cache items. This value MUST be a value from the following table:

| Value  | Meaning  |
|--------|--|
| 0x0001 | Specifies that the <b>rgPCDINumber</b> field exists.   |
| 0x0002 | Specifies that the <b>rgPCDIString</b> field exists.   |
| 0x0010 | Specifies that the <b>rgPCDIError</b> field exists.    |
| 0x0020 | Specifies that the <b>rgPCDIDateTime</b> field exists. |

**cItems (4 bytes):** An unsigned integer that specifies the number of cache items in the array specified by the field used to store cache items, as specified by **mdSxoper**.

**rgPCDINumber (variable):** An array of **Xnum** (section [2.5.171](#)) that specifies the values of the cache items. This value MUST exist if and only if **mdSxoper** equals 0x0001. The number of elements in the array MUST be equal to **cItems**.

**rgPCDIString (variable):** An array of **XLWideString** (section [2.5.168](#)) that specifies the values of the cache items. This value MUST exist if and only if **mdSxoper** equals 0x0002. The number of elements in the array MUST be equal to **cItems**.

**rgPCDIError (variable):** An array of **BErr** (section [2.5.97.2](#)) that specifies the values of the cache items. This value MUST exist if and only if **mdSxoper** equals 0x0010. The number of elements in the array MUST be equal to **cItems**.

**rgPCDIDatetime (variable):** An array of **PCDIDateTime** (section [2.5.100](#)) that specifies the values of the cache items. This value MUST exist if and only if **mdSxoper** equals 0x0020. The number of elements in the array MUST be equal to **cItems**.

#### 2.4.142 BrtBeginPCDKPI

The **BrtBeginPCDKPI** record specifies an OLAP key performance indicator (KPI) and the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8                   | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-------------------------|---|---|---|---|---|---|---|---------------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| A                       | B | C | D | E | F | G | H | stUnique (variable) |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stCaption (variable)    |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stDispFolder (variable) |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stMeasGrp (variable)    |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stParent (variable)     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stValue (variable)      |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stGoal (variable)       |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stStatus (variable)     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stTrend (variable)      |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stWeight (variable)     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stCurTimeMbr (variable) |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |                     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

- A - fLoadDispFld (1 bit):** A bit that specifies whether **stDispFolder** exists after the fixed-size portion of the record.
- B - fLoadMeasGrp (1 bit):** A bit that specifies whether **stMeasGrp** exists after the fixed-size portion of the record.
- C - fLoadParent (1 bit):** A bit that specifies whether **stParent** exists after the fixed-size portion of the record.
- D - fLoadGoal (1 bit):** A bit that specifies whether **stGoal** exists after the fixed-size portion of the record.
- E - fLoadStatus (1 bit):** A bit that specifies whether **stStatus** is saved after the fixed-size portion of the record.
- F - fLoadTrend (1 bit):** A bit that specifies whether **stTrend** exists after the fixed-size portion of the record.
- G - fLoadWeight (1 bit):** A bit that specifies whether **stWeight** exists after the fixed-size portion of the record.
- H - fLoadCurTimeMbr (1 bit):** A bit that specifies whether **stCurTimeMbr** exists after the fixed-size portion of the record.
- stUnique (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of this KPI. The length of this string MUST be greater than zero. If the **bVerCacheCreated** of the preceding **BrtBeginPivotCacheDef** (section [2.4.162](#)) record is greater than or equal to 3, then the length of this string MUST be less than 32,768 characters; otherwise, it MUST be less than 256 characters.
- stCaption (variable):** An **XLWideString** that specifies the display name of this KPI. The length of this string MUST be greater than zero and MUST be less than 32,768 characters.
- stDispFolder (variable):** An optional **XLWideString** that specifies the display folder of this KPI. The length of this string MUST be less than 65,536 characters. This value MUST exist if and only if **fLoadDispFld** is 1.
- stMeasGrp (variable):** An optional **XLWideString** that specifies the name of the measure group to which this KPI belongs. The length of this string MUST be less than 65,536 characters. This value MUST exist if and only if **fLoadMeasGrp** is 1.
- stParent (variable):** An optional **XLWideString** that specifies the MDX unique name of the parent KPI for this KPI. If not empty, MUST match the **stUnique** field in the **BrtBeginPCDKPI** record that specifies the parent KPI. The length of this string MUST be less than 65,536 characters. This value MUST exist if and only if **fLoadParent** is 1.
- stValue (variable):** An **XLWideString** that specifies the MDX unique name of the measure (section [2.2.5.2.7.1](#)) used for the value component of this KPI. The length of this string MUST be greater than zero. If the **bVerCacheCreated** field of the preceding **BrtBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string MUST be less than 32,768 characters; otherwise, the length of this string MUST be less than 256 characters.
- This value MUST be equal to the **stUnique** value of one of the **BrtBeginPCDHierarchy** (section [2.4.140](#)) records in the **BrtBeginPCDHierarchies** collection (section [2.4.139](#)) following the **BrtBeginPivotCacheDef** record preceding this record. The matching **BrtBeginPCDHierarchy** record MUST have **fMeasure** equal to 1.

**stGoal (variable):** An optional **XLWideString** that specifies MDX unique name of the measure used for the goal component of this KPI. If the **bVerCacheCreated** field of the preceding **BrBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string MUST be less than 32,768 characters; otherwise, the length of this string MUST be less than 256 characters.

This value MUST be equal to the **stUnique** value of one of the **BrBeginPCDHierarchy** records in the **BrBeginPCDHierarchies** collection following the **BrBeginPivotCacheDef** record preceding this record. The matching **BrBeginPCDHierarchy** record MUST have **fMeasure** equal to 1. This value MUST exist if and only if **fLoadGoal** is 1.

**stStatus (variable):** An optional **XLWideString** that specifies the MDX unique name of the measure used for the status component of this KPI. If the **bVerCacheCreated** field of the preceding **BrBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string MUST be less than 32,768 characters; otherwise, the length of this string MUST be less than 256 characters.

MUST be equal to the **stUnique** value of one of the **BrBeginPCDHierarchy** records in the **BrBeginPCDHierarchies** collection following the **BrBeginPivotCacheDef** record preceding this record. The matching **BrBeginPCDHierarchy** record MUST have **fMeasure** equal to 1. This value MUST exist if and only if **fLoadStatus** is 1.

**stTrend (variable):** An optional **XLWideString** that specifies the MDX unique name of the measure used for the trend component of this KPI. If the **bVerCacheCreated** field of the preceding **BrBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string MUST be less than 32,768 characters; otherwise, the length of this string MUST be less than 256 characters.

This value MUST be equal to the **stUnique** value of one of the **BrBeginPCDHierarchy** records in the **BrBeginPCDHierarchies** collection following the **BrBeginPivotCacheDef** record preceding this record. The matching **BrBeginPCDHierarchy** record MUST have **fMeasure** equal to 1. This value MUST exist if and only if **fLoadTrend** is 1.

**stWeight (variable):** An optional **XLWideString** that specifies the MDX expression used for the weight component of this KPI. If the **bVerCacheCreated** field of the preceding **BrBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string MUST be less than 32,768 characters; otherwise, the length of this string MUST be less than 256 characters. This value MUST exist if and only if **fLoadWeight** is 1. <15>

**stCurTimeMbr (variable):** An optional **XLWideString** that specifies the MDX unique name of the current time member (3) for this KPI. If the **bVerCacheCreated** field of the preceding **BrBeginPivotCacheDef** record is greater than or equal to 3, then the length of this string MUST be less than 32,768 characters; otherwise, the length of this string MUST be less than 256 characters. This value MUST exist if and only if **fLoadCurTimeMbr** is 1. <16>

#### 2.4.143 BrBeginPCDKPIs

The **BrBeginPCDKPIs** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the KPIs (section [2.2.5.2.7.2](#)) in a **PivotCache** (section [2.2.5.2](#)).

|       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |  |
| cKpis |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

**cKpis (4 bytes):** An unsigned integer that specifies the number of KPIs (section [2.2.5.2.7.2](#)) in the **PivotCache**. This value MUST be equal to the number of **BrBeginPCDKPI** (section [2.4.142](#)) records in this collection.

#### 2.4.144 BrtBeginPCDSConsol

The **BrtBeginPCDSConsol** record specifies properties of a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the source data (section [2.2.5.2.1](#)) ranges for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache**. The source data ranges are specified by the **BrtBeginPCDSCSet** (section [2.4.148](#)) records in this collection. This record MUST exist if and only if the **isrctype** field of the preceding **BrtBeginPCDSource** (section [2.4.160](#)) record is 2.

|   |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|----------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | reserved |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fAutoPage (1 bit):** A bit that specifies whether there is one automatically created cache field (section [2.2.5.2.2](#)) with cache items (section [2.2.5.2.3](#)) qualifying each source data range of the multiple consolidation ranges **PivotCache**. This value MUST be a value from the following table:

| Value | Meaning  |
|-------|--|
| 0     | The cache fields that qualify the source data ranges are not automatically created, and the number of <b>BrtBeginPCDSCPage</b> (section <a href="#">2.4.145</a> ) records in this collection MUST be greater than or equal to 0 and less than or equal to 4.                                     |
| 1     | There is one automatically created cache field with cache items qualifying each source data range of the multiple consolidation ranges <b>PivotCache</b> . Each cache item qualifies one source data range. The number of <b>BrtBeginPCDSCPage</b> records in this collection MUST be exactly 1. |

**reserved (15 bits):** This value MUST be 0 and MUST be ignored.

#### 2.4.145 BrtBeginPCDSCPage

The **BrtBeginPCDSCPage** record specifies a count of **BrtBeginPCDSCPIItem** (section [2.4.147](#)) records and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies values that correspond to cache items of a cache field (section [2.2.5.2.2](#)) for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache**.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| citems |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**citems (4 bytes):** An unsigned integer that specifies the number of **BrtBeginPCDSCPIItem** records in this collection. This value MUST be equal to the number of **BrtBeginPCDSCPIItem** records in this collection.

#### 2.4.146 BrtBeginPCDSCPages

The **BrtBeginPCDSCPages** record specifies a count of **BrtBeginPCDSCPage** records (section [2.4.145](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies information for optional cache fields (section [2.2.5.2.2](#)) in the **PivotCache**, as specified by multiple consolidation ranges (section [2.2.5.2.1.1](#)).

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cPages |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cPages (4 bytes):** An unsigned integer that specifies the number of optional cache fields in the **PivotCache**, as specified by Multiple Consolidation Ranges. This value MUST be equal to the number of **BrtBeginPCDSCPage** records in the collection. This value MUST be less than or equal to 4.

#### 2.4.147 BrtBeginPCDSCPItem

The **BrtBeginPCDSCPItem** record specifies a value that corresponds to a cache item (section [2.2.5.2.3](#)) (as specified by multiple consolidation ranges (section [2.2.5.2.1.1](#)), and specifies the beginning of an empty collection of records (defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF).

|                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| stName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the value that is used for creating a cache item in an optional cache field (section [2.2.5.2.2](#)) for a multiple consolidation ranges **PivotCache**, as specified by Multiple Consolidation Ranges. The length of this string MUST be greater than or equal to 1 character and less than or equal to 255 characters. This value MUST be unique case-insensitive within this collection of **BrtBeginPCDSCPItem** records.

#### 2.4.148 BrtBeginPCDSCSet

The **BrtBeginPCDSCSet** record specifies properties of a range of the source data (section [2.2.5.2.1](#)) for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The range is either in this workbook or another workbook.

|                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rgiItem (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |



|                          |          |   |   |           |                      |
|--------------------------|----------|---|---|-----------|----------------------|
| ...                      |          |   |   |           |                      |
| fName                    | fBuiltIn | A | B | reserved2 | irstSheet (variable) |
| ...                      |          |   |   |           |                      |
| irstRelId (variable)     |          |   |   |           |                      |
| ...                      |          |   |   |           |                      |
| rfx (16 bytes, optional) |          |   |   |           |                      |
| ...                      |          |   |   |           |                      |
| irstName (variable)      |          |   |   |           |                      |
| ...                      |          |   |   |           |                      |

**rgiItem (16 bytes):** An array of 4-byte unsigned integers. Each element of the array specifies an index to a value for a cache item (section [2.2.5.2.3](#)) of a cache field (section [2.2.5.2.2](#)) for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** associated with this range. Each element of the array specifies a zero-based index to a **BrtBeginPCDSCPIItem** (section [2.4.147](#)) record in the **BrtBeginPCDSCPage** collection following the **BrtBeginPCDSCConsol** (section [2.4.148](#)) collection that precedes this record.

The first element in this array corresponds to the first **BrtBeginPCDSCPage** collection in the **BrtBeginPCDSCPages** (section [2.4.146](#)) collection following the **BrtBeginPCDSCConsol** collection that precedes this record.

The second element in this array corresponds to the second **BrtBeginPCDSCPage** collection (section [2.4.145](#)) in the **BrtBeginPCDSCPages** collection following the **BrtBeginPCDSCConsol** collection that precedes this record.

The third element in this array corresponds to the third **BrtBeginPCDSCPage** collection in the **BrtBeginPCDSCPages** collection following the **BrtBeginPCDSCConsol** collection that precedes this record.

The fourth element in this array corresponds to the fourth **BrtBeginPCDSCPage** collection in the **BrtBeginPCDSCPages** collection following the **BrtBeginPCDSCConsol** collection that precedes this record.

If the number of **BrtBeginPCDSCPage** collections in the **BrtBeginPCDSCPages** collection is less than four, the value for each array element that does not have a corresponding **BrtBeginPCDSCPage** collection MUST be 0xFFFFFFFF. If the **BrtBeginPCDSCPage** collection corresponding to an array element has no following **BrtBeginPCDSCPIItem** (section [2.4.147](#)) records, the value of that array element MUST be 0xFFFFFFFF. The value of each array element MUST be either greater than or equal to 0 and less than the number of **BrtBeginPCDSCPIItem** records in the **BrtBeginPCDSCPage** collection following the **BrtBeginPCDSCConsol** collection that precedes this record, or MUST be 0xFFFFFFFF if no **BrtBeginPCDSCPIItem** record is specified. For more details, see section [2.2.5.2.1.1](#).

**fName (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the range is specified by **irstName** or **rfx**. This value MUST be a value from the following table:

| Value | Meaning   |
|-------|---|
| 0x00  | The range is specified by <b>rfx</b> . The <b>irstName</b> field MUST NOT be present. The <b>rfx</b> field MUST be present. The value of <b>fLoadSheet</b> MUST be 1. |
| 0x01  | The range is specified by <b>irstName</b> . The <b>irstName</b> field MUST be present. The <b>rfx</b> field MUST NOT be present.                                      |

**fBuiltIn (1 byte):** A **Boolean** that specifies whether the defined name specified by the **irstName** field refers to a **built-in name** or a user-defined name. This value MUST be a value from the following table:

| Value | Meaning  |
|-------|--|
| 0x00  | <b>irstName</b> specifies a user-defined name. |
| 0x01  | <b>irstName</b> specifies a built-in name.     |

If the value of **fName** is 0x00, this value MUST be 0x00.

**A - fLoadRelId (1 bit):** A bit that specifies whether **irstRelId** exists.

**B - fLoadSheet (1 bit):** A bit that specifies whether **irstSheet** exists.

**reserved2 (6 bits):** This value MUST be zero, and MUST be ignored.

**irstSheet (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the sheet in which the range is located. The length of the string MUST be greater than or equal to 1, and less than or equal to 31. This field MUST exist when **fLoadSheet** is equal to 1, and MUST NOT exist when **fLoadSheet** is equal to 0.

**irstRelId (variable):** A **RelID** (section [2.5.114](#)) that specifies a path to another workbook that contains the range. This field MUST exist when **fLoadRelId** is equal to 1, and MUST NOT exist when **fLoadRelId** is equal to 0.

**rfx (16 bytes):** An **UncheckedRfX** (section [2.5.153](#)) that specifies a range that is part of the source data for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache**. This field MUST exist when **fName** is equal to 0, and MUST NOT exist when **fName** is equal to 1.

**irstName (variable):** An **XLWideString** that specifies the defined name that is part of the source data for a multiple consolidation ranges **PivotCache**. The length of this string MUST be greater than or equal to 1, and less than or equal to 255. This field MUST exist when **fName** is equal to 1, and MUST NOT exist when **fName** is equal to 0.

#### 2.4.149 BrtBeginPCDSCSets

The **BrtBeginPCDSCSets** record specifies a count of ranges used as source data for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies ranges used as source data for a multiple consolidation ranges **PivotCache**.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cSets |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cSets (4 bytes):** An unsigned integer that specifies the number of ranges used as source data for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache**. This value MUST be equal to the number of **BrBeginPCDSCSet** (section [2.4.148](#)) records in this collection.

#### 2.4.150 BrtBeginPCDSDTCEMember

The **BrtBeginPCDSDTCEMember** record specifies properties of the tuple cache entry (as specified in section [2.2.5.2.11](#)), and the beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. A tuple cache entry specifies either a reference to an OLAP member or a reference to a tuple cache set.

|         |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10       | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| bmboloc |   |   |   |   |   |   |   |   |   | ifdbihdb |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...     |   |   |   |   |   |   |   |   |   | iitem    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...     |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**bmboloc (1 byte):** An unsigned integer that specifies the meaning of **iitem**. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x01  | <b>iitem</b> specifies a cache item (section <a href="#">2.2.5.2.3</a> ).                 |
| 0x02  | <b>iitem</b> specifies the default OLAP member, the ALL OLAP member or a tuple cache set. |

**ifdbihdb (4 bytes):** An unsigned integer that specifies a zero-based index whose meaning is determined by the value of **bmboloc**, as specified in the following table.

| Value of bmboloc | Meaning  |
|------------------|--|
| 0x01             | The <b>ifdbihdb</b> field is a cache field (section <a href="#">2.2.5.2.2</a> ) index, as specified by Cache Fields, that specifies the cache field for this tuple cache entry. The <b>ifdbihdb</b> field MUST be greater than or equal to 0 and less than the count of cache fields in the tuple cache. |
| 0x02             | The <b>ifdbihdb</b> field is a cache hierarchy index (section <a href="#">2.2.5.2.7</a> ) that specifies the cache hierarchy for this tuple cache entry. The <b>ifdbihdb</b> field MUST be greater than or equal to 0 and less than the count of cache hierarchies in the tuple cache.                   |

**iitem (4 bytes):** A signed integer whose meaning is determined by the value of **bmboloc**, as specified in the following table.

| Value of <b>bmbrioc</b> | Meaning   |
|-------------------------|---|
| 0x01                    | The <b>iitem</b> field is a cache item index that specifies the cache item of the cache field specified by the <b>ifdbihdb</b> field. The value of the cache item specifies the unique name of the OLAP member that this record refers to.<br>The <b>iitem</b> field MUST be greater than or equal to 0 and less than the count of cache items for the cache field.   |
| 0x02                    | If <b>iitem</b> is -1, then this tuple cache entry is the reference to the default OLAP member of the cache hierarchy specified by the <b>ifdbihdb</b> field.<br>If <b>iitem</b> is -2, then this tuple cache entry is the reference to the ALL OLAP member of the cache hierarchy specified by <b>ifdbihdb</b> field.<br>Otherwise, <b>iitem</b> is a zero-based index of a tuple cache set in the <b>PCDSDTCSETS</b> collection (defined in section <a href="#">2.1.7.38</a> ) of this tuple cache that specifies a tuple cache set that this record refers to.<br>The <b>iitem</b> field MUST be one of the following values: -2,-1, or greater than or equal to 0 and less than the count of tuple cache sets in the <b>PCDSDTCSETS</b> collection of this tuple cache. |

#### 2.4.151 **BrBeginPCDSDTCMembers**

The **BrBeginPCDSDTCMembers** record specifies the beginning of a collection of **BrBeginPCDSDTCMember** records (section [2.4.150](#)) as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of tuple cache entries (section [2.2.5.2.11](#)).

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cMembers |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cMembers (4 bytes):** An unsigned integer that specifies the number of tuple cache entries, as specified by tuple cache. This value MUST be equal to the number of **BrBeginPCDSDTCMember** records in the collection.

#### 2.4.152 **BrBeginPCDSDTCMembersSortBy**

The **BrBeginPCDSDTCMembersSortBy** record specifies the beginning of a collection of **BrBeginPCDSDTCMember** records (section [2.4.150](#)). The collection of records specifies a collection of tuple cache entries (section [2.2.5.2.11](#)), used to sort a tuple cache set.

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cMembers |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cMembers (4 bytes):** An unsigned integer that specifies the number of tuple cache entries, as specified by (section [2.2.5.2.11](#)), in the collection of tuple cache entries that is used to sort the tuple cache set. This value MUST be equal to the number of **BrBeginPCDSDTCMember** (section [2.4.150](#)) records in this collection.

### 2.4.153 BrtBeginPCSDTCEntries

The **BrtBeginPCSDTCEntries** record specifies the number of cached cube values, as specified in section [2.2.5.2.11](#), and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a cache of cube values; each of the values is optionally followed by a collection of tuple cache entries used in the value calculation.

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cEntries |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cEntries (4 bytes):** An unsigned integer that specifies the number of cached cube values, as specified in a section [2.2.5.2.11](#). This value MUST be equal to the total number of records (**BrtPCDIMissing** / **BrtPCDINumber** / **BrtPCDIError** / **BrtPCDIString**) in the collection.

### 2.4.154 BrtBeginPCSDTCTCQueries

The **BrtBeginPCSDTCTCQueries** record specifies the beginning of a collection of **BrtBeginPCSDTCTCQuery** (section [2.4.155](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records is part of the Tuple Cache and specifies cached MDX expressions that evaluate to a collection of tuple cache entries, specified by section [2.2.5.2.11](#).

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cQueries |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cQueries (4 bytes):** An unsigned integer that specifies the number of cached MDX expressions that evaluates to a collection of tuple cache entries, as specified by tuple cache, in this collection. This value MUST be equal to the number of **BrtBeginPCSDTCTCQuery** records in the collection.

### 2.4.155 BrtBeginPCSDTCTCQuery

The **BrtBeginPCSDTCTCQuery** record specifies the MDX expression that is used to evaluate the tuple cache entries, as specified in section [2.2.5.2.11](#), and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. This record is optionally followed by a **BrtBeginPCSDTCTCEMbers** collection (section [2.4.151](#)) that specifies the cached cube members (3) in the tuple cache entry that the MDX expression evaluates to.

|                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| irstQuery (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**irstQuery (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX expression that is used to evaluate the tuple cache entries. The length of this string **MUST** be less than 65,536 characters.

#### 2.4.156 BrtBeginPCSDTCSets

The **BRTBeginPCSDTCSets** record specifies the properties of a tuple cache set, as specified in section [2.2.5.2.11](#), and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection specifies a tuple cache set in the tuple cache. The collection can include the **PCSDTCEMEMBERSSORTBY** collection (defined in section [2.1.7.38](#)) to specify the tuple cache entries used to sort the tuple cache set. The **PCSDTCEMEMBERSSORTBY** collection (defined in section [2.1.7.38](#)) is present when **fLoadSortTuple** is 1.

|          |   |          |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|----------|---|---|---|---|---|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8                  | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cTuples  |   |          |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iRankMax |   |          |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ssoType  |   |          |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A        | B | reserved |   |   |   |   |   | irstDef (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...      |   |          |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cTuples (4 bytes):** An unsigned integer that specifies the number of OLAP tuples in the tuple cache set. This value **MUST** be less than 0x80000000, or **MUST** be 0xFFFFFFFF when the number of OLAP tuples in the tuple cache set is unknown.

**iRankMax (4 bytes):** An unsigned integer that specifies the number of **BrtBeginPCSDTCEMembers** collections (section [2.4.151](#)) of tuple cache entries that this tuple cache set currently contains. This value **MUST** be greater than 0x00000000 and less than or equal to 0x00100000. This value **MUST** be less than or equal to **cTuples**. This value **MUST** be ignored if **fQueryFailed** is 1.

**ssoType (4 bytes):** An **SdSetSortOrder** (section [2.5.131](#)) that specifies the sort order (2) of the tuple cache entries in the tuple cache set. If this field is equal to **SSOASC** or **SSODESC**, the tuples which specify the sort order (2) are specified by the sequence of records that conforms to the **PCSDTCEMEMBERSSORTBY** rule (defined in section [2.1.7.38](#)) following this record in the sequence of records that conforms to the **PCSDTCSets** rule (defined in section [2.1.7.38](#)).

**A - fQueryFailed (1 bit):** A bit that specifies whether the querying on this tuple cache set failed. A value of 1 specifies that **MDX query** execution has not finished successfully.

**B - fLoadSortTuple (1 bit):** A bit that specifies whether tuple cache entries used to sort the tuple cache set exist in the file. This value **MUST** be 1 if and only if **ssoType** is equal to **SSOASC** (0x00000001) or **SSODESC** (0x00000002).

**reserved (6 bits):** This value **MUST** be zero and **MUST** be ignored.

**irstDef (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX expression that was used to evaluate this tuple cache set. The length of this string **MUST** be less than 65,536 characters.

#### 2.4.157 BrtBeginPCSDTCSets

The **BrtBeginPCSDTCSets** record specifies the beginning of a collection of **BrtBeginPCSDTCSets** (section [2.4.156](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of **BrtBeginPCSDTCSets** records specifies the collection of tuple cache sets (section [2.2.5.2.11](#)), in the **PivotCache** (section [2.2.5.2](#)).

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cSets |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cSets (4 bytes):** An unsigned integer that specifies the number of tuple cache sets in the **PivotCache**. This value **MUST** be equal to the number of **BrtBeginPCSDTCSets** records in the collection.

#### 2.4.158 BrtBeginPCSDTupleCache

The **BrtBeginPCSDTupleCache** record specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a tuple cache (section [2.2.5.2.11](#)) within the **PivotCache** (section [2.2.5.2](#)). Relevant information retrieved from the OLAP server as a result of using cube functions in a sheet is cached in the tuple cache. By using this cached information, client applications can avoid un-necessary communication with the OLAP server.

This record **MUST** exist if and only if the value of the **fSheetData** field on the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record associated with this tuple cache is 1.

#### 2.4.159 BrtBeginPcdSFCEntries

The **BrtBeginPcdSFCEntries** record specifies the beginning of a collection of **BrtPCDSFCIEEntry** (section [2.4.703](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of **BrtPCDSFCIEEntry** records specifies the number formats provided by an OLAP server for cube values.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| centry |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**centry (4 bytes):** An unsigned integer that specifies the count of **BrtPCDSFCIEEntry** (section [2.4.703](#)) records in this collection.

#### 2.4.160 BrtBeginPCDSsource

The **BrtBeginPCDSsource** record specifies the properties of **PivotCache** (section [2.2.5.2](#)) source data (section [2.2.5.2.1](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies properties of the source data of a **PivotCache** (section [2.2.5.2](#)).

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iSrcType |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwConnID |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iSrcType (4 bytes):** An unsigned integer that specifies the **PivotCache** source data type. This value **MUST** be a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Sheet source data.   |
| 0x00000001 | External source data.  |
| 0x00000002 | Multiple consolidation range (section <a href="#">2.2.5.2.1.1</a> ) source data. |
| 0x00000003 | Scenario source data.  |

If this value is 0x00000000, the collection **MUST** contain the **BrBeginPCDSRange** (section [2.4.161](#)) record; the source data is specified by the **range** or **namedRange** field in the **BrBeginPCDSRange** record in this collection.

If this value is 0x00000002, the collection **MUST** contain the **BrBeginPCDSConsol** (section [2.4.144](#)) record; the source data is specified by the **BrBeginPCDSConsol** collection in this collection.

**dwConnID (4 bytes):** An unsigned integer that specifies the unique identifier of the external connection (section [2.2.8](#)). This value **MUST** be ignored if **iSrcType** is not 0x00000001. If **iSrcType** is 0x00000001, it **MUST** be greater than 0x00000000 and it **MUST** match a **dwConnID** value in one of the **BrBeginExtConnection** (section [2.4.76](#)) records in the **External Data Connections** (section [2.1.7.24](#)) part.

## 2.4.161 BrtBeginPCDSRange

The **BrtBeginPCDSRange** record specifies the properties of the source data (section [2.2.5.2.1](#)) for a **PivotCache** (section [2.2.5.2](#)) contained in the workbook and specifies beginning of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies source data for a **PivotCache** contained in the workbook. The workbook that contains the source data can be this workbook, or an [external workbook](#) (section [2.1.10](#)). The location of the source data within the workbook is specified as a defined name, or as a range.

|                  |           |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |                      |    |    |    |    |    |    |
|------------------|-----------|---|---|---|---|---|---|---|-----------|----|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----------------------|----|----|----|----|----|----|
| 0                | 1         | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9         | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18        | 19 | 20 | 21 | 22 | 23 | 24 | 25                   | 26 | 27 | 28 | 29 | 30 | 31 |
| A                | reserved1 |   |   |   |   |   |   | B | reserved2 |    |    |    |    |    |    | C  | D  | reserved3 |    |    |    |    |    |    | sheetName (variable) |    |    |    |    |    |    |
| ...              |           |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |                      |    |    |    |    |    |    |
| relId (variable) |           |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |                      |    |    |    |    |    |    |



|                            |
|----------------------------|
| ...                        |
| namedRange (variable)      |
| ...                        |
| range (16 bytes, optional) |
| ...                        |

**A - fName (1 bit):** A bit that specifies that the source data is specified by a defined name. If this value is 1, the location of this data source (1) inside a workbook is specified by **namedRange**; otherwise, it is specified by **range**.

**reserved1 (7 bits):** This value MUST be zero and MUST be ignored.

**B - fBuiltIn (1 bit):** A bit that specifies that the defined name specified by **namedRange** is a built-in name. If the value of **fName** is 0, this value MUST be 0.

**reserved2 (7 bits):** This value MUST be zero and MUST be ignored.

**C - fLoadRelId (1 bit):** A bit that specifies that the source data is in an external workbook. If this value is 1, the path to the external workbook is specified by **RelID** (section [2.5.114](#)).

**D - fLoadSheet (1 bit):** A bit that specifies that the source data is scoped to a single sheet. If **fName** is 0 then the value of this bit SHOULD be 1. [<17>](#)

**reserved3 (6 bits):** This value MUST be zero and MUST be ignored.

**sheetName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the sheet to which the source data is scoped. This field exists if and only if the value of **fLoadSheet** is 1. This string MUST comply with the restrictions specified for the **strName** field in **BrtBundleSh** (section [2.4.301](#)).

**relId (variable):** A **RelID** that specifies a relationship that specifies a path to an external workbook that contains the source data. This field exists if and only if the value of **fLoadRelId** is 1.

**namedRange (variable):** An **XLNameWideString** (section [2.5.165](#)) that specifies the defined name that is the source data. This field exists if and only if the value of **fName** is 1.

**range (16 bytes):** An **UncheckedRfX** (section [2.5.153](#)) that specifies the range that is the source data. This field exists if and only if the value of **fName** is 0.

#### 2.4.162 BrtBeginPivotCacheDef

The **BrtBeginPivotCacheDef** record specifies properties of a **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a **PivotCache**.

|                           |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
|---------------------------|---|---|---|---|---|---|---|---------------------------|---|---|---|---|---|---|---|------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8                         | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6                | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| bVerCacheLastRefresh      |   |   |   |   |   |   |   | bVerCacheRefreshableMin   |   |   |   |   |   |   |   | bVerCacheCreated |   |   |   |   |   |   |   | A | B | C | D | E | F | G | H |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| citmGhostMax              |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| xnumRefreshedDate         |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ...                       |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| I                         | J | K | L | M |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | cRecords |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ...                       |   |   |   |   |   |   |   | stRefreshedWho (variable) |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ...                       |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| stRelIDRecords (variable) |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ...                       |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| unused (optional)         |   |   |   |   |   |   |   |                           |   |   |   |   |   |   |   |                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |

**bVerCacheLastRefresh (1 byte):** A **DataFunctionalityLevel** (section [2.5.28](#)) that specifies the data functionality level (section [2.2.5.1](#)) that the **PivotCache** was last refreshed with.

This value MUST NOT be less than **bVerCacheRefreshableMin** value.

**bVerCacheRefreshableMin (1 byte):** A **DataFunctionalityLevel** that specifies the lowest data functionality level that the application is required to support to refresh the **PivotCache**. For more details, see section [2.2.5.1](#).

**bVerCacheCreated (1 byte):** A **DataFunctionalityLevel** that specifies the data functionality level that the **PivotCache** was created with. For more details, see section [2.2.5.1](#).

**A - fSaveData (1 bit):** A bit that specifies whether the cache records (section [2.2.5.2.10](#)) exist. This value MUST be equal to 0 for OLAP **PivotCaches**.

**B - fInvalid (1 bit):** A bit that specifies whether the cache records of this **PivotCache** are in an invalid state, in which case they MUST be ignored.

**C - fRefreshOnLoad (1 bit):** A bit that specifies whether the **PivotCache** is refreshed on load.

**D - fOptimizeCache (1 bit):** A bit that specifies whether the application applies optimizations to the **PivotCache** to reduce memory usage. This value MUST be equal to 0 for non-external and non-ODBC source data (section [2.2.5.2.1](#)).

**E - fEnableRefresh (1 bit):** A bit that specifies whether refresh of the **PivotCache** is enabled.

**F - fBackgroundQuery (1 bit):** A bit that specifies whether to refresh this **PivotCache** asynchronously. This value MUST be equal to 0 if the **iSrcType** field in the associated **BrtBeginPCDSources** (section [2.4.160](#)) record is not equal to 0x00000001.

**G - fUpgradeOnRefresh (1 bit):** A bit that specifies whether the data functionality level of this **PivotCache** has to be upgraded to 3 during the next refresh. This value MUST be zero if the data functionality level of this **PivotCache** is greater than or equal to 3.

**H - fSheetData (1 bit):** A bit that specifies whether the **PivotCache** is used to store information for cube functions. This value MUST be equal to 0 for non-OLAP **PivotCaches**. If the value is equal to 1, this **PivotCache** MUST NOT be associated with any PivotTable as specified in section [2.2.5.3.1](#).

**citmGhostMax (4 bytes):** A signed integer that specifies the number of unused cache items (section [2.2.5.2.3](#)) to allow before discarding unused cache items on the next refresh. This value MUST be greater than -2 and less than 1048577. If this value is equal to 0, all unused cache items are discarded on the next refresh. If this value is equal to -1, the number of unused cache items retained by the application is optimized to balance memory usage on the system and future usage of cache items.

**xnumRefreshedDate (8 bytes):** A **DateAsXnum** (section [2.5.29](#)) that specifies the date when the **PivotCache** was last refreshed.

**I - fLoadRefreshedWho (1 bit):** A bit that specifies whether the **stRefreshedWho** field exists.

**J - fLoadRelIDRecords (1 bit):** A bit that specifies whether the **stRelIDRecords** field exists. This value MUST be equal to 1 if **fSaveData** is equal to 1 and **fInvalid** is equal to 0.

**K - fSupportSubquery (1 bit):** A bit that specifies whether the source data of the **PivotCache** supports OLAP subselect.

**L - fSupportAttribDrill (1 bit):** A bit that specifies whether the source data of the **PivotCache** supports **attribute drilldown**.

**M - reserved (4 bits):** This value MUST be zero, and MUST be ignored.

**cRecords (4 bytes):** An unsigned integer that specifies the number of cache records in the **PivotCache**. If **fSaveData** is equal to 0, this value is undefined and MUST be ignored.

**stRefreshedWho (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies the name of the user who last refreshed the **PivotCache**. This value MUST exist if and only if **fLoadRefreshedWho** is equal to 1. The length of this value MUST be less than 256 characters. The name is an application-specific setting that is not necessarily related to the **User Names** (section [2.1.7.55](#)) part ABNF.

**stRelIDRecords (variable):** An optional **RelID** that specifies the unique identifier that corresponds to the related **PivotCache Records** (section [2.1.7.39](#)) part. This value MUST exist and MUST be non-empty if and only if **fLoadRelIDRecords** is equal to 1.

**unused (4 bytes):** This value is undefined and MUST be ignored. This field MUST exist if and only if **fLoadRefreshedWho** is equal to 0.

#### 2.4.163 BrtBeginPivotCacheID

The **BrtBeginPivotCacheID** record specifies the relationship between a **PivotCache** (section [2.2.5.2](#)) identifier and its associated **PivotCache Definition** (section [2.1.7.38](#)). For more information, see section [2.2.5.3.1](#).

|                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| idSx                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstcacheRelID (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**idSx (4 bytes):** An unsigned integer that specifies the identifier for the **PivotCache Definition** specified by **irstcacheRelID**. This value MUST be unique in the collection of **BrtBeginPivotCacheID** (section [2.4.163](#)) records directly following the immediately preceding **BrtBeginPivotCacheIDs** (section [2.4.164](#)) collection.

**irstcacheRelID (variable):** A **RelID** that specifies a **PivotCache Definition**.

#### 2.4.164 BrtBeginPivotCacheIDs

The **BrtBeginPivotCacheIDs** record specifies the beginning of a collection of **PivotCache** identifier records as defined by the **workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the **PivotCache** identifiers for the workbook.

#### 2.4.165 BrtBeginPivotCacheRecords

The **BrtBeginPivotCacheRecords** record specifies the beginning of a collection of records as defined by the **PivotCache Records** (section [2.1.7.39](#)) part ABNF. The collection of records specifies the cache records (section [2.2.5.2.10](#)) for a **PivotCache** (section [2.2.5.2](#)).

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| crecords |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**crecords (4 bytes):** An unsigned integer that specifies the number of cache records in the **PivotCache**. This value MUST be equal to the number of **BrtPCRRecord** (section [2.4.704](#)) and **BrtPCRRecordDt** (section [2.4.705](#)) records in the collection.

#### 2.4.166 BrtBeginPivotTableRefs

The **BrtBeginPivotTableRefs** record specifies the beginning of a collection of **PivotTable** identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF rules. The collection of records specifies the Non-Worksheet PivotTables (section [2.2.5.5](#)) in the **Workbook**.

#### 2.4.167 BrtBeginPivotTableUISettings

The **BrtBeginPivotTableUISettings** record specifies the beginning of a collection of records as defined in the **PivotCache Definition** (section [2.1.7.38](#)) part **ABNF**. The collection of records specifies settings for the **PivotTable field list**.

|           |   |   |           |   |   |   |   |                                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|-----------|---|---|-----------|---|---|---|---|--------------------------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0         | 1 | 2 | 3         | 4 | 5 | 6 | 7 | 8                              | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
| FRTHeader |   |   |           |   |   |   |   |                                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| A         |   | B | reserved2 |   |   |   |   | stPpmConnectionName (variable) |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...       |   |   |           |   |   |   |   |                                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record

**A - reserved1 (2 bits):** MUST be 0. MUST be ignored.

**B - fRelNeededHidden (1 bit):** A bit that specifies whether user closed the relationship warning for this **PivotTable**.

**reserved2 (5 bits):** MUST be 0. MUST be ignored.

**stPpmConnectionName (variable):** An **XLWideString** (section [2.5.168](#)) that contains the name of the model data source connection (section [2.2.8.9](#)) associated with this PivotTable.

#### 2.4.168 BrtBeginPName

The **BrtBeginPName** record specifies information used for a calculated field (section [2.2.5.2.5](#)) or calculated item (section [2.2.5.2.6](#)) and specifies the beginning of a collection of records as specified by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. When used for a calculated field, this record specifies a reference to a cache field (section [2.2.5.2.2](#)) used in a calculated field formulas (section [2.2.2](#)), and the specified collection of records MUST be empty. When used for a calculated item, this record specifies a reference to a pivot item (section [2.2.5.3.3](#)) used in calculated item formulas, and the specified collection of records MUST NOT be empty.

|      |   |   |   |   |   |   |   |   |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9        | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ifdb |   |   |   |   |   |   |   |   |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ifn  |   |   |   |   |   |   |   | A | reserved |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ifdb (4 bytes):** An unsigned integer that specifies a zero-based index to a cache field used in a calculated field formula. When this record is used for a calculated item, this field MUST be equal to -1.

**ifn (8 bits):** An unsigned integer that specifies an aggregation function that is used to aggregate the data items (section [2.2.5.3.7.5.1](#)) in a pivot field. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|----------|
| 0     | "SUM"    |
| 1     | "COUNTA" |

| Value | Meaning                             |
|-------|-------------------------------------|
| 2     | "AVG"                               |
| 3     | "MAX"                               |
| 4     | "MIN"                               |
| 5     | "PRODUCT"                           |
| 6     | "COUNT"                             |
| 7     | "STDEV"                             |
| 8     | "STDEVP"                            |
| 9     | "VAR"                               |
| 10    | "VARP"                              |
| 255   | Aggregation function not specified. |

**A - fErrName (1 bit):** A bit that specifies whether the cache field specified by the **ifdb** field was found in the pivot cache (section [2.2.5.2](#)) after the PivotTable view (section [2.2.5.3](#)) was calculated. If the cache field record was not found, then this bit MUST be equal to 1.

**reserved (7 bits):** This value MUST be zero, and MUST be ignored.

#### 2.4.169 BrtBeginPNames

The **BrtBeginPNames** record specifies a count of **BrtBeginPName** (section [2.4.168](#)) records and specifies the beginning of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of references to cache fields (section [2.2.5.2.2](#)) used in a calculated field (section [2.2.5.2.5](#)) formula (section [2.2.2](#)) or pivot items (section [2.2.5.3.3](#)) used in a calculated item (section [2.2.5.2.6](#)) formula (section [2.2.2](#)).

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cnames |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cnames (4 bytes):** An unsigned integer that specifies the number of cache field or pivot item references in this collection. The value of **cnames** MUST be equal to the number of **BrtBeginPName** records in this collection.

#### 2.4.170 BrtBeginPNPair

The **BrtBeginPNPair** record specifies a reference to a pivot item (section [2.2.5.3.3](#)). This record is used in a calculated item (section [2.2.5.2.6](#)) formula (section [2.2.2](#)), and specifies the beginning of an empty collection as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

|     |   |          |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|---|----------|---|---|---|---|---|---|---|---|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0   | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| A   | B | reserved |   |   |   |   |   |   |   |   | ifield |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |          |   |   |   |   |   |   |   |   | iitem  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |          |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**A - fPhysical (1 bit):** A bit that specifies whether **iitem** specifies a cache item (section [2.2.5.2.3](#)) index. The possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | <b>iitem</b> specifies a cache item index.        |
| 1     | <b>iitem</b> does not specify a cache item index. |

**B - fRelative (1 bit):** A bit that specifies whether the item is referred to by relative position rather than absolute position. If **fPhysical** is 0, **fRelative** MUST be 0, and MUST be ignored. If **fPhysical** is 1, **fRelative** MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | Absolute position.   |
| 1     | Position relative to the calculated item referring to this item. |

**reserved (6 bits):** This value MUST be zero, and MUST be ignored.

**ifield (4 bytes):** An unsigned integer that is a cache field (section [2.2.5.2.2](#)) index. This index specifies a cache field which contains the cache item associated with the pivot item specified by **iitem**.

**iitem (4 bytes):** A signed integer that specifies a pivot item of the **PivotTable** view (section [2.2.5.3](#)) associated with this record as specified in section [2.2.5.3.1](#). This pivot item is used in a calculated item formula (section [2.2.2](#)). If more than one **PivotTable** view is associated with this record, **iitem** specifies a pivot item for each such **PivotTable** view.

If the value of **fPhysical** is 0, **iitem** is a cache item index, and specifies the pivot item associated with that cache item.

Otherwise if the value of **fRelative** is 0 or if no pivot item in the visible item collection has a pivot item index smaller than the pivot item index of the current pivot item, **iitem** is a visible item index. Otherwise, the pivot item specified by **iitem** is the pivot item whose visible item index equals the value of **iitem** + 1 + the largest visible item index whose associated pivot item has a pivot item index smaller than the pivot item index of the current pivot item. If this value is less than 0 or greater than or equal to the number of elements in the visible item collection, no pivot item is specified.

The current pivot item is the pivot item in the current pivot field (section [2.2.5.3.2](#)) that corresponds to the calculated item that contains this record.

The current pivot field is the pivot field of the **PivotTable** view associated with the cache field specified by **ifield**.

The visible item collection is the ordered collection of all pivot items (section [2.2.5.3.3](#)) specified by the sequence of records that conforms to the **SXVIS** rule (defined in section [2.1.7.40](#)) associated with the current pivot field that satisfy the following criteria:

- The value of the **fHidden** field of the **BrtBeginSXVI** (section [2.4.263](#)) record associated with the pivot item is 0.
- The value of the **fMissing** field of the **BrtBeginSXVI** record associated with the pivot item is 0 or the value of the **fShowAllItems** field of the **BrtBeginSXVD** record associated with the current pivot field is 1.
- The value of the **itmtype** field of the **BrtBeginSXVI** record associated with the pivot item is **PITDATA** (defined in section [2.5.104](#)).

A visible item index is specified to be the zero-based index of a pivot item in the visible item collection.

### 2.4.171 BrtBeginPNPairs

The **BrtBeginPNPairs** record specifies the beginning of a collection of **BrtBeginPNPair** (section [2.4.170](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a reference to a pivot item (section [2.2.5.3.3](#)), which is used in a calculated item (section [2.2.5.2.6](#)) formula (section [2.2.2](#)).

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cpairs |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cpairs (4 bytes):** This value MUST be 1, and MUST be ignored.

### 2.4.172 BrtBeginPRFilter

The **BrtBeginPRFilter** record specifies information about the set of pivot items (section [2.2.5.3.3](#)), data items (section [2.2.5.3.7.5.1](#)), or cache items (section [2.2.5.2.3](#)) associated with a pivot field (section [2.2.5.3.2](#)), the data field (section [2.2.5.3.7.5.2](#)), or a cache field (section [2.2.5.2.2](#)) that specifies a filter for a **PivotTable** rule (section [2.2.5.3.9](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the set of pivot items, data items, or cache items (section [2.2.5.2.3](#)) included in the filter. When this record is in a **Worksheet** part or in a **PivotCache Definition** part, see **BrtBeginPRRule** (section [2.4.178](#)) for details of how the **PivotTable** view (section [2.2.5.3](#)) for a **PivotTable** rule containing this filter is specified. More information about this record's function is available in the **PivotTable** rule section.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| PRFilter |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |



|     |
|-----|
| ... |
| ... |

**PRFilter (11 bytes):** A **PRFILTER** (section [2.1.8](#)) that specifies information about the set of pivot items, data items, or cache items associated with a pivot field, the data field, or a cache field that specifies a filter for a **PivotTable** rule.

#### 2.4.173 BrtBeginPRFilter14

The **BrtBeginPRFilter14** record specifies information about the set of pivot items (section [2.2.5.3.3](#)), data items (section [2.2.5.3.7.5.1](#)) associated with a pivot field, or a data field that specifies a filter for a **PivotTable** rule (section [2.2.5.3.9](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the set of pivot items, or data items included in the filter. More information about this record's function is available in the **PivotTable** rule section.

|            |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| PRFilter   |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...        |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...        |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**PRFilter (11 bytes):** A **PRFILTER** (section [2.1.8](#)) that specifies information about the set of pivot items, or data items (section [2.2.5.3.7.5.1](#)) associated with a pivot field, or a data field that specifies a filter for a **PivotTable** rule (section [2.2.5.3.9](#)).

#### 2.4.174 BrtBeginPRFilters

The **BrtBeginPRFilters** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the selected pivot fields (section [2.2.5](#)) and the selected pivot items (section [2.2.5.3.3](#)) within those pivot fields.

|          |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|----------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| cfilters |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**cfilters (4 bytes):** An unsigned integer that specifies the number **BrtBeginPRFilter** records in this collection.

### 2.4.175 BrtBeginPRFilters14

The **BrtBeginPRFilters14** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the selected pivot fields (section [2.2.5](#)) and the selected pivot items (section [2.2.5.3.3](#)) within those pivot fields.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cfilters   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**cfilters (4 bytes):** An unsigned integer that specifies the number **BrtBeginPRFilter14** (section [2.4.173](#)) records in this collection.

### 2.4.176 BrtBeginPRFItem

The **BrtBeginPRFItem** record specifies a zero-based index to a pivot item (section [2.2.5.3.3](#)) or a cache item (section [2.2.5.2.3](#)) for a **PivotTable** rule (section [2.2.5.3.9](#)), and specifies the beginning of an empty collection of records as defined by the **Common Productions** part ABNF (section [2.1.8](#)).

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iitem |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iitem (4 bytes):** An unsigned integer that specifies a data item (section [2.2.5.3.7.5.1](#)), pivot item, or cache item. For the **BrtBeginPRFilter** record (section [2.4.172](#)) in the sequence of records that conforms to the **PRFILTER** rule (section [2.1.8](#)) and containing this record, the following rules define what this value specifies:

- If the **PRFilter.isxvd** field in the **BrtBeginPRFilter** specifies the data field (section [2.2.5.3.7.5.2](#)), then **iitem** is a data item index.
- If the **PRFilter.isxvd** field in the **BrtBeginPRFilter** specifies a pivot field, then **iitem** is a pivot item index.
- If the **PRFilter.isxvd** field in the **BrtBeginPRFilter** specifies a cache field (section [2.2.5.2.2](#)), then **iitem** is a cache item index.

### 2.4.177 BrtBeginPRFItem14

The **BrtBeginPRFItem14** record specifies a zero-based index to a pivot item (section [2.2.5.3.3](#)) or data item (section [2.2.5.3.7.5.1](#)) for a **PivotTable** rule (section [2.2.5.3.9](#)), and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| iitem     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**iitem (4 bytes):** An unsigned integer that specifies a data item or pivot item. For the **BrtBeginPRFilter14** record (section [2.4.173](#)) record in the sequence of records that conforms to the **PRFILTER14** rule (defined in section [2.1.7.40](#)) and containing this record, the following rules define what this value specifies:

- If the **PRFilter.isxvd** field in the preceding **BrtBeginPRFilter14** specifies the data field (section [2.2.5.3.7.5.2](#)), then **iitem** is a data item index.
- If the **PRFilter.isxvd** field in the preceding **BrtBeginPRFilter14** specifies a pivot field (section [2.2.5.3.2](#)), then **iitem** is a pivot item index.

#### 2.4.178 BrtBeginPRule

The **BrtBeginPRule** record specifies the details for a **PivotTable** rule (section [2.2.5.3.9](#)) for a **PivotTable** view (section [2.2.5.3](#)) or **PivotCache** (section [2.2.5.2](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a **PivotTable** rule. When this record is in a **Worksheet** part, the **PivotTable** view for this **PivotTable** rule is specified by the **BrtBeginSxSelect** (section [2.4.249](#)) record that immediately precedes this record. When this record is in a **PivotCache Definition** part, it specifies a **PivotTable** rule used for a calculated item (section [2.2.5.2.6](#)) calculation and the **PivotTable** views associated with this record are specified in section [2.2.5.3.1](#).

|                            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| pruleheaderdata (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**pruleheaderdata (variable):** A **PRuleHeaderData** (section [2.5.110](#)) that specifies information about this **PivotTable** rule.

#### 2.4.179 BrtBeginPRule14

The **BrtBeginPRule14** record specifies the details for a **PivotTable** rule (section [2.2.5.3.9](#)) for a **PivotTable** view (section [2.2.5.3](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a **PivotTable** rule.

|                            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| pruleheaderdata (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**pruleheaderdata (variable):** A **PRuleHeaderData** (section [2.5.110](#)) that specifies information about this **PivotTable** rule.

### 2.4.180 BrtBeginQSI

The **BrtBeginQSI** record specifies properties of a query table and specifies the beginning of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies a query table.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                     |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|---------------------|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                  | 17 | 18 | 19 | 20     | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A           | B | C | D | E | F | G | H | I | J | K  | L  | M  | N  | O  | P  | Q                   | R  | S  | T  | unused |    |    |    |    |    |    |    |    |    |    |    |
| itblAutoFmt |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | dwConnID            |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |
| ...         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | irstName (variable) |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |
| ...         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                     |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |

**A - fTitles (1 bit):** A bit that specifies whether the first row (2) of the query table contains column (2) titles.

**B - fRowNums (1 bit):** A bit that specifies whether the first column (2) of the query table displays row (2) numbers.

**C - fDisableRefresh (1 bit):** A bit that specifies whether the query table can be refreshed. The possible values for this field are listed in the following table.

| Value | Meaning                              |
|-------|--------------------------------------|
| 0x0   | The query table can be refreshed.    |
| 0x1   | The query table cannot be refreshed. |

**D - fAsync (1 bit):** A bit that specifies whether the query table refreshes data asynchronously. This value MUST be set to 1 if **fNewAsync** field is set to 1.

**E - fNewAsync (1 bit):** A bit that specifies whether data has been refreshed for this query table. This value MUST be set to 0 if **fAsync** field is set to 0. The possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The first background data refresh was finished at the time the file was saved.     |
| 1     | The first background data refresh was not finished at the time the file was saved. |

**F - fAutoRefresh (1 bit):** A bit that specifies whether the query table refreshes its data automatically when the document is opened.

**G - fShrink (1 bit):** A bit that specifies the behavior when dealing with a variable number of rows (2) of data in the query table between refresh operations. If **fOverwrite** is 1, this value MUST be 0. This value MUST be a value from the following table.

| Value | Meaning                         |
|-------|---------------------------------|
| 0     | Unused cells are to be cleared. |
| 1     | Unused cells are to be deleted. |

**H - fOverwrite (1 bit):** A bit that specifies the behavior when dealing with a variable number of rows (2) of data in the query table between refresh operations. If **fShrink** is 1, this value MUST be 0. This value MUST be a value from the following table.

| Value | Meaning                                |
|-------|--|
| 0     | Insert new cells for new data.         |
| 1     | Overwrite existing cells for new data. |

**I - fFill (1 bit):** A bit that specifies whether formula (section [2.2.2](#)) in columns (2) adjacent to the query table are filled down whenever the query table is refreshed.

**J - fSaveData (1 bit):** A bit that specifies whether the query table preserves all of its data in the sheet when the document is saved. This value MUST be a value from the following table.

| Value | Meaning                                    |
|-------|--|
| 0     | Data in the query table will not be saved. |
| 1     | Data in the query table will be saved.     |

**K - fDisableEdit (1 bit):** A bit that specifies whether the cell content in the query table is editable. The possible values for this field are listed in the following table.

| Value | Meaning              |
|-------|----------------------|
| 0     | Content is editable. |
| 1     | Content is locked.   |

- L - fPreserveFmt (1 bit):** A bit that specifies whether the application will preserve formatting in the query table and copy this formatting to new rows (2) of data added to the query table.
- M - fAutoFit (1 bit):** A bit that specifies whether column (2) widths are automatically adjusted on refresh to fit the data retrieved.
- N - fDummyList (1 bit):** A bit that specifies whether this query table has not been fully formed and populated with data.
- O - ibitAtrNum (1 bit):** A bit that specifies whether numeric cell data is formatted according to the **style** specified in **itblAutoFmt** field.
- P - ibitAtrFmt (1 bit):** A bit that specifies whether cell text is formatted according to the style specified in **itblAutoFmt** field.
- Q - ibitAtrAlc (1 bit):** A bit that specifies whether cell text alignment is set according to the style specified in **itblAutoFmt** field.
- R - ibitAtrBdr (1 bit):** A bit that specifies whether border is set according to the style specified in **itblAutoFmt** field.
- S - ibitAtrPat (1 bit):** A bit that specifies whether the cell background is formatted according to the style specified in **itblAutoFmt** field.
- T - ibitAtrProt (1 bit):** A bit that specifies whether the cell is **protected** according to the style specified in **itblAutoFmt** field.

**unused (12 bits):** This value is undefined and MUST be ignored.

**itblAutoFmt (2 bytes):** An **AutoFormatID** (section [2.5.3](#)) that specifies the AutoFormat to be applied to the query table. This value MUST be less than or equal to 0x0014.

**dwConnID (4 bytes):** An unsigned integer that specifies the identifier number of the external connection (section [2.2.8](#)) to use to refresh data in the query table. This value MUST be greater than 0 and MUST be equal to **dwConnID** in one of the **BrBeginExtConnection** (section [2.4.76](#)) records in the **External Data Connections** (section [2.1.7.24](#)) part.

**irstName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the unique name of this query table. Within this **workbook** (section [2.1.7.60](#)), there MUST be a defined name as specified by a **BrName** (section [2.4.680](#)) record with its **fHidden** field equal to 1 and its **name** field matching this field's value and its **formula.rgce** field only containing a PtgArea3d (section [2.5.97.19](#)) referencing the range of cells for the query table fields. Spaces within **irstName** are converted to underscores for the purposes of this comparison.

### 2.4.181 BrtBeginQSIF

The **BrtBeginQSIF** record specifies properties of a single field of a query table and specifies the beginning of an empty collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF.

|   |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|----------|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5        | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | C | D | E | reserved |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                     |
|---------------------|
| idField             |
| idlstf              |
| irstName (variable) |
| ...                 |

**A - fUserIns (1 bit):** A bit that specifies whether this field is a user-defined field or comes from the external connection (section [2.2.8](#)). User-defined fields are preserved during data refresh operations.

**B - fFillDown (1 bit):** A bit that specifies whether the formula (section [2.2.2](#)) in this field is filled down on data refresh. A value of 1 specifies that formulas is filled down. If this value is 1, **fUserIns** MUST be equal to 1.

**C - fRowNums (1 bit):** A bit that specifies whether this field contains row (2) numbers for the records returned. A value of 1 indicates that the field will contain row (2) numbers. If this value is 1, **fUserIns** MUST be equal to 0.

**D - fClipped (1 bit):** A bit that specifies whether this field is currently clipped and is not visible in the sheet. A value of 1 specifies that this field is clipped. If this value is equal to 1, **fUserIns** MUST be equal to 0.

**E - fFirstName (1 bit):** A bit that specifies whether this record contains **irstName**.

**reserved (27 bits):** This value MUST be zero and MUST be ignored.

**idField (4 bytes):** A **QsiFieldId** (section [2.5.111](#)) that specifies the unique identifier of this query table field. This value MUST be unique within this query table.

**idlstf (4 bytes):** An unsigned integer that specifies the identifier of the table field if this query table field is attached to a table object rather than a range in the sheet. This value MUST be equal to 0 if the query table field is not attached to a table field; otherwise this value MUST be equal to the **idField** field on a **BrBeginListCol** (section [2.4.97](#)) record within the table associated with this query table and this record's **idField** field MUST be equal to the **idqsif** of that **BrBeginListCol** record.

**irstName (variable):** An **XLWideString** (section [2.5.168](#)) specifying the name of this query table field. If **fFirstName** is equal to 0, **irstName** MUST NOT be present. If **fFirstName** is equal to 1, **irstName** MUST be present. This string MUST be less than or equal to 255 characters in length.

## 2.4.182 BrtBeginQSIFs

This record specifies the number of columns (2) in this query table and specifies the beginning of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies the query table fields in this query table.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| nCols |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**nCols (4 bytes):** A **DCol** (section [2.5.31](#)) that specifies the number of columns (2) contained in this query table. This value MUST be equal to the number of **BrtBeginQSIF** (section [2.4.181](#)) records in this collection.

## 2.4.183 BrtBeginQSIR

The **BrtBeginQSIR** record specifies properties of query table data refresh operations and specifies the beginning of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies information about the query table data refresh.

|                |   |   |   |   |                        |   |   |   |   |          |   |   |   |   |               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------|---|---|---|---|------------------------|---|---|---|---|----------|---|---|---|---|---------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|                |   |   |   |   |                        |   |   |   |   | 1        |   |   |   |   | 2             |   |   |   |   |   |   |   |   |   | 3 |   |   |   |   |   |   |
| 0              | 1 | 2 | 3 | 4 | 5                      | 6 | 7 | 8 | 9 | 0        | 1 | 2 | 3 | 4 | 5             | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| A              | B | C | D | E | wVerBeforeRefreshAlert |   |   |   |   | reserved |   |   |   |   | idFieldNext   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...            |   |   |   |   |                        |   |   |   |   |          |   |   |   |   | ccolExtraLeft |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ccolExtraRight |   |   |   |   |                        |   |   |   |   |          |   |   |   |   |               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**A - fPersist (1 bit):** A bit that specifies whether the layout will be preserved for this query table across data refresh operations.

**B - fPersistSort (1 bit):** A bit that specifies whether sorting will be preserved for this query table across data refresh operations. This value MUST be equal to **fPersist**.

**C - fPersistAutoFilter (1 bit):** A bit that specifies whether AutoFilters will be preserved for this query table across data refresh operations. This value MUST be equal to **fPersist**.

**D - fIdWrapped (1 bit):** A bit that specifies whether the **idFieldNext** value cannot be unique amongst **PivotTable** (section [2.1.7.40](#)) field identifiers for this query table. A value of 1 specifies that **PivotTable** field identifiers need to be checked for uniqueness before assignment to avoid duplicates.

**E - fTitlesOld (1 bit):** A bit that specifies whether the query table had a **header row (1)** the last time it was refreshed.

**wVerBeforeRefreshAlert (5 bits):** An unsigned integer that specifies the minimum version of the application that is expected to correctly refresh the data in the query table. If the application version is smaller than this number, the user will be alerted before any refresh operation is performed.

**reserved (6 bits):** This value MUST be zero and MUST be ignored.

**idFieldNext (4 bytes):** An unsigned integer that specifies the next unique query table field identifier available for use in this query table. This value MUST be less than or equal to 65,535.

**ccolExtraLeft (2 bytes):** A **DColShort** (section [2.5.32](#)) that specifies the number of columns (2) included at the beginning of the query table that are not bound to external data. This number MUST be less than 16,384.



**ccolExtraRight (2 bytes):** A **DColShort** that specifies the number of columns (2) included at the end of the query table that are not bound to external data. This number **MUST** be less than 16,384.

#### 2.4.184 BrtBeginRRSort

The **BrtBeginRRSort** record specifies sort map (section [2.2.12.10](#)) properties and specifies the beginning of a collection of records as defined by the **Sort Map** (section [2.1.7.49](#)) part ABNF. The collection of **BrtRRSortItem** (section [2.4.734](#)) records specifies the sort map properties of the specified cell range. For a given sort map, there **MUST** be at most two of these records. If there are two records, one **MUST** have the **fCol** bit set, and the other **MUST NOT** have the **fCol** bit set.

|                |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|----------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| rfx (16 bytes) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...            |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| fCol           |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| cItems         |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**rfx (16 bytes):** An **UncheckedRFX** (section [2.5.153](#)) that specifies the row (2) and column (2) bounds of the sort map.

**fCol (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether this sort map refers to a column (2) or row (2) sort map. This value **MUST** be 0 or 1. If the value is 0, then this record specifies a row (2) sort map; otherwise this record specifies a column (2) sort map.

**cItems (4 bytes):** An unsigned integer that specifies the number of **BrtRRSortItem** (section [2.4.734](#)) records. This value **MUST** be equal to the number of **BrtRRSortItem** records between this record and the next **BrtEndRRSort** (section [2.4.519](#)) record. This value **MUST** be greater than 0 and **MUST** be less than or equal to 0x0FFFFFFF.

#### 2.4.185 BrtBeginRwBrk

The **BrtBeginRwBrk** record specifies horizontal page break (2) properties and specifies the beginning of a collection of **BrtBrk** (section [2.4.300](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtBrk** records specifies horizontal page breaks (2).

|            |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| ibrkMac    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ibrkManMac |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**ibrkMac (4 bytes):** An unsigned integer that specifies the number of horizontal page breaks (2) in the workbook. This value **MUST** be less than or equal to 1,023.

**ibrkManMac (4 bytes):** An unsigned integer that specifies the number of manual horizontal page breaks (2) that occur at locations specified by the user. This value MUST be equal to **ibrkMac**.

#### 2.4.186 BrtBeginScenMan

The **BrtBeginScenMan** record specifies the properties of a **Scenario Manager** and specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the Scenario Manager for the sheet.

|                        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
|------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6         | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
| isctCur                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | isctShown |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| sqrfxResult (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

**isctCur (2 bytes):** An unsigned integer that specifies a zero-based index to a **BrtBeginSct** (section [2.4.187](#)) record in the collection of **BrtBeginSct** records directly following this record. The referenced **BrtBeginSct** specifies the current **scenario** selected. If this value is 0xFFFF, this indicates that no scenario is currently selected; otherwise, this value MUST be less than the total number of **BrtBeginSct** records in this collection.

**isctShown (2 bytes):** An unsigned integer that specifies a zero-based index to a **BrtBeginSct** record in the collection of **BrtBeginSct** records directly following this record. The referenced **BrtBeginSct** specifies the last shown scenario. If this value is 0xFFFF, this indicates that no scenario has been shown; otherwise this value MUST be less than the total number of **BrtBeginSct** records in this collection.

**sqrfxResult (variable):** An **UncheckedSqRfx** (section [2.5.155](#)) that specifies the cell or cells which are results for the scenarios. If no result cells have been indicated then **sqrfxResult.crfx** MUST be set to 0xFFFFFFFF; otherwise **sqrfxResult.crfx** MUST be less than or equal to 0x00000020 (32) and the range defined by **sqrfxResult** MUST NOT contain more than 32 cells.

#### 2.4.187 BrtBeginSct

The **BrtBeginSct** record specifies properties of a scenario and specifies the beginning of a collection of **BrtSlc** (section [2.4.743](#)) records as specified in the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrtSlc** records specifies the cells that are included in the scenario.

|      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6               | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cref |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | fLocked         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | fHidden         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | Name (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|                     |
|---------------------|
| ...                 |
| Comment (variable)  |
| ...                 |
| UserName (variable) |
| ...                 |

**cref (2 bytes):** An unsigned integer that specifies the count of **BrtSic** records in the collection. This number **MUST** be greater than or equal to 1, **MUST** be equal to the count of cells in the scenario, and **MUST** be less than or equal to 32.

**fLocked (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies if the scenario is locked for editing when the sheet is protected. **MUST** be a value from the following table.

| Value      | Meaning                     |
|------------|-----------------------------|
| 0x00000000 | The scenario is not locked. |
| 0x00000001 | The scenario is locked.     |

If the sheet is protected and the **fScenarios** field in the **BrtSheetProtectionIso** (section [2.4.741](#)) or **BrtSheetProtection** (section [2.4.740](#)) record for this sheet is set to 1, then this setting is ignored.

**fHidden (4 bytes):** A **Boolean** that specifies if the scenario is hidden when the sheet is protected and the **fScenarios** field in the **BrtFileSharingIso** (section [2.4.642](#)) or **BrtSheetProtection** record for this sheet is set to 0. This value **MUST** be a value from the following table.

| Value      | Meaning                     |
|------------|-----------------------------|
| 0x00000000 | The scenario is not hidden. |
| 0x00000001 | The scenario is hidden.     |

If the scenario is marked as hidden but the **fScenarios** field in the **BrtSheetProtectionIso** (section [2.4.741](#)) or **BrtSheetProtection** record for this sheet is set to 1, then this setting is ignored.

**Name (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the scenario. This value **MUST** be unique across all **BrtBeginSct** in the **Worksheet** part, and **MUST** contain less than 256 characters.

**Comment (variable):** An **XLWideString** that specifies the comment for this scenario. This value **MUST** contain less than 256 characters. [<18>](#)

**UserName (variable):** An **XLWideString** that specifies the name of the user who last modified this scenario. This value **MUST** contain more than 1 character and less than 55 characters.

### 2.4.188 BrtBeginSheet

The **BrtBeginSheet** record specifies the beginning of a collection of records as defined by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF, **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, **Macro Sheet** part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies properties of the sheet.

### 2.4.189 BrtBeginSheetData

The **BrtBeginSheetData** record specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies the cell table (section [2.2.1](#)) data for a sheet.

### 2.4.190 BrtBeginSingleCells

The **BrtBeginSingleCells** record specifies the beginning of a collection of records as defined by the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies XML maps to single cells.

### 2.4.191 BrtBeginSlicer

The **BrtBeginSlicer** record specifies a slicer view (section [2.2.14.2](#)) in this worksheet and specifies the beginning of an empty collection of records as defined by the **Slicers** (section [2.2.14](#)) part ABNF.

|                              |   |   |   |                   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------------------|---|---|---|-------------------|---|---|---|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                            | 1 | 2 | 3 | 4                 | 5 | 6 | 7 | 8                 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| A                            | B | C | D | unused            |   |   |   | dwStartSlicerItem |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                          |   |   |   | dwColumnCount     |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                          |   |   |   | dwLevel           |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                          |   |   |   | dxRowHeight       |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                          |   |   |   | stName (variable) |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                          |   |   |   |                   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stSlicerCacheName (variable) |   |   |   |                   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                          |   |   |   |                   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stCaption (variable)         |   |   |   |                   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                          |   |   |   |                   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stStyle (variable)           |   |   |   |                   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

...

**A - fCaptionVisible (1 bit):** A bit that specifies if the caption is displayed.

**B - fHasCaption (1 bit):** A bit that specifies whether the **stCaption** field exists.

**C - fHasStyle (1 bit):** A bit that specifies whether the **stStyle** field exists.

**D - fLockedPosition (1 bit):** A bit that specifies if the slicer view is locked.

**unused (4 bits):** This value is undefined, and MUST be ignored.

**dwStartSlicerItem (4 bytes):** An unsigned integer that specifies the zero-based index of the first slicer item (section [2.2.14.1.4.1](#)) displayed by the slicer view.

**dwColumnCount (4 bytes):** An unsigned integer that specifies the number of columns (2) in the slicer view. This value MUST be greater than or equal to 1 and less than or equal to 20,000.

**dwLevel (4 bytes):** An unsigned integer that specifies the OLAP level of the OLAP hierarchy of the slicer source data (section [2.2.14.1.1](#)) used by the slicer view.

If the slicer source data is OLAP, then the value MUST be greater than or equal to 0 and MUST be less than **cLevel** of the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record specified by the **BrtBeginSlicerCacheDef** record specified by **stSlicerCacheName**. If the OLAP hierarchy has the **OLAP All level**, then the value MUST be other than 0.

This value MUST be 0 if the slicer source data is non-OLAP.

**dxRowHeight (4 bytes):** An unsigned integer that specifies the row (2) height of the slicer view in **EMUs**.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the slicer view. This value MUST be a unique case insensitive name within scope of the workbook. The length of this value MUST be greater than or equal to 1 character and less than or equal to 32,767 characters.

**stSlicerCacheName (variable):** An **XLWideString** that specifies the name of the slicer cache (section [2.2.14.1](#)). There MUST be a **BrtBeginSlicerCacheDef** (section [2.4.193](#)) record within this workbook with the **stName** field equal to the value of this field.

**stCaption (variable):** An **XLWideString** that specifies the caption of the slicer view. This value MUST exist if and only if **fHasCaption** is equal to 1. If this string exists, the length MUST be greater than or equal to 1 character.

**stStyle (variable):** An **XLWideString** that specifies the slicer style (section [2.2.6.3.1](#)) of the slicer view. This value MUST exist if and only if **fHasStyle** is equal to 1. If this field exists, this string MUST match the **stName** of a **BrtBeginSlicerStyle** (section [2.4.208](#)) record within the workbook, or MUST be equal to one of the built-in slicer style names listed in the following table.

| Built-In Slicer Style Names |
|-----------------------------|
| SlicerStyleLight1           |
| SlicerStyleLight2           |

| Built-In Slicer Style Names |
|-----------------------------|
| SlicerStyleLight3           |
| SlicerStyleLight4           |
| SlicerStyleLight5           |
| SlicerStyleLight6           |
| SlicerStyleOther1           |
| SlicerStyleOther2           |
| SlicerStyleDark1            |
| SlicerStyleDark2            |
| SlicerStyleDark3            |
| SlicerStyleDark4            |
| SlicerStyleDark5            |
| SlicerStyleDark6            |

#### 2.4.192 BrtBeginSlicerCache

The **BrtBeginSlicerCache** record specifies the beginning of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies a slicer cache (section [2.2.14.1](#)).

#### 2.4.193 BrtBeginSlicerCacheDef

The **BrtBeginSlicerCacheDef** record specifies properties of a slicer cache (section [2.2.14.1](#)) and specifies the beginning of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies a slicer cache.

| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| stName (variable)      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stHierarchy (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stName (variable):** An **XLNameWideString** (section [2.5.165](#)) that specifies the name of the slicer cache. This value **MUST** be a unique case insensitive name within the scope of defined names. The length of this value **MUST** be greater than or equal to 1 character and less than or equal to 255 characters.

**stHierarchy (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the cache field (section [2.2.5.2.2](#)) or MDX unique name used by the slicer cache.

If the slicer source data (section [2.2.14.1.1](#)) is non-OLAP, then the value of this field MUST be equal to the value of the **stFldName** field in one of the **BrtBeginPCDField** (section [2.4.130](#)) records within the associated **PivotCache** (section [2.2.5.2](#)), as specified in section [2.2.14.1.2](#), and specifies a cache field. Field **fServerBased** in **BrtBeginPCDField** MUST be 0. The **fFilterInclusive** fields of the **BrtBeginSXVD** records (section [2.4.261](#)) of all included pivot fields (section [2.2.5](#)) MUST be equal.

If the [slicer source data](#) is OLAP, then the value MUST be equal to the value of the **stUnique** field in one of the **BrtBeginPCDHierarchy** (section [2.4.140](#)) records within the associated OLAP **PivotCache**, as specified in section [2.2.5.3.1](#), and specifies an MDX unique name. The **fFilterInclusive** field of the associated **BrtBeginSXTH** (section [2.4.252](#)), as specified in section [2.2.5.3.4](#), MUST be 1. The following fields of the **BrtBeginPCDHierarchy** record MUST be 0: **fMeasure**, **fSet**, and **fMeasureHierarchy**.

### 2.4.194 BrtBeginSlicerCacheID

The **BrtBeginSlicerCacheID** record specifies a reference to a slicer cache (section [2.2.14.1](#)) in this workbook and specifies the beginning of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF.

|                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |  |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table.

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 0     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 1     |

The **FRTHHeader.RelID** specifies a relationship (section [2.1.3](#)) that specifies a slicer cache part in this workbook.

### 2.4.195 BrtBeginSlicerCacheIDs

The **BrtBeginSlicerCacheIDs** record specifies the beginning of a collection of slicer cache identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the slicer cache identifiers for the workbook.

## 2.4.196 BrtBeginSlicerCacheLevelData

The **BrtBeginSlicerCacheLevelData** record specifies properties of an OLAP level in the OLAP hierarchy specified by this slicer cache (section [2.2.14.1](#)), and specifies the beginning of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies OLAP members that are cached for this OLAP level within the OLAP hierarchy specified by this slicer cache.

|                            |   |   |   |   |   |   |   |   |                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|----------------------------|---|---|---|---|---|---|---|---|-------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0                          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9                       | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |
| citem                      |   |   |   |   |   |   |   |   |                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| A                          |   |   | B |   |   | C |   |   | stUniqueName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| ...                        |   |   |   |   |   |   |   |   |                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| stSourceCaption (variable) |   |   |   |   |   |   |   |   |                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| ...                        |   |   |   |   |   |   |   |   |                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

**citem (4 bytes):** An unsigned integer that specifies the total number of OLAP members in the OLAP slicer source data (section [2.2.14.1.1](#)) in this OLAP level within the OLAP hierarchy specified by this slicer cache.

**A - fSortOrder (2 bits):** An unsigned integer that specifies how the OLAP members in this OLAP level are sorted in the slicer view (section [2.2.14.2](#)). This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | The OLAP members are sorted in original order as determined by the OLAP slicer source data. |
| 0x1   | The OLAP members are sorted in ascending alphabetical order.                                |
| 0x2   | The OLAP members are sorted in descending alphabetical order.                               |

**B - fCrossFilter (2 bits):** An unsigned integer that specifies how the OLAP members in this OLAP level that are used in slicer cross filtering (section [2.2.14.1.5](#)) are displayed. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x0   | The table style element (section <a href="#">2.2.6.2.2</a> ) of the slicer style (section <a href="#">2.2.6.3.1</a> ) for OLAP members with no data is not applied to OLAP members with no data, and OLAP members with no data are not sorted separately in the list of OLAP members in the slicer view. |
| 0x1   | The table style element of the slicer style for OLAP members with no data is applied to OLAP members with no data, and OLAP members with no data are sorted at the bottom in the list of OLAP members in the slicer view.  |
| 0x2   | The table style element of the slicer style for OLAP members with no data is applied to OLAP members with no data, and OLAP members with no data are not sorted separately in  |



| Value | Meaning                                      |
|-------|--|
|       | the list of OLAP members in the slicer view. |

**C - reserved (4 bits):** This value MUST be zero, and MUST be ignored.

**stUniqueName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of this OLAP level within the OLAP hierarchy specified by this slicer cache. The length of this string MUST be at least 1 character and MUST NOT exceed 32,767 characters.

**stSourceCaption (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the caption of the OLAP level specified by this element within the OLAP hierarchy specified by this slicer cache. The length of this string MUST NOT exceed 65,535 characters.

#### 2.4.197 BrtBeginSlicerCacheLevelsData

The **BrtBeginSlicerCacheLevelsData** record specifies the beginning of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies OLAP levels of the OLAP hierarchy specified by this slicer cache (section [2.2.14.1](#)).

|        |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
|--------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|--|--|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |  |  |
| levels |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |

**levels (4 bytes):** An unsigned integer that specifies the number of OLAP levels of the OLAP hierarchy specified by this slicer cache. This value MUST match the number of **BrtBeginSlicerCacheLevelData** (section [2.4.196](#)) records in this collection.

#### 2.4.198 BrtBeginSlicerCacheNative

The **BrtBeginSlicerCacheNative** record specifies the beginning of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies non-OLAP slicer items (section [2.2.14.1.4.1](#)) that are cached within this slicer cache (section [2.2.14.1](#)).

|           |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |  |
|-----------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|--|--|--|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |  |  |  |
| reserved1 |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |  |
| dwcacheId |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |  |
| A         | B | C | D | E |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |  |

**reserved1 (4 bytes):** MUST be 0, and MUST be ignored.

**dwcacheId (4 bytes):** An integer that that specifies the associated non-OLAP **PivotCache** (section [2.2.5.2](#)). MUST match the **icacheId** field of the **BrtBeginPCD14** (section [2.4.117](#)) record of an existing **PivotCache**.

**A - fSortOrder (2 bits):** An unsigned integer that specifies how the non-OLAP slicer items are sorted in the slicer view (section [2.2.14.2](#)). This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x1   | The non-OLAP slicer items are sorted in ascending order.  |
| 0x2   | The non-OLAP slicer items are sorted in descending order. |

**B - fCrossFilter (2 bits):** An unsigned integer that specifies how the non-OLAP slicer items that are used in slicer cross filtering (section [2.2.14.1.5](#)) are displayed. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x0   | The table style element (section <a href="#">2.2.6.2.2</a> ) of the slicer style (section <a href="#">2.2.6.3.1</a> ) for non-OLAP slicer items without data is not applied to non-OLAP slicer items without data, and non-OLAP slicer items without data are not sorted separately in the list of non-OLAP slicer items in the slicer view. |
| 0x1   | The table style element of the slicer style for non-OLAP slicer items without data is applied to non-OLAP slicer items without data, and non-OLAP slicer items without data are sorted at the bottom in the list of non-OLAP slicer items in the slicer view.  |
| 0x2   | The table style element of the slicer style for non-OLAP slicer items without data is applied to non-OLAP slicer items without data, and non-OLAP slicer items without data are not sorted separately in the list of non-OLAP slicer items in the slicer view.   |

**C - fSortUsingCustomLists (1 bit):** A bit that specifies whether **custom lists** are used when sorting the non-OLAP slicer items.

**D - fShowAllItems (1 bit):** A bit that specifies whether unused non-OLAP cache items (section [2.2.5.2.3](#)) in the associated **PivotCache** (section [2.2.5.2](#)) are displayed. See Cache Items for more details on unused cache items.

**E - reserved2 (2 bits):** This value MUST be zero, and MUST be ignored.

#### 2.4.199 BrtBeginSlicerCacheOlapImpl

The **BrtBeginSlicerCacheOlapImpl** record specifies the beginning of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies the associated OLAP **PivotCache**. See section [2.2.14.1.2](#) for more details.

|               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| ipivotcacheid |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**ipivotcacheid (4 bytes):** An unsigned integer that specifies the associated OLAP **PivotCache**. This value MUST match the **icacheId** field of [BrtBeginPCD14](#) (section [2.4.117](#)) record of existing **PivotCache**.

## 2.4.200 BrtBeginSlicerCacheSelections

The **BrtBeginSlicerCacheSelections** record specifies the beginning of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies the OLAP members from the slicer cache (section [2.2.14.1](#)) that are selected.

|              |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cUniqueNames |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cUniqueNames (4 bytes):** An unsigned integer that specifies how many OLAP members are selected on the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. This value MUST be equal to the number of **BrtSlicerCacheSelection** (section [2.4.749](#)) **BrtSlicerCacheSelection** records in this collection.

## 2.4.201 BrtBeginSlicerCacheSiRange

The **BrtBeginSlicerCacheSiRange** record specifies the beginning of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies OLAP slicer items (section [2.2.14.1.4.1](#)) for the OLAP level specified by the **BrtBeginSlicerCacheLevelData** (section [2.4.196](#)) record that precedes this record that are part of this range.

|            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| iitemstart |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| crange     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**iitemstart (4 bytes):** An unsigned integer that specifies the zero-based index of an OLAP member on this OLAP level for the first OLAP slicer item in this range. See (section [2.2.14.1.4.1](#)) for more information. The order of OLAP members is determined by the current sort order (1) and current slicer cross filtering (section [2.2.14.1.5](#)) setting applied to all OLAP members on this OLAP level. The value of the starting position MUST be 0 or MUST be a multiple of 1000.

**crange (4 bytes):** An unsigned integer that specifies the number of OLAP slicer items that are specified by the **BrtSlicerCacheOlapItem** (section [2.4.747](#)) records in this collection. The number of OLAP slicer items MUST be equal to the number of **BrtSlicerCacheOlapItem** records in this collection.

## 2.4.202 BrtBeginSlicerCacheSiRanges

The **BrtBeginSlicerCacheSiRanges** record specifies the beginning of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. This collection specifies OLAP members in the OLAP level specified by the **BrtBeginSlicerCacheLevelData** (section [2.4.196](#)) that precedes this collection.

### 2.4.203 BrtBeginSlicerCachesPivotCacheID

The **BrtBeginSlicerCachesPivotCacheID** record specifies a reference to a **PivotCache** (section [2.2.5.2](#)) used by a slicer cache (section [2.2.14.1](#)) with OLAP **slicer source data** (section [2.2.14.1.1](#)) and specifies the beginning of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table.

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 0     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 1     |

The **FRTHHeader.RelID** specifies a relationship (section [2.1.3](#)) that specifies a **PivotCache** part containing a **PivotCache** used by a slicer cache with OLAP [slicer source data](#).

**unused (4 bytes):** This value is undefined, and MUST be ignored.

### 2.4.204 BrtBeginSlicerCachesPivotCacheIDs

The **BrtBeginSlicerCachesPivotCacheIDs** record specifies the beginning of a collection of **PivotCache** identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the **PivotCaches** used by slicer caches (section [2.2.14.1](#)) with OLAP slicer source data (section [2.2.14.1.1](#)).

### 2.4.205 BrtBeginSlicerEx

The **BrtBeginSlicerEx** record specifies a relationship (section [2.1.3](#)) identifier of the part that contains the slicers (section [2.2.14](#)) in this worksheet and specifies the beginning of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)).

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

...

**FRTHeader (variable):** An **FRTHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHeader** fields MUST have the values listed in the following table.

| Field                     | Value |
|---------------------------|-------|
| <b>FRTHeader.fRef</b>     | 0     |
| <b>FRTHeader.fSqref</b>   | 0     |
| <b>FRTHeader.fFormula</b> | 0     |
| <b>FRTHeader.fRelID</b>   | 1     |

The **FRTHeader.RelID** specifies a relationship identifier of the part that contains the slicers (section [2.2.14](#)) in this worksheet.

#### 2.4.206 BrtBeginSlicers

The **BrtBeginSlicers** record specifies the beginning of a collection of **BrtBeginSlicer** (section [2.4.191](#)) records as defined by the **Slicers** (section [2.2.14](#)) part ABNF. The collection of **BrtBeginSlicer** records specifies all slicer views (section [2.2.14.2](#)) in the worksheet.

#### 2.4.207 BrtBeginSlicersEx

The **BrtBeginSlicersEx** record specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the Slicers (section [2.2.14](#)) part identifier for the worksheet.

#### 2.4.208 BrtBeginSlicerStyle

The **BrtBeginSlicerStyle** record specifies which table style (section [2.2.6.3](#)) is the basis for this slicer style (section [2.2.6.3.1](#)) and specifies the beginning of a collection of records and collections as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies the table style elements (section [2.2.6.2.2](#)) of the slicer style that are specific to slicers (section [2.2.14](#)). Together with the base table style, this collection specifies a user-defined slicer style.

|                   |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
|-------------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|--|--|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |  |  |
| FRTHeader         |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
| stName (variable) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
| ...               |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**stName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the name of the user-defined table style that this slicer style is based upon. The length of the string MUST be greater than or equal to 1 character and less than or equal to 255 characters. This string MUST be unique within the **BrBeginSlicerStyle** (section [2.4.208](#)) records in the **Styles** part ABNF. This string MUST match the **strName** field of a **BrBeginTableStyle** (section [2.4.268](#)) record in the **Styles** part. In the **BrBeginTableStyle** record with a **strName** field that matches this string, the **fIsPivot** field MUST be equal to 0 and the **fIsTable** field MUST be equal to 0.

## 2.4.209 BrtBeginSlicerStyleElements

The **BrtBeginSlicerStyleElements** record specifies the beginning of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies the table style elements (section [2.2.6.2.2](#)) of a slicer style (section [2.2.6.3.1](#)) that are specific to slicers (section [2.2.14](#)).

## 2.4.210 BrtBeginSlicerStyles

The **BrtBeginSlicerStyles** record specifies the default slicer style to apply to slicers (section [2.2.14](#)) and specifies the beginning of a collection of records and collections as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies user-defined slicer styles.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stDefSlicer (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**stDefSlicer (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the default slicer style to apply to slicers (section [2.2.14](#)). The length of the string MUST be greater than or equal to 1 character and less than or equal to 255 characters.

## 2.4.211 BrtBeginSmartTags

The **BrtBeginSmartTags** record specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the smart tag properties of this sheet. [<19>](#)

The **BrtBeginSmartTags** record is only present when the **fEmbedFactoids** field in the **BrWbFactoid** (section [2.4.806](#)) record is set to 0.

## 2.4.212 BrtBeginSmartTagTypes

The **BrtBeginSmartTagTypes** record specifies the beginning of a collection of **BrSmartTagType** (section [2.4.751](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrSmartTagType** records specifies the properties for a smart tag type that contains the identification information for the smart tag. [<20>](#)

## 2.4.213 BrtBeginSortCond

The **BrtBeginSortCond** record specifies a **sort condition** and associated row (2) or column (2) to which the sort condition applies, and specifies the beginning of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Query Table** (section [2.1.7.42](#)) part ABNF.

|     |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|--------|---|---|---|--------|---|---|---|---|----|----|----|----|----|----|---------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1      | 2 | 3 | 4 | 5      | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                  | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | sortOn |   |   |   | unused |   |   |   |   |    |    |    |    |    |    | rfx (16 bytes)      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    | sortCondUnion       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    | stSsList (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    |                     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fSortDes (1 bit):** A bit that specifies the direction of the sort. Possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | If <b>sortOn</b> is 0x0, sort in ascending order. If <b>sortOn</b> is 0x1 or 0x2, cells in which the cell color/cell font color occurs as specified by <b>sortCondUnion</b> are ordered at the top of the range. If <b>sortOn</b> is 0x3, cells in which the icon occurs as specified by <b>sortCondUnion</b> are ordered at the top of the range.        |
| 1     | If <b>sortOn</b> is 0x0, sort in descending order. If <b>sortOn</b> is 0x1 or 0x2, cells in which the cell color/cell font color occurs as specified by <b>sortCondUnion</b> are ordered at the bottom of the range. If <b>sortOn</b> is 0x3, cells in which the icon occurs as specified by <b>sortCondUnion</b> are ordered at the bottom of the range. |

**sortOn (4 bits):** An unsigned integer that specifies how the cells in a range are sorted. This value MUST be one of the values listed in the following table.

| Value | Meaning                     |
|-------|-----------------------------|
| 0x0   | Sort by the cell value      |
| 0x1   | Sort by the cell color      |
| 0x2   | Sort by the cell font color |
| 0x3   | Sort by the cell icon       |

**unused (11 bits):** This value undefined and MUST be ignored.

**rfx (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) that specifies the row (2) or column (2) to which this sort condition applies. If **fCol** equals 0 in the **BrtBeginSortState** (section [2.4.215](#)) that precedes this record as defined in the **Worksheet** part ABNF, the **Macro Sheet** part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Query Table** part ABNF, then this value specifies the column (2) to which this sort condition applies and **rfx.colFirst** MUST be equal to **rfx.colLast**. If **fCol** equals 1 in the **BrtBeginSortState** that precedes this record as defined in the **Worksheet** part ABNF, the **Macro Sheet** part ABNF, the **Table** part ABNF, and the **Query Table** part ABNF, then this value specifies the row (2) to which this sort condition applies and **rfx.rwFirst** MUST be equal to **rfx.rwLast**. This value MUST be contained within the **rfx** in the **BrtBeginSortState** that precedes this record as defined in the **Worksheet** part ABNF, the **Macro Sheet** part ABNF, the **Table** part ABNF, and the **Query Table** part ABNF.

**sortCondUnion (8 bytes):** A structure that specifies the conditional data to be evaluated. The data type of this structure depends on the value of the **sortOn** field, according to the following table.

| Value of sortOn | Type and meaning of sortCondUnion  |
|-----------------|--|
| 0x0             | Unused. This value is undefined and MUST be ignored.   |
| 0x1, 0x2        | A 4-byte unsigned integer that specifies the zero-based index of a <b>BrtDXF</b> (section <a href="#">2.4.342</a> ) record in the collection of all records directly following <b>BrtBeginDXFs</b> (section <a href="#">2.4.55</a> ). The referenced <b>BrtDXF</b> specifies the <a href="#">differential formatting</a> (section <a href="#">2.2.6.2</a> ) to use for the sort. The latter 4-byte field MUST be 0, and MUST be ignored. |
| 0x3             | A <a href="#">CFFlag</a> that specifies the icon and icon set to use for the sort.   |

**stSsList (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies a comma-delimited list of strings that specifies a custom sort order (2). The order of strings in the list specifies the sort order (2). When a cell value matches a string in the list, it is sorted ahead of the cell values that match a later string in the list, and so on for each cell in the range. This value MUST be ignored if **sortOn** is not equal to 0x0.

#### 2.4.214 BrtBeginSortCond14

The **BrtBeginSortCond14** record specifies a sort condition to apply to a range and specifies the beginning of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Query Table** (section [2.1.7.42](#)) part ABNF. This record is equivalent to **BrtBeginSortCond** (section [2.4.213](#)) but allows for specification of additional icon sets to use for the sort.

|     |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|--------|---|---|---|--------|---|---|---|---|----|----|----|----|----|----|----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1      | 2 | 3 | 4 | 5      | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16             | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | sortOn |   |   |   | unused |   |   |   |   |    |    |    |    |    |    | rfx (16 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    | sortCondUnion  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |        |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |



|     |                     |
|-----|---------------------|
| ... | stSsList (variable) |
| ... |                     |

**A - fSortDes (1 bit):** A bit that specifies the direction of the sort. Possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | If <b>sortOn</b> is 0x0, sort in ascending order. If <b>sortOn</b> is 0x1 or 0x2, cells in which the cell color/cell font color occurs as specified by <b>sortCondUnion</b> are ordered at the top of the range. If <b>sortOn</b> is 0x3, cells in which the icon occurs as specified by <b>sortCondUnion</b> are ordered at the top of the range.        |
| 1     | If <b>sortOn</b> is 0x0, sort in descending order. If <b>sortOn</b> is 0x1 or 0x2, cells in which the cell color/cell font color occurs as specified by <b>sortCondUnion</b> are ordered at the bottom of the range. If <b>sortOn</b> is 0x3, cells in which the icon occurs as specified by <b>sortCondUnion</b> are ordered at the bottom of the range. |

**sortOn (4 bits):** An unsigned integer that specifies how the cells in a range are sorted. This value MUST be one of the values in the following table.

| Value | Meaning                     |
|-------|-----------------------------|
| 0x0   | Sort by the cell value      |
| 0x1   | Sort by the cell color      |
| 0x2   | Sort by the cell font color |
| 0x3   | Sort by the cell icon       |

**unused (11 bits):** This value undefined and MUST be ignored.

**rfx (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) that specifies the row (2) or column (2) to which this sort condition applies. If **fCol** equals 0 in the **BrtBeginSortState** (section [2.4.215](#)) that precedes this record as defined in the **Worksheet** part ABNF, the **Macro Sheet** part ABNF, the **Table** part ABNF, and the **Query Table** (section [2.1.7.42](#)) part ABNF, then this value specifies the column (2) to which this sort condition applies and **rfx.colFirst** MUST be equal to **rfx.colLast**. If **fCol** equals 1 in the **BrtBeginSortState** that precedes this record as defined in the **Worksheet** part ABNF, the **Macro Sheet** part ABNF, the **Table** part ABNF, and the **Query Table** part ABNF, then this value specifies the row (2) to which this sort condition applies and **rfx.rwFirst** MUST be equal to **rfx.rwLast**. This value MUST be contained within the **rfx** in the **BrtBeginSortState** that precedes this record as defined in the **Worksheet** part ABNF, the **Macro Sheet** part ABNF, the **Table** part ABNF, and the **Query Table** part ABNF.

**sortCondUnion (8 bytes):** A structure that specifies the conditional data to be evaluated. The data type of this structure depends on the value of the **sortOn** field, according to the following table.

| Value of sortOn | Type and meaning of sortCondUnion                    |
|-----------------|--|
| 0x0             | Unused. This value is undefined and MUST be ignored. |

| Value of sortOn | Type and meaning of sortCondUnion  |
|-----------------|--|
| 0x1, 0x2        | A 4-byte unsigned integer that specifies the zero-based index of a <b>BrtDXF</b> (section <a href="#">2.4.342</a> ) record in the collection of all records directly following <b>BrtBeginDXFs</b> (section <a href="#">2.4.55</a> ). The referenced <b>BrtDXF</b> specifies the <a href="#">differential formatting</a> (section <a href="#">2.2.6.2</a> ) to use for the sort. The latter 4-byte field MUST be 0, and MUST be ignored. |
| 0x3             | A <b>CFFlag14</b> (section <a href="#">2.5.13</a> ) that specifies the icon and icon set to use for the sort.  |

**stSsList (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies a comma-delimited list of strings that specifies a custom sort order (2). The order of strings in the list specifies the sort order (2). When a cell value matches a string in the list, it is sorted ahead of the cell values that match a later string in the list, and so on for each cell in the range. This value MUST be ignored if **sortOn** is not equal to 0x0.

#### 2.4.215 BrtBeginSortState

The **BrtBeginSortState** record specifies sort properties and specifies the beginning of a collection of records as specified by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies the different sort conditions that apply to a range.

|     |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|--------|---|---|---|---|---|---|----|----|----|----|----|----|----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3      | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16             | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | B | C | unused |   |   |   |   |   |   |    |    |    |    |    |    | rfx (16 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fCol (1 bit):** A bit that specifies whether to sort by rows (2) or columns (2). If AutoFilter is applied to the range, then **fCol** MUST be ignored. Possible values for this field are listed in the following table.

| Value | Meaning             |
|-------|---------------------|
| 0     | Sort by rows (2)    |
| 1     | Sort by columns (2) |

**B - fCaseSensitive (1 bit):** A bit that specifies whether the sort is case-sensitive.

**C - fAltMethod (1 bit):** A bit that specifies whether to use a sorting method other than character order such as **stroke order** or **Mandarin phonetic symbols**. Possible values for this field are listed in the following table.

| Value | Meaning                     |
|-------|-----------------------------|
| 0     | Sort using character order. |

| Value | Meaning   |
|-------|---|
| 1     | Sort using a method other than character order. |

**unused (13 bits):** This value is undefined and MUST be ignored.

**rfx (16 bytes):** An **UncheckedRFX** (section [2.5.153](#)) that specifies the range to sort.

#### 2.4.216 BrtBeginSparklineGroup

The **BrtBeginSparklineGroup** record specifies **sparkline** group information and specifies the beginning of a collection of records and collections as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the properties for this sparkline group.

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----------------|------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15             | 16               | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A                    | B | C | D | E | F | G | H | I | J | K  | L  | M  | N  | O  | brtcolorSeries |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                | brtcolorNegative |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                | brtcolorAxis     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                | brtcolorMarkers  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                | brtcolorFirst    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                | brtcolorLast     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |                | brtcolorHigh     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|     |             |
|-----|-------------|
| ... |             |
| ... | brtcolorLow |
| ... |             |
| ... | dManualMax  |
| ... |             |
| ... | dManualMin  |
| ... |             |
| ... | dLineWeight |
| ... |             |
| ... | isltype     |
| ... |             |

**FRTHeader (variable):** An **FRTHeader** (section [2.5.60](#)) that specifies the date range for the sparkline group.

The **FRTHeader** fields MUST have the values listed in the following table.

| Field                      | Value  |
|----------------------------|--------|
| <b>FRTHeader.fRef</b>      | 0      |
| <b>FRTHeader.fSqref</b>    | 0      |
| <b>FRTHeader.fFormulas</b> | 0 or 1 |
| <b>FRTHeader.fRelID</b>    | 0      |

If **FRTHeader.fFormulas** equals 1, then **cformula** of the **FRTHeader.rgFormulas** MUST be equal to 1 and the **formula** of the single **FRTFormula** (section [2.5.58](#)) comprising the **array** of the **FRTHeader.rgFormulas** MUST contain only one **Ptg** (section [2.5.97.16](#)) structure, and that **Ptg** structure MUST be either **PtgName** (section [2.5.97.60](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgRef3d** (section [2.5.97.69](#)), or **PtgArea3d** (section [2.5.97.19](#)). If the **Ptg** structure is a **PtgRef3d** or **PtgArea3d**, then the **ixti** of the **PtgRef3d** or **PtgArea3d** MUST specify an **Xti** (section [2.5.172](#)) that MUST have **firstSheet** greater than or equal to zero, and MUST have **lastSheet** equal to **firstSheet**. If the **Ptg** structure is a **PtgArea3d**, then the **area** of the **PtgArea3d** MUST either have **rowFirst** equal to **rowLast** and **columnFirst.fRwRel** equal to **columnLast.fRwRel**, or **columnFirst.col** equal to **columnLast.col** and **columnFirst.fColRel** equal to **columnLast.fColRel**.

**A - fDateAxis (1 bit):** A bit that specifies whether this sparkline group uses a date axis.

| Value of <b>fDateAxis</b> | Meaning  |
|---------------------------|--|
| 0                         | No date axis is specified for this sparkline group.                    |
| 1                         | A date axis is specified by <b>FRTHeader</b> for this sparkline group. |

**B - fShowEmptyCellAsZero (2 bits):** An unsigned integer that specifies how empty cells are plotted. This value MUST be a value from the following table.

| Value of <b>fShowEmptyCellAsZero</b> | Meaning                                  |
|--------------------------------------|--|
| 0x0                                  | Empty cells are plotted as zero.         |
| 0x1                                  | Empty cells are not plotted.             |
| 0x2                                  | Empty cells are plotted as interpolated. |

**C - fMarkers (1 bit):** A bit that specifies whether **data markers** are displayed for each sparkline in this sparkline group.

**D - fHigh (1 bit):** A bit that specifies whether the **data points (2)** with the highest value are formatted differently for each sparkline in this sparkline group.

**E - fLow (1 bit):** A bit that specifies whether the data points (2) with the lowest value are formatted differently for each sparkline in this sparkline group.

**F - fFirst (1 bit):** A bit that specifies whether the first data point (2) is formatted differently for each sparkline in this sparkline group.

**G - fLast (1 bit):** A bit that specifies whether the last data point (2) is formatted differently for each sparkline in this sparkline group.

**H - fNegative (1 bit):** A bit that specifies whether the negative data points (2) are formatted differently for each sparkline in this sparkline group.

**I - fAxis (1 bit):** A bit that specifies whether the horizontal axis is displayed for each sparkline in this sparkline group.

**J - fDisplayHidden (1 bit):** A bit that specifies whether data in hidden cells are plotted for the sparklines in this sparkline group.

**K - fIndividualAutoMax (1 bit):** A bit that specifies whether the vertical axis maximum for each sparkline in this sparkline group is calculated automatically such that the data point (2) with the maximum value can be displayed in the **plot area**. This value MUST be 0 if **fGroupAutoMax** equals 1.

**L - fIndividualAutoMin (1 bit):** A bit that specifies whether the vertical axis minimum for each sparkline in this sparkline group is calculated automatically such that the data point (2) with the minimum value can be displayed in the plot area. This value MUST be 0 if **fGroupAutoMin** equals 1.

**M - fGroupAutoMax (1 bit):** A bit that specifies whether the vertical axis maximum is shared across all sparklines in this sparkline group and is calculated automatically such that the data point (2) with the maximum value can be displayed in the plot area. This value MUST be 0 if **fIndividualAutoMax** equals 1.

**N - fGroupAutoMin (1 bit):** A bit that specifies whether the vertical axis minimum is shared across all sparklines in this sparkline group and is calculated automatically such that the data point (2) with the minimum value can be displayed in the plot area. This value MUST be 0 if **fIndividualAutoMin** equals 1.

**O - fRTL (1 bit):** A bit that specifies whether each sparkline in the sparkline group is displayed in a right-to-left manner.

**brtcolorSeries (8 bytes):** A **BrtColor** (section [2.4.321](#)) that specifies the color for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**brtcolorNegative (8 bytes):** A **BrtColor** that specifies the color of the negative data points (2) for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**brtcolorAxis (8 bytes):** A **BrtColor** that specifies the color of the horizontal axis for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**brtcolorMarkers (8 bytes):** A **BrtColor** that specifies the color of the data markers for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**brtcolorFirst (8 bytes):** A **BrtColor** that specifies the color of the first data point (2) for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**brtcolorLast (8 bytes):** A **BrtColor** that specifies the color of the last data point (2) for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**brtcolorHigh (8 bytes):** A **BrtColor** that specifies the color of the highest data point (2) for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**brtcolorLow (8 bytes):** A **BrtColor** that specifies the color of the lowest data point (2) for each sparkline in this sparkline group. The **xColorType** of this **BrtColor** MUST NOT equal 0x00.

**dManualMax (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the maximum for the vertical axis that is shared across all sparklines in this sparkline group. This value MUST be zero if either **fIndividualAutoMax** or **fGroupAutoMax** equal 1.

**dManualMin (8 bytes):** An **Xnum** that specifies the minimum for the vertical axis that is shared across all sparklines in this sparkline group. This value MUST be zero if either **fIndividualAutoMin** or **fGroupAutoMin** equal 1.

**dLineWeight (8 bytes):** An **Xnum** that specifies the line weight for each sparkline in the sparkline group, where the line weight is measured in points. This value MUST be greater than or equal to zero, and MUST be less than or equal to 1584.

**isltype (4 bytes):** An unsigned integer that specifies the type of the sparkline group. This value MUST be one of the following values.

| Value of isltype | Meaning                            |
|------------------|------------------------------------|
| 0x00000000       | Line sparklines                    |
| 0x00000001       | Column (3) sparklines              |
| 0x00000002       | 100% stacked column (3) sparklines |

### 2.4.217 BrtBeginSparklineGroups

The **BrtBeginSparklineGroups** record specifies the beginning of a collection of records and collections as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the groups of sparklines on the sheet.

### 2.4.218 BrtBeginSparklines

The **BrtBeginSparklines** record specifies the beginning of a collection of [BrtSparkline](#) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of [BrtSparkline](#) records specifies properties for individual sparklines.

### 2.4.219 BrtBeginSst

The **BrtBeginSst** record specifies properties of a shared string table and specifies the beginning of a collection of **BrtSSTItem** (section [2.4.753](#)) records as defined by the **Shared Strings** (section [2.1.7.45](#)) part ABNF. The collection of **BrtSSTItem** records specifies a shared string table. **cstUnique** MUST be less than or equal to **cstTotal**.

|           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cstTotal  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| cstUnique |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cstTotal (4 bytes):** An unsigned integer that specifies the number of references in the **workbook** (section [2.1.7.60](#)) to items in the **BrtSSTItem** collection. This value MUST be less than or equal to 0x7FFFFFFF.

**cstUnique (4 bytes):** An unsigned integer that specifies the number of records in the **BrtSSTItem** collection. This value MUST be less than or equal to 0x7FFFFFFF.

### 2.4.220 BrtBeginStyles

The **BrtBeginStyles** record specifies a count of **BrtStyle** (section [2.4.755](#)) records and specifies the beginning of a collection of **BrtStyle** records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtStyle** records specifies all cell styles (section [2.2.6.1.2](#)) in the **workbook** (section [2.1.7.60](#)). The collection MUST contain at least 1 and no more than 0xFF96 **BrtStyle** records.

|         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cstyles |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cstyles (4 bytes):** An unsigned integer that specifies the number of **BrtStyle** records in the collection. This value MUST be at least 1 and no more than 0xFF96.

### 2.4.221 BrtBeginStyleSheet

The **BrtBeginStyleSheet** record specifies the beginning of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies style (section [2.2.6](#)) information for a workbook.

### 2.4.222 BrtBeginStyleSheetExt14

The **BrtBeginStyleSheetExt14** record specifies the beginning of a collection of records and collections as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection specifies additional style (section [2.2.6](#)) information for the workbook.

### 2.4.223 BrtBeginSupBook

The **BrtBeginSupBook** record specifies the properties of an external link (section [2.2.7.4](#)) and specifies the beginning of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies information about the external link.

|                    |   |   |   |   |   |   |   |   |   |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|--------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11                 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| sbt                |   |   |   |   |   |   |   |   |   |    | string1 (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| string2 (variable) |   |   |   |   |   |   |   |   |   |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**sbt (2 bytes):** An **ExternalReferenceType** (section [2.5.43](#)) that specifies the type of the external link.

**string1 (variable):** The type and meaning of this field is dependent on the value of **sbt**, and is specified in the following table.

| Value of sbt  | Meaning of string1  |
|---|---|
| <b>Workbook</b> (section <a href="#">2.1.7.60</a> ) | A <b>RelID</b> (section <a href="#">2.5.114</a> ) that specifies an external workbook (section <a href="#">2.2.7.4.1</a> ). This value MUST NOT be a NULL string. |
| DDE (see section <a href="#">2.5.43</a> )           | An <b>XLWideString</b> that specifies the name of a Dynamic Data Exchange (DDE) server.   |
| OLE (see section <a href="#">2.5.43</a> )           | A <b>RelID</b> that specifies an OLE data source (1) file. This value MUST NOT be a NULL string.  |

**string2 (variable):** The type and meaning of this field is dependent on the value of **sbt**, and is specified in the following table.

| Value of sbt  | Meaning of string2   |
|---|--|
| <b>Workbook</b> (section <a href="#">2.1.7.60</a> ) | An <b>XLNullableWideString</b> (section <a href="#">2.5.166</a> ) that is not used. The value of this field MUST be a NULL string. |



| Value of sbt | Meaning of string2   |
|--------------|--|
| DDE          | An <b>XLWideString</b> that specifies the name of a Dynamic Data Exchange (DDE) topic.                             |
| OLE          | An <b>XLWideString</b> that specifies the ProgID of the object class associated with the OLE data source (1) file. |

#### 2.4.224 BrtBeginSXChange

The **BrtBeginSXChange** record specifies the value used for **PivotTable** What-if Analysis (section [2.2.5.3.10](#)) calculation and the allocation method for how to apply the value, and specifies the beginning of a collection of records and collections as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of MDX unique names that identifies the original value in the OLAP source data (section [2.2.5.2.1](#)) that was changed.

|           |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------|---|---|---|---|---|---|---|---|---|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1                     | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHeader |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| reserved  |   |   |   |   |   |   |   |   |   | sxma                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...       |   |   |   |   |   |   |   |   |   | irstWeight (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...       |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| xnum      |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...       |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**reserved (1 byte):** This value MUST be 2, and MUST be ignored.

**sxma (4 bytes):** An **SXMA** (section [2.5.147](#)) that specifies the allocation method, used by PivotTable What-if Analysis, to change the value in the OLAP source data.

**irstWeight (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the **OLAP weight expression** for PivotTable What-if Analysis. If the value of **sxma** is **WEIGHTED\_ALLOCATION** (see section [2.5.147](#)) or **WEIGHTED\_INCREMENT** (see section [2.5.147](#)), the string MUST be greater than or equal to zero and less than or equal to 65,535 characters in length. If the value of **sxma** is **EQUAL\_ALLOCATION** (see section [2.5.147](#)) or **EQUAL\_INCREMENT** (see section [2.5.147](#)), the string length MUST be zero.

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the numerical value that replaces the original value in the OLAP source data for PivotTable What-if Analysis.

## 2.4.225 BrtBeginSXChanges

The **BrtBeginSXChanges** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the values used for PivotTable What-if Analysis calculations and the allocation methods for how to apply the values, and specifies the collections of MDX unique names that identify the original values in the OLAP source data that were changed.

## 2.4.226 BrtBeginSXCondFmt

The **BrtBeginSXCondFmt** record specifies the scope, type and priority of conditional formatting applied to this PivotTable view (section [2.2.5.3](#)), as specified by the preceding **BrtBeginSXView** (section [2.4.264](#)) record, and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies details about where this conditional formatting applies in the PivotTable view.

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| sxcondfmtScope |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sxcondfmtType  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ipriority      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**sxcondfmtScope (4 bytes):** An unsigned integer that specifies the scope of this PivotTable view conditional formatting. This value **MUST** be a value from the following table.

| Name                    | Value      | Description  |
|-------------------------|------------|--|
| SXCONDFMTSELECTIONSCOPE | 0x00000000 | This conditional formatting is applied to the cells (as specified by the <b>PIVOTRULES</b> (section <a href="#">2.1.7.40</a> ) of this collection).  |
| SXCONDFMTDATASCOPE      | 0x00000001 | This conditional formatting is applied to all cells (as specified by the <b>PIVOTRULES</b> of this collection) that display values for the data item (section <a href="#">2.2.5.3.7.5.1</a> ).             |
| SXCONDFMTFIELDSCOPE     | 0x00000002 | This conditional formatting is applied to all cells (as specified by the <b>PIVOTRULES</b> of this collection) that display values for the pivot field (section <a href="#">2.2.5.3.2</a> ) intersections. |

The value of **sxcondfmtScope** **MUST** be **SXCONDFMTFIELDSCOPE** if **sxcondfmtType** value is **SXCONDFMTTOP10R** or **SXCONDFMTTOP10C**.

If the value of this field is **SXCONDFMTDATASCOPE** or **SXCONDFMTFIELDSCOPE** there **MUST** be only one **PIVOTRULE** within **PIVOTRULES** of this **SXCONDFMT** (section [2.1.7.40](#)) as specified in the **PivotTable** (section [2.1.7.40](#)) part ABNF.

**sxcondfmtType (4 bytes):** An unsigned integer that specifies the type of this PivotTable view conditional formatting. This value **MUST** be a value from the following table:

| Name              | Value      | Description  |
|-------------------|------------|--|
| SXCONDFMTTOP10NIL | 0x00000000 | Top N or Bottom N conditional formatting is not evaluated.                           |
| SXCONDFMTTOP10A   | 0x00000001 | Top N or Bottom N conditional formatting is evaluated across the entire scope range. |
| SXCONDFMTTOP10R   | 0x00000002 | Top N or Bottom N conditional formatting is evaluated for each row (2).              |
| SXCONDFMTTOP10C   | 0x00000003 | Top N or Bottom N conditional formatting is evaluated for each column (2).           |

The value of this field MUST be **SXCONDFMTTOP10NIL** or **SXCONDFMTTOP10A** if **sxcondfmtScope** value is **SXCONDFMTSELECTIONSCOPE** or **SXCONDFMTDATASCOPE**.

**ipriority (4 bytes):** An unsigned integer that specifies the priority of the PivotTable view conditional formatting. This value MUST be greater than or equal to 1. The sheet where this PivotTable view is located MUST have a **BrBeginConditionalFormatting** (section [2.4.32](#)) collection with the **fPivot** field equal to 1, and there MUST be a **BrBeginCFRule** (section [2.4.21](#)) item in that collection with the **ipri** field equal to the value of this field.

#### 2.4.227 BrtBeginSXCondFmt14

The **BrtBeginSXCondFmt14** record specifies the scope, type and priority of conditional formatting applied to this PivotTable view, as specified by the preceding **BrtBeginSXView** (section [2.4.264](#)) record, and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies details about where this conditional formatting applies in the PivotTable view. This record is equivalent to **BrtBeginSXCondFmt** (section [2.4.226](#)) but allows to specify a GUID for the associated **BrtBeginCFRule14** (section [2.4.22](#)) record.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
|-----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| FRHeader        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| guid (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| sxcondfmtScope  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| reserved        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ipriority       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record information (section [2.1.6](#)) for this record.

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#), section [2.3.2](#), that specifies a particular **BrtBeginCFRule14** (section [2.4.22](#)) in the collection of **BrtBeginCFRule14** records as

defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. There MUST exist a **BrtBeginCFRule14** with a **guid** field with the same value as this value, and it MUST be the same **BrtBeginCFRule14** specified by **ipriority**.

**sxcondfmtScope (4 bytes):** An unsigned integer that specifies the scope of this **PivotTable** view (section [2.2.5.3](#)) conditional formatting. This value MUST be a value from the following table:

| Name                    | Value      | Description  |
|-------------------------|------------|--|
| SXCONDFMTSELECTIONSCOPE | 0x00000000 | This conditional formatting is applied to the cells (as specified by the records of the <b>PIVOTRULES14</b> rule (defined in section <a href="#">2.1.7.40</a> ) of this collection).   |
| SXCONDFMTDATASCOPE      | 0x00000001 | This conditional formatting is applied to all cells (as specified by the records of the <b>PIVOTRULES14</b> rule of this collection) that display values for the data item (section <a href="#">2.2.5.3.7.5.1</a> ).             |
| SXCONDFMTFIELDSCOPE     | 0x00000002 | This conditional formatting is applied to all cells (as specified by the records of the <b>PIVOTRULES14</b> rule of this collection) that display values for the pivot field (section <a href="#">2.2.5.3.2</a> ) intersections. |

**reserved (4 bytes):** This value MUST be zero and MUST be ignored.

**ipriority (4 bytes):** An unsigned integer that specifies the priority of the PivotTable view (section [2.2.5.3](#)) conditional formatting. This value MUST be greater than or equal to 1. The sheet where this PivotTable view is located MUST have a **BrtBeginConditionalFormatting14** (section [2.4.33](#)) collection with the **fPivot** field equal to 1, and there MUST be a **BrtBeginCFRule14** (section [2.4.22](#)) item in that collection with the **ipri** field equal to the value of this field.

#### 2.4.228 BrtBeginSXCondFmts

The **BrtBeginSXCondFmts** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies conditional formats that apply to this PivotTable.

|             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| csxcondfmts |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxcondfmts (4 bytes):** An unsigned integer that specifies the number of conditional formats that apply to this **PivotTable** (section [2.1.7.40](#)). This value MUST be the same as the number of **BrtBeginSXCondFmt** (section [2.4.226](#)) records in this collection.

## 2.4.229 BrtBeginSXCondFmts14

The **BrtBeginSXCondFmts14** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies conditional formats that apply to this PivotTable.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHdr      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| csxcondfmts |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHdr (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**csxcondfmts (4 bytes):** An unsigned integer that specifies the number of conditional formats that are specified by **BrtBeginSXCondFmt14** (section [2.4.227](#)) records in this collection. This value MUST be equal to the number of **BrtBeginSXCondFmt14** records in this collection.

## 2.4.230 BrtBeginSXCrtFormat

The **BrtBeginSXCrtFormat** record specifies details for a **PivotChart** (section [2.2.3.2](#)) format and specifies the beginning of a collection records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection specifies a reference to a **PivotTable** rule (section [2.2.5.3.9](#)) that specifies where in the **PivotChart** the formatting is applied.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dwChart           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwFmt             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fSeriesFormatting |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**dwChart (4 bytes):** An unsigned integer that specifies the **PivotChart** to which this format applies. The **PivotChart** is specified by a **chart** part (section [2.2.3.1](#)). The associated **chart** part contains a **fmtId** element, as defined in [\[ISO/IEC29500-1:2011\]](#), section 21.2.2.70, with a **val** attribute. The attribute **val** MUST have a value equal to the value of this field.

**dwFmt (4 bytes):** An unsigned integer that specifies a zero-based index to a **pivotFmt** element, as defined in [\[ISO/IEC29500-1:2011\]](#), section 21.2.2.142, in the **pivotFmts** collection, as defined in [\[ISO/IEC29500-1:2011\]](#), section 21.2.1.143, in the **chart** part specified by **dwChart**. This value MUST be less than the number of **pivotFmt** elements in that collection.

**fSeriesFormatting (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether this format applies to a data series or a data point (2). Possible values for this field are listed in the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Specifies that this format applies to a data point (2). |
| 0x00000001 | Specifies that this format applies to a data series.    |

A data series is specified by a **ser** element that is a child of one of the chart elements from the list of valid child elements of the **plotArea** element, as defined in [\[ISO/IEC29500-4:2011\]](#), section 21.2.2.145, in the **chart** part specified by **dwChart**. A data point (2) is specified by the **dPt** element, as defined in [\[ISO/IEC29500-4:2011\]](#), section 21.2.2.52.

#### 2.4.231 BrtBeginSXCrtFormats

The **BrtBeginSXCrtFormats** record specifies references to **PivotChart** (section [2.2.3.2](#)) formats and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies references to **PivotChart** formats.

|               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| csxcrtformats |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxcrtformats (4 bytes):** An unsigned integer that specifies the number of references to **PivotChart** formats. This value MUST match the number of **BrtBeginSXCrtFormat** (section [2.4.230](#)) records in this collection.

#### 2.4.232 BrtBeginSXDI

The **BrtBeginSXDI** record specifies a data item (section [2.2.5.3.7.5.1](#)) that summarizes data in a **PivotTable** (section [2.1.7.40](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. Data items (section [2.2.5.3.7.5.1](#)) use summary functions to combine values from the underlying source data (section [2.2.5.2.1](#)).

|                  |   |   |   |   |   |   |   |   |   |                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------|---|---|---|---|---|---|---|---|---|--------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1                        | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| isxvdData        |   |   |   |   |   |   |   |   |   |                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iiftab           |   |   |   |   |   |   |   |   |   |                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| df               |   |   |   |   |   |   |   |   |   |                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| isxvd            |   |   |   |   |   |   |   |   |   |                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| isxvi            |   |   |   |   |   |   |   |   |   |                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ifmt             |   |   |   |   |   |   |   |   |   |                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| fLoadDisplayName |   |   |   |   |   |   |   |   |   | stDisplayName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

...

**isxvdData (4 bytes):** An **ISXVD** (section [2.5.83](#)) that specifies the pivot field (section [2.2.5.3.2](#)) that this data item summarizes. This value MUST NOT equal -1 or -2.

If the **PivotTable** view (section [2.2.5.3](#)) is a non-OLAP **PivotTable** view, the values in the source data associated with the associated cache field (section [2.2.5.2.2](#)) of the referenced pivot field are aggregated as specified in this record.

If the **PivotTable** view is an OLAP **PivotTable** view, the associated pivot hierarchy (section [2.2.5.3.4](#)) of the referenced pivot field specifies the OLAP measure for this data item and the **iiftab** field is ignored. The associated pivot hierarchy is determined as specified in section [2.2.5.3.4](#).

The **sxaxisData** field of the referenced **BrtBeginSXVD** record (section [2.4.261](#)) MUST be equal to 1.

**iiftab (4 bytes):** A **DataConsolidationFunction** (section [2.5.27](#)) that specifies the aggregation function that applies to this data item. The valid values of this field are specified by the **DataConsolidationFunction** enumeration.

**df (4 bytes):** A **ShowDataAs** (section [2.5.133](#)) that specifies the data format for this data item. This value MUST be less than or equal to 0x00000008.

**isxvd (4 bytes):** An **ISXVD** (section [2.5.83](#)) that specifies the pivot field the calculations specified by the **df** field are based on. When **df** is greater than 0x00000000 and less than 0x00000005, this value MUST NOT equal -1 or -2. When **df** is 0x00000000 or greater than or equal to 0x00000005, this field is ignored.

**isxvi (4 bytes):** An unsigned integer that specifies which pivot item (section [2.2.5.3.3](#)) the calculations specified by the **df** field are based on. When **df** is greater than 0x00000000 and less than 0x00000004, this field MUST be a value from the following table.

| Value                    | Meaning   |
|--------------------------|---|
| 0x00000000 to 0x00100000 | Specifies the pivot item index in the pivot field specified by <b>isxvd</b> , as specified in section <a href="#">2.2.5.3.3</a> . The referenced <b>BrtBeginSXVI</b> (section <a href="#">2.4.263</a> ) record specifies the pivot item this calculation is based on. |
| 0x001000FC               | The calculation is based on the previous pivot item.  |
| 0x001000FD               | The calculation is based on the next pivot item.  |

When **df** is 0x00000000 or greater than or equal to 0x00000004 this field is ignored.

**ifmt (4 bytes):** A **PivotNumFmt** (section [2.5.105](#)) that specifies the format applied to this data item.

**fLoadDisplayName (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the **stDisplayName** field exists after the fixed size portion of the record. This value MUST be a value from the following table.

| Value | Meaning                              |
|-------|--------------------------------------|
| 0x00  | <b>stDisplayName</b> does not exist. |

| Value | Meaning                      |
|-------|------------------------------|
| 0x01  | <b>stDisplayName</b> exists. |

**stDisplayName (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies the name of the data item. If the value of the **bVerSxMacro** field defined in the associated **BrtBeginSXView** (section [2.4.264](#)) record is less than 3, the length of this value MUST be less than 256 characters; otherwise it MUST be less than 32,768 characters. This value MUST exist if and only if **fLoadDisplayName** is 0x01.

#### 2.4.233 BrtBeginSXDI

The **BrtBeginSXDI** record specifies the beginning of a collection of records, as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, that specifies the data items (section [2.2.5.3.7.5.1](#)) that appear on the data axis (section [2.2.5.3.7.5](#)) of this PivotTable view (section [2.2.5.3](#)).

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| csxdis |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxdis (4 bytes):** An unsigned integer that specifies the number of data items on the data axis of this PivotTable view. This value MUST be equal to the number of **BrtBeginSXDI** (section [2.4.232](#)) records in this collection.

#### 2.4.234 BrtBeginSXEdit

The **BrtBeginSXEdit** record specifies the user input, related to **PivotTable** What-if Analysis (section [2.2.5.3.10](#)), in a single cell of the **PivotTable** data area (section [2.2.5.3.8.1.4](#)), and specifies the beginning of a collection of records and collections as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of MDX unique names that identifies the value in the OLAP source data (section [2.2.5.2.1](#)), and specifies a **PivotTable** rule (section [2.2.5.3.9](#)) that can be used to identify the cell in the **PivotTable** data area (section [2.2.5.3.8.1.4](#)).

|                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5                   | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| sxet                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | xnum (optional)     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | datetime (optional) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |



|              |                |  |
|--------------|----------------|--|
| ...          | st (variable)  |  |
| ...          |                |  |
| f (optional) | err (optional) |  |

**FRTHeader (variable):** An optional **FRTHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

This field exists if and only if the size of this record is greater than 4 bytes. The **FRTHeader** fields in the following table MUST be equal to their respective values in the table:

| Field           | Value  |
|-----------------|--------|
| <b>fRef</b>     | 0      |
| <b>fSqref</b>   | 0      |
| <b>fFormula</b> | 0 or 1 |
| <b>fRelID</b>   | 0      |

If **FRTHeader.rgFormulas** exists, **FRTHeader.rgFormulas.cformula** MUST be equal to 0x00000001 and the **reserved** field of the **FRTFormula** (section [2.5.58](#)) structure in the first element of the array **FRTHeader.rgFormulas.array** MUST be equal to 0x00000002.

The length of **FRTHeader.blob** MUST be zero.

**sxet (1 byte):** An **SXET** (section [2.5.146](#)) that specifies the value type of the user input in the PivotTable data area. MUST be equal to **SXET\_FMLA** if and only if **FRTHeader.fFormula** is equal to 1. If the record size is less than 4, **sxet** MUST be equal to **SXET\_BOOL** or **SXET\_ERROR**. If the record size is greater than 4, **sxet** MUST be equal to **SXET\_NUM**, **SXET\_DATETIME** or **SXET\_FMLA**.

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the numerical value that replaces the original cell value in PivotTable data area by user input. This value MUST exist if and only if **sxet** is equal to **SXET\_NUM**.

**datetime (8 bytes):** An **PCDIDateTime** (section [2.5.100](#)) that specifies a date-time value that replaces the original cell value in PivotTable data area by user input. This value MUST exist if and only if **sxet** is equal to **SXET\_DATETIME**.

**st (variable):** An **XLWideString** (section [2.5.168](#)) that specifies a string value that replaces the original cell value in PivotTable data area by user input. This value MUST exist if and only if **sxet** is equal to **SXET\_STRING** (section [2.5.146](#)). The length of the string MUST be greater than 0 and MUST be less than 32,768 characters.

**f (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies a Boolean value that replaces the original cell value in PivotTable data area by user input. This value MUST exist if and only if **sxet** is equal to **SXET\_BOOL**.

**err (1 byte):** A **BErr** (section [2.5.97.2](#)) that specifies an error that replaces the original cell value in PivotTable data area by user input. This value MUST exist if and only if **sxet** is equal to **SXET\_ERROR**.

### 2.4.235 BrtBeginSXEdits

The **BrtBeginSXEdits** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies user inputs, related to **PivotTable** What-if Analysis (section [2.2.5.3.10](#)), in single cells of the **PivotTable** data area (section [2.2.5.3.8.1.4](#)), and specifies the collections of MDX unique names that identify the values in the OLAP source data (section [2.2.5.2.1](#)). In addition, the collection specifies the **PivotTable** rules (section [2.2.5.3.9](#)) that can be used to identify the cells in the **PivotTable** data area.

### 2.4.236 BrtBeginSXFILTER

The **BrtBeginSXFILTER** record specifies properties of an advanced filter (section [2.2.5.3.6.1](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a PivotTable (section [2.2.5](#)) advanced filter.

|                          |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------|---|---|---|----------|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|-------------------|----|----|----|----|----|----|----|----|----|----|----|
| 0                        | 1 | 2 | 3 | 4        | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20                | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| isxvd                    |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| isxvdMProp               |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| sxft                     |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| unused                   |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| dwId                     |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| isxdiMeasure             |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| isxthMeasure             |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| A                        | B | C | D | reserved |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    | stName (variable) |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| stDescription (variable) |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| stVal1 (variable)        |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| stVal2 (variable)        |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |
| ...                      |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |

**isxvd (4 bytes):** An **ISXVD** (section [2.5.83](#)) that specifies the pivot field (section [2.2.5.3.2](#)) to which this advanced filter applies. This value MUST NOT be equal to -1 or -2.

**isxvdMProp (4 bytes):** An **ISXVD** that specifies the pivot field specifying the member (3) property on which this advanced filter is based. This value is only used by label filters (section [2.2.5.3.6.1.1](#)). If this advanced filter is a label filter, as specified by **sxft**, and this advanced filter is based on a member (3) property, then this value MUST be greater than or equal to 0. Otherwise, it MUST be -1 and MUST be ignored.

**sxft (4 bytes):** A **PivotFilterType** (section [2.5.103](#)) that specifies the type of this advanced filter.

**unused (4 bytes):** This value is undefined and MUST be ignored.

**dwId (4 bytes):** An unsigned integer that specifies the unique identifier of this advanced filter.

**isxdiMeasure (4 bytes):** An **ISXDI** (section [2.5.81](#)) that specifies the data item (section [2.2.5.3.7.5.1](#)) on which this value filter (section [2.2.5.3.6.1.3](#)) is based. If this advanced filter is a value filter, as specified by **sxft**, and this advanced filter is associated with a non-OLAP **PivotTable** (section [2.1.7.40](#)), then this value MUST be greater than or equal to 0. Otherwise, it MUST be -1 and MUST be ignored.

**isxthMeasure (4 bytes):** An **ISXTH** (section [2.5.82](#)) that specifies the pivot hierarchy (section [2.2.5.3.4](#)) used by this advanced filter. The pivot hierarchy this value specifies MUST have an associated cache hierarchy (section [2.2.5.2.7](#)) with the **fMeasure** field equal to 1. If this advanced filter is a value filter, as specified by **sxft**, and this advanced filter is associated with an OLAP **PivotTable** (section [2.1.7.40](#)), then this value MUST be greater than or equal to 0. Otherwise, it MUST be -1 and MUST be ignored.

**A - fLoadName (1 bit):** A bit that specifies whether **stName** exists.

**B - fLoadDescription (1 bit):** A bit that specifies whether **stDescription** exists.

**C - fLoadVal1 (1 bit):** A bit that specifies whether **stVal1** exists. This value MUST be 1 if and only if this advanced filter is a label filter (section [2.2.5.3.6.1.1](#)), as specified by **sxft**.

**D - fLoadVal2 (1 bit):** A bit that specifies whether **stVal2** exists. This value MUST be 1 if and only if this advanced filter is of type "is between" or "is not between", as specified by **sxft**.

**reserved (12 bits):** This value MUST be zero, and MUST be ignored.

**stName (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies the name of this filter. The length of this value MUST be less than 65,536. This value MUST exist if and only if **fLoadName** is equal to 1.

**stDescription (variable):** An optional **XLWideString** that specifies the description of this advanced filter. The length of this value MUST be less than 65,536. This value MUST exist if and only if **fLoadDescription** is equal to 1.

**stVal1 (variable):** An optional **XLWideString** that specifies the first string value used by label filters. The length of this value MUST be less than 65,536. This value MUST exist if and only if **fLoadVal1** is equal to 1.

**stVal2 (variable):** An optional **XLWideString** that specifies the second string value used by label filters. The length of this value MUST be less than 65,536. This value MUST exist if and only if **fLoadVal2** is equal to 1.

### 2.4.237 BrtBeginSXFilters

The **BrtBeginSXFilters** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of advanced filters (section [2.2.5.3.6.1](#)) that apply to this PivotTable view (section [2.2.5.3](#)).

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| csxfilter |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**csxfilter (4 bytes):** An unsigned integer that specifies the number of advanced filters that apply to this PivotTable view. This value MUST be equal to the number of **BrtBeginSXFILTER** (section [2.4.236](#)) records in this collection.

### 2.4.238 BrtBeginSXFormat

The **BrtBeginSXFormat** record specifies [differential formatting](#) (section [2.2.6.2](#)) applied to the **PivotTable** view and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the differential formatting applied to the **PivotTable** view area identified by the **PivotTable** rule (section [2.2.5.3.9](#)) as specified by the collection of records beginning with the following **BrtBeginPRule** (section [2.4.178](#)) record.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16    | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rIType |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | dxfid |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rIType (2 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the specified differential formatting is applied to the **PivotTable** view area identified by the **PivotTable** rule as specified by the following **BrtBeginPRule** record. This value MUST be a value from the following table.

| Value  | Meaning  |
|--------|--|
| 0x0000 | The differential formatting is cleared from the <b>PivotTable</b> view area. |
| 0x0001 | The differential formatting is applied to the <b>PivotTable</b> view area.   |

**dxfid (4 bytes):** A **DXFid** (section [2.5.37](#)) that specifies the differential formatting applied to this **PivotTable** view area identified by the **PivotTable** rule as specified by the following **BrtBeginPRule** record. If **rIType** is equal to 0x0000, the value of **dxfid** MUST be equal to 0xFFFFFFFF.

### 2.4.239 BrtBeginSXFormats

The **BrtBeginSXFormats** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of formats that apply to this PivotTable view (section [2.2.5.3](#)).

|            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| csxformats |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxformats (4 bytes):** An unsigned integer that specifies the number of formats that apply to this PivotTable view. This value MUST be equal to the number of **BrBeginSXFormat** (section [2.4.238](#)) records for this PivotTable view.

#### 2.4.240 BrtBeginSXLI

The **BrtBeginSXLI** (section [2.4.240](#)) record specifies properties of a pivot line (section [2.2.5.3.8.3](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot line in a PivotTable view (section [2.2.5.3](#)).

|         |   |   |   |   |   |   |   |   |   |         |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---------|---|---|---|---|---|---|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1       | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9        | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cSic    |   |   |   |   |   |   |   |   |   | itmtype |   |   |   |   |   |   |   |   |   | reserved |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| cisxvis |   |   |   |   |   |   |   |   |   |         |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iData   |   |   |   |   |   |   |   |   |   |         |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cSic (2 bytes):** An unsigned integer that specifies the number of pivot line entries (section [2.2.5.3.8.4](#)) to reuse from the previous pivot line (as specified by the **BrtBeginISXVIs** (section [2.4.94](#)) record in the previous **SXLI** collection) within the **SXLIRWS** or **SXLICOLS** collection that contains this record (for **PivotTable** definitions, see section [2.1.7.40](#)).

**itmtype (1 byte):** A **PivotItemType** (section [2.5.104](#)) that specifies the type of this pivot line.

**reserved (1 byte):** This value MUST be 0, and MUST be ignored.

**cisxvis (4 bytes):** An unsigned integer that specifies the count of pivot line entries specified by the **BrtBeginISXVIs** record contained in this **SXLI** (for definition, see section [2.1.7.40](#)) collection. This value MUST be equal to the count of elements in the **rgisxvis** array in the **BrtBeginISXVIs** record. The pivot line entries used in this pivot line will be those reused from the previous pivot line, as specified by **cSic**, in addition to those specified by the **BrtBeginISXVIs** record.

**iData (4 bytes):** An **ISXDI** (section [2.5.81](#)) that specifies the data item (section [2.2.5.3.7.5.1](#)) to use for this pivot line. If the data field (section [2.2.5.3.7.5.2](#)) is on the row (2) axis or column (2) axis using this pivot line, this value MUST NOT equal -1. Otherwise, this value MUST be 0 and MUST be ignored.

#### 2.4.241 BrtBeginSXLICols

The **BrtBeginSXLICols** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot lines (section [2.2.5.3.8.3](#)) that appear on the column (2) area of the PivotTable view (section [2.2.5.3](#)). For details about the column (2) area, see Location and Body (section [2.2.5.3.8.1](#)).

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| csxlis |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxlis (4 bytes):** An unsigned integer that specifies the number of pivot lines that appear on the column (2) area of the PivotTable view. For details about the column (2) area, see Location and Body (section [2.2.5.3.8.1](#)). This value MUST be equal to the number of **BrBeginSXLI** (section [2.4.240](#) records in this collection.

#### 2.4.242 BrtBeginSXLIRws

The **BrBeginSXLIRws** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot lines that appear on the row (2) area of the PivotTable view. For details about the row (2) area, see Location and Body (section [2.2.5.3.8.1](#)).

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| csxlis |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxlis (4 bytes):** An unsigned integer that specifies the number of pivot lines that appear on the row (2) area of the PivotTable view. For details about the row (2) area, see Location and Body (section [2.2.5.3.8.1](#)). This value MUST be equal to the number of **BrBeginSXLI** (section [2.4.240](#) records in this collection.

#### 2.4.243 BrtBeginSXLocation

The **BrtBeginSXLocation** record specifies the location of a PivotTable view (section [2.2.5.3](#)) in a sheet, and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

|                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rfxGeom (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| rwFirstHead        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| rwFirstData        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| colFirstData       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| crwPage            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ccolPage           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rfxGeom (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) that specifies the location of the PivotTable view body in a sheet. For more details about the PivotTable view body, see Location and Body (section [2.2.5.3.8.1](#)).

**rwFirstHead (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies first row (2) in a **PivotTable** report body that contains pivot item (section [2.2.5.3.3](#)) captions, data item (section [2.2.5.3.7.5.1](#)) captions, or data values. For more details about the PivotTable view body, see Location and Body (section [2.2.5.3.8.1](#)). If no row (2) area and no column (2) area exists, this value MUST be equal to **rfxGeom.rwFirst** + 1, and MUST be ignored. The value of this field MUST be less than or equal to **rwFirstData**.

**rwFirstData (4 bytes):** An **UncheckedRw** that specifies the location of the topmost row (2) of the PivotTable view body, where cells containing values of data items will appear. For more details about the PivotTable view body, see Location and Body (section [2.2.5.3.8.1](#)).

**colFirstData (4 bytes):** An **UncheckedCol** that specifies the location of the first column (2) of the PivotTable view body, where cells containing values of data items will appear. For more details about the PivotTable view body, see Location and Body (section [2.2.5.3.8.1](#)).

**crwPage (4 bytes):** A **DRw** (section [2.5.34](#)) that specifies the number of rows (2) with cells containing data for pivot fields (section [2.2.5](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view.

**ccolPage (4 bytes):** A **DCol** (section [2.5.31](#)) that specifies the number of columns (2) with cells containing data for pivot fields on the page axis of the PivotTable view.

#### 2.4.244 BrtBeginSXPI

The **BrtBeginSXPI** record specifies properties of a pivot field (section [2.2.5.3.2](#)) or pivot hierarchy (section [2.2.5.3.4](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view (section [2.2.5.3](#)) and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot field or pivot hierarchy (section [2.2.5.3.4](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view.

|                        |   |          |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------------------|---|----------|---|---|---|---|---|---|---|---|---|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                      | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2                     | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| isxvd                  |   |          |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| isxvi                  |   |          |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| isxth                  |   |          |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A                      | B | reserved |   |   |   |   |   |   |   |   |   | irstUnique (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                    |   |          |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| irstDisplay (variable) |   |          |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                    |   |          |   |   |   |   |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**isxvd (4 bytes):** An **ISXVD** (section [2.5.83](#)) that specifies a pivot field that is displayed on the page axis area of the **PivotTable** view. This value MUST NOT equal -1 or -2. The value of the **sxaxisPage** of the **sxaxis** field of the referenced **BrtBeginSXVD** record (section [2.4.261](#)) MUST be equal to 1.

**isxvi (4 bytes):** An unsigned integer that specifies the pivot item (section [2.2.5.3.3](#)) included in the filter for this pivot field. This value MUST be a value from the following table.

| Value                    | Meaning  |
|--------------------------|--|
| 0x00000000 to 0x00100000 | Specifies a pivot item index, as specified in section <a href="#">2.2.5.3.3</a> , for the pivot item included in the filter, as specified by Non-OLAP Page Filtering (section <a href="#">2.2.5.3.7.1.1</a> ). |
| 0x001000FE               | Specifies that pivot items are included as specified in sections <a href="#">2.2.5.3.7.1.1</a> (Non-OLAP Page Filtering) and section <a href="#">2.2.5.3.7.1.2</a> (OLAP Page Filtering).                      |

If this field is not equal to 0x001000FE, then the **fEnableMultiplePageItems** field in the **BrtBeginSXVD** record of the pivot field specified by **isxvd** MUST be equal to 0. If the **fEnableMultiplePageItems** field in the **BrtBeginSXVD** record of the pivot field specified by **isxvd** is equal to 1, this field MUST be equal to 0x001000FE. If this is an OLAP **PivotTable** view, this field MUST be equal to 0x001000FE.

**isxth (4 bytes):** An **ISXTH** (section [2.5.82](#)) that specifies the pivot hierarchy to which the pivot field specified by **isxvd** belongs. If this **PivotTable** is an OLAP **PivotTable**, this field MUST NOT be equal to -1 or -2. If this **PivotTable** is not an OLAP **PivotTable**, this value MUST be ignored.

**A - fUnique (1 bit):** A bit that specifies whether **irstUnique** is present after the fixed-length portion of this record. This value MUST be equal to 0 for **PivotTables** that are not OLAP **PivotTables**.

**B - fDisplay (1 bit):** A bit that specifies whether **irstDisplay** is present after the fixed-length portion of this record. This value MUST be equal to 0 for **PivotTables** that are not OLAP **PivotTables**.

**reserved (6 bits):** This value MUST be zero, and MUST be ignored.

**irstUnique (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of an OLAP member. If the **fEnableMultiplePageItems** field on the **BrtBeginSXTH** (section [2.4.252](#)) record specified by this record's **isxth** field is equal to 0, the OLAP member specified by this field is included in the manual filter (section [2.2.5.3.5](#)).

If the **irstUnique** field is present and the **bVerCacheCreated** field on the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record associated with this **PivotTable** view is less than 3, then this string MUST be less than or equal to 255 characters in length. If the **bVerCacheCreated** field of that **BrtBeginPivotCacheDef** record associated with this **PivotTable** view is greater than or equal to 3, then this string MUST be less than or equal to 32,767 characters in length.

If the **fUnique** field is 1, this **irstUnique** field MUST be present. If the **fUnique** field is 0, this **irstUnique** field MUST NOT be present. If the **fEnableMultiplePageItems** field on the **BrtBeginSXTH** record specified by this record's **isxth** field is equal to 1, this field MUST be ignored.



**irstDisplay (variable):** An **XLWideString** that specifies the caption of the OLAP member specified by this record's **irstUnique** field when the **fEnableMultiplePageItems** field on the **BrBeginSxTH** record specified by this record's **isxth** field is equal to 0.

If the **irstDisplay** field is present and the **bVerCacheCreated** field on the **BrBeginPivotCacheDef** record associated with this PivotTable view is less than 3, then this string MUST be less than or equal to 255 characters in length. If the **bVerCacheCreated** field of that **BrBeginPivotCacheDef** record associated with this PivotTable view is greater than or equal to 3, then this string MUST be less than or equal to 32,767 characters in length.

If the **fDisplay** field is 1, this **irstDisplay** field MUST be present. If the **fDisplay** field is 0, this **irstDisplay** field MUST NOT be present. If the **fEnableMultiplePageItems** field on the **BrBeginSxTH** record specified by this record's **isxth** field is equal to 1, this field MUST be ignored.

#### 2.4.245 BrtBeginSXPIs

The **BrtBeginSXPIs** record specifies the beginning of a collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot fields (section [2.2.5](#)) on the page axis (section [2.2.5.3.7.1](#)) of the **PivotTable** view (section [2.2.5.3](#)). If this record exists, the number of **BrtBeginSXVD** records (section [2.4.261](#)) in this **PivotTable** view MUST be greater than 0.

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |  |
| csxpis |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

**csxpis (4 bytes):** An unsigned integer that specifies the count of pivot fields on the page axis. This value MUST be equal to the number of **BrtBeginSXPI** (section [2.4.244](#)) records in this collection.

#### 2.4.246 BrtBeginSxRow

The **BrtBeginSxRow** record specifies the beginning of a collection of records as defined by the PIVOTROWS15 rule in the **PivotTable** (section [2.1.7.40](#)) part ABNF rules. The collection of records specifies **PivotValueCell** (section [2.2.5.6.1](#)) data units and forms a single row (2) of **PivotValues** (section [2.2.5.6](#)) in a Non-Worksheet PivotTable (section [2.2.5.5](#)).

|            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |  |
| FRTHheader |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| csxvcells  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

**FRTHheader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**csxvcells (4 bytes):** An unsigned integer that specifies the number of **PivotValueCell** data units in this collection. This value MUST be equal to the number of **PIVOTVALUECELL15** (section [2.1.7.40](#)) rules that appear in the **PIVOTROWS15** (section [2.1.7.40](#)) rule specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF rules.

### 2.4.247 BrtBeginSXRules

The **BrtBeginSXRules** record specifies the beginning of a collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of **PivotTable** rule (section [2.2.5.3.9](#)).

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| csxrules |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxrules (4 bytes):** An unsigned integer that specifies the number of **PivotTable** rules in this collection. This value MUST be equal to the number of **BrtBeginPRule** (section [2.4.178](#)) records in this collection.

### 2.4.248 BrtBeginSXRules14

The **BrtBeginSXRules14** record specifies the beginning of a collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of **PivotTable** rules (section [2.2.5.3.9](#)).

|            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| csxrules   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**csxrules (4 bytes):** An unsigned integer that specifies the number of **PivotTable** rules in this collection. This value MUST be equal to the number of **BrtBeginPRule14** (section [2.4.179](#)) records in this collection.

### 2.4.249 BrtBeginSxSelect

The **BrtBeginSxSelect** record specifies the selection properties of a **PivotTable** view and specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a **PivotTable** rule (section [2.2.5.3.9](#)) used to identify cells of the selection. This record MUST be ignored if **irstRelID** is NULL or points to an invalid **PivotTable** (section [2.1.7.40](#)) part.

|     |   |   |   |   |   |           |   |   |   |   |   |   |   |   |          |         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|-----------|---|---|---|---|---|---|---|---|----------|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0   | 1 | 2 | 3 | 4 | 5 | 6         | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4        | 5       | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| pnn |   |   |   |   |   |           |   |   |   |   |   |   |   |   |          |         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A   | B | C | D | E | F | sxaxisAct |   |   |   |   |   |   |   |   |          | iDimAct |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |           |   |   |   |   |   |   |   |   | iLiStart |         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|                      |         |
|----------------------|---------|
| ...                  | iLiMic  |
| ...                  | iLiMac  |
| ...                  | rwAct   |
| ...                  | colAct  |
| ...                  | rwPrev  |
| ...                  | colPrev |
| ...                  | cClick  |
| irstRelID (variable) |         |
| ...                  |         |

**pnn (4 bytes):** A **Pnn** (section [2.5.107](#)) that specifies the window **pane** that contains the selection in the PivotTable view [<21>](#).

**A - fLabelOnly (1 bit):** A bit that specifies whether only cells in the page area (section [2.2.5.3.8.1.3](#)), row (2) area, or column (2) area are included in this selection. This value MUST be equal to 0 if the **fDataOnly** field is 1.

**B - fDataOnly (1 bit):** A bit that specifies whether only cells in the data area (section [2.2.5.3.8.1.4](#)) are included in this selection. This value MUST be equal to 0 if the **fLabelOnly** field is 1.

**C - fToggleDataHeader (1 bit):** A bit that specifies whether the PivotTable view selection toggle is enabled. The selection toggle enables a method for the user to select values, labels, or both values and labels.

**D - fExtendable (1 bit):** A bit that specifies whether the selection can be extended with additional selections.

**E - fSelectionClick (2 bits):** This value MUST be 0, and MUST be ignored.

**F - reserved (2 bits):** This value MUST be 0, and MUST be ignored.

**sxaxisAct (1 byte):** An unsigned integer that specifies the area of the PivotTable view in which the **active cell** of the selection lies. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x00  | The area of the PivotTable view in which the active cell of the selection lies is not specified.                 |
| 0x01  | The row (2) area of the PivotTable view specified by <b>irstRelID</b> contains the active cell of the selection. |
| 0x02  | The column (2) area of the PivotTable view specified by <b>irstRelID</b> contains the active cell                |

| Value | Meaning   |
|-------|---|
|       | of the selection.   |
| 0x04  | The page area of the PivotTable view specified by <b>irstRelID</b> contains the active cell of the selection <a href="#">&lt;22&gt;</a> . |

**iDimAct (4 bytes):** An unsigned integer that specifies the zero-based position within the PivotTable axis (section [2.2.5.3.7](#)) of the pivot field (section [2.2.5.3.2](#)) in which the active cell of the selection lies. If each of **sxaxisAct.sxaxisRw**, **sxaxisAct.sxaxisCol**, **sxaxisAct.sxaxisPage**, **sxaxisAct.sxaxisData** is 0 then this value MUST be 0. If **sxaxisAct.sxaxisRw** is 1, then this value MUST be less than the value of the **cisxvd** field of the **BrtBeginISXVDRws** (section [2.4.93](#)) record of the **PivotTable** part specified by **irstRelID**. If **sxaxisAct.sxaxisCol** is 1, then this value MUST be less than the value of the **cisxvd** field of the **BrtBeginISXVDCols** (section [2.4.92](#)) record. If **sxaxisAct.sxaxisPage** is 1, then this value MUST be 0.

**iLiStart (4 bytes):** An unsigned integer that specifies the pivot line (section [2.2.5.3.8.3](#)) where the selection operation started. The value of this field MUST be greater than or equal to **iLiMic** and less than or equal to **iLiMac**.

If **sxaxisAct.sxaxisRw** is 1, then this value specifies a zero-based index into the collection of **SXLI** (section [2.1.7.40](#)) rules following the **BrtBeginSXLIRws** (section [2.4.242](#)) record in the **PivotTable** part specified by **irstRelID**. If **sxaxisAct.sxaxisCol** is 1, then this value specifies a zero-based index into the collection of **SXLI** rules following the **BrtBeginSXLICols** (section [2.4.241](#)) record in the **PivotTable** part specified by **irstRelID**. If **sxaxisAct.sxaxisPage** is 1, then the value MUST be 0.

**iLiMic (4 bytes):** An unsigned integer that specifies the minimum pivot line the selection contains.

If **sxaxisAct.sxaxisRw** is 1, then this value specifies a zero-based index into the collection of **SXLI** (section [2.1.7.40](#)) rules following the **BrtBeginSXLIRws** record in the **PivotTable** part specified by **irstRelID** and MUST be less than or equal to the value of the **csxlis** field of the **BrtBeginSXLIRws** record. If **sxaxisAct.sxaxisCol** is 1, then this value specifies a zero-based index into the collection of **SXLI** rules following the **BrtBeginSXLICols** record in the **PivotTable** part specified by **irstRelID** and MUST be less than or equal to the value of the **csxlis** field of the **BrtBeginSXLICols** record. If **sxaxisAct.sxaxisPage** is 1, then the value MUST be 0.

**iLiMac (4 bytes):** An unsigned integer that specifies the maximum pivot line the selection contains.

If **sxaxisAct.sxaxisRw** is 1, then this value specifies a zero-based index into the collection of **SXLI** (section [2.1.7.40](#)) rules following the **BrtBeginSXLIRws** record in the **PivotTable** part specified by **irstRelID** and MUST be less than or equal to the value of the **csxlis** field of the **BrtBeginSXLIRws** record. If **sxaxisAct.sxaxisCol** is 1, then this value specifies a zero-based index into the collection of **SXLI** rules following the **BrtBeginSXLICols** record in the **PivotTable** part specified by **irstRelID** and MUST be less than or equal to the value of the **csxlis** field of the **BrtBeginSXLICols** record. If **sxaxisAct.sxaxisPage** is 1, then the value MUST be 0.

**rwAct (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) of the active cell the selection contains. If **sxaxisAct.sxaxisRw** is 1, then this value MUST be within the row (2) area. If **sxaxisAct.sxaxisCol** is 1, then this value MUST be within the column (2) area. If **sxaxisAct.sxaxisPage** is 1, then this value MUST be within the page area.

**colAct (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) of the active cell the selection contains. If **sxaxisAct.sxaxisRw** is 1, then this value MUST be within the row (2) area. If **sxaxisAct.sxaxisCol** is 1, then this value MUST be within the column (2) area. If **sxaxisAct.sxaxisPage** is 1, then this value MUST be within the page area.

**rwPrev (4 bytes):** An **UncheckedRw** that specifies the row (2) that is clicked to begin the selection.

**colPrev (4 bytes):** An **UncheckedCol** that specifies the column (2) that is clicked to begin the selection.

**cClick (2 bytes):** An unsigned integer that specifies the number of clicks to make this selection. The value MUST be greater than or equal to 1. The value cycles through 1 to *N*, where *N* is the number of different ways the selection can be extended.

**irstRelID (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the relationship identifier to the PivotTable view that the selection applies to.

## 2.4.250 BrtBeginSXTDMP

The **BrtBeginSXTDMP** record specifies properties of a member (3) property and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1           | 2 | 3 | 4         | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
|-------------------------|---|---|---|---|---|---|---|---|---|---|-------------|---|---|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| cchLevelUnq             |   |   |   |   |   |   |   |   |   |   | ichPropName |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| cchPropName             |   |   |   |   |   |   |   |   |   |   | isxtl       |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...                     |   |   |   |   |   |   |   |   |   |   | isxvd       |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...                     |   |   |   |   |   |   |   |   |   |   | A           | B | C | reserved3 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| irstProperty (variable) |   |   |   |   |   |   |   |   |   |   |             |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...                     |   |   |   |   |   |   |   |   |   |   |             |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

**cchLevelUnq (2 bytes):** An unsigned integer that specifies the length of the MDX unique name of the associated OLAP level represented by the cache hierarchy (section [2.2.5.2.7](#)) that is associated with this pivot hierarchy (section [2.2.5.3.4](#)). This MDX unique name comes before the member (3) property name in **irstProperty**.

For example, if the value of **irstProperty** equals "[Store].[Store Name].[Store Manager]", **cchLevelUnq** equals 20. This refers to "[Store].[Store Name]".

**ichPropName (2 bytes):** An unsigned integer that specifies the zero-based position of the character where the member (3) property name portion begins in **irstProperty**. This value MUST be equal to the value as specified by the following formula.

$$\text{ichPropName} = \text{cchLevelUnq} + 2$$

For example, if the value of **irstProperty** equals "[Store].[Store Name].[Store Manager]", **ichPropName** equals 22. This refers to the starting character of "Store Manager".

**cchPropName (2 bytes)**: An unsigned integer that specifies the length of the member (3) property name portion of **irstProperty**. This value MUST be equal to the value as specified by the following formula, where 'n' is the length of **irstProperty**.

$$\text{cchPropName} = n - \text{ichPropName} - 1$$

For example, if the value of **irstProperty** equals "[Store].[Store Name].[Store Manager]", **cchPropName** equals 13. This refers to the length of "Store Manager".

**isxtl (4 bytes)**: An unsigned integer that specifies the zero-based ordinal of the associated OLAP level represented by the cache hierarchy that is associated with this pivot hierarchy. If this value is equal to 32,767, this specifies that this member (3) property will apply to all levels. If this value is not equal to 32,767 and **isxvd** is not equal to -1, then this value MUST be equal to the **isxtl** field of the **BrtBeginPCDField** (section [2.4.130](#)) record of the cache field (section [2.2.5.2.2](#)) associated with the pivot field specified by **isxvd**.

**isxvd (4 bytes)**: An **ISXVD** (section [2.5.83](#)) that specifies the pivot field that this member (3) property is associated with. This value MUST NOT be equal to -2.

If this value is not equal to -1, the **fOlapMemPropField** of the **BrtBeginPCDField** record of the cache field associated with the pivot field specified by this field MUST be 1. If this value is not equal to -1, **irstProperty** MUST be equal to the **stFldName** field of the **BrtBeginPCDField** record of the cache field associated with the pivot field specified by this field.

If this value is equal to -1, **irstProperty** MUST NOT equal the **stFldName** of any **BrtBeginPCDField** records on the **PivotCache** (section [2.2.5.2](#)) associated with this PivotTable view.

**A - fDisplayInReport (1 bit)**: A bit that specifies whether to show this member (3) property value in a PivotTable cell.

**B - reserved1 (1 bit)**: This value MUST be zero, and MUST be ignored.

**C - reserved2 (1 bit)**: This value MUST be zero, and MUST be ignored.

**reserved3 (13 bits)**: This value MUST be zero, and MUST be ignored.

**irstProperty (variable)**: An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of this member (3) property.

#### 2.4.251 BrtBeginSXTDMPS

The **BrtBeginSXTDMPS** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies member (3) properties in this pivot hierarchy (section [2.2.5.3.4](#)).

If the **bVerSxMacro** of the **BrtBeginSXView** (section [2.4.264](#)) is less than 0x03, **BrtSXTDMPOrder** (section [2.4.775](#)) records MUST NOT be present in this collection. If the **bVerSxMacro** of the **BrtBeginSXView** is greater than or equal to 0x03, **BrtBeginSXTDMP** (section [2.4.250](#)) records MUST NOT be present in this collection.

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| csxtdmp |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**csxtdmp (4 bytes):** An unsigned integer that specifies the count of member (3) properties in this pivot hierarchy. This value MUST be equal to the number of **SXTDMP** (section [2.1.7.40](#)) collections specifying member (3) properties in this collection.

#### 2.4.252 BrtBeginSXTH

The **BrtBeginSXTH** record specifies properties of a pivot hierarchy (section [2.2.5.3.4](#)) and specifies a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot hierarchy.

|     |           |   |   |   |   |   |   |   |   |           |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|-----------|---|---|---|---|---|---|---|---|-----------|------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1         | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10        | 11                     | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | B         | C | D | E | F | G | H | I | J | reserved1 |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| K   | reserved2 |   |   |   |   |   |   |   |   |           | irstCaption (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |           |   |   |   |   |   |   |   |   |           |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fOutlineMode (1 bit):** A bit that specifies whether the pivot fields (section [2.2.5](#)) representing the levels of this pivot hierarchy have the **fOutline** field of the **BrtBeginSXVD** record (section [2.4.261](#)) set to 1 when the pivot fields are first created. See section [2.2.5.3.7.4.2](#) for more information.

**B - fEnableMultiplePageItems (1 bit):** A bit that specifies whether multiple OLAP members can be selected when the pivot hierarchy is on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view (section [2.2.5.3](#)).

**C - fSubtotalAtTop (1 bit):** A bit that specifies whether the pivot fields representing the levels of this pivot hierarchy have the **fSubtotalAtTop** field of the **BrtBeginSxvd** record set to 1 when the pivot fields are first created. See Subtotaling (section [2.2.5.3.7.4.2](#)) for more information.

**D - fDontShowFList (1 bit):** A bit that specifies whether this pivot hierarchy is hidden in the pivot field list, a mechanism for adding and removing pivot fields and pivot hierarchies from the PivotTable view.

**E - fDragToRow (1 bit):** A bit that specifies whether this pivot hierarchy can be placed on the row (2) axis of the PivotTable view. Possible values for this field and their meanings are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that this pivot hierarchy cannot be placed on the row (2) axis of the PivotTable view.  |
| 1     | Specifies that this pivot hierarchy can be placed on the row (2) axis of the PivotTable view. If this field is equal to 1, the <b>fMeasure</b> field on the <b>BrtBeginPCDHierarchy</b> |

| Value | Meaning   |
|-------|---|
|       | (section <a href="#">2.4.140</a> ) record of the associated cache hierarchy (section <a href="#">2.2.5.2.7</a> ) MUST be 0. |

**F - fDragToColumn (1 bit):** A bit that specifies whether this pivot hierarchy can be placed on the column (2) axis of the PivotTable view. Possible values for this field and their meanings are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that this pivot hierarchy cannot be placed on the column (2) axis of the PivotTable view.  |
| 1     | Specifies that this pivot hierarchy can be placed on the column (2) axis of the PivotTable view. If this field is equal to 1, the <b>fMeasure</b> field of the <b>BrtBeginPCDHierarchy</b> record of the associated cache hierarchy MUST be 0. |

**G - fDragToPage (1 bit):** A bit that specifies whether this pivot hierarchy can be placed on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view. Possible values for this field and their meanings are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that this pivot hierarchy cannot be placed on the page axis of the PivotTable view.  |
| 1     | Specifies that this pivot hierarchy can be placed on the page axis of the PivotTable view. If this field is equal to 1, the <b>fMeasure</b> field in the <b>BrtBeginPCDHierarchy</b> record of the associated cache hierarchy MUST be 0. |

**H - fDragToHide (1 bit):** A bit that specifies whether this pivot hierarchy can be removed from the PivotTable view.

**I - fDragToData (1 bit):** A bit that specifies whether this pivot hierarchy can be placed on the data axis (section [2.2.5.3.7.5](#)) of the PivotTable view. Possible values for this field and their meanings are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that this pivot hierarchy cannot be placed on the data axis of the PivotTable view.  |
| 1     | Specifies that this pivot hierarchy can be placed on the data axis of the PivotTable view. If this field is equal to 1, the <b>fMeasure</b> field on the <b>BrtBeginPCDHierarchy</b> record of the associated cache hierarchy MUST be 1. |

**J - fFilterInclusive (1 bit):** A bit that specifies whether manual filters (section [2.2.5.3.5](#)) applied to this pivot hierarchy are inclusive or exclusive. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | OLAP members specified in the manual filter are excluded from the PivotTable view along with their descendants. |
| 1     | OLAP members specified in the manual filter are included from the PivotTable view along                         |



| Value | Meaning                                |
|-------|--|
|       | with their ascendants and descendants. |

For more information, see section [2.2.5.3.5.2](#).

**reserved1 (22 bits):** This value MUST be zero, and MUST be ignored.

**K - fLoadCap (1 bit):** A bit that specifies whether an **irstCaption** is included in this record.

**reserved2 (15 bits):** This value MUST be zero, and MUST be ignored.

**irstCaption (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the user-defined caption of this pivot hierarchy. This value MUST exist if **fLoadCap** is 1. This value MUST NOT exist if **fLoadCap** is 0. This value MUST be less than or equal to 32,767 characters in length.

### 2.4.253 BrtBeginSXTHItem

This **BrtBeginSXTHItem** record specifies the MDX unique name of an OLAP member to be included or excluded in PivotTable view manual filtering (section [2.2.5.3.5](#)) and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

|                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| irstItem (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**irstItem (variable):** An **XLWideString** that specifies the MDX unique name of an OLAP member to be included or excluded in PivotTable view OLAP manual filters (section [2.2.5.3.5.2](#)).

### 2.4.254 BrtBeginSXTHItems

The **BrtBeginSXTHItems** record specifies the count of OLAP members that are included or excluded in **PivotTable** manual filtering (section [2.2.5.3.5](#)) and specifies the beginning of a collection of records as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the OLAP members that are included or excluded in **PivotTable** manual filtering.

|       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| CSZ   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iSXTL |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csz (4 bytes):** An unsigned integer that specifies the count of MDX unique names of OLAP members that are included or excluded in PivotTable OLAP manual filters (section [2.2.5.3.5.2](#)). This value MUST be equal to the number of **BrtBeginSXTHItem** (section [2.4.253](#)) records in this collection.

**iSXTL (4 bytes):** A signed integer that specifies the zero-based ordinal of the level associated with the **BrBeginSXTItem** records in this collection. A value of -1 specifies that the **BrBeginSXTItem** records in this collection can be from any pivot field (section 2.2.5.3.2) of the corresponding pivot hierarchy (section 2.2.5.3.4) as specified by the preceding **BrBeginSXTH** (section 2.4.252) collection.

If the data functionality level (section 2.2.5.1) of this PivotTable view (section 2.2.5.3) is greater than or equal to 3, or this pivot hierarchy is not on the page axis (section 2.2.5.3.7.1), this value MUST be greater than or equal to 0. If the data functionality level of this PivotTable view is less than 3 and this pivot hierarchy is on the page axis, this value MUST be equal to -1.

#### 2.4.255 BrBeginSXTHs

The **BrBeginSXTHs** record specifies the beginning of a collection of records as defined by the **PivotTable** (section 2.1.7.40) part ABNF. The collection of records specifies pivot hierarchies of the PivotTable view (section 2.2.5.3).

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| csxth |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**csxth (4 bytes):** An unsigned integer that specifies the number of **BrBeginSXTH** (section 2.4.252) records within this collection. This value MUST be equal to the number of **BrBeginSXTH** records. This value MUST be equal to the number of **BrBeginPCDHierarchy** (section 2.4.140) records plus the number of **BrBeginPCDKPI** records (section 2.4.142) of the associated **PivotCache** (section 2.2.5.2).

#### 2.4.256 BrBeginSXTupleSet

The **BrBeginSXTupleSet** record specifies the beginning of a collection of records and collections as defined by the Common Productions ABNF (section 2.1.8). The collection of records specifies an OLAP named set.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cRow       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cCol       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section 2.5.54) that specifies the future record (section 2.1.6) information for this record.

**cRow (4 bytes):** An unsigned integer that specifies the number of **BrBeginSXTupleSetRow** (section 2.4.259) records within this collection. This value MUST be greater than or equal to 1. The result of **cRow \* cCol** MUST be less than or equal to 3000.

**cCol (4 bytes):** An unsigned integer that specifies the number of **BrtSXTupleSetHeaderItem** (section [2.4.778](#)) records within this collection. This value MUST be greater than or equal to 1. The result of **cRow \* cCol** MUST be less than or equal to 3000.

#### 2.4.257 BrtBeginSXTupleSetData

The **BrtBeginSXTupleSetData** record specifies the beginning of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies the MDX tuples within the associated OLAP named set. The value of the **cRow** field in the **BrtBeginSXTupleSet** (section [2.4.256](#)) record that immediately precedes this record MUST be equal to the number of **BrtBeginSXTupleSetRow** records between this **BrtBeginSXTupleSetData** record and the **BrtEndSXTupleSetData** record that immediately follows this record.

#### 2.4.258 BrtBeginSXTupleSetHeader

The **BrtBeginSXTupleSetHeader** record specifies the beginning of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies the MDX unique names of the OLAP hierarchies and the MDX unique names of the OLAP levels of the OLAP named set. The value of the **cCol** field in the **BrtBeginSXTupleSet** record that immediately precedes this record MUST be equal to the number of **BrtSXTupleSetHeaderItem** records between this **BrtBeginSXTupleSetHeader** record and the **BrtEndSXTupleSetHeader** record that immediately follows this record.

#### 2.4.259 BrtBeginSXTupleSetRow

The **BrtBeginSXTupleSetRow** record specifies the beginning of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies an MDX tuple within the OLAP named set. The value of the **cRow** field in the **BrtBeginSXTupleSet** record that immediately precedes this record MUST be equal to the number of **BrtBeginSXTupleSetRow** records between the **BrtBeginSXTupleSetData** record that immediately precedes this record and the **BrtEndSXTupleSetData** record that immediately follows this record. The value of the **cCol** field in the **BrtBeginSXTupleSet** record that immediately precedes this record MUST be equal to the number of **BrtSXTupleSetRowItem** records between this **BrtBeginSXTupleSetRow** record and the **BrtEndSXTupleSetRow** record that immediately follows this record.

#### 2.4.260 BrtBeginSxvcells

The **BrtBeginSxvcells** record specifies the beginning of a collection of records, as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF rules. The collection of records specifies a **PivotValues** (section [2.2.5.6](#)) collection in a Non-Worksheet PivotTable (section [2.2.5.5](#)).

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHdr  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cRw     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cCol    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cacheId |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**cRw (4 bytes):** An unsigned integer that specifies the number of **BrBeginSxRow** (section [2.4.246](#)) records in this collection. This value MUST be equal to the number of **BrBeginSxRow** (section [2.4.246](#)) and **BrEndSxRow** (section [2.4.581](#)) record pairs that appear between this **BrBeginSxvcells** record and the next **BrEndSxvcells** (section [2.4.595](#)) record.

**cCol (4 bytes):** An unsigned integer that specifies the number of **PivotValueCell** data units in this collection. This value MUST be equal to the number of **PIVOTVALUECELL15** (section [2.1.7.40](#)) rules that appear in the **PIVOTROWS15** (section [2.1.7.40](#)) rule specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF rules. The value MUST be equal to the value of the **csxvcells** field of each of the **BrBeginSxRow** (section [2.4.246](#)) records that appear between this **BrBeginSxvcells** record and the next **BrEndSxvcells** (section [2.4.595](#)).

**cacheId (4 bytes):** An unsigned integer attribute that specifies the OLAP **PivotCache** (section [2.2.5.2](#)) associated with the **PivotTable** (section [2.1.7.40](#)) associated with this record.

The **PivotCache Definition** (section [2.1.7.38](#)) associated with the **PivotTable** that is associated with this record MUST be extended by a **BrBeginPCD14** (section [2.4.117](#)) and a **BrEndPCD14** record as specified in the **PivotCache Definition** part ABNF. The **icacheId** field of the **BrBeginPCD14** record MUST be equal to this field. The **fSlicerData** field of the **BrBeginPCD14** record MUST be 0.

The **PivotCache Definition** (section [2.1.7.38](#)) associated with the **PivotTable** that is associated with this record MUST be extended by a **BrPivotCacheIdVersion** (section [2.4.708](#)) record as specified in the **PivotCache Definition** part ABNF.

## 2.4.261 BrtBeginSXVD

The **BrtBeginSXVD** record specifies pivot field (section [2.2.5.3.2](#)) properties and specifies the beginning of a collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. This collection of records specifies a pivot field on the **PivotTable** view (section [2.2.5.3](#)).

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |        |    |    |    |    |    |    |   |  |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|----|---|--|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25     | 26 | 27 | 28 | 29 | 30 | 31 |   |  |
| sxaxis              |   |   |   |   |   |   |   |   |   | A  | B  | C  | D  | E  | F  | G  | H  | I  | J  | K  | L  | M  |    |    | N      | O  | P  | Q  | R  | S  | T  | U |  |
| ifmt                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |        |    |    |    |    |    |    |   |  |
| V                   | W | X | Y | Z | a | b | c | d | e | f  | g  | h  | i  | j  | k  | l  | m  | n  | o  | p  | q  | r  | s  | t  | unused |    |    |    |    |    |    |   |  |
| citmAutoShow        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |        |    |    |    |    |    |    |   |  |
| isxdiautoShow       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |        |    |    |    |    |    |    |   |  |
| irstName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |        |    |    |    |    |    |    |   |  |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |        |    |    |    |    |    |    |   |  |

|                                      |
|--------------------------------------|
| irstSub (variable)                   |
| ...                                  |
| irstMemberPropertyCaption (variable) |
| ...                                  |

**sxaxis (1 byte):** An **SXAxis** (section [2.5.145](#)) that specifies the axis or axes this field is present on. For more details, see section [2.2.5.3.7](#).

If **sxaxis.sxaxisData** is equal to 1, then there MUST be a **BrtBeginSXDI** (section [2.4.232](#)) record in the same PivotTable view as this record with an **isxvdData** field that references this record. If **sxaxis.sxaxisData** is equal to 1 and this is an OLAP PivotTable, then the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record associated with this record MUST have its **fMeasure** field equal to 1.

If **sxaxis.sxaxisRw** is equal to 1 and this is a non-OLAP PivotTable, then the **BrtBeginISXVDRws** (section [2.4.93](#)) collection in the same PivotTable view as this record MUST have a value within its **rgisxvdrws** field that references this record. If **sxaxis.sxAxisRw** is equal to 1, **sxaxis.sxaxisCol** and **sxaxis.sxaxisPage** MUST be equal to 0. If **sxaxis.sxAxisRw** is equal to 1 and this is an OLAP PivotTable, then the **BrtBeginPCDHierarchy** record associated with this record MUST have its **fMeasure** field equal to 0.

If **sxaxis.sxaxisCol** is equal to 1 and this is a non-OLAP PivotTable, then the **BrtBeginISXVDCols** (section [2.4.92](#)) in the same PivotTable view as this record MUST have a value within its **rgisxvdcols** that references this record. If **sxaxis.sxAxisCol** is equal to 1, **sxaxis.sxaxisRw** and **sxaxis.sxaxisPage** MUST be equal to 0. If **sxaxis.sxAxisCol** is equal to 1 and this is an OLAP PivotTable, then the **BrtBeginPCDHierarchy** record associated with this record MUST have its **fMeasure** field equal to 0.

If **sxaxis.sxaxisPage** is equal to 1, then there MUST be a **BrtBeginSXPI** (section [2.4.244](#)) record in the same PivotTable view as this record with an **isxvd** that references this record. If **sxaxis.sxAxisPage** is equal to 1, **sxaxis.sxaxisRw** and **sxaxis.sxaxisCol** MUST be equal to 0. If **sxaxis.sxAxisPage** is equal to 1 and this is an OLAP PivotTable, then the **BrtBeginPCDHierarchy** record associated with this record MUST have its **fMeasure** field equal to 0.

**A - fDefault (1 bit):** A bit that specifies whether the default subtotal is displayed for this pivot field. The default subtotal is separately determined for each data item (section [2.2.5.3.7.5.1](#)) (as specified by the **iiftab** field in the **BrtBeginSXDI** record) in this PivotTable view. If this value is equal to 1, a **BrtBeginSXVI** (section [2.4.263](#)) with an **itmType** field equal to **PITDEFAULT** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 0, a **BrtBeginSXVI** with an **itmType** field equal to **PITDEFAULT** MUST NOT exist within this collection. For more information, see section [2.2.5.3.7.4.2](#).

**B - fSum (1 bit):** A bit that specifies whether subtotals using the sum aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrtBeginSXVI** with an **itmType** field equal to **PITSUM** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 1, **fDefault** MUST be 0. If this value is equal to 0, a **BrtBeginSXVI** with an **itmType** field equal to **PITSUM** MUST NOT exist within this collection. MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).

- C - fCounta (1 bit):** A bit that specifies whether subtotals using the count aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITCOUNTA** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITCOUNTA** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).
- D - fAverage (1 bit):** A bit that specifies whether subtotals using the average aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITAVG** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITAVG** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).
- E - fMax (1 bit):** A bit that specifies whether subtotals using the maximum aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITMAX** MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITMAX** (section [2.5.104](#)) MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).
- F - fMin (1 bit):** A bit that specifies whether subtotals using the minimum aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITMIN** MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITMIN** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).
- G - fProduct (1 bit):** A bit that specifies whether subtotals using the product aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITPRODUCT** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITPRODUCT** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).
- H - fCount (1 bit):** A bit that specifies whether subtotals using the count number aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITCOUNT** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITCOUNT** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).
- I - fStdev (1 bit):** A bit that specifies whether subtotals using the standard deviation aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITSTDDEV** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITSTDDEV** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).
- J - fStdevp (1 bit):** A bit that specifies whether subtotals using the standard deviation population aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITSTDDEVP** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 0, **fDefault** MUST be 1. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITSTDDEVP** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).

**K - fVar (1 bit):** A bit that specifies whether subtotals using the variance aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITVAR** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 1, **fDefault** MUST be 0. If this value is equal to 0, a **BrBeginSXVI** with an **itmType** field equal to **PITVAR** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).

**L - fVarp (1 bit):** A bit that specifies whether subtotals using the variance population aggregate function are displayed for this pivot field. If this value is equal to 1, a **BrBeginSXVI** with an **itmType** field equal to **PITVARP** (section [2.5.104](#)) MUST exist within this collection. If this value is equal to 1, **fDefault** MUST be 0. If this value is equal to 0, a **BrBeginSXVI** with an **itmType** field equal to **PITVARP** MUST NOT exist within this collection. This value MUST be 0 for OLAP PivotTables. For more information, see section [2.2.5.3.7.4.2](#).

**M - reserved1 (4 bits):** This value MUST be 0, and MUST be ignored.

**N - fDrilledLevel (1 bit):** A bit that specifies whether all pivot items (section [2.2.5.3.3](#)) in this pivot field are expanded. This value MUST be 0 and MUST be ignored for non-OLAP PivotTables. For more details, section [2.2.5.3.7.4.1](#).

**O - fHideDD (1 bit):** A bit that specifies whether drop-down buttons (mechanisms for applying manual filters (section [2.2.5.3.5](#)), advanced filters (section [2.2.5.3.6.1](#)), and sorting options) are shown in cells where pivot field labels are displayed (for more details, see section [2.2.5.3.8.3](#)).

**P - fHiddenLvl (1 bit):** A bit that specifies whether this pivot field is not shown in the PivotTable view. This value MUST be equal to 0 for non-OLAP PivotTables.

**Q - fUseMemPropCaption (1 bit):** A bit that specifies whether this record contains an **irstMemberPropertyCaption** field. This value MUST be equal to 0 for non-OLAP PivotTables. This value MUST be equal to 0 if the **bVerSxMacro** field on the immediately preceding **BrBeginSXView** (section [2.4.264](#)) record is less than 3.

**R - fCompact (1 bit):** A bit that specifies whether this pivot field is in compact axis mode. For more details, see section [2.2.5.3.8.3](#).

**S - fDisplayName (1 bit):** A bit that specifies whether the **irstName** field exists.

**T - fDisplaySub (1 bit):** A bit that specifies whether the **irstSub** field exists.

**U - fTensorSort (1 bit):** A bit that specifies whether pivot items of this pivot field are displayed in the order retrieved from the source data. This value MUST be equal to 0 for non-OLAP PivotTables. For more details, see section [2.2.5](#).

**ifmt (4 bytes):** A **PivotNumFmtExt** (section [2.5.106](#)) that specifies the number format applied to the pivot items in this pivot field.

**V - fDragToRow (1 bit):** A bit that specifies whether this pivot field can be placed on the row (2) axis. This value MUST be ignored for an OLAP PivotTable view. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that the user will be prevented from placing this pivot field on the row (2) axis.     |
| 1     | Specifies that the user will not be prevented from placing this pivot field on the row (2) axis. |



**W - fDragToColumn (1 bit):** A bit that specifies whether this pivot field can be placed on the column (2) axis. This value MUST be ignored for an OLAP PivotTable view. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that the user will be prevented from placing this pivot field on the column (2) axis.     |
| 1     | Specifies that the user will not be prevented from placing this pivot field on the column (2) axis. |

**X - fDragToPage (1 bit):** A bit that specifies whether this pivot field can be placed on the page axis (section [2.2.5.3.7.1](#)). This value MUST be ignored for an OLAP PivotTable view. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that the user will be prevented from placing this pivot field on the page axis.     |
| 1     | Specifies that the user will not be prevented from placing this pivot field on the page axis. |

**Y - fDragToHide (1 bit):** A bit that specifies whether this pivot field can be removed from the PivotTable view. This value MUST be ignored for an OLAP PivotTable view. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that the user will be prevented from removing this pivot field from the PivotTable view.     |
| 1     | Specifies that the user will not be prevented from removing this pivot field from the PivotTable view. |

**Z - fDragToData (1 bit):** A bit that specifies whether this pivot field can be placed on the data axis (section [2.2.5.3.7.5](#)). This value MUST be ignored for an OLAP PivotTable view. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that the user will be prevented from placing this pivot field on the data axis.     |
| 1     | Specifies that the user will not be prevented from placing this pivot field on the data axis. |

**a - fShowAllItems (1 bit):** A bit that specifies whether to show all pivot items for this pivot field, including pivot items that do not currently exist in the source data. This value MUST be 0 for an OLAP PivotTable view. For more information, see Nesting (section [2.2.5.3.7.4](#)). This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that all pivot items are not displayed. |
| 1     | Specifies that all pivot items are displayed.     |



- b - fOutline (1 bit):** A bit that specifies whether this pivot field is in **outline** form. For more details, see sections [2.2.5.3.8](#) and [2.2.5.3.7.4.2](#).
- c - fInsertBlankRow (1 bit):** A bit that specifies whether to insert a blank row (2) after each pivot item (section [2.2.5.3.3](#)).
- d - fSubtotalAtTop (1 bit):** A bit that specifies whether subtotals are displayed at the top of the group when **fOutline** is equal to 1. For more details, see sections [2.2.5.3.8](#) and [2.2.5.3.7.4.2](#).
- e - fServerBased (1 bit):** A bit that specifies whether this pivot field is server-based when on the page axis. For more details, see section [2.2.5.2.1](#).

This value MUST be 1 if and only if the **fServerBased** field of the **BrBeginPCDField** (section [2.4.130](#)) that specifies the cache field (section [2.2.5.2.2](#)) associated with this pivot field is 1. If this value is 1, the **BrBeginPivotCacheDef** (section [2.4.162](#)) collection that specifies the **PivotCache** (section [2.2.5.2](#)) associated with this **PivotTable** (section [2.1.7.40](#)) MUST have a **BrBeginPCDSOURCE** (section [2.4.160](#)) record with a **isrctype** field equal to 1. This value MUST be 0 for PivotTables not based on ODBC source data.

- f - reserved2 (1 bit):** This value MUST be 0, and MUST be ignored.
- g - fPageBreaksBetweenItems (1 bit):** A bit that specifies whether a page break (2) will be inserted after each pivot item when the PivotTable is printed.
- h - fAutoSort (1 bit):** A bit that specifies whether autosort (for definition, see section [2.2.5.3.2.1](#)) is applied to this pivot field.
- i - fAscendSort (1 bit):** A bit that specifies whether an autosort (for definition, see section [2.2.5.3.2.1](#)) applied to this pivot field will sort in ascending order. This value MUST be a value from the following table.

| Value | Meaning                   |
|-------|---------------------------|
| 0     | Sort in ascending order.  |
| 1     | Sort in descending order. |

- j - fAutoShow (1 bit):** A bit that specifies whether an AutoShow filter is applied to this pivot field. For more details, see section (section [2.2.5.3.6.2](#)).
- k - fTopAutoShow (1 bit):** A bit that specifies whether an AutoShow filter applied to this pivot field will show the top-ranked or bottom-ranked values. For more details, see Simple Filters (section [2.2.5.3.6.2](#)). This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | An AutoShow filter applied to this pivot field will show the bottom-ranked values. |
| 1     | An AutoShow filter applied to this pivot field will show the top-ranked values.    |

- l - fHideNewItems (1 bit):** A bit that specifies whether new pivot items that appear after a refresh are hidden by default. This value MUST be equal to 0 for non-OLAP PivotTables. Possible values for this field are listed in the following table.

| Value | Meaning                                    |
|-------|--|
| 0     | New pivot items will be shown by default.  |
| 1     | New pivot items will be hidden by default. |

**m - fHasAdvFilter (1 bit):** A bit that specifies whether this pivot field has a value filter (section [2.2.5.3.6.1.3](#)) applied to it.

**n - fFilterInclusive (1 bit):** A bit that specifies manual filter behavior. For non-OLAP PivotTables, this bit specifies whether new items will be excluded in manual filtering by default. For OLAP PivotTables, this bit specifies whether a manual filter applied to this pivot field specifies pivot items that are included or excluded. If this pivot field is associated with a pivot hierarchy, this value MUST equal the **fFilterInclusive** field on the **BrtBeginSXT** (section [2.4.252](#)) record of the pivot hierarchy that this pivot field is associated with. For OLAP PivotTables, see section [2.2.5.3.5.2](#) for more details.

**o - fEnableMultiplePageItems (1 bit):** A bit that specifies whether this pivot field can have multiple pivot items selected when it is on the page axis. This value MUST be 0 and MUST be ignored for OLAP PivotTables.

**p - fNotAutoSortDft (1 bit):** A bit that specifies whether a sort operation that will be applied to this pivot field is an autosort operation or a simple data sort. Possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | A sort operation applied to this pivot field is an autosort. If this value is equal to 0, <b>fAutoSort</b> MUST be equal to 0. |
| 1     | A sort operation applied to this pivot field is a simple data sort that will only be applied once, and not an autosort.        |

**q - fMemPropDisplayInReport (1 bit):** A bit that specifies whether to show member (3) property values in the OLAP PivotTable view. The member (3) property is only displayed if the pivot hierarchy is on the row (2) axis as specified by **sxaxis.sxaxisRw** or on the column (2) axis as specified by **sxaxis.sxaxisCol**. This value MUST be equal to 0 for non-OLAP PivotTables. If this value is 1, the **fOlapMemPropField** field on the **BrtBeginPCDF** record of the cache field associated with this pivot field MUST be 1.

**r - fMemPropDisplayInTip (1 bit):** A bit that specifies whether to show member (3) property values in a **ToolTip**. This value MUST be equal to 0 for non-OLAP PivotTables. If this value is 1, the **fOlapMemPropField** field on the **BrtBeginPCDF** record of the cache field associated with this pivot field MUST be 1. If the **bVerSxMacro** field on the immediately preceding **BrtBeginSXView** record is less than 3, this value MUST be equal to 0.

**s - fMemPropDisplayInCaption (1 bit):** A bit that specifies whether to show member (3) property captions as specified by the **irstMemberPropertyCaption** field instead of the pivot item captions. This value MUST be equal to 0 for non-OLAP PivotTables. If this value is 1, the **fOlapMemPropField** field on the **BrtBeginPCDF** record of the cache field associated with this pivot field MUST be 1. If the **bVerSxMacro** field on the associated **BrtBeginSXView** is less than 3, this value MUST be equal to 0.

**t - fItemsDrilledByDefault (1 bit):** A bit that specifies whether the attribute hierarchy in an OLAP PivotTable is expanded by default. This value MUST be equal to 0 for non-OLAP PivotTables. If this value is equal to 1, the **fAttributeHierarchy** field on the

**BrtBeginPCDHierarchy** record of the cache hierarchy (section [2.2.5.2.7](#)) associated with the pivot hierarchy this pivot field is **associated** with MUST be equal to 1. For more information, section [2.2.5.3.7.4.1](#).

**unused (7 bits):** This value is undefined, and MUST be ignored.

**citmAutoShow (4 bytes):** A signed integer that specifies the number of items to show when the **fAutoShow** field is equal to 1. If the **bVerSxMacro** field on the associated **BrtBeginSXView** record is less than 3, this value MUST be greater than or equal to 1 and less than or equal to 255. If the **bVerSxMacro** field on the associated **BrtBeginSXView** record is greater than or equal to 3, this value MUST be greater than or equal to 1.

**isxdiAutoShow (4 bytes):** An **ISXDI** (section [2.5.81](#)) that specifies the data item that AutoShow ranks by when **fAutoShow** is equal to 1. If **fAutoShow** is equal to 1, this value MUST NOT equal -1.

**irstName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of this pivot field.

If **fDisplayName** is equal to 1, **irstName** MUST be present. If **fDisplayName** is equal to 0, **irstName** MUST NOT be present. If present, this value MUST be greater than or equal to 1 character in length. If the **bVerSxMacro** on the **BrtBeginSXView** record associated with this record is less than 3, **irstName** MUST be less than or equal to 255 characters in length. Otherwise, **irstName** MUST be less than or equal to 32,767 characters in length. If this is a non-OLAP **PivotTable**, this **irstName** MUST NOT equal the **irstName** of another **BrtBeginSXVD** associated with the same **BrtBeginSXView** that this record is associated with.

**irstSub (variable):** An **XLWideString** that specifies the custom text that is displayed for the subtotals label. A "?" character within the string specifies that the name of the pivot item will be inserted in that position when the string is displayed.

If **fDisplaySub** is equal to 1, **irstSub** MUST be present. If **fDisplaySub** is equal to 0, **irstSub** MUST NOT be present. If present, this value MUST be greater than or equal to 1 character in length. If the **bVerSxMacro** on the **BrtBeginSXView** associated with this record is less than 3, **irstSub** MUST be less than or equal to 255 characters in length. Otherwise, **irstSub** MUST be less than or equal to 32,767 characters in length.

**irstMemberPropertyCaption (variable):** An **XLWideString** that specifies the MDX unique name of the member (3) property used as a caption for the pivot field and pivot items.

If **fUseMemPropCaption** is equal to 1, **irstMemberPropertyCaption** MUST be present. If **fUseMemPropCaption** is equal to 0, **irstMemberPropertyCaption** MUST NOT be present. If present, **irstMemberPropertyCaption** MUST be less than or equal to 32,767 characters in length. If present, **irstMemberPropertyCaption** MUST be greater than 0 characters in length.

## 2.4.262 BrtBeginSXVDs

This record specifies the beginning of a collection of records as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot fields (section [2.2.5](#)) of the **PivotTable** view (section [2.2.5.3](#)).

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| csxvds |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**csxvds (4 bytes):** An unsigned integer that specifies the number of pivot fields of the **PivotTable** view. This value MUST equal the number of **BrtBeginSXVD** records (section [2.4.261](#)) in this collection. If this **PivotTable** is an OLAP **PivotTable**, this value MUST be less than or equal to the number of **BrtBeginPCDField** (section [2.4.130](#)) records in the associated **PivotCache** (section [2.2.5.2](#)). If this **PivotTable** is not an OLAP **PivotTable**, this value MUST be equal to the number of **BrtBeginPCDField** records in the associated **PivotCache**.

### 2.4.263 BrtBeginSXVI

This record specifies a pivot item (section [2.2.5.3.3](#)) and specifies the beginning of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF.

|         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |                        |   |   |   |        |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----------|---|---|---|---|------------------------|---|---|---|--------|---|---|---|---|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8        | 9 | 0 | 1 | 2 | 3                      | 4 | 5 | 6 | 7      | 8 | 9 | 0 | 1 |
| itmtype |   |   |   |   |   |   |   |   | A | B | C | D | E | F | G | H | I | reserved |   |   |   |   |                        |   |   |   | iCache |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   | displayName (variable) |   |   |   |        |   |   |   |   |
| ...     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |                        |   |   |   |        |   |   |   |   |

**itmtype (1 byte):** A **PivotItemType** (section [2.5.104](#)) that specifies the type of this pivot item. This value MUST NOT equal **PITGRAND** or **PITBLANK** (section [2.5.104](#)). All **BrtBeginSXVI** (section [2.4.263](#)) records that have a value of **PITDATA** (defined in section [2.5.104](#)) for the **itmtype** field MUST precede all other **BrtBeginSXVI** records in the **PivotTable** part ABNF.

**A - fHidden (1 bit):** A bit that specifies whether this pivot item is hidden by a manual filter (section [2.2.5.3.5](#)). If this record applies to an OLAP **PivotTable** view (section [2.2.5.3](#)) or the value of **itmtype** is not **PITDATA**, this value MUST be 0.

**B - fHideDetail (1 bit):** A bit that specifies whether this pivot item is collapsed. This value MUST be 0 for OLAP **PivotTable** views. For more details, section [2.2.5.3.7.4.1](#).

**C - fFormula (1 bit):** A bit that specifies whether the cache item (section [2.2.5.2.3](#)) associated with this pivot item is a calculated item (section [2.2.5.2.6](#)). If this record applies to an OLAP **PivotTable** view or the value of the **itmtype** field is not **PITDATA**, this value MUST be 0.

**D - fMissing (1 bit):** A bit that specifies whether this pivot item is missing from the source data (section [2.2.5.2.1](#)). If this record applies to an OLAP **PivotTable** view or the value of **itmtype** is not **PITDATA**, this value MUST be 0.

**E - fDisplayName (1 bit):** A bit that specifies whether this pivot item has a user-defined caption.

**F - fDrilledMember (1 bit):** A bit that specifies whether this pivot item is expanded. This value MUST be 0 for non-OLAP **PivotTable** views, or if the **fAttributeHierarchy** field in the **BrtBeginPCDHierarchy** (section [2.4.140](#)) record in the associated cache hierarchy (section

[2.2.5.2.7](#)), as specified by section [2.2.5.3.4](#), has a value of 1. If the value of **itmtype** is not **PITDATA**, this value MUST be 0. For more details, section [2.2.5.3.7.4.1](#).

**G - fHasChildrenEst (1 bit):** A bit that specifies whether the pivot item can have child objects. If this record applies to a non-OLAP PivotTable view, this value MUST be 0.

**H - fCollapsedMember (1 bit):** A bit that specifies whether this pivot item is collapsed when the preceding PivotTable view field is on the row (2) axis or column (2) axis. The value MUST be 0 for non-OLAP PivotTable views. This value MUST be 0 unless the **fAttributeHierarchy** field in the **BrBeginPCDHierarchy** record in the associated cache hierarchy, as specified by section [2.2.5.3.4](#), has a value of 1. This field MUST be ignored, unless there is a following pivot field (section [2.2.5.3.2](#)) for which the **fAttributeHierarchy** field in the **BrBeginPCDHierarchy** record in the associated cache hierarchy, as specified by cache hierarchies (section [2.2.5.2.7](#)), also has a value of 1. For more details, section [2.2.5.3.7.4.1](#).

**I - fOlapFilterSelected (1 bit):** A bit that specifies whether this pivot item is included in the manual filter applied to the corresponding pivot field specified by the preceding **BrBeginSXVD** record (section [2.4.261](#)). This value MUST be 0 for non-OLAP **PivotTable** views. For more details, see section [2.2.5.3.5.2](#). The meaning of this value is specified in the following table.

| Value of <b>fFilterInclusive</b> field of <b>BrBeginSXVD</b> record | Value of <b>fOlapFilterSelected</b> | Meaning  |
|---|-------------------------------------|--|
| 1   | 1                                   | This pivot item is included in the manual filter applied to the corresponding pivot field specified by the preceding <b>BrBeginSXVD</b> record, and will be displayed in the corresponding <b>PivotTable</b> view specified by the preceding <b>BrBeginSXView</b> (section <a href="#">2.4.264</a> ) record. |
| 1   | 0                                   | This pivot item is not included in the manual filter applied to the corresponding pivot field specified by the preceding <b>BrBeginSXVD</b> record, and will not be displayed in the corresponding <b>PivotTable</b> view specified by the preceding <b>BrBeginSXView</b> record.                            |
| 0   | 1                                   | This pivot item is excluded from the manual filter applied to the corresponding pivot field specified by the preceding <b>BrBeginSXVD</b> record, and will not be displayed in the corresponding <b>PivotTable</b> view specified by the preceding <b>BrBeginSXView</b> record.                              |
| 0   | 0                                   | This pivot item is not excluded from the manual filter applied to the corresponding pivot field specified by the preceding <b>BrBeginSXVD</b> record, and will be displayed in the corresponding <b>PivotTable</b> view specified by the preceding <b>BrBeginSXView</b> record.                              |

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

**iCache (4 bytes):** A signed integer that specifies a reference to a cache item. If **itmtype** is not **PITDATA**, a reference to a cache item is not specified and this value MUST be -1. Otherwise, this value MUST be a cache item index, as specified by Cache Items, in the cache field (section [2.2.5.2.2](#)) that is associated with this pivot field.

**displayName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the user-defined caption of this pivot item. This field exists only if the value of the **fDisplayName** field is 1. If the **bVerSxMacro** field of the **BrtBeginSXView** record for this PivotTable view is less than or equal to 2, the length MUST be less than 256 characters. Otherwise, the length MUST be less than 32,768 characters.

#### 2.4.264 BrtBeginSXView

The **BrtBeginSXView** record specifies PivotTable view (section [2.2.5.3](#)) properties and specifies the beginning of a collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a PivotTable view.

|                      |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|-----------|---|----|----|----|----|-------------------|-----------|-----------|----|----|----|---------------------|----|----|----|----|------------|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8         | 9 | 10 | 11 | 12 | 13 | 14                | 15        | 16        | 17 | 18 | 19 | 20                  | 21 | 22 | 23 | 24 | 25         | 26 | 27 | 28 | 29 | 30 | 31 |
| bVerSxMacro          |   |   |   |   |   |   |   |           | A | B  | C  | D  | E  | F                 | G         | H         | I  | J  |    |                     | K  | L  | M  | N  | cIndentInc |    |    |    | O  |    |    |
| P                    | Q | R | S | T | U | V | W | X         | Y | Z  | a  | b  | c  | d                 | e         | f         | g  | h  | i  | j                   | k  | l  | m  | n  | o          | p  | q  | r  | s  | t  | u  |
| v                    | w | x | y | z | α | β | γ | δ         | ε | ζ  | η  | θ  | ι  | κ                 | reserved5 |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| saxis4Data           |   |   |   |   |   |   |   | cWrapPage |   |    |    |    |    | bVerSxLastUpdated |           |           |    |    |    | bVerSxUpdateableMin |    |    |    |    |            |    |    |    |    |    |    |
| ipos4Data            |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| itblAutoFmt          |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           | reserved6 |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| dwCrtFmtId           |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| idCache              |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| irstName (variable)  |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| irstData (variable)  |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| irstGrand (variable) |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |           |   |    |    |    |    |                   |           |           |    |    |    |                     |    |    |    |    |            |    |    |    |    |    |    |

|                               |
|-------------------------------|
| irstErrorString (variable)    |
| ...                           |
| irstNullString (variable)     |
| ...                           |
| irstPageFieldStyle (variable) |
| ...                           |
| irstTableStyle (variable)     |
| ...                           |
| irstVacateStyle (variable)    |
| ...                           |
| irstTag (variable)            |
| ...                           |
| irstColHdrName (variable)     |
| ...                           |
| irstRwHdrName (variable)      |
| ...                           |

**bVerSxMacro (1 byte):** A **DataFunctionalityLevel** (section [2.5.28](#)) that specifies the data functionality level (section [2.2.5.1](#)) that this PivotTable view was created with.

**A - fDisplayImmediateItems (1 bit):** A bit that specifies whether pivot item (section [2.2.5.3.3](#)) labels will be displayed in the row (2) area and the column (2) area when there are no data items (section [2.2.5.3.7.5.1](#)) in the PivotTable view.

**B - fEnableDataEd (1 bit):** A bit that specifies whether cells displaying values for data items can be edited.

**C - fDisableFList (1 bit):** A bit that specifies whether the pivot field (section [2.2.5.3.2](#)) list, a mechanism for adding and removing pivot fields from the PivotTable view, will not be displayed.

**D - fReenterOnLoadOnce (1 bit):** A bit that specifies whether the PivotTable view will be automatically updated on load.

**E - fNotViewCalculatedMembers (1 bit):** A bit that specifies whether OLAP calculated members (3) will not be displayed in the PivotTable view. This value MUST be ignored for non-OLAP PivotTables.

**F - fNotVisualTotals (1 bit):** A bit that specifies whether hidden pivot items (section [2.2.5.3.3](#)) will be included when calculating totals. This value MUST be ignored for non-OLAP PivotTable views.

**G - fPageMultipleItemLabel (1 bit):** A bit that specifies whether a pivot field on the page axis (section [2.2.5.3.7.1](#)) with multiple pivot items selected displays "(multiple items)" instead of "All". This value MUST be ignored for OLAP PivotTable views.

**H - reserved1 (1 bit):** This value MUST be 0 and MUST be ignored.

**I - fHideDDDData (1 bit):** A bit that specifies whether a drop-down button, a mechanism for removing data items from the PivotTable view, for the data field (section [2.2.5.3.7.5.2](#)) in the PivotTable view is hidden.

**J - reserved2 (3 bits):** This value MUST be 0 and MUST be ignored.

**K - fHideDrillIndicators (1 bit):** A bit that specifies whether **expand/collapse buttons** are hidden.

**L - fPrintDrillIndicators (1 bit):** A bit that specifies whether expand/collapse buttons are printed.

**M - fMemPropsInTips (1 bit):** A bit that specifies whether member (3) property information is shown in PivotTable view ToolTips.

**N - fNoPivotTips (1 bit):** A bit that specifies whether ToolTips are not displayed for cells associated with the PivotTable view.

**cIndentInc (7 bits):** An unsigned integer that specifies the indentation increment that is used for pivot fields in compact axis mode. The increment is one space greater than the number specified by this field. A value of 127 specifies that indentation is not used. For more details, see section [2.2.5.3.8.3](#).

**O - fNoHeaders (1 bit):** A bit that specifies whether data field captions and pivot field captions on the row (2) axis and the column (2) axis in the PivotTable view are not displayed.

**P - fNoStencil (1 bit):** A bit that specifies how **drop zones** are displayed in the PivotTable view. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Large drop zones are displayed when there are no data items in the PivotTable view. Small drop zones are not displayed. |
| 1     | Small drop zones are displayed. Large drop zones are not displayed.   |

**Q - fHideTotAnnotation (1 bit):** A bit that specifies whether an asterisk is not displayed next to the caption for subtotals and grand totals when the **fNotVisualTotals** field is equal to 1. This value MUST be ignored for non-OLAP PivotTable view.

**R - fIncludeEmptyRw (1 bit):** A bit that specifies whether to include rows (2) with no data in the source data (section [2.2.5.2.1](#)) in the PivotTable view. This value MUST be ignored for non-OLAP PivotTable view.



**S - fIncludeEmptyCol (1 bit):** A bit that specifies whether to include columns (2) with no data in the source data in the PivotTable view. This value MUST be ignored for non-OLAP PivotTable view.

**T - fEnableWizard (1 bit):** A bit that specifies whether the PivotTable wizard is available.

**U - fEnableDrilldown (1 bit):** A bit that specifies whether details can be shown for a cell that displays the value for a data item.

**V - fEnableFieldDialog (1 bit):** A bit that specifies whether pivot field properties can be displayed.

**W - fPreserveFormatting (1 bit):** A bit that specifies whether formatting applied by the user to PivotTable view cells is preserved on refresh.

**X - fAutoFormat (1 bit):** A bit that specifies whether an AutoFormat has been applied to the PivotTable view.

**Y - fDisplayErrorString (1 bit):** A bit that specifies what is displayed in cells that contain values for data items when an error occurs. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | If there are errors, error strings to display in the cells are determined by the application.               |
| 1     | If there are errors, the string as specified by the <b>irstErrorString</b> field is displayed in the cells. |

**Z - fDisplayNullString (1 bit):** A bit that specifies what is displayed in cells that contain values for data items that are empty. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | If a cell is empty, nothing is displayed.  |
| 1     | If a cell is empty, the string as specified by the <b>irstNullString</b> field is displayed in the cell. |

**a - fAcrossPageLay (1 bit):** A bit that specifies how pivot fields are laid out in the sheet when there are multiple pivot fields on the page axis. This value MUST be equal to one of the following.

| Value | Meaning   |
|-------|---|
| 0     | Pivot fields will be displayed down, then over. |
| 1     | Pivot fields will be displayed over, then down. |

**b - fSubtotalHiddenPageItems (1 bit):** A bit that specifies page-filtering behavior. See section [2.2.5.3.7.1.1](#) for details.

If this is an OLAP PivotTable view, this value MUST [<23>](#) be equal to 1. If this is not an OLAP PivotTable view and the **bVerSxMacro** field is greater than or equal to 3, this value MUST be equal to 0.

- c - fRwGrand (1 bit):** A bit that specifies whether grand totals are displayed for the column (2) axis.
- d - fColGrand (1 bit):** A bit that specifies whether grand totals are displayed for the row (2) axis.
- e - fPrintTitles (1 bit):** A bit that specifies whether print titles are set to parts of the row (2) area and column (2) area when the PivotTable view is recalculated.
- f - unused (1 bit):** This value is undefined and MUST be ignored.
- g - fRepeatItemsOnEachPrintedPage (1 bit):** A bit that specifies whether pivot item captions on the row (2) area are repeated on each printed page for pivot fields in tabular form.
- h - fMergeLabels (1 bit):** A bit that specifies whether pivot item captions on the row (2) area and column (2) area that span multiple cells are merged into a single cell.
- i - fDisplayData (1 bit):** A bit that specifies whether there is an **irstData** field after the fixed part of this record. This value MUST be equal to 1.
- j - fDisplayGrand (1 bit):** A bit that specifies whether there is an **irstGrand** field after the fixed part of this record.
- k - fDisplayPageFieldStyle (1 bit):** A bit that specifies whether there is an **irstPageFieldStyle** field after the fixed part of this record.
- l - fDisplayTableStyle (1 bit):** A bit that specifies whether there is an **irstTableStyle** field after the fixed part of this record.
- m - fDisplayVacateStyle (1 bit):** A bit that specifies whether there is an **irstVacateStyle** field after the fixed part of this record.
- n - ibitAtrNum (1 bit):** A bit that specifies whether AutoFormat number format properties are applied.
- o - ibitAtrFnt (1 bit):** A bit that specifies whether AutoFormat font format properties are applied.
- p - ibitAtrAlc (1 bit):** A bit that specifies whether AutoFormat alignment format properties are applied.
- q - ibitAtrBdr (1 bit):** A bit that specifies whether AutoFormat border format properties are applied.
- r - ibitAtrPat (1 bit):** A bit that specifies whether AutoFormat pattern format properties are applied.
- s - ibitAtrProt (1 bit):** A bit that specifies whether the AutoFormat style is protected.
- t - fDisplayTag (1 bit):** A bit that specifies whether there is an **irstTag** field after the fixed part of this record.
- u - reserved3 (1 bit):** This value MUST be 0, and MUST be ignored.
- v - fDefaultCompact (1 bit):** A bit that specifies whether new pivot fields are created in compact axis mode. For more details, see section [2.2.5.3.8.3](#).

**w - fDefaultOutline (1 bit):** A bit that specifies whether new pivot fields are created in outline form. For more information, see section [2.2.5.3.7.4.2](#).

**x - fOutlineData (1 bit):** A bit that specifies whether the data field in the PivotTable view is displayed in outline form. For more details, see Subtotaling (section [2.2.5.3.7.4.2](#)).

**y - fCompactData (1 bit):** A bit that specifies whether the data field in the PivotTable view is displayed in compact axis mode. For more details, see section [2.2.5.3.8.3](#).

**z - fNewDropZones (1 bit):** A bit that specifies whether in-grid drop zones are disabled.

**a - fPublished (1 bit):** A bit that specifies whether this PivotTable view is included in the version of the workbook that is published to or rendered on a Web or application server.

**β - fEmptyDisplayErrorString (1 bit):** A bit that specifies whether the **irstErrorString** field does not exist after the fixed part of this record.

**γ - fEmptyDisplayNullString (1 bit):** A bit that specifies whether the **irstNullString** field does not exist after the fixed part of this record.

**δ - fTurnOffImmersive (1 bit):** A bit that specifies whether the PivotTable contextual tab, a user interface for manipulating PivotTable options, is not displayed.

**ε - fSingleFilterPerField (1 bit):** A bit that specifies whether the pivot fields in the PivotTable view each can have only one filter. For more details, see section [2.2.5.3.5](#) and section [2.2.5.3.6.1](#). This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Each pivot field can have multiple filters applied to it. |
| 1     | Each pivot field can have only one filter applied to it.  |

**ζ - fUseRwHdrName (1 bit):** A bit that specifies whether there is an **irstRwHdrName** field after the fixed part of this record.

**η - fUseColHdrName (1 bit):** A bit that specifies whether there is an **irstColHdrName** field after the fixed part of this record.

**θ - fNonDefaultSortInFlist (1 bit):** A bit that specifies how pivot fields in this PivotTable are sorted in the pivot field list, a mechanism for adding and removing pivot fields from the PivotTable view. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Pivot fields are displayed in source data order.            |
| 1     | Pivot fields are displayed in ascending alphabetical order. |

**ι - reserved4 (1 bit):** This value MUST be 0, and MUST be ignored.

**κ - fDontUseCustomLists (1 bit):** A bit that specifies whether custom lists are not used when sorting the pivot items in the PivotTable view.

**reserved5 (17 bits):** This value MUST be 0, and MUST be ignored.

**sxaxis4Data (1 byte):** An unsigned integer that specifies which PivotTable axis (section [2.2.5.3.7](#)) the data field appears on. MUST be one of the following values:

| Value | Meaning  |
|-------|--|
| 0x01  | The data field appears on the row (2) axis.    |
| 0x02  | The data field appears on the column (2) axis. |

**cWrapPage (1 byte):** An unsigned integer that specifies the number of pivot fields on the page axis to display before starting another row (2) or column (2), as specified by the **fAcrossPageLay** field. A value of 0 specifies that no wrapping will occur.

**bVerSxLastUpdated (1 byte):** A **DataFunctionalityLevel** that specifies the data functionality level that this PivotTable view was last updated with.

**bVerSxUpdateableMin (1 byte):** A **DataFunctionalityLevel** that specifies the lowest data functionality level the application is allowed to update this PivotTable view with.

**ipos4Data (4 bytes):** A signed integer that specifies the default position of the data field on the PivotTable axis (section [2.2.5.3.7](#)) specified by **sxaxis4Data**. A value of -1 specifies that the data field appears as the last field on the axis. All other values specify a specific zero-based position on that axis. This value MUST be greater than or equal to -1.

**itblAutoFmt (2 bytes):** An **AutoFormatID** (section [2.5.3](#)) that specifies which AutoFormat will be applied.

**reserved6 (2 bytes):** This value MUST be 0, and MUST be ignored.

**dwCrtFmtId (4 bytes):** An unsigned integer that specifies the next available chart identifier to use when creating a **PivotChart** (section [2.2.3.2](#)) for this PivotTable.

**idCache (4 bytes):** An unsigned integer that specifies the **PivotCache** (section [2.2.5.2](#)) identifier of the **PivotCache** used by this PivotTable view. This value MUST be equal to the **idSx** field of a **BrBeginPivotCacheID** (section [2.4.163](#)) record. For more details, see section [2.2.5.3.1](#).

**irstName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the unique name for this PivotTable view. This string MUST be less than or equal to 255 characters in length. This string MUST NOT equal the **irstName** field on any other PivotTable view that exists on the same sheet.

**irstData (variable):** An **XLWideString** that specifies the caption of the data field in the PivotTable view. This caption is shown when the PivotTable view has two or more data items. If **fDisplayData** is equal to 1, this field MUST be present in this record. If **fDisplayData** is equal to 0, this field MUST NOT be present in this record. This string MUST be less than or equal to 255 characters in length.

**irstGrand (variable):** An **XLWideString** that specifies a user-defined caption to display for grand totals when the PivotTable is recalculated. This string MUST be less than or equal to 255 characters in length. If the **fDisplayGrand** field is equal to 1, this field MUST be present in this record. If **fDisplayGrand** is equal to 0, this field MUST NOT be present in this record.

**irstErrorString (variable):** An **XLWideString** that specifies the string to display in cells that contain values for data items when an error occurs. This string MUST be less than or equal to 255 characters in length. If **fEmptyDisplayErrorString** is equal to 0, this field MUST be

present in this record. If **fEmptyDisplayErrorString** is equal to 1, this field MUST NOT be present in this record.

**irstNullString (variable):** An **XLWideString** that specifies the string to display in cells that contain values for data items that are empty. This string MUST be less than or equal to 255 characters in length. If **fEmptyDisplayNullString** is equal to 0, this field MUST be present in this record. If **fEmptyDisplayNullString** is equal to 1, this field MUST NOT be present in this record.

**irstPageFieldStyle (variable):** An **XLWideString** that specifies the cell style (section [2.2.6.1.2](#)) to apply to each cell that contains data for pivot fields on the page axis of the PivotTable view. The style is specified by the **BrtStyle** (section [2.4.755](#)) record that has an **stName** field equal to the value of this field. If **fDisplayPageFieldStyle** is 1, this field MUST be present in this record. If **fDisplayPageFieldStyle** is 0, this field MUST NOT be present in this record. This string MUST be less than or equal to 255 characters in length.

**irstTableStyle (variable):** A **XLWideString** that specifies the cell style to apply to this PivotTable view. The style is specified by the **BrtStyle** record that has an **stName** field equal to the value of this field. For more details, see section [2.2.6](#). If **fDisplayTableStyle** is equal to 1, this field MUST be present in the record. If **fDisplayTableStyle** is equal to 0, this field MUST NOT be present in the record.

**irstVacateStyle (variable):** An **XLWideString** that specifies the cell style to apply to the cells left blank when a PivotTable view shrinks during a refresh operation. The style is specified by the **BrtStyle** record that has an **stName** field equal to the value of this field. If **fDisplayVacateStyle** is equal to 1, this field MUST be present in the record. If **fDisplayVacateStyle** is equal to 0, this field MUST NOT be present in the record. This string MUST be less than or equal to 255 characters in length.

**irstTag (variable):** An **XLWideString** that specifies a user-defined string that is associated with this PivotTable view. This string MUST be less than or equal to 255 characters in length. If **fDisplayTag** is equal to 1, this field MUST be present in the record. If **fDisplayTag** is equal to 0, this field MUST NOT be present in the record.

**irstColHdrName (variable):** An **XLWideString** that specifies the user-defined string to display in the column (2) header when one or more pivot fields in the PivotTable view are in compact axis mode. If this field is not present, an application specific string is used in the column (2) header. For more details, see section [2.2.5.3.8.3](#).

If **fUseRwHdrName** is equal to 1, this field MUST be present in the record. If **fUseRwHdrName** is equal to 0, this field MUST NOT be present in the record. If **bVerSxMacro** is less than 3, this string MUST be less than or equal to 255 characters in length. If **bVerSxMacro** is greater than or equal to 3, this string MUST be less than or equal to 32,767 characters in length.

**irstRwHdrName (variable):** An **XLWideString** that specifies the user-defined string to display in the row (2) header when one or more pivot fields in the PivotTable view are in compact axis mode. If this field is not present, an application-specific string is used in the row (2) header. For more details, see section [2.2.5.3.8.3](#).

If **fUseRwHdrName** is equal to 1, this field MUST be present in the record. If **fUseRwHdrName** is equal to 0, this field MUST NOT be present in the record. If **bVerSxMacro** is less than 3, this string MUST be less than or equal to 255 characters in length. If **bVerSxMacro** is greater than or equal to 3, this string MUST be less than or equal to 32,767 characters in length.

## 2.4.265 BrtBeginSXView14

The **BrtBeginSXView14** record specifies additional properties of a PivotTable view (section [2.2.5.3](#)) and specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies additional properties of the PivotTable view relating to **PivotTable** What-if Analysis (section [2.2.5.3.10](#)) and conditional formatting.

|                               |   |   |   |   |   |   |                        |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------------|---|---|---|---|---|---|------------------------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                             | 1 | 2 | 3 | 4 | 5 | 6 | 7                      | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader                    |   |   |   |   |   |   |                        |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A                             | B | C | D | E | F | G | sxma                   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                           |   |   |   |   |   |   | irstAltText (variable) |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                           |   |   |   |   |   |   |                        |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstAltTextSummary (variable) |   |   |   |   |   |   |                        |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                           |   |   |   |   |   |   |                        |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstWeight (variable)         |   |   |   |   |   |   |                        |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                           |   |   |   |   |   |   |                        |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fFillDownLabelsDefault (1 bit):** A bit that specifies the behavior of pivot fields (section [2.2.5.3.2](#)) that are not a part of the PivotTable view if they are later added to a PivotTable view. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that pivot fields added to the PivotTable view behave as if the <b>fFillDownLabels</b> fields of <b>BrtSXVD14</b> (section <a href="#">2.4.786</a> ) records associated with those pivot fields are set to 0x00. |
| 1     | Specifies that pivot fields added to the PivotTable view behave as if the <b>fFillDownLabels</b> fields of <b>BrtSXVD14</b> records associated with those pivot fields are set to 0x01.                                    |

**B - fVisualTotalsForSets (1 bit):** A bit that specifies whether hidden pivot items (section [2.2.5.3.3](#)) will be included when calculating totals for named sets (section [2.2.5.2.7.3](#)). This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | Include hidden pivot items in the set totals.        |
| 1     | Do not include hidden pivot items in the set totals. |

**C - fEnableWB (1 bit):** A bit that specifies whether PivotTable What-if Analysis is enabled for this PivotTable view.

**D - fAutoApply (1 bit):** A bit that specifies whether PivotTable What-if Analysis values are automatically allocated.

**E - fShowValuesRow (1 bit):** A bit that specifies whether to show the values row (2) in the PivotTable report.

**F - fCalcMembersInAdvFilters (1 bit):** A bit that specifies whether OLAP calculated members (3) participate in manual filters (section [2.2.5.3.5](#)) and advanced filters (section [2.2.5.3.6.1](#)). This value MUST be a value in the following table.

| Value | Meaning   |
|-------|---|
| 0     | OLAP calculated members (3) do not participate in manual filters and advanced filters.                  |
| 1     | OLAP calculated members (3) participate in manual filters and advanced filters as do other pivot items. |

**G - unused (2 bits):** This value is undefined, and MUST be ignored.

**sxma (4 bytes):** An  **SXMA**  (section [2.5.147](#)) that specifies the method of allocation to use for PivotTable What-if Analysis.

**irstAltText (variable):** An  **XLNullableWideString**  (section [2.5.166](#)) that specifies the alternate text for the PivotTable view. This string MUST be less than or equal to 2,000 characters in length.

**irstAltTextSummary (variable):** An  **XLNullableWideString**  that specifies the alternate text summary for the PivotTable view. This string MUST be less than or equal to 2,000 characters in length.

**irstWeight (variable):** An  **XLNullableWideString**  that specifies the multidimensional expression (MDX) of the weight expression for weighted allocations of PivotTable What-if Analysis. This string MUST be less than or equal to 65,535 characters in length.

#### 2.4.266 BrtBeginSXVIs

The **BrtBeginSXVIs** record specifies the beginning of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of pivot items (section [2.2.5.3.3](#)).

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| csxvis |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**csxvis (4 bytes):** An unsigned integer that specifies the count of pivot items in this collection.

#### 2.4.267 BrtBeginTableSlicerCache

The **BrtBeginTableSlicerCache** record specifies the beginning of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies of this slicer cache (section [2.2.14.1](#)).

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwColumn   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwLstd     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A          |   |   |   | B |   |   |   | C |   |    |    | D  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**dwColumn (4 bytes):** An integer that specifies the associated column (2) in a table. MUST match the **idField** field of the **BrBeginListCol** (section [2.4.97](#)) record of an existing **Table**.

**dwLstd (4 bytes):** An integer that that specifies the associated **Table** (section [2.1.7.51](#)). MUST match the **idList** field of the **BrBeginList** (section [2.4.96](#)) record of an existing **Table**.

**A - fSortOrder (2 bits):** An unsigned integer that specifies how the table slicer items are sorted in the slicer view (section [2.2.14.2](#)). This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x1   | The non-OLAP slicer items are sorted in ascending order.  |
| 0x2   | The non-OLAP slicer items are sorted in descending order. |

**B - iCrossFilter (2 bits):** An unsigned integer that specifies how the table slicer items that are used in slicer cross filtering (section [2.2.14.1.5](#)) are displayed. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x0   | The table style element (section <a href="#">2.2.6.2.2</a> ) of the slicer style (section <a href="#">2.2.6.3.1</a> ) for table slicer items without data is not applied to table slicer items without data, and table slicer items without data are not sorted separately in the list of table slicer items in the slicer view. |
| 0x1   | The table style element of the slicer style for table slicer items without data is applied to table slicer items without data, and table slicer items without data are sorted at the bottom in the list of table slicer items in the slicer view.  |
| 0x2   | The table style element of the slicer style for table slicer items without data is applied to table slicer items without data, and table slicer items without data are not sorted separately in the list of table slicer items in the slicer view.   |

**C - fSortUsingCustomLists (1 bit):** A bit that specifies whether custom lists are used when sorting the non-OLAP slicer items.

**D - reserved (3 bits):** This value MUST be zero, and MUST be ignored.



## 2.4.268 BrtBeginTableStyle

The **BrtBeginTableStyle** record specifies a single user-defined table style (section [2.2.6.3](#)) and specifies the beginning of a collection of **BrtTableStyleElement** (section [2.4.791](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtTableStyleElement** records specifies a table style.

|     |   |   |           |   |   |   |   |   |   |    |    |    |    |    |                    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|-----------|---|---|---|---|---|---|----|----|----|----|----|--------------------|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3         | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15                 | 16   | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | B | C | reserved2 |   |   |   |   |   |   |    |    |    |    |    |                    | ctse |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |           |   |   |   |   |   |   |    |    |    |    |    | strName (variable) |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |           |   |   |   |   |   |   |    |    |    |    |    |                    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - fIsPivot (1 bit):** A bit that specifies whether this table style is intended to be available for use with **PivotTable** (section [2.1.7.40](#)).

**C - fIsTable (1 bit):** A bit that specifies whether this table style is intended to be available for use with tables.

**reserved2 (13 bits):** This value MUST be 0, and MUST be ignored.

**ctse (4 bytes):** An unsigned integer that specifies the number of **BrtTableStyleElement** records in this collection. This value MUST be less than or equal to 28.

**strName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the name of this table style. The length of this string MUST be greater than 0 and MUST be less than 256 characters.

## 2.4.269 BrtBeginTableStyles

The **BrtBeginTableStyles** record specifies properties of table styles (section [2.2.6.3](#)) and specifies the beginning of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies the user-defined table styles for the workbook. This record also specifies the names of the default table styles to be assigned to new tables and **PivotTables** (section [2.1.7.40](#)), and the count of table style records that follow.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cts                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| strDefList (variable)  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| strDefPivot (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

...

**cts (4 bytes):** An unsigned integer that specifies the number of **BrtBeginTableStyle** (section [2.4.268](#)) records in the collection.

**strDefList (variable):** An **XLNullableWideString** that specifies the name of the default table style to be assigned to new tables. The length of this string **MUST** be less than 256 characters.

**strDefPivot (variable):** An **XLNullableWideString** that specifies the name of the default table style to be assigned to new PivotTables. The length of this string **MUST** be less than 256 characters.

#### 2.4.270 BrtBeginTimelineCacheID

The **BrtBeginTimelineCacheID** record specifies a reference to a Timeline cache (section [2.2.15.1](#)) in the workbook and specifies the beginning of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF.

|                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields **MUST** have the values listed in the following table.

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 0     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 1     |

The **FRTHHeader.RelID** specifies a relationship (section [2.1.3](#)) that specifies a Timeline cache part in the workbook.

#### 2.4.271 BrtBeginTimelineCacheIDs

The **BrtBeginTimelineCacheIDs** record specifies the beginning of a collection of Timeline cache identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the Timeline cache identifiers for the workbook.

#### 2.4.272 BrtBeginTimelineCachePivotCacheIDs

The **BrtBeginTimelineCachePivotCacheIDs** record specifies the beginning of a collection of **PivotCache** identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The

collection of records specifies the **PivotCaches** used by Timeline caches (section [2.2.15.1](#)) with OLAP source data (section [2.2.5.2.1](#)).

### 2.4.273 BrtBeginTimelineEx

The **BrtBeginTimelineEx** record specifies a relationship (section [2.1.3](#)) identifier of the part that contains the Timelines (section [2.2.15](#)) in this worksheet and specifies the beginning of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)).

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table.

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 0     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 1     |

The **FRTHHeader.RelID** specifies a relationship identifier of the part that contains the Timelines (section [2.2.15](#)) in this worksheet.

### 2.4.274 BrtBeginTimelinesEx

The **BrtBeginTimelinesEx** record specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the Timelines (section [2.2.15](#)) part identifier for the worksheet.

### 2.4.275 BrtBeginTimelineStyle

The **BrtBeginTimelineStyle** record specifies which [table style](#) is the basis for this [timeline style](#) and specifies the beginning of a collection of records and collections as defined by the [Styles](#) part ABNF. The collection of records specifies the [table style elements](#) of the timeline style that are specific to [timelines](#). Together with the base table style, this collection specifies a user-defined timeline style.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                               |
|-------------------------------|
| stDefTimelineStyle (variable) |
| ...                           |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**stDefTimelineStyle (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the name of the user-defined table style that this timeline style is based upon. The length of the string MUST be greater than or equal to 1 character and less than or equal to 255 characters. This string MUST be unique within the **BrtBeginTimelineStyle** records in the **Styles** part ABNF. This string MUST match the **strName** field of a [BrtBeginTableStyle](#) record in the **Styles** part. In the **BrtBeginTableStyle** record with a **strName** field that matches this string, the **fIsPivot** field MUST be equal to 0 and the **fIsTable** field MUST be equal to 0.

#### 2.4.276 BrtBeginTimelineStyleElements

The **BrtBeginTimelineStyleElements** record specifies the beginning of a collection of records as defined by the [Styles](#) part ABNF. The collection of records specifies the [table style elements](#) of a [timeline styles](#) that are specific to [timelines](#).

#### 2.4.277 BrtBeginTimelineStyles

The **BrtBeginTimelineStyles** record specifies the default timeline style to apply to [timelines](#) and specifies the beginning of a collection of records and collections as defined by the [Styles](#) part ABNF. The collection of records specifies user-defined timeline styles.

|                               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stDefTimelineStyle (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**stDefTimelineStyle (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the default timeline style to apply to timeline (section [2.2.15](#)). The length of the string MUST be greater than or equal to 1 character and less than or equal to 255 characters.

#### 2.4.278 BrtBeginTimelineStylesheetExt15

The **BrtBeginTimelineStylesheetExt15** record specifies the beginning of a collection of records and collections as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection specifies additional style (section [2.2.6](#)) information for the workbook.

## 2.4.279 BrtBeginUserCsView

The **BrtBeginUserCsView** record specifies settings of a custom view for a chart sheet. It also specifies the beginning of a collection of records as defined by the **Chart Sheet** (section 2.1.7.7) part ABNF. This collection specifies additional custom view settings. There is an accompanying **BrtUserBookView** (section 2.4.797) record that specifies the custom view settings that apply to a whole workbook. The set of this record and the accompanying **BrtUserBookView** record share the same GUID.

|                 |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|----------|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| guid (16 bytes) |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| iTabId          |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwScale         |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A               | B | reserved |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**guid (16 bytes):** A GUID as specified by [MS-DTYP], section 2.3.2, that specifies the unique identifier of a **BrtUserBookView** (section 2.4.797) record in the **Workbook** (section 2.1.7.60) part. The referenced **BrtUserBookView** specifies the custom workbook view that this custom view is associated with.

**iTabId (4 bytes):** An unsigned integer that specifies the active sheet in this view. This value MUST correspond to the **iTabID** of an existing **BrtBundleSh** (section 2.4.301).

**dwScale (4 bytes):** An unsigned integer that is a percentage value that specifies the zoom level of the chart sheet displayed in the view. This value MUST be greater than or equal to 10 and less than or equal to 400.

**A - hsState (2 bits):** An **ST\_SheetState** (section 2.5.142) that specifies the visibility state of the chart sheet displayed in the view.

**B - fZoomToFit (1 bit):** A bit that specifies that the chart sheet scales to fill the entire window displaying this view.

**reserved (29 bits):** This value MUST be zero and MUST be ignored.

## 2.4.280 BrtBeginUserCsViews

The **BrtBeginUserCsViews** record specifies the beginning of a collection of records as defined by the **Chart Sheet** part ABNF. The collection of records specifies custom view settings for chart sheets.

## 2.4.281 BrtBeginUsers

The **BrtBeginUsers** record specifies the beginning of a collection of **BrtUsr** (section 2.4.798) records as defined by the **Revision Log** (section 2.1.7.44) part ABNF and **User Names** (section 2.1.7.55) part ABNF. The collection of **BrtUsr** records specifies properties for users editing a shared

workbook. The count of **BrtUsr** records following this record is specified by the **BrtCUsr** (section [2.4.331](#)) record.

## 2.4.282 BrtBeginUserShView

The **BrtBeginUserShView** record specifies custom view settings for a sheet. It also specifies the beginning of a collection of records as defined by the **Worksheet** (section [2.1.7.61](#)) part ABNF, the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. This collection specifies additional custom view settings. There is a accompanying **BrtUserBookView** (section [2.4.797](#)) record that specifies the custom view settings that apply to a whole workbook. The set of this record and the accompanying **BrtUserBookView** record share the same GUID.

|                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| guid (16 bytes)       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iTabId                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| dwScale               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| icv                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A                     | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U | V | W | X | Y | Z | a | b | c | d |   |   |
| rfxTopLeft (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#), section [2.3.2](#), that specifies the unique identifier of a **BrtUserBookView** (section [2.4.797](#)) record in the **Workbook** (section [2.1.7.60](#)) part ABNF. The referenced **BrtUserBookView** specifies the custom workbook view that this custom view is associated with.

**iTabId (4 bytes):** An unsigned integer that specifies the active sheet in this view. This value MUST equal the value of the **iTabID** field in a **BrtBundleSh** (section [2.4.301](#)) record. This value MUST be greater than or equal to 1 and less than or equal to 65,535.

**dwScale (4 bytes):** An unsigned integer that specifies a percentage value that specifies the zoom level of the sheet displayed in the view. If the sheet is a **dialog sheet**, MUST be zero or a value greater than or equal to 10 and less than or equal to 400. If the sheet is not a dialog sheet, MUST be greater than or equal to 10 and less than or equal to 400.

**icv (4 bytes):** An **Icv** (section [2.5.75](#)) that specifies the color of the **gridlines** displayed in the view. This value MUST be less than or equal to 64.

**A - fShowBrks (1 bit):** A bit that specifies whether page breaks (2) are displayed in the view.

- B - fDspFmlaSv (1 bit):** A bit that specifies whether formulas (section [2.2.2](#)) are displayed in the view. This value MUST be 0 for dialog sheets.
- C - fDspGridSv (1 bit):** A bit that specifies whether gridlines are displayed in the view.
- D - fDspRwColSv (1 bit):** A bit that specifies whether row (2) headings and column (2) headings are displayed in the view. This value MUST be 0 for dialog sheets.
- E - fDspGutsSv (1 bit):** A bit that specifies whether **outline symbols** are displayed in the view. This value MUST be 0 for dialog sheets. This value MUST be 1 for macro sheets.
- F - fDspZerosSv (1 bit):** A bit that specifies how zero values are displayed in cells in the view. This value MUST be 0 for dialog sheets.

| Value | Meaning  |
|-------|--|
| 0     | Cells with a zero value appear blank.                |
| 1     | Cells with a zero value display the number 0 (zero). |

- G - fHorizontal (1 bit):** A bit that specifies whether printed pages are centered horizontally.
- H - fVertical (1 bit):** A bit that specifies whether printed pages are centered vertically.
- I - fPrintRwCol (1 bit):** A bit that specifies whether row (2) headings and column (2) headings are printed. This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fPrintIncl** field value of 0.
- J - fPrintGrid (1 bit):** A bit that specifies whether gridlines are printed. This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fPrintIncl** field value of 0.
- K - fFitToPage (1 bit):** A bit that specifies whether **fit to page** is applied to printed pages. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fPrintIncl** field value of 0.
- L - fPrintArea (1 bit):** A bit that specifies whether there is a **print area** applied to the sheet. This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fPrintIncl** field value of 0.  
  
Additionally if **fPrintArea** is 1, there MUST be a **BrtName** (section [2.4.680](#)) record for the print area as specified in the description for the **fPrintIncl** field in **BrtUserBookView** (section [2.4.797](#)).
- M - fOnePrintArea (1 bit):** A bit that specifies whether there is exactly one print area applied to the sheet. This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fPrintIncl** field value of 0.  
  
Additionally if **fOnePrintArea** is 1, there MUST be a **BrtName** record for the print area as specified in the description for the **fPrintIncl** field in **BrtUserBookView**.
- N - fFilterMode (1 bit):** A bit that specifies whether an AutoFilter range is being filtered. This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section

[2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fRowColIncl** field value of 0.

Additionally if **fFilterMode** is 1, there MUST be a **BrtName** record for the range being filtered and a **BrtName** record for the range containing filter criteria as specified in the description for the **fRowColIncl** field in **BrtUserBookView**.

**O - fEzFilter (1 bit):** A bit that specifies whether AutoFilter dropdown buttons are displayed in the view. This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fRowColIncl** field value of 0.

Additionally if **fEzFilter** is 1, there MUST be a **BrtName** record for the range being filtered and a **BrtName** record for the range containing filter criteria as specified in the description for the **fRowColIncl** field in **BrtUserBookView**.

**P - reserved1 (1 bit):** This value MUST be zero and MUST be ignored.

**Q - reserved2 (1 bit):** This value MUST be zero and MUST be ignored.

**R - fSplitV (1 bit):** A bit that specifies whether there are **split panes** stacked vertically in the view.

**S - fSplitH (1 bit):** A bit that specifies whether there are split panes arranged side-by-side in the view.

**T - fHiddenRw (2 bits):** An unsigned integer that specifies whether any **hidden rows** exist in the sheet in this view. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | There are no hidden rows in the sheet in this view. |
| 0x1   | There are hidden rows in the sheet in this view.    |

This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fRowColIncl** field value of 0.

Additionally, if **fHiddenRow** is 0x1, there MUST be a **BrtName** record for the hidden rows as specified in the description for the **fRowColIncl** field in **BrtUserBookView**.

**U - fHiddenCol (1 bit):** A bit that specifies whether any **hidden columns** exist in the sheet in this view. This value MUST be 0 for dialog sheets. This value MUST be 0 if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fRowColIncl** field value of 0.

Additionally, if **fHiddenCol** is 1, there MUST be a **BrtName** record for the hidden rows as specified in the description for the **fRowColIncl** field in **BrtUserBookView**.

**V - hsState (2 bits):** An **ST\_SheetState** (section [2.5.142](#)) that specifies the visibility state of the sheet in this view.

**W - reserved3 (1 bit):** This value MUST be zero and MUST be ignored.

**X - fFilterUnique (1 bit):** A bit that specifies whether duplicate records are filtered out of a range in the sheet in this view. This value MUST be 0 for dialog sheets. This value MUST be 0



if the **BrtUserBookView** (section [2.4.797](#)) record with **guid** field value equal to the **guid** of this record has a **fRowColIncl** field value of 0.

Additionally if **fFilterUnique** is 1, there MUST be a **BrtName** record for the range being filtered and a **BrtName** record for the range containing filter criteria as specified in the description for the **fRowColIncl** field in **BrtUserBookView**.

**Y - fSheetLayoutView (1 bit):** A bit that specifies whether the type of view displayed is a **Page Break Preview view**. The value of **fSheetLayoutView** and **fPageLayoutView** MUST NOT both be TRUE (1). This value MUST be 0 for macro sheets and dialog sheets.

**Z - fPageLayoutView (1 bit):** A bit that specifies whether the type of view displayed is a **Page Layout view**. The value of **fSheetLayoutView** and **fPageLayoutView** MUST NOT both be TRUE (1). This value MUST be 0 for macro sheets and dialog sheets.

**a - reserved4 (1 bit):** This value MUST be zero, and MUST be ignored.

**b - fRuler (1 bit):** A bit that specifies whether the **ruler** is displayed in the view.

**c - reserved5 (1 bit):** This value MUST be zero, and MUST be ignored.

**d - reserved6 (1 bit):** This value MUST be zero, and MUST be ignored.

**rfxTopLeft (16 bytes):** An **UncheckedRfX** (section [2.5.153](#)) that specifies the logical top-left cell displayed in the view.

#### 2.4.283 BrtBeginUserShViews

The **BrtBeginUserShViews** record specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies custom view settings for sheets.

#### 2.4.284 BrtBeginVolDeps

The **BrtBeginVolDeps** record specifies the beginning of a collection of records as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies dependency information for all cells that depend on either RTD server or cube functions.

#### 2.4.285 BrtBeginVolMain

The **BrtBeginVolMain** record specifies properties of a volatile dependency (section [2.2.13](#)) and specifies the beginning of a collection of records as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies dependency information for all **RTD topics** within a type (section [2.2.13.1](#)) that share the same first string or function argument.

|                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
|------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
| first (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...              |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

**first (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the RTD server or the OLAP connection (section [2.2.8.3.1](#)) associated with the dependencies.

If the **type** field of the associated **BrBeginVolType** (section [2.4.287](#)) record is 0, **first** specifies the ProgID of the RTD server.

If the **type** field of the associated **BrBeginVolType** record is 1, **first** specifies the name of the OLAP Connection.

The associated **BrBeginVolType** record is the record immediately preceding this record.

#### 2.4.286 BrBeginVolTopic

The **BrBeginVolTopic** record specifies the beginning of a collection of records and collections as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies a cached returned value (section [2.2.13.4](#)) and subtopics (section [2.2.13.3](#)).

#### 2.4.287 BrBeginVolType

The **BrBeginVolType** record specifies the type of a volatile dependency (section [2.2.13](#)) and specifies the beginning of a collection of records as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies dependency information for a set of cells that either all depend upon an RTD server, or all depend upon cube functions.

|   |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|----------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | reserved |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - type (1 bit):** A bit that specifies the type of dependency information. This value MUST be a value from the following table.

| Value | Meaning                                       |
|-------|---|
| 0     | Dependency information is for an RTD server.  |
| 1     | Dependency information is for cube functions. |

**reserved (31 bits):** This value MUST be 0, and MUST be ignored.

#### 2.4.288 BrBeginWebExtensions

The **BrBeginWebExtensions** record specifies the beginning of a collection of records as defined by the WEBEXTENSIONS rule in the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies additional properties for bindings for Web Extensions ([\[MS-OWEXML\]](#) section 1.3) on the worksheet.

#### 2.4.289 BrBeginWebPubItem

The **BrBeginWebPubItem** record specifies content in the workbook that is published to the Web and specifies the beginning of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF, **Worksheet** part ABNF (section [2.1.7.61](#)), and **Chart Sheet** (section [2.1.7.7](#)) part ABNF.

|                    |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
|--------------------|---|---|---|---|---|---|---|--------------------------|---|---|---|-----------|-------------------|---|---|---|---|---|---|---|---|---|---|--------|---|---|---|---|---|---|---|--|--|--|--|--|--|--|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8                        | 9 | 0 | 1 | 2         | 3                 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4      | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |  |  |  |  |  |
| tws                |   |   |   |   |   |   |   | A                        | B | C | D | reserved3 |                   |   |   |   |   |   |   |   |   |   |   | unused |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   | nStyleId                 |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   | rfx (16 bytes, optional) |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   | reserved4 (optional)     |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   | reserved5 (optional)     |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   | reserved6 (optional)     |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   | reserved7 (optional)     |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   | E                        | F | G | H | I         | stBkmk (variable) |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| stName (variable)  |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| stFile (variable)  |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| stTitle (variable) |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |
| ...                |   |   |   |   |   |   |   |                          |   |   |   |           |                   |   |   |   |   |   |   |   |   |   |   |        |   |   |   |   |   |   |   |  |  |  |  |  |  |  |

**tws (1 byte):** A **Tws** (section [2.5.150](#)) that specifies the type of the published content. If the record belongs to **Workbook** (section [2.1.7.60](#)) part ABNF, **tws** MUST be equal to **TWSWORKBOOK** or to **TWSLABEL**. If the record belongs to **Worksheet** part ABNF (section [2.1.7.61](#)) or **Chart Sheet** part ABNF, **tws** MUST NOT be equal to **TWSWORKBOOK**.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - fAutoRepublish (1 bit):** A bit that specifies whether the content will be automatically published every time the workbook is saved.

**C - reserved2 (1 bit):** This value MUST be 0, and MUST be ignored.

**D - fMhtml (1 bit):** A bit that specifies whether the content is to be published as **MIME Encapsulation of Aggregate HTML Documents (MHTML)**. MHTML is used to bind

resources which are typically represented by external links, such as image and sound files, along with HTML code into a single file.

**reserved3 (12 bits):** This value MUST be 0, and MUST be ignored.

**unused (2 bytes):** This value undefined and MUST be ignored.

**nStyleId (4 bytes):** An unsigned integer that specifies the unique identifier for this published content. This value MUST be greater than 0.

**rfx (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) that specifies the rectangular cell range to be published. This value exists if and only if **tw**s is equal to TWSREF.

**reserved4 (4 bytes):** This value MUST be equal to 1,048,576, and MUST be ignored. This value exists if and only if **tw**s is not equal to TWSREF.

**reserved5 (4 bytes):** This value MUST be equal to 1,048,576, and MUST be ignored. This value exists if and only if **tw**s is not equal to TWSREF.

**reserved6 (4 bytes):** This value MUST be equal to 16,384, and MUST be ignored. Exists if and only if **tw**s is not equal to TWSREF.

**reserved7 (4 bytes):** This value MUST be equal to 16,384, and MUST be ignored. Exists if and only if **tw**s is not equal to TWSREF.

**E - fReserved1 (1 bit):** This value MUST be 1, and MUST be ignored.

**F - fName (1 bit):** A bit that specifies whether the **stName** exists. This value MUST be equal to 0 if **tw**s is less than 0x05, or is equal to TWSCHART and this record is contained in a **Chart Sheet**. Otherwise, this value MUST be equal to 1.

**G - fReserved2 (1 bit):** This value MUST be 1 and MUST be ignored.

**H - fTitle (1 bit):** A bit that specifies whether the **stTitle** exists.

**I - reserved8 (4 bits):** This value MUST be zero, and MUST be ignored.

**stBkmk (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the destination <div> tag of the published content. Destination <div> tag specifies the unique section in the published HTML the content being published is written to. The length of the string MUST NOT exceed 255 characters.

**stName (variable):** An **XLNameWideString** that specifies the name of the content to be published. It exists if and only if **fName** is equal 1. The length of the string MUST NOT exceed 255 characters.

**stFile (variable):** An **XLWideString** that specifies the name of the destination file to which the content will be published. The length of the string MUST NOT exceed 255 characters.

**stTitle (variable):** An **XLWideString** that specifies the title of the published content. This value exists if and only if **fTitle** is equal 1. The length of the string MUST NOT exceed 255 characters.

## 2.4.290 BrtBeginWebPubItems

The **BrtBeginWebPubItems** record specifies the count of **BrtBeginWebPubItem** (section [2.4.289](#)) records in the collection and specifies the beginning of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF, **Worksheet** part ABNF (section [2.1.7.61](#)), and **Chart**

**Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies the content in this workbook that has been published.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cItems |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cItems (4 bytes):** An unsigned integer that specifies the number of items in the collection. This value MUST be equal to the number of **BrtBeginWebPubItem** records in the collection.

### 2.4.291 BrtBeginWsSortMap

The **BrtBeginWsSortMap** record specifies sort map (section [2.2.12.10](#)) properties of a sheet and specifies the beginning of a collection of records as defined by the **Sort Map** (section [2.1.7.49](#)) part ABNF. The collection of records specifies the sort map properties of a sheet.

### 2.4.292 BrtBeginWsView

The **BrtBeginWsView** record specifies **sheet view** settings for the current sheet. It also specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. This collection specifies additional sheet view settings for the current sheet. Sheet view settings and workbook view settings for the associated workbook view (specified by **iwbkview**) together define the display of a sheet.

|              |   |   |   |   |   |   |   |   |   |    |           |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------|---|---|---|---|---|---|---|---|---|----|-----------|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11        | 12 | 13 | 14 | 15 | 16        | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A            | B | C | D | E | F | G | H | I | J | K  | reserved1 |    |    |    |    | xlView    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...          |   |   |   |   |   |   |   |   |   |    | rwTop     |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...          |   |   |   |   |   |   |   |   |   |    | colLeft   |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...          |   |   |   |   |   |   |   |   |   |    | icvHdr    |    |    |    |    | reserved2 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| reserved3    |   |   |   |   |   |   |   |   |   |    | wScale    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| wScaleNormal |   |   |   |   |   |   |   |   |   |    | wScaleSLV |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| wScalePLV    |   |   |   |   |   |   |   |   |   |    | iWbkView  |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...          |   |   |   |   |   |   |   |   |   |    |           |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fWnProt (1 bit):** A bit that specifies whether the window displaying the sheet view is locked because of **window protection**.

**B - fDspFmla (1 bit):** A bit that specifies whether formulas (section [2.2.2](#)) are displayed in cells in the sheet view. This value MUST be 0 for dialog sheets.

**C - fDspGrid (1 bit):** A bit that specifies whether gridlines are displayed in the sheet view.

**D - fDspRwCol (1 bit):** A bit that specifies whether row (2) headings and column (2) headings are displayed in the sheet view. This value MUST be 0 for dialog sheets.

**E - fDspZeros (1 bit):** A bit that specifies how zero values are displayed in cells in the sheet view. This value MUST be 0 for dialog sheets. Possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Cells with a zero value appear blank.                |
| 1     | Cells with a zero value display the number 0 (zero). |

**F - fRightToLeft (1 bit):** A bit that specifies whether the sheet view is displayed in a right-to-left manner.

**G - fSelected (1 bit):** A bit that specifies whether the sheet is selected in the sheet view.

**H - fDspRuler (1 bit):** A bit that specifies whether the ruler is displayed in the sheet view. This value MUST be ignored if **xlView** is not equal to XLVPAGELAYOUTVIEW. This value MUST be 1 for dialog sheets and macro sheets.

**I - fDspGuts (1 bit):** A bit that specifies whether outline symbols are displayed in the sheet view. This value MUST be 0 for dialog sheets.

**J - fDefaultHdr (1 bit):** A bit that specifies whether the default color is used for the gridlines, overriding the color specified in **icvHdr**. This value MUST be 1 for dialog sheets.

**K - fWhitespaceHidden (1 bit):** A bit that specifies whether the page margins, headers, and footers are hidden. This value MUST be ignored if **xlView** is not equal to XLVPAGELAYOUTVIEW. This value MUST be zero for dialog sheets and macro sheets.

**reserved1 (5 bits):** This value MUST be zero and MUST be ignored.

**xlView (4 bytes):** An **XLView** (section [2.5.167](#)) that specifies the type of sheet view.

**rwTop (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the first row (2) that is displayed in the sheet view.

**colLeft (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the first column (2) that is displayed in the sheet view.

**icvHdr (1 byte):** An **Icv** (section [2.5.75](#)) that specifies the color of the gridlines displayed in the sheet view.

**reserved2 (1 byte):** This value MUST be zero and MUST be ignored.

**reserved3 (2 bytes):** This value MUST be zero and MUST be ignored.

**wScale (2 bytes):** An unsigned integer that specifies a percentage value that specifies the zoom level of the sheet displayed in the sheet view. This value MUST be greater than or equal to 10 and less than or equal to 400.

**wScaleNormal (2 bytes):** An unsigned integer that specifies a percentage value that specifies the zoom level of the sheet when displayed in **Normal view**. This value MUST be zero or a

value greater than or equal to 10 and less than or equal to 400. If the value is zero, the zoom level is assumed to be 100.

**wScaleSLV (2 bytes):** An unsigned integer that specifies a percentage value that specifies the zoom level of the sheet when displayed in Page Break Preview view. This value MUST be zero or a value greater than or equal to 10 and less than or equal to 400. If the value is zero, the zoom level is assumed to be 100.

**wScalePLV (2 bytes):** An unsigned integer that specifies a percentage value that specifies the zoom level of the sheet when displayed in Page Layout view. This value MUST be zero or a value greater than or equal to 10 and less than or equal to 400. If the value is zero, the zoom level is assumed to be 100.

**iWbkView (4 bytes):** An unsigned integer that specifies the zero-based index of a **BrtBookView** (section [2.4.298](#)) record in the collection of all records directly following **BrtBeginBookViews** (section [2.4.11](#)) in the **Workbook** (section [2.1.7.60](#)) part. The referenced **BrtBookView** specifies the workbook view this sheet view is associated with.

### 2.4.293 BrtBeginWsViews

The **BrtBeginWsViews** record specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies the sheet views for the current sheet.

### 2.4.294 BrtBigName

The **BrtBigName** record specifies a name/value pair of arbitrary user-defined data that is associated with the current sheet.

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| strName (variable)  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| strRelID (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**strName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the custom property. The name MUST be unique in the current sheet. The length of the name MUST NOT exceed 65,535 characters.

**strRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies a binary part that contains the value of the custom property in this file.

### 2.4.295 BrtBkHim

The **BrtBkHim** record specifies the background image of the sheet.

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rgb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rgb (variable):** A **RelID** (section [2.5.114](#)) that specifies the relationship to the **Images** (section [2.1.7.30](#)) part. This value MUST NOT be NULL and MUST have length greater than zero.

#### 2.4.296 BrtBookProtection

The **BrtBookProtection** record specifies protection options for a workbook.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16         | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| protpwdBook |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | protpwdRev |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| wFlags      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**protpwdBook (2 bytes):** An unsigned integer that specifies the verifier value of the password required for unlocking structure and window protection for the workbook [<24>](#).

Window protection is defined as preventing changes to the windows of the workbook such as moving, resizing, and closing windows.

Structure protection is defined as preventing changes to the structure of the workbook such as moving, deleting, hiding, unhiding, renaming sheets, inserting new sheets, and moving sheets to another workbook.

If the value of this field is 0x0000, then no password is required to remove structure and window protection. If the value is not 0x0000, then the field contains the password verifier of the password required to remove structure and window protection. The algorithm to generate the password verifier is specified in Password Verifier Algorithm (section [2.2.9](#)).

**protpwdRev (2 bytes):** An unsigned integer that specifies the verifier value of the password required to unlock change tracking information for the workbook [<25>](#).

If the value of this field is 0x0000, then no password is required to remove revision protection. If the value is not 0x0000, then the field contains the password verifier of the password required to remove revision protection. The algorithm to generate the password verifier is specified in Password Verifier Algorithm.

**wFlags (2 bytes):** A **BookProtectionFlags** (section [2.5.6](#)) that specifies what aspects of the workbook are protected.

#### 2.4.297 BrtBookProtectionIso

The **BrtBookProtectionIso** record specifies protection options for a workbook in a manner compatible with ISO/IEC 29500 workbook protection records as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.2.29. A **BrtBookProtectionIso** record MUST be immediately followed by a **BrtBookProtection** (section [2.4.296](#)) record whose **protpwdBook** and **protpwdRev** fields MUST



be set to 0x0000 and whose **wFlags** field MUST have the same value as the field of the same name in the **BrtBookProtectionIso** record.

|                               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                             | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dwBookSpinCount               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwRevSpinCount                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| wFlags                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | ipdBookPasswordData (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ipdRevPasswordData (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**dwBookSpinCount (4 bytes):** An unsigned 32-bit integer that specifies the number of times that the hash function was iterated over the password to generate the **rgbHash** field of **ipdBookPasswordData**, as described in Strong Password Verifier Algorithm (section [2.2.10](#)). This value MUST NOT be greater than 10,000,000.

**dwRevSpinCount (4 bytes):** An unsigned 32-bit integer that specifies the number of times that the hash function was iterated over the password to generate the **rgbHash** field of **ipdRevPasswordData**, as described in Strong Password Verifier Algorithm. This value MUST NOT be greater than 10,000,000.

**wFlags (2 bytes):** A **BookProtectionFlags** (section [2.5.6](#)) that specifies what aspects of the workbook are protected. It MUST have the same value as the **wFlags** field in the following **BrtBookProtection** (section [2.4.296](#)) record.

**ipdBookPasswordData (variable):** An **IsoPasswordData** (section [2.5.79](#)) that specifies the **salt**, hash algorithm and password hash of the password required for unlocking structure and window protection for the workbook [<26>](#). If the size of the **rgbHash** member of this field is zero, then no password is required to remove structure and window protection and the size of the **rgbHash** member of **ipdRevPasswordData** MUST be nonzero.

Window protection is defined as preventing changes to the windows of the workbook such as moving, resizing, and closing windows.

Structure protection is defined as preventing changes to the structure of the workbook such as moving, deleting, hiding, unhiding, renaming sheets, inserting new sheets, and moving sheets to another workbook.

**ipdRevPasswordData (variable):** An **IsoPasswordData** (section [2.5.79](#)) that specifies the salt, hash algorithm, and password hash for the password required to unlock change tracking information for the workbook [<27>](#). If the size of this field is zero, then no password is required to remove revision protection and the size of the **rgbHash** member of **ipdBookPasswordData** MUST be nonzero.

## 2.4.298 BrtBookView

The **BrtBookView** record specifies a single workbook view.

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| xWn       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| yWn       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dxWn      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dyWn      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| iTabRatio |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| itabFirst |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| itabCur   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A         | B | C | D | E | F | G | H |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**xWn (4 bytes):** A signed integer that specifies the X coordinate for the left side of the window that contains the workbook. The unit of measurement for this value is **twips**.

**yWn (4 bytes):** A signed integer that specifies the Y coordinate for the top of the window that contains the workbook. The unit of measurement for this value is twips.

**dxWn (4 bytes):** An unsigned integer that specifies the width of the window that contains the workbook. The value MUST be less than 2,147,483,647. The unit of measurement for this value is twips.

**dyWn (4 bytes):** An unsigned integer that specifies the height of the window that contains the workbook. The value MUST be less than 2,147,483,647. The unit of measurement for this value is twips.

**iTabRatio (4 bytes):** An unsigned integer that specifies the ratio of the window area used for selecting sheets to the window area used for horizontal scrolling. The value of **iTabRatio** MUST be greater than or equal to 0 and less than or equal to 1,000, where 1,000 means the space is entirely used for sheet selection, and 0 means the space is entirely used for horizontal scrolling.

**itabFirst (4 bytes):** An unsigned integer that specifies a zero-based index of a **BrtBundleSh** (section [2.4.301](#)) record in the collection of all records directly following **BrtBeginBundleShs** (section [2.4.13](#)). The referenced **BrtBundleSh** specifies the first sheet in this workbook view.

**itabCur (4 bytes):** An unsigned integer that specifies a zero-based index of a **BrtBundleSh** record in the collection of all records directly following **BrtBeginBundleShs**. The referenced **BrtBundleSh** specifies the active sheet in this workbook view.

**A - fHidden (1 bit):** A bit that specifies whether the window that contains the workbook is in the list of hidden windows.

- B - fVeryHidden (1 bit):** A bit that specifies whether the window that contains the workbook has the properties of **fHidden**, and also that the user cannot see that the window that contains the workbook is in the list of hidden windows.
- C - fIconic (1 bit):** A bit that specifies whether the window that contains the workbook is minimized in the workbook view.
- D - fDspHScroll (1 bit):** A bit that specifies whether a horizontal scroll bar is displayed in the workbook view.
- E - fDspVScroll (1 bit):** A bit that specifies whether a vertical scroll bar is displayed in the workbook view.
- F - fBotAdornment (1 bit):** A bit that specifies whether the **sheet tabs** are displayed in the workbook view.
- G - fAFDateGroup (1 bit):** A bit that specifies whether to group dates when presenting the user with filtering options in the user interface.
- H - unused (1 bit):** This value is undefined, and MUST be ignored.

#### 2.4.299 BrtBorder

The **BrtBorder** record specifies the set of formats for the border of a cell.

| 0   | 1 | 2        | 3 | 4 | 5 | 6 | 7        | 8 | 9       | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24         | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
|-----|---|----------|---|---|---|---|----------|---|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|------------|----|----|----|----|----|----|----|--|
| A   | B | reserved |   |   |   |   |          |   | blxfTop |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    | blxfBottom |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   | blxfLeft |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    | blxfRight  |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   | blxfDiag |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |
| ... |   |          |   |   |   |   |          |   |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |            |    |    |    |    |    |    |    |  |

...

**A - fBdrDiagDown (1 bit):** A bit that specifies a diagonal line that extends from the upper-left corner of the cell to the lower-right corner of the cell.

**B - fBdrDiagUp (1 bit):** A bit that specifies a diagonal line that extends from the lower-left corner of the cell to the upper-right corner of the cell.

**reserved (6 bits):** This value MUST be 0, and MUST be ignored.

**blxfTop (10 bytes):** A **Blxf** (section [2.5.4](#)) that specifies the format for the top border of the cell.

**blxfBottom (10 bytes):** A **Blxf** that specifies the format for the bottom border of the cell.

**blxfLeft (10 bytes):** A **Blxf** that specifies the format for the left border of the cell.

**blxfRight (10 bytes):** A **Blxf** that specifies the format for the right border of the cell.

**blxfDiag (10 bytes):** A **Blxf** that specifies the format for the diagonal lines in the cell. If **fBdrDiagDown** or **fBdrDiagUp** is 1, then **blxfDiag.dg** MUST NOT be 0.

### 2.4.300 BrtBrk

The **BrtBrk** record specifies a single page break (2).

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| unRwCol     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unColRwStrt |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unColRwEnd  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fMan        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fPivot      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**unRwCol (4 bytes):** A **Rw\_Col** (section [2.5.126](#)) that specifies the row (2) or column (2) index of the page break (2). If this record is preceded by a **BrtBeginRwBrk** (section [2.4.185](#)), then **unRwCol** specifies a row (2) index. If this record is preceded by a **BrtBeginColBrk** (section [2.4.23](#)), then **unRwCol** specifies a column (2) index and MUST be less than 16,384.

**unColRwStrt (4 bytes):** A **Rw\_Col** that specifies the index of the column (2) or row (2) where this page break (2) begins. If this record is preceded by a **BrtBeginRwBrk**, then **unColRwStrt** specifies a column (2) index and MUST be less than 16,384. If this record is preceded by a **BrtBeginColBrk**, then **unColRwStrt** specifies a row (2) index.

**unColRwEnd (4 bytes):** A **Rw\_Col** that specifies the index of the column (2) or row (2) where this page break (2) ends. If this record is preceded by a **BrtBeginRwBrk**, then **unColRwEnd** specifies a column (2) index and MUST be less than 16,384. If this record is preceded by a

**BrBeginColBrk**, then **unColRwEnd** specifies a row (2) index. This value MUST be greater than or equal to **unColRwStrt**.

For example, a horizontal page break (2) at row (2) 8 that spans between column (2) A and column (2) Z will be saved with values given by the following table.

| Field              | Value | Meaning                                     |
|--------------------|-------|---|
| <b>unRwCol</b>     | 7     | The zero-based index of the eighth row (2). |
| <b>unColRwStrt</b> | 0     | The zero-based index of column (2) A.       |
| <b>unColRwEnd</b>  | 25    | The zero-based index of column (2) Z.       |

**fMan (4 bytes)**: An unsigned integer that specifies whether the page break (2) was specified by the user. This value MUST be a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | The page break (2) occurs automatically when the printable region does not fit the page. |
| 0x00000001 | The page break (2) was specified by the user.  |

**fPivot (4 bytes)**: An unsigned integer that specifies whether this page break (2) was created by a **PivotTable** (section [2.1.7.40](#)). This value MUST be a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | The page break (2) was not created by a <a href="#">PivotTable</a> . |
| 0x00000001 | The page break (2) was created by a PivotTable.                      |

### 2.4.301 BrtBundleSh

The **BrtBundleSh** record specifies a sheet.

| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| hsState             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iTabID              |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| strRelID (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| strName (variable)  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

**hsState (4 bytes):** An **ST\_SheetState** (section [2.5.142](#)) that specifies the visibility state of the sheet.

**iTabID (4 bytes):** An unsigned integer that specifies the unique identifier of the sheet. This value **MUST** be between 1 and 0x0000FFFF inclusive.

**strRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies the relationship that specifies the part containing sheet data. The relationship **MUST** be one of the following types:

- Chart Sheet (section [2.1.7.7](#))
- Dialog Sheet (section [2.1.7.20](#))
- Macro Sheet (section [2.1.7.32](#))
- International Macro Sheet (section [2.1.7.31](#))
- Worksheet (section [2.1.7.61](#))

If **strRelID** is NULL and **hsState** is VERYHIDDEN, then the type of sheet is a **module sheet**.

**strName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the unique case-insensitive name of the sheet. The length of this string **MUST** be at least 1 and **MUST NOT** exceed 31 characters. The string **MUST NOT** contain the following characters:

- 0x0000
- 0x0003
- colon (:)
- backslash (\)
- asterisk (\*)
- question mark (?)
- forward slash (/)
- opening square bracket ([)
- closing square bracket (])

The string **MUST NOT** begin or end with the single quote (') character.

### 2.4.302 BrtCalcProp

The **BrtCalcProp** record specifies workbook calculation properties.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| recalcID    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fAutoRecalc |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                  |   |   |   |   |   |   |   |   |          |  |
|------------------|---|---|---|---|---|---|---|---|----------|--|
| cCalcCount       |   |   |   |   |   |   |   |   |          |  |
| xnumDelta        |   |   |   |   |   |   |   |   |          |  |
| ...              |   |   |   |   |   |   |   |   |          |  |
| cUserThreadCount |   |   |   |   |   |   |   |   |          |  |
| A                | B | C | D | E | F | G | H | I | reserved |  |

**recalcID (4 bytes):** An unsigned integer that specifies the recalculation engine identifier of the recalculation engine that performed the last recalculation. If the value is less than the recalculation engine identifier associated with the application, the application will recalculate the results of all formulas on this workbook immediately after loading the file.

**fAutoRecalc (4 bytes):** An unsigned integer that specifies the **calculation mode** for the workbook. This value MUST be one of the values from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Workbook is in <b>manual calculation mode</b> .                                 |
| 0x00000001 | Workbook is in <b>automatic calculation mode</b> .                              |
| 0x00000002 | Same as 0x00000001, except that tables are excluded from automatic calculation. |

**cCalcCount (4 bytes):** An unsigned integer that specifies the number of iterations to run when calculating a workbook in **iterative calculation** mode. This value is used when **fIter** is set to 1.

**xnumDelta (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the minimum change for iterative calculations. This value is used when **fIter** is set to 1. The application stops calculating after **cCalcCount** iterations or after all values in the circular reference change by less than **xnumDelta** between iterations, whichever comes first.

**cUserThreadCount (4 bytes):** A signed integer that specifies the number of concurrent calculation processes to be used to calculate this workbook. This value is used when **fUserSetThreadCount** and **fMTREnabled** are set to 1. This value MUST be greater than 0 and MUST be less than or equal to 1,024.

**A - fFullCalcOnLoad (1 bit):** A bit that specifies whether the application performs a full calculation when the workbook is opened.

**B - fRefA1 (1 bit):** A bit that specifies the cell reference style used by this workbook. Possible values for this field are listed in the following table.

| Value | Meaning                                |
|-------|--|
| 0     | Specifies <b>R1C1</b> reference style. |
| 1     | Specifies <b>A1</b> reference style.   |

**C - fIter (1 bit):** A bit that specifies whether to enable iterative calculation. If the value is 0, iterative calculation is disabled. If the value is 1, iterative calculation is enabled.

**D - fFullPrec (1 bit):** A bit that specifies whether the **precision as displayed** mode is selected. Possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that precision as displayed mode is selected.     |
| 1     | Specifies that precision as displayed mode is not selected. |

**E - fSomeUncalcd (1 bit):** A bit that specifies whether the workbook was calculated before it was saved. Possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Specifies that recalculation was fully finished before save.                       |
| 1     | Specifies that recalculation was not fully finished before the workbook was saved. |

**F - fSaveRecalc (1 bit):** A bit that specifies whether to recalculate the workbook before it is saved, when in manual calculation mode.

**G - fMTREnabled (1 bit):** A bit that specifies whether concurrent calculation processes are enabled for this workbook.

**H - fUserSetThreadCount (1 bit):** A bit that specifies whether the user has set the number of concurrent calculation processes for this workbook.

**I - fNoDeps (1 bit):** A bit that specifies whether all cells in the workbook are calculated. Possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Dependencies are respected and only formulas (section <a href="#">2.2.2</a> ) that depend on cells that changed in the workbook are calculated. |
| 1     | Dependencies are ignored and all cell formulas in this workbook fully calculate every time a calculation is triggered.                          |

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

### 2.4.303 BrtCellBlank

The **BrtCellBlank** record specifies a cell that is blank as specified in the **Worksheet** part ABNF (section [2.1.7.61](#)), **Macro Sheet** (section [2.1.7.32](#)) part ABNF, and **Revision Log** (section [2.1.7.44](#)) part ABNF.

|      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cell |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |




...

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

### 2.4.304 BrtCellBool

The **BrtCellBool** record specifies a cell containing a **Boolean** (section [2.5.97.3](#)) value as specified in the **Worksheet** part ABNF (section [2.1.7.61](#)), **Macro Sheet** (section [2.1.7.32](#)) part ABNF, and **Revision Log** (section [2.1.7.44](#)) part ABNF.

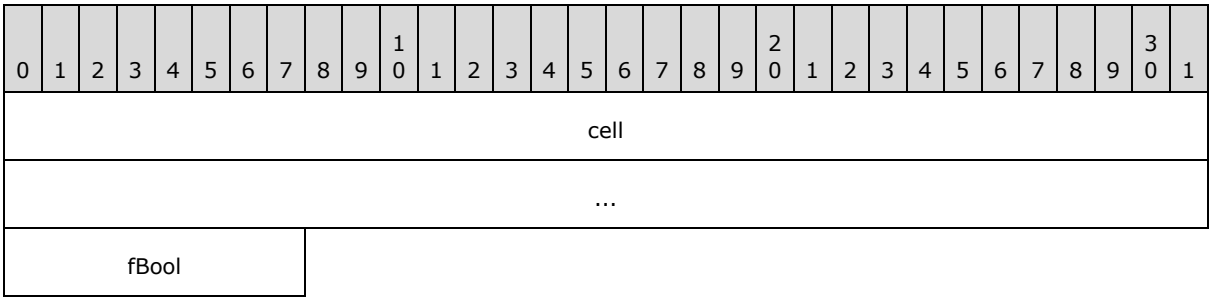


**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**fBool (1 byte):** A **Boolean** that specifies the value contained in the cell. This value MUST be a value from the following table.

| Value | Meaning                     |
|-------|-----------------------------|
| 0x00  | <b>Boolean</b> value FALSE. |
| 0x01  | <b>Boolean</b> value TRUE.  |

### 2.4.305 BrtCellError

The **BrtCellError** record specifies a cell containing an error value as specified in the **Worksheet** part ABNF (section [2.1.7.61](#)), **Macro Sheet** (section [2.1.7.32](#)) part ABNF, and **Revision Log** (section [2.1.7.44](#)) part ABNF.

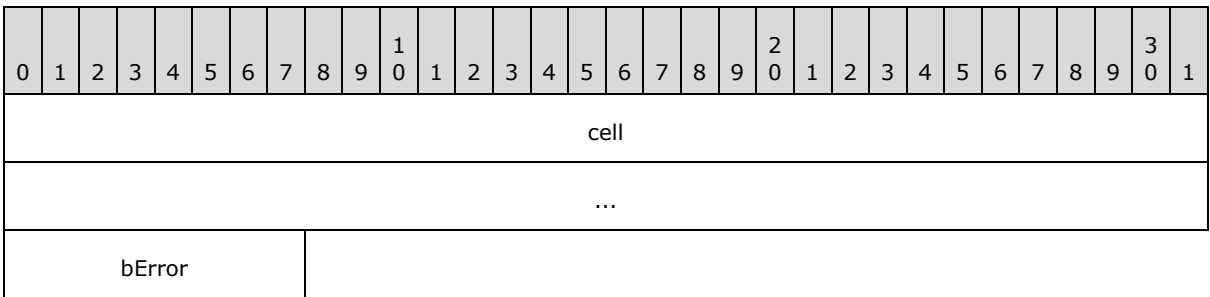

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**bError (1 byte):** A **BErr** (section [2.5.97.2](#)) that specifies the type of error in this cell.

### 2.4.306 BrtCellIgnoreEC

The **BrtCellIgnoreEC** record specifies the types of error conditions that are ignored in a formula evaluation for a specified range or ranges.

|                   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9        | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A                 | B | C | D | E | F | G | H | I | reserved |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sqrfxu (variable) |   |   |   |   |   |   |   |   |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - ffecCalcError (1 bit):** A bit that specifies whether to ignore calculation errors.

**B - ffecEmptyCellRef (1 bit):** A bit that specifies whether to ignore errors arising from references to empty cells.

**C - ffecNumStoredAsText (1 bit):** A bit that specifies whether to ignore errors arising from formatting of numeric values.

**D - ffecInconsistRange (1 bit):** A bit that specifies whether to ignore errors arising from formulas that contain references to less than the entirety of a range containing continuous data.

**E - ffecInconsistFmla (1 bit):** A bit that specifies whether to ignore errors arising from formulas that are inconsistent with formulas in neighboring cells.

**F - ffecTextDateInsuff (1 bit):** A bit that specifies whether to ignore errors arising from formatting of date/time values.

**G - ffecUnprotFmla (1 bit):** A bit that specifies whether to ignore errors arising from unprotected formulas.

**H - ffecDataValidation (1 bit):** A bit that specifies whether to ignore errors arising from data validation.

**I - ffecCalcCol (1 bit):** A bit that specifies whether to ignore errors arising from **calculated column** formulas (section [2.2.2](#)).

**reserved (23 bits):** This value MUST be 0, and MUST be ignored.

**sqrfxu (variable):** An **UncheckedSqRfX** (section [2.5.155](#)) that specifies the range or ranges where cell errors have been ignored. The **sqrfxu.crfx** MUST be less than 8,192.

### 2.4.307 BrtCellIgnoreEC14

The **BrtCellIgnoreEC14** record specifies the types of error conditions that are ignored in a formula evaluation for a specified range or ranges. This record is equivalent to **BrtCellIgnoreEC** (section [2.4.306](#)) but allows for more than 8,192 ranges where cell errors have been ignored.

|                       |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9        | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A                     | B | C | D | E | F | G | H | I | reserved |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

| Field                       | Value |
|-----------------------------|-------|
| <b>FRTHHeader.fRef</b>      | 0     |
| <b>FRTHHeader.fSqref</b>    | 1     |
| <b>FRTHHeader.fFormulas</b> | 0     |
| <b>FRTHHeader.fRelID</b>    | 0     |

The **sqrfx** of the single **FRTSqref** (section [2.5.65](#)) comprising the **array** of the **FRTHHeader.rqSqrefs** is an **UncheckedSqRfX** (section [2.5.155](#)) that specifies the range or ranges where cell errors have been ignored.

The **FRTHHeader.rgSqrefs.csqref** MUST be 1.

The **sqrfx.crfx** of the single **FRTSqref** comprising the **array** of the **FRTHHeader.rqSqrefs** MUST be equal to or greater than 8,192.

- A - ffecCalcError (1 bit):** A bit that specifies whether to ignore calculation errors.
- B - ffecEmptyCellRef (1 bit):** A bit that specifies whether to ignore errors arising from references to empty cells.
- C - ffecNumStoredAsText (1 bit):** A bit that specifies whether to ignore errors arising from formatting of numeric values.
- D - ffecInconsistRange (1 bit):** A bit that specifies whether to ignore errors arising from formulas (section [2.2.2](#)) that contain references to less than the entirety of a range containing continuous data.
- E - ffecInconsistFmla (1 bit):** A bit that specifies whether to ignore errors arising from formulas that are inconsistent with formulas in neighboring cells.
- F - ffecTextDateInsuff (1 bit):** A bit that specifies whether to ignore errors arising from formatting of date/time values.
- G - ffecUnprotFmla (1 bit):** A bit that specifies whether to ignore errors arising from unprotected formulas.
- H - ffecDataValidation (1 bit):** A bit that specifies whether to ignore errors arising from data validation.

**I - ffecCalcCol (1 bit):** A bit that specifies whether to ignore errors arising from calculated column formulas.

**reserved (23 bits):** This value MUST be 0, and MUST be ignored.

### 2.4.308 BrtCellIsst

The **BrtCellIsst** record specifies a cell that contains a string as specified in the **Worksheet** part ABNF (section [2.1.7.61](#)), **Macro Sheet** (section [2.1.7.32](#)) part ABNF, and **Revision Log** (section [2.1.7.44](#)) part ABNF.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cell |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| isst |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**isst (4 bytes):** An unsigned integer that specifies a zero-based index of a **BrtSSTItem** (section [2.4.753](#)) record in the collection of all records directly following **BrtBeginSst** (section [2.4.219](#)) in the **Shared Strings** (section [2.1.7.45](#)) part ABNF. The referenced **BrtSSTItem** specifies the string that this cell contains. This value MUST be less than the total number of **BrtSSTItem** records between **BrtBeginSst** and **BrtEndSst** (section [2.4.554](#)).

### 2.4.309 BrtCellMeta

The **BrtCellMeta** record specifies a reference to a cell metadata (section [2.2.4.2](#)) metadata block (section [2.2.4.5](#)) in the metadata part (section [2.1.7.34](#)).

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| icmb |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**icmb (4 bytes):** A signed integer that specifies a one-based index of a **BrtMdb** (section [2.4.673](#)) record in the collection of all records directly following the **BrtBeginEsmdb** (section [2.4.70](#)) record whose **fCellMeta** field equals 0x00000001. The referenced **BrtMdb** specifies a cell metadata (section [2.2.4.2](#)) metadata block that is associated with the **BrtCellBlank** (section [2.4.303](#)), **BrtCellRk** (section [2.4.311](#)), **BrtCellError** (section [2.4.305](#)), **BrtCellBool** (section [2.4.304](#)), **BrtCellReal** (section [2.4.310](#)), **BrtCellIsst** (section [2.4.308](#)), **BrtCellSt** (section [2.4.314](#)), **BrtFmlaString** (section [2.4.650](#)), **BrtFmlaNum** (section [2.4.649](#)), **BrtFmlaBool** (section [2.4.647](#)), or **BrtFmlaError** (section [2.4.648](#)) record that follows **BrtCellMeta** (section [2.4.309](#)).

### 2.4.310 BrtCellReal

The **BrtCellReal** record specifies a cell containing a real number as specified in the **Worksheet** (section [2.1.7.61](#)) part ABNF, **Macro Sheet** (section [2.1.7.32](#)) part ABNF, and **Revision Log** (section [2.1.7.44](#)) part ABNF.

| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cell |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnum |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the value of the cell.

### 2.4.311 BrtCellRk

The **BrtCellRk** record specifies a cell containing a number as specified in the **Worksheet** (section [2.1.7.61](#)) part ABNF, **Macro Sheet** (section [2.1.7.32](#)) part ABNF, and **Revision Log** (section [2.1.7.44](#)) part ABNF.

| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cell  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| value |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**value (4 bytes):** An **RkNumber** (section [2.5.122](#)) that contains the value of this cell.

### 2.4.312 BrtCellRString

The **BrtCellRString** record specifies a cell that contains a string, as specified in the **Revision Log** (section [2.1.7.44](#)) part ABNF.

|                  |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|------------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| cell             |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...              |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| value (variable) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...              |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**value (variable):** A **RichStr** (section [2.5.121](#)) that specifies the string value of the cell.

### 2.4.313 BrtCellSmartTagProperty

The **BrtCellSmartTagProperty** record specifies a property of a smart tag in a cell. [<28>](#)

|                |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|----------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| key (variable) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...            |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| val (variable) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...            |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**key (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the key of the property. The length of the string MUST be greater than or equal to 1 character and less than or equal to 255 characters.

**val (variable):** An **XLWideString** that specifies the value of the property. The length of the string MUST be greater than or equal to 1 character and less than or equal to 65535 [<29>](#) characters.

### 2.4.314 BrtCellSt

The **BrtCellSt** record specifies a cell that contains a string or the most recent evaluation of a data table (1) formula (section [2.2.2](#)) that resulted in a string, as specified in the **Worksheet** (section [2.1.7.61](#)) part ABNF.

|      |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| cell |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

|                  |
|------------------|
| ...              |
| value (variable) |
| ...              |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**value (variable):** An **XLWideString** (section [2.5.168](#)) that contains the string content of the cell. This value MUST be less than or equal to 32,767 characters.

### 2.4.315 BrtCellWatch

The **BrtCellWatch** record specifies a reference to a watched cell.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rw  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| col |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rw (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) of the cell.

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) of the cell.

### 2.4.316 BrtCFIcon

The **BrtCFIcon** record specifies a single icon of an icon set.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| iconSet    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| index      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record information for this record.

**iconSet (4 bytes):** A **KPISets14** (section [2.5.86](#)) that specifies the icon set.

**index (4 bytes):** An **Icon** (section [2.5.74](#)) that specifies the icon. If **iconSet** is equal to -1, this value MUST be -1. If **iconSet** is not equal to -1, this value MUST be greater than or equal to 0. If the icon set specified by **iconSet** has 3 icons, this value MUST be less than or equal to 2. If the icon set specified by **iconSet** has 4 icons, this value MUST be less than or equal to 3. If the icon set specified by **iconSet** has 5 icons, this value MUST be less than or equal to 4.

### 2.4.317 BrtCFRuleExt

The **BrtCFRuleExt** record specifies additional properties for conditional formatting rule.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| FRTHHeader      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| guid (16 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that is used to identify the **BrtBeginCFRule14** (section [2.4.22](#)) record that contains the additional properties for this conditional formatting rule. This value **MUST** be equal to the **guid** field of one of the **BRTBeginCFRule14** records as described by the **Worksheet** (section [2.1.7.61](#)) part ABNF.

### 2.4.318 BrtCFVO

The **BrtCFVO** record specifies a Conditional Formatting Value Object (CFVO) that specifies how to calculate a value from the range of cells to which a conditional formatting rule applies.

The value this structure specifies how to calculate is referred to as a CFVO value in other records.

| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| iType              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| numParam           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fSaveGTE           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fGTE               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cbFmla             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| formula (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iType (4 bytes):** A **CFVOType** (section [2.5.18](#)) that specifies how the CFVO value is determined.



- If this record is preceded by a **BrtBeginColorScale** (section [2.4.26](#)) record and specifies the beginning of the color scale, then this value MUST NOT be CFVOMAX.
- If this record is preceded by a **BrtBeginColorScale** record and specifies the end of the color scale, then this value MUST NOT be CFVOMIN.
- If this record is preceded by a **BrtBeginColorScale** record and specifies the midpoint of the color scale, then this value MUST NOT be CFVOMAX and MUST NOT be CFVOMIN.
- If this record is preceded by a **BrtBeginDatabar** (section [2.4.40](#)) record and specifies the cell value for the shortest data bar, then this value MUST NOT be CFVOMAX.
- If this record is preceded by a **BrtBeginDatabar** record and specifies the cell value for the longest data bar, then this value MUST NOT be CFVOMIN.
- If this record is preceded by a **BrtBeginIconSet** (section [2.4.87](#)) record, then this value MUST NOT be CFVOMAX or CFVOMIN.
- If **iType** is CFVOMIN or CFVOMAX, **numParam**, **cbFmla**, and **formula** are all undefined and MUST be ignored.
- If **iType** is CFVOFMLA, **numParam** is undefined and MUST be ignored.
- If **iType** is CFVONUM, CFVOPERCENT, or CFVOPERCENTILE and **cbFmla** is greater than 0, then **numParam** is undefined and MUST be ignored.
- If **iType** is CFVONUM, CFVOPERCENT, or CFVOPERCENTILE and **cbFmla** is 0, then **numParam** is used.

**numParam (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the numerical value of this **BrtCFVO** (section [2.4.318](#)) as specified by **iType**. If **iType** is CFVOPERCENT or CFVOPERCENTILE, **numParam** MUST be greater than or equal to 0 and less than or equal to 100.

**fSaveGTE (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the value of **fGTE** is used to specify the conditional formatting behavior of this **BrtCFVO**. If the current group of **BrtCFVO** records are not preceded by a **BrtBeginIconSet** record and therefore not describing an icon set, then this value MUST be ignored. Otherwise, it MUST have a value of 0x00000001.

**fGTE (4 bytes):** A **Boolean** that specifies whether the first **BrtCFVO** will use greater-than or greater-than-or-equal-to when applying conditional formatting rules. This value MUST have a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Greater-than is used when applying conditional formatting rules.             |
| 0x00000001 | Greater-than-or-equal-to is used when applying conditional formatting rules. |

This value MUST be ignored if the current group of **BrtCFVO** records is not preceded by a **BrtBeginIconSet** record and therefore does not describe an icon set.

**cbFmla (4 bytes):** An unsigned integer that specifies the length in bytes of **formula.rgce**.

**formula (variable):** A **CFVOParsedFormula** (section [2.5.97.7](#)) that specifies the formula (section [2.2.2](#)) that is evaluated and compared to the cell value by using the comparison method specified by this **BrtCFVO**.

### 2.4.319 BrtCFVO14

The **BrtCFVO14** record specifies a Conditional Formatting Value Object (CFVO) that specifies how to calculate a value from the range of cells to which a conditional formatting rule applies. This record is equivalent to **BrtCFVO** (section [2.4.318](#)) but allows to specify additional values for the **iType** field.

The value this structure specifies how to calculate is referred to as a CFVO value in other records.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| iType                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| numParam              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fSaveGTE              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fGTE                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cbFmla                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record. The **FRTHHeader** flags MUST have the values listed in the following table.

| Field                      | Value  |
|----------------------------|--------|
| <b>FRTHHeader.fRef</b>     | 0      |
| <b>FRTHHeader.fSqref</b>   | 0      |
| <b>FRTHHeader.fFormula</b> | 0 or 1 |
| <b>FRTHHeader.fRelID</b>   | 0      |

The **FRTHHeader.fFormula** MUST be 1 if **cbFmla** is greater than 0.

If **FRTHHeader.fFormula** is 1, **rgFormulas.cformula** MUST equal 1. The **formula** of the single **FRTFormula** (section [2.5.58](#)) comprising the **array** of the **rgFormulas** specifies the **FRTCFVOParsedFormula14** (section [2.5.56](#)) for this **BrtCFVO14** (section [2.4.319](#)).

**iType (4 bytes):** A **CFVOType14** (section [2.5.19](#)) that specifies how the CFVO value is determined.

- If this record is preceded by a **BrtBeginColorScale14** (section [2.4.27](#)) record and specifies the beginning of the color scale, then this value MUST NOT be CFVOMAX\_14.
- If this record is preceded by a **BrtBeginColorScale14** record and specifies the end of the color scale, then this value MUST NOT be CFVOMIN\_14.
- If this record is preceded by a **BrtBeginColorScale14** record and specifies the midpoint of the color scale, then this value MUST NOT be CFVOMAX\_14 and MUST NOT be CFVOMIN\_14.
- If this record is not preceded by a **BrtBeginDatabar14** record, then this value MUST NOT be CFVOAUTOMAX\_14 and MUST NOT be CFVOAUTOMIN\_14.
- If this record is preceded by a **BrtBeginDatabar14** record and specifies the minimum cell value used for the data bars in this conditional formatting range, then this value MUST NOT be CFVOMAX\_14 or CFVOAUTOMAX\_14.
- If this record is preceded by a **BrtBeginDatabar14** record and specifies the maximum cell value used for the data bars in this conditional formatting range, then this value MUST NOT be CFVOMIN\_14 or CFVOAUTOMIN\_14.
- If this record is preceded by a **BrtBeginIconSet14** (section [2.4.88](#)) record, then this value MUST NOT be CFVOMAX\_14 or CFVOMIN\_14.
- If **iType** is CFVOMIN\_14, CFVOMAX\_14, CFVOAUTOMAX\_14, or CFVOAUTOMIN\_14, **numParam**, **cbFmla**, and **formula** are all undefined and MUST be ignored.
- If **iType** is CFVOFMLA\_14, **numParam** is undefined and MUST be ignored.
- If **iType** is CFVONUM\_14, CFVOPERCENT\_14, or CFVOPERCENTILE\_14 and **cbFmla** is greater than 0, then **numParam** is undefined and MUST be ignored.
- If **iType** is CFVONUM\_14, CFVOPERCENT\_14, or CFVOPERCENTILE\_14 and **cbFmla** is 0, then **numParam** is used.

**numParam (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the numerical value of this **BrtCFVO14** as specified by **iType**. If **iType** is CFVOPERCENT\_14 or CFVOPERCENTILE\_14, **numParam** MUST be greater than or equal to 0 and less than or equal to 100.

**fSaveGTE (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the value of **fGTE** is used to specify the conditional formatting behavior of this **BrtCFVO14**. If the current group of **BrtCFVO14** records are not preceded by a **BrtBeginIconSet14** record and therefore not describing an icon set, then this value MUST be ignored. Otherwise, it MUST have a value of 0x00000001.

**fGTE (4 bytes):** A **Boolean** that specifies whether the first **BrtCFVO14** will use greater-than or greater-than-or-equal-to when applying conditional formatting rules. This value MUST have a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Greater-than is used when applying conditional formatting rules.             |
| 0x00000001 | Greater-than-or-equal-to is used when applying conditional formatting rules. |

This value MUST be ignored if the current group of **Br tCFVO14** records is not preceded by a **Br tBeginIconSet14** record and therefore does not describe an icon set.

**cbFmla (4 bytes):** An unsigned integer that specifies whether a formula (section [2.2.2](#)) is present in **FRTHeader**. This value MUST be 0x00000000 if there is no formula, and MUST be nonzero if there is. This value MUST be equal to the number of bytes in the formula **rgce** if a formula is present in **FRTHeader**.

### 2.4.320 Br tColInfo

The **Br tColInfo** record specifies the column (2) width and formatting for one or more columns (2) of a sheet.

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| colFirst |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| colLast  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| coldx    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ixfe     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A        | B | C | D | E |   | F |   | G | H | I |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**colFirst (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the first column (2) to which this width and formatting is applied.

**colLast (4 bytes):** An **UncheckedCol** that specifies the last column (2) to which this width and formatting is applied.

**coldx (4 bytes):** An unsigned integer that specifies the column (2) width in standard digits for all columns (2) between **colFirst** and **colLast**, inclusive. For the purposes of this field specification, a standard digit is defined as the widest digit in the Normal style (section [2.2.6.1.2.2](#)) font. The default column (2) width is measured in the number of standard digits that fit in the column (2) multiplied by 256 and rounded down. This value MUST be less than or equal to 65,535.

**ixfe (4 bytes):** An unsigned integer that specifies the zero-based index of a **Br tXF** (section [2.4.816](#)) record in the collection of all records directly following **Br tBeginCellIXFs** (section [2.4.20](#)) in the **Styles** (section [2.1.7.50](#)) part. The referenced **Br tXF** specifies the format to apply as the default format for the columns (2) specified by **colFirst** and **colLast**. This value MUST be less than the **cxfs** field of the **Br tBeginCellIXFs** record in the styles part.

**A - fHidden (1 bit):** A bit that specifies whether the columns (2) are hidden.

**B - fUserSet (1 bit):** A bit that specifies whether the width of the columns (2) is different than the default.

**C - fBestFit (1 bit):** A bit that specifies whether the width of the columns (2) has been adjusted to display all contents of all cells in those columns (2).

**D - fPhonetic (1 bit):** A bit that specifies whether phonetic information is displayed in the cells of the specified columns (2) by default.

**E - reserved1 (4 bits):** This value MUST be 0, and MUST be ignored.

**F - iOutLevel (3 bits):** An unsigned integer that specifies the **outline level (1)** of the columns (2). The value MUST be greater than or equal to 0 and less than or equal to 7.

**G - unused (1 bit):** This value is undefined, and MUST be ignored.

**H - fCollapsed (1 bit):** A bit that specifies whether the outline level (1) of the columns (2) is collapsed.

**I - reserved2 (3 bits):** This value MUST be 0, and MUST be ignored.

### 2.4.321 BrtColor

The **BrtColor** record specifies a color.

|      |            |   |   |   |   |   |        |       |   |    |    |       |               |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|------------|---|---|---|---|---|--------|-------|---|----|----|-------|---------------|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1          | 2 | 3 | 4 | 5 | 6 | 7      | 8     | 9 | 10 | 11 | 12    | 13            | 14 | 15 | 16 | 17     | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A    | xColorType |   |   |   |   |   |        | index |   |    |    |       | nTintAndShade |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| bRed |            |   |   |   |   |   | bGreen |       |   |    |    | bBlue |               |    |    |    | bAlpha |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fValidRGB (1 bit):** A bit that specifies whether the color specified by **index** matches the color specified by **bRed**, **bGreen**, **bBlue**, and **bAlpha**. This value MUST be 1 if **xColorType** is 2. Possible values for this field and their meanings are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The color specified by <b>index</b> does not match the color specified by <b>bRed</b> , <b>bGreen</b> , <b>bBlue</b> , and <b>bAlpha</b> . <b>bRed</b> , <b>bGreen</b> , <b>bBlue</b> , and <b>bAlpha</b> MUST be ignored. |
| 1     | The color specified by <b>index</b> matches the color specified by <b>bRed</b> , <b>bGreen</b> , <b>bBlue</b> , and <b>bAlpha</b> .  |

**xColorType (7 bits):** An unsigned integer that specifies the type of color information contained in this record. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x00  | Color information is automatically determined by the application.  |
| 0x01  | This color is a color from a color palette and is specified by <b>index</b> .  |
| 0x02  | This color is a standard ARGB color and is specified by the values in <b>bRed</b> , <b>bGreen</b> , <b>bBlue</b> , and <b>bAlpha</b> . |
| 0x03  | This color is a <b>theme</b> color and is specified by <b>index</b> .  |

**index (1 byte):** A value that specifies the index of a color from a collection of colors. The type and meaning of this field depends on the value of **xColorType** and is specified by the following table.

| Value of xColorType | Meaning of index field   |
|---------------------|--|
| 0x00                | Undefined and MUST be ignored.   |
| 0x01                | An <b>Icv</b> (section <a href="#">2.5.75</a> ) that specifies a color from a color palette.   |
| 0x02                | Undefined and MUST be ignored.   |
| 0x03                | <p>An unsigned integer that specifies a subelement of the <b>clrScheme</b> element in the <b>Theme</b> (section <a href="#">2.1.7.52</a>) part that specifies a color. The following lists which subelement of <b>clrScheme</b> to use for each legal value of <b>index</b>:</p> <ul style="list-style-type: none"> <li>▪ Index = 0x00, subelement = dk1</li> <li>▪ Index = 0x01, subelement = lt1</li> <li>▪ Index = 0x02, subelement = dk2</li> <li>▪ Index = 0x03, subelement = lt2</li> <li>▪ Index = 0x04, subelement = accent1</li> <li>▪ Index = 0x05, subelement = accent2</li> <li>▪ Index = 0x06, subelement = accent3</li> <li>▪ Index = 0x07, subelement = accent4</li> <li>▪ Index = 0x08, subelement = accent5</li> <li>▪ Index = 0x09, subelement = accent6</li> <li>▪ Index = 0x0A, subelement = hlink</li> <li>▪ Index = 0x0B, subelement = folHlink</li> </ul> |

**nTintAndShade (2 bytes):** A signed integer that specifies the amount of tint or **shade** applied to the color specified by **index** or **bRed**, **bGreen**, **bBlue**, and **bAlpha**. The maximum possible positive value means 100% lightening, the maximum possible negative value means 100% darkening, and 0 means no change.

**bRed (1 byte):** An unsigned integer that specifies the intensity of red in this color, where 0 is no red and 255 is maximum red.

**bGreen (1 byte):** An unsigned integer that specifies the intensity of green in this color, where 0 is no green and 255 is maximum green.

**bBlue (1 byte):** An unsigned integer that specifies the intensity of blue in this color, where 0 is no blue and 255 is maximum blue.

**bAlpha (1 byte):** An unsigned integer that specifies the transparency of this color, where 0 is completely transparent and 255 is completely opaque.

#### 2.4.322 BrtColor14

The **BrtColor14** record specifies a color.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| BrtColor   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**BrtColor (8 bytes):** A **BrtColor** (section [2.4.321](#)) that specifies a color.

### 2.4.323 BrtColorFilter

The **BrtColorFilter** record specifies the color by which to filter and whether to use the fill color of the cell or font face color in the filter criteria. If the fill color or font face color of the cell does not match the color specified in the criteria, the rows (2) corresponding to those cells are hidden from view.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dxfid      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fCellColor |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**dxfid (4 bytes):** A **DXFid** (section [2.5.37](#)) section that specifies the color by which to filter. This value MUST NOT equal 0xFFFFFFFF.

**fCellColor (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether to filter by the fill color of the cell or font face color. This value MUST be a value from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | The application filters by font face color of the cell. |
| 0x00000001 | The application filters by the fill color of the cell.  |

### 2.4.324 BrtCommentAuthor

The **BrtCommentAuthor** record specifies the author of a comment.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| author (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**author (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the author. The string length MUST be greater than or equal to 1 and less than or equal to 54.

### 2.4.325 BrtCommentText

The **BrtCommentText** record specifies the text of a comment.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| text (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**text (variable):** A **RichStr** (section [2.5.121](#)) that specifies the text. The value of **text.fRichStr** MUST be 1. The value of **text.fExtStr** MUST be 0.

### 2.4.326 BrtCrashRecErr

The **BrtCrashRecErr** record specifies an error found during an application fault.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| stName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the description of the error that occurred during an application fault. The length of the string MUST be less than or equal to 65,535.

### 2.4.327 BrtCsPageSetup

The **BrtCsPageSetup** record specifies page layout and printing settings for a chart sheet.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22        | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |  |
| iPaperSize |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| iRes       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| iVRes      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| iCopies    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| iPageStart |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | A  | B  | C  | D  | E  | F  | reserved2 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |



|                    |
|--------------------|
| szRelID (variable) |
| ...                |

**iPaperSize (4 bytes):** An unsigned integer that specifies the size of the printer paper. This value **MUST** be greater than or equal to 0 and less than 2,147,483,647. The value 0 or values greater than or equal to 256 specify printer paper sizes defined by the user. Values greater than 118 and less than 256 are reserved for future use.

The meaning of values between 1 and 118, inclusive, is given by the following table.

| Value | Meaning                         |
|-------|---------------------------------|
| 1     | US Letter 8 1/2 x 11 in.        |
| 2     | US Letter Small 8 1/2 x 11 in.  |
| 3     | US Tabloid 11 x 17 in.          |
| 4     | US Ledger 17 x 11 in.           |
| 5     | US Legal 8 1/2 x 14 in.         |
| 6     | US Statement 5 1/2 x 8 1/2 in.  |
| 7     | US Executive 7 1/4 x 10 1/2 in. |
| 8     | A3 297 x 420 mm.                |
| 9     | A4 210 x 297 mm.                |
| 10    | A4 Small 210 x 297 mm.          |
| 11    | A5 148 x 210 mm.                |
| 12    | B4 (JIS) 250 x 354.             |
| 13    | B5 (JIS) 182 x 257 mm.          |
| 14    | Folio 8 1/2 x 13 in.            |
| 15    | Quarto 215 x 275 mm.            |
| 16    | 10 x 14 in.                     |
| 17    | 11 x 17 in.                     |
| 18    | US Note 8 1/2 x 11 in.          |
| 19    | US Envelope #9 3 7/8 x 8 7/8.   |
| 20    | US Envelope #10 4 1/8 x 9 1/2.  |
| 21    | US Envelope #11 4 1/2 x 10 3/8. |
| 22    | US Envelope #12 4 3/4 x 11.     |
| 23    | US Envelope #14 5 x 11 1/2.     |

| <b>Value</b> | <b>Meaning</b>                      |
|--------------|-------------------------------------|
| 24           | C size sheet.                       |
| 25           | D size sheet.                       |
| 26           | E size sheet.                       |
| 27           | Envelope DL 110 x 220mm.            |
| 28           | Envelope C5 162 x 229 mm.           |
| 29           | Envelope C3 324 x 458 mm.           |
| 30           | Envelope C4 229 x 324 mm.           |
| 31           | Envelope C6 114 x 162 mm.           |
| 32           | Envelope C65 114 x 229 mm.          |
| 33           | Envelope B4 250 x 353 mm.           |
| 34           | Envelope B5 176 x 250 mm.           |
| 35           | Envelope B6 176 x 125 mm.           |
| 36           | Envelope 110 x 230 mm.              |
| 37           | US Envelope Monarch 3.875 x 7.5 in. |
| 38           | 6 3/4 US Envelope 3 5/8 x 6 1/2 in. |
| 39           | US Std Fanfold 14 7/8 x 11 in.      |
| 40           | German Std Fanfold 8 1/2 x 12 in.   |
| 41           | German Legal Fanfold 8 1/2 x 13 in. |
| 42           | B4 (ISO) 250 x 353 mm.              |
| 43           | Japanese Postcard 100 x 148 mm.     |
| 44           | 9 x 11 in.                          |
| 45           | 10 x 11 in.                         |
| 46           | 15 x 11 in.                         |
| 47           | Envelope Invite 220 x 220 mm.       |
| 48           | RESERVED--DO NOT USE.               |
| 49           | RESERVED--DO NOT USE.               |
| 50           | US Letter Extra 9 1/2 x 12 in.      |
| 51           | US Legal Extra 9 1/2 x 15 in.       |
| 52           | US Tabloid Extra 11.69 x 18 in.     |
| 53           | A4 Extra 9.27 x 12.69 in.           |

| <b>Value</b> | <b>Meaning</b>                                 |
|--------------|--|
| 54           | Letter Transverse 8 1/2 x 11 in.               |
| 55           | A4 Transverse 210 x 297 mm.                    |
| 56           | Letter Extra Transverse 9 1/2 x 12 in.         |
| 57           | SuperA/A4 227 x 356 mm.                        |
| 58           | SuperB/A3 305 x 487 mm.                        |
| 59           | US Letter Plus 8.5 x 12.69 in.                 |
| 60           | A4 Plus 210 x 330 mm.                          |
| 61           | A5 Transverse 148 x 210 mm.                    |
| 62           | B5 (JIS) Transverse 182 x 257 mm.              |
| 63           | A3 Extra 322 x 445 mm.                         |
| 64           | A5 Extra 174 x 235 mm.                         |
| 65           | B5 (ISO) Extra 201 x 276 mm.                   |
| 66           | A2 420 x 594 mm.                               |
| 67           | A3 Transverse 297 x 420 mm.                    |
| 68           | A3 Extra Transverse 322 x 445 mm.              |
| 69           | Japanese Double Postcard 200 x 148 mm.         |
| 70           | A6 105 x 148 mm.                               |
| 71           | Japanese Envelope Kaku #2.                     |
| 72           | Japanese Envelope Kaku #3.                     |
| 73           | Japanese Envelope Chou #3.                     |
| 74           | Japanese Envelope Chou #4.                     |
| 75           | Letter Rotated 11 x 8 1/2 11 in.               |
| 76           | A3 Rotated 420 x 297 mm.                       |
| 77           | A4 Rotated 297 x 210 mm.                       |
| 78           | A5 Rotated 210 x 148 mm.                       |
| 79           | B4 (JIS) Rotated 364 x 257 mm.                 |
| 80           | B5 (JIS) Rotated 257 x 182 mm.                 |
| 81           | Japanese Postcard Rotated 148 x 100 mm.        |
| 82           | Double Japanese Postcard Rotated 148 x 200 mm. |
| 83           | A6 Rotated 148 x 105 mm.                       |

| <b>Value</b> | <b>Meaning</b>                        |
|--------------|---------------------------------------|
| 84           | Japanese Envelope Kaku #2 Rotated.    |
| 85           | Japanese Envelope Kaku #3 Rotated.    |
| 86           | Japanese Envelope Chou #3 Rotated.    |
| 87           | Japanese Envelope Chou #4 Rotated.    |
| 88           | B6 (JIS) 128 x 182 mm.                |
| 89           | B6 (JIS) Rotated 182 x 128 mm.        |
| 90           | 12 x 11 in.                           |
| 91           | Japanese Envelope You #4.             |
| 92           | Japanese Envelope You #4 Rotated.     |
| 93           | PRC 16K 146 x 215 mm.                 |
| 94           | PRC 32K 97 x 151 mm.                  |
| 95           | PRC 32K(Big) 97 x 151 mm.             |
| 96           | PRC Envelope #1 102 x 165 mm.         |
| 97           | PRC Envelope #2 102 x 176 mm.         |
| 98           | PRC Envelope #3 125 x 176 mm.         |
| 99           | PRC Envelope #4 110 x 208 mm.         |
| 100          | PRC Envelope #5 110 x 220 mm.         |
| 101          | PRC Envelope #6 120 x 230 mm.         |
| 102          | PRC Envelope #7 160 x 230 mm.         |
| 103          | PRC Envelope #8 120 x 309 mm.         |
| 104          | PRC Envelope #9 229 x 324 mm.         |
| 105          | PRC Envelope #10 324 x 458 mm.        |
| 106          | PRC 16K Rotated.                      |
| 107          | PRC 32K Rotated.                      |
| 108          | PRC 32K(Big) Rotated.                 |
| 109          | PRC Envelope #1 Rotated 165 x 102 mm. |
| 110          | PRC Envelope #2 Rotated 176 x 102 mm. |
| 111          | PRC Envelope #3 Rotated 176 x 125 mm. |
| 112          | PRC Envelope #4 Rotated 208 x 110 mm. |
| 113          | PRC Envelope #5 Rotated 220 x 110 mm. |

| Value | Meaning                                |
|-------|--|
| 114   | PRC Envelope #6 Rotated 230 x 120 mm.  |
| 115   | PRC Envelope #7 Rotated 230 x 160 mm.  |
| 116   | PRC Envelope #8 Rotated 309 x 120 mm.  |
| 117   | PRC Envelope #9 Rotated 324 x 229 mm.  |
| 118   | PRC Envelope #10 Rotated 458 x 324 mm. |

**iRes (4 bytes):** An unsigned integer that specifies the horizontal resolution of the printer in dots per inch.

**iVRes (4 bytes):** An unsigned integer that specifies the vertical resolution of the printer in dots per inch.

**iCopies (4 bytes):** An unsigned integer that specifies the number of copies to print. This value MUST be greater than or equal to 1 and less than or equal to 32,767.

**iPageStart (2 bytes):** A signed integer that specifies the page number of the starting page for a count or numbering of pages in a chart sheet. This value MUST be ignored if **fUsePage** is 0.

**A - fLandscape (1 bit):** A bit that specifies the orientation of the printed page. This value MUST be ignored if **fNoOrient** has a value of 1. Otherwise, the orientation is indicated by values and meanings in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Portrait orientation, in which the longest edge of the page is vertical.    |
| 1     | Landscape orientation, in which the longest edge of the page is horizontal. |

**B - reserved1 (1 bit):** This value MUST be zero, and MUST be ignored.

**C - fNoColor (1 bit):** A bit that specifies the color setting of the printed page.

| Value | Meaning  |
|-------|--|
| 0     | The printer will be instructed to print the page in color.           |
| 1     | The printer will be instructed to print the page in black and white. |

**D - fNoOrient (1 bit):** A bit that specifies orientation of the printed page. Possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | The value of <b>fLandscape</b> is used to specify the orientation settings of the printed page.                       |
| 1     | Application-specific and printer-specific behavior is used to determine the orientation settings of the printed page. |

**E - fUsePage (1 bit):** A bit that specifies whether **iPageStart** is used to specify the first page number in the chart sheet. Possible values for this field are listed in the following table.

| Value | Meaning   |
|-------|---|
| 0     | The page numbering will start with a value of 1.  |
| 1     | The value of <b>iPageStart</b> is used to specify the first page number in the chart sheet. |

**F - fDraft (1 bit):** A bit that specifies whether graphics are included on the printed page. Possible values for this field are listed in the following table.

| Value | Meaning                                     |
|-------|---|
| 0     | Graphics are included on the printed page.  |
| 1     | Graphics are omitted from the printed page. |

**reserved2 (10 bits):** This value MUST be 0, and MUST be ignored.

**szRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies the link to the **Printer Settings** (section [2.1.7.41](#)) part. This value MUST be a reference to a valid **Printer Settings** part. This value MUST be less than or equal to 260 characters long.

### 2.4.328 BrtCsProp

The **BrtCsProp** record specifies properties for a chart sheet.

| 0   | 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15                 | 16          | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----|--------|---|---|---|---|---|---|---|---|----|----|----|----|----|--------------------|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| A   | unused |   |   |   |   |   |   |   |   |    |    |    |    |    |                    | brtcolorTab |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |   |   |   |   |   |    |    |    |    |    |                    |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |   |   |   |   |   |    |    |    |    |    | strName (variable) |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |   |   |   |   |   |    |    |    |    |    |                    |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fPublish (1 bit):** A bit that specifies whether the chart sheet is published.

**unused (15 bits):** This value is undefined, and MUST be ignored.

**brtcolorTab (8 bytes):** A **BrtColor** (section [2.4.321](#)) that specifies a background color of the sheet tab.

**strName (variable):** A **CodeName** (section [2.5.21](#)) for this chart sheet.

### 2.4.329 BrtCsProtection

The **BrtCsProtection** record specifies protection options for a chart sheet.

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16       | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| protpwd |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | fLocked  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | fObjects |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**protpwd (2 bytes):** An unsigned integer that specifies the verifier value for the password required for editing the chart sheet. If the value is 0x0000, then no password is required. The algorithm to generate the verifier value from the password is specified in section [2.2.9](#).

**fLocked (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether changes can be made to elements of the chart in the chart sheet. The chart will continue to reflect changes in source data (section [2.2.5.2.1](#)). This value **MUST** be a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Changes to the chart elements are not prevented. |
| 0x00000001 | Changes to the chart elements are prevented.     |

**fObjects (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether changes can be made to graphic objects (such as shapes, text boxes, and controls) in the chart sheet. This value **MUST** be a value from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Changes to the graphic objects are not prevented. |
| 0x00000001 | Changes to the graphic objects are prevented.     |

### 2.4.330 BrtCsProtectionIso

The **BrtCsProtectionIso** record specifies protection options for a chart sheet in a manner compatible with ISO/IEC 29500 chart sheet protection records as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.3.1.84. A **BrtCsProtectionIso** record **MUST** be immediately followed by a **BrtCsProtection** record (section [2.4.329](#)) whose **protpwd** field **MUST** be set to 0x0000 and whose **fLocked** and **fObjects** fields **MUST** have the same values as the fields of the same names in the **BrtCsProtectionIso** record.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dwSpinCount |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fLocked     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fObjects    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                            |
|----------------------------|
| ipdPasswordData (variable) |
| ...                        |

**dwSpinCount (4 bytes):** An unsigned 32-bit integer that specifies the number of times that the hash function was iterated over the password to generate the **rgbHash** field of **ipdPasswordData**, as described in section [2.2.10](#). This value MUST NOT be greater than 10,000,000.

**fLocked (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether changes can be made to elements of the chart in the chart sheet. The chart will continue to reflect changes in source data (section [2.2.5.2.1](#)). This value MUST have the same value as the **fLocked** field in the following **BrtCsProtection** record (section [2.4.329](#)), and MUST be a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Changes to the chart elements are not prevented. |
| 0x00000001 | Changes to the chart elements are prevented.     |

**fObjects (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether changes can be made to graphic objects (such as shapes, text boxes, and controls) in the chart sheet. This value MUST have the same value as the **fObjects** field in the following **BrtCsProtection** record (section [2.4.329](#)), and MUST be a value from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Changes to the graphic objects are not prevented. |
| 0x00000001 | Changes to the graphic objects are prevented.     |

**ipdPasswordData (variable):** An **IsoPasswordData** (section [2.5.79](#)) that specifies the salt, hash algorithm and password hash of the password required for editing the chart sheet, calculated using the Strong Password Verifier Algorithm (section [2.2.10](#)). The size of the **rgbHash** member of this field MUST NOT be zero.

### 2.4.331 BrtCUsr

The **BrtCUsr** record specifies the count of users that are currently editing this shared workbook.

|         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cUsrSav |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cUsrSav (2 bytes):** An unsigned integer that specifies the count of **BrtUsr** records (section [2.4.798](#)) that appear after the **BrtBeginUsers** record (section [2.4.281](#)). This value MUST be a value between 0 and 256, inclusive.



### 2.4.332 BrtCustomFilter

The **BrtCustomFilter** record specifies custom AutoFilter criteria.

|     |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                         |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----------|----|----|----|----|----|-------------------------|----|----|----|-------|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10       | 11 | 12 | 13 | 14 | 15 | 16                      | 17 | 18 | 19 | 20    | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| vts |   |   |   |   |   |   |   |   |   | grbitSgn |    |    |    |    |    |                         |    |    |    | union |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                         |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    | vtsStringXls (variable) |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                         |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |

**vts (1 byte):** An unsigned integer that specifies the type of data used in this record. This value MUST be a value from the following table.

| Value | Meaning                              |
|-------|--------------------------------------|
| 0x04  | Filter by a real number.             |
| 0x06  | Filter by a string.                  |
| 0x08  | Filter by a Boolean.                 |
| 0x0C  | Filter by blanks values.             |
| 0x0E  | Filter by values that are not blank. |

**grbitSgn (1 byte):** An unsigned integer that specifies the comparison operation to be performed. This value MUST be a value from the following table.

| Value | Meaning                   |
|-------|---------------------------|
| 0x01  | Less than.                |
| 0x02  | Equal to.                 |
| 0x03  | Less than or equal to.    |
| 0x04  | Greater than.             |
| 0x05  | Not equal to.             |
| 0x06  | Greater than or equal to. |

**union (8 bytes):** A union that specifies the **Boolean** or numeric value of the comparison criteria to be used for this AutoFilter. The data type of the content of the union is dependent on **vts**, and is defined in the following table.

| Value of vts                           | Type and meaning of union   |
|--|---|
| 0x00000004                             | An <b>Xnum</b> (section <a href="#">2.5.171</a> ) that specifies a numeric value.   |
| 0x00000008                             | A 1-byte <b>Boolean</b> (section <a href="#">2.5.97.3</a> ) that specifies a Boolean value, followed by a 7-byte field that is undefined and MUST be ignored. |
| 0x00000006<br>0x0000000C<br>0X0000000E | Unused. This union is undefined and MUST be ignored.  |

**vtsStringXls (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the string-based value of the comparison criteria to be used for this AutoFilter. For the purposes of comparisons, the characters "?" and "\*" are used as wildcards. A "?" refers to any single character, and a "\*" refers to any number of characters. This field MUST be present if and only if **vts** is equal to 0x06.

### 2.4.333 BrtCustomFilter14

The **BrtCustomFilter** record specifies custom AutoFilter criteria.

|     |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                         |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----------|----|----|----|----|----|-------------------------|----|----|----|-------|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10       | 11 | 12 | 13 | 14 | 15 | 16                      | 17 | 18 | 19 | 20    | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| vts |   |   |   |   |   |   |   |   |   | grbitSgn |    |    |    |    |    |                         |    |    |    | union |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                         |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    | vtsStringXls (variable) |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                         |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |

**vts (1 byte):** An unsigned integer that specifies the type of data used in this record. This value MUST be a value from the following table.

| Value | Meaning                              |
|-------|--------------------------------------|
| 0x04  | Filter by a real number.             |
| 0x06  | Filter by a string.                  |
| 0x08  | Filter by a Boolean.                 |
| 0x0C  | Filter by blanks values.             |
| 0x0E  | Filter by values that are not blank. |

**grbitSgn (1 byte):** An unsigned integer that specifies the comparison operation to be performed. This value MUST be a value from the following table.

| Value | Meaning                   |
|-------|---------------------------|
| 0x01  | Less than.                |
| 0x02  | Equal to.                 |
| 0x03  | Less than or equal to.    |
| 0x04  | Greater than.             |
| 0x05  | Not equal to.             |
| 0x06  | Greater than or equal to. |

**union (8 bytes):** A union that specifies the Boolean or numeric value of the comparison criteria to be used for this AutoFilter. The data type of the content of the union is dependent on **vts**, and is defined in the following table.

| Value of vts                           | Type and meaning of union   |
|--|---|
| 0x00000004                             | An <b>Xnum</b> (section <a href="#">2.5.171</a> ) that specifies a numeric value.   |
| 0x00000008                             | A 1-byte <b>Boolean</b> (section <a href="#">2.5.97.3</a> ) that specifies a Boolean value, followed by a 7-byte field that is undefined and MUST be ignored. |
| 0x00000006<br>0x0000000C<br>0x0000000E | Unused. This union is undefined and MUST be ignored.  |

**vtsStringXls (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the string-based value of the comparison criteria to be used for this AutoFilter. For the purposes of comparisons, the characters "?" and "\*" are used as wildcards. A "?" refers to any single character, and a "\*" refers to any number of characters. This field MUST be present if and only if **vts** is equal to 0x06.

#### 2.4.334 BrtDbCommand15

The **BrtDbCommand15** record specifies OLE DB command text used by this **model data source OLE DB connection** (section [2.2.8.9.1](#)).

|                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHHeader          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| irstText (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**irstText (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the command text.

### 2.4.335 BrtDbTable15

The **BrtDbTable15** record specifies a single database table used by this **model data source OLE DB connection** (section [2.2.8.9.1](#)) or **model data source data feed connection** (section [2.2.8.9.2](#)).

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**irstName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of this table.

### 2.4.336 BrtDecoupledPivotCacheID

The **BrtDecoupledPivotCacheID** record specifies both a reference to a **PivotCache** (section [2.2.5.2](#)) structure that is used by a Non-Worksheet PivotTables (section [2.2.5.5](#)) and the beginning of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF rules.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values that are listed in the following table.

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 0     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 1     |

The **FRTHHeader.RelID** specifies a relationship (section [2.1.3](#)) that specifies a **PivotCache** part containing a **PivotCache** structure used by a Non-Worksheet PivotTable (section [2.2.5.5](#)).

### 2.4.337 BrtDrawing

The **BrtDrawing** record specifies a link to a **Drawings** part as specified in [\[ISO/IEC29500-1:2011\]](#), section 12.3.8, that specifies a drawing for a sheet.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| stRelId (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stRelId (variable):** A **RelID** (section [2.5.114](#)) that specifies the link to the **Drawings** part.

### 2.4.338 BrtDRef

The **BrtDRef** record specifies a data reference used by data consolidation. A data reference is either an **UncheckedRfX** (section [2.5.153](#)) or a defined name.

|                      |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                      |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----------|----|----|----|----|----|----------------------|----|----|----|--------------------------|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10       | 11 | 12 | 13 | 14 | 15 | 16                   | 17 | 18 | 19 | 20                       | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fName                |   |   |   |   |   |   |   |   |   | fBuiltin |    |    |    |    |    |                      |    |    |    | rfx (16 bytes, optional) |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                      |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    | reserved1 (optional) |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    | reserved2 (optional) |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    | reserved3 (optional) |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    | reserved4 (optional) |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    | xstrName (variable)  |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                      |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| xstrSheet (variable) |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                      |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                      |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| relId (variable)     |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                      |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |          |    |    |    |    |    |                      |    |    |    |                          |    |    |    |    |    |    |    |    |    |    |    |

**fName (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies whether this data reference is a cell range or a defined name. This value **MUST** be a value in the following table.

| Value | Meaning                                       |
|-------|---|
| 0x00  | This data reference refers to a cell range.   |
| 0x01  | This data reference refers to a defined name. |

**fBuiltin (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the value of **xstrName** refers to a built-in defined name or a user-created defined name. When **fName** is 0x00, **fBuiltin** MUST be 0x00. When **fName** is 0x01, **fBuiltin** MUST be a value in the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | The value in <b>xstrSheet</b> refers to a user-created defined name.  |
| 0x01  | The value in <b>xstrSheet</b> refers to a built-in defined name. The value in <b>xstrSheet</b> MUST be one of values in the following list: <ul style="list-style-type: none"> <li>▪ Consolidate_Area</li> <li>▪ Auto_Open</li> <li>▪ Auto_Close</li> <li>▪ Extract</li> <li>▪ Database</li> <li>▪ Criteria</li> <li>▪ Print_Area</li> <li>▪ Print_Titles</li> <li>▪ Recorder</li> <li>▪ Data_Form</li> <li>▪ Auto_Activate</li> <li>▪ Auto_Deactivate</li> <li>▪ Sheet_Title</li> <li>▪ _FilterDatabase</li> </ul> |

**rfx (16 bytes):** An **UncheckedRfx** that specifies the cell range referenced by this data reference. This value exists if and only if **fName** is 0x00.

**reserved1 (4 bytes):** This value MUST be equal to 1,048,576 and MUST be ignored. Exists if and only if **fName** is 0x01.

**reserved2 (4 bytes):** This value MUST be equal to 1,048,576 and MUST be ignored. Exists if and only if **fName** is 0x01.

**reserved3 (4 bytes):** This value MUST be equal to 16,384 and MUST be ignored. Exists if and only if **fName** is 0x01.

**reserved4 (4 bytes):** This value MUST be equal to 16,384 and MUST be ignored. Exists if and only if **fName** is 0x01.

**xstrName (variable):** An **XLWideString** (section 2.5.168) that specifies the name of this data reference. When **fName** is 0x00, this field MUST be an empty **XLWideString**. When **fName** is 0x01, **xstrName** MUST specify a non-empty string which represents the name of this data reference.

**xstrSheet (variable):** An **XLWideString** that specifies the name of the sheet containing the source of this data reference. If **fName** is 0x01 and the defined name has workbook scope, **xstrSheet** MUST be an empty **XLWideString**. Otherwise, **xstrSheet** MUST be the name of the sheet which contains this data reference.

**relId (variable):** A **RelID** (section 2.5.114) that specifies the source of this data reference. When this data reference refers to an [external workbook](#) (section 2.1.10), **relId** MUST specify the relationship identifier describing this external reference. Otherwise, **relId** MUST be a zero-length **RelID**.

### 2.4.339 BrtDVal

The **BrtDVal** record specifies data validation for a range on this sheet.

|                        |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|-----------|----|----|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10        | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21       | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| valType                |   |   |   | A |   |   | B | C | D | mdImeMode |    |    |    |    |    | E  | F  | G  |    |    | reserved |    |    |    |    |    |    |    |    |    |    |
| sqrfx (variable)       |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
| DValStrings (variable) |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
| formula1 (variable)    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
| formula2 (variable)    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |

**valType (4 bits):** An unsigned integer that specifies the type of data validation. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | Specifies that the data validation allows any type of value and does not check for a type or range of values. |

| Value | Meaning  |
|-------|--|
| 0x1   | Specifies that the data validation checks for and allows whole number values satisfying the given condition.       |
| 0x2   | Specifies that the data validation checks for and allows decimal values satisfying the given condition.            |
| 0x3   | Specifies that the data validation checks for and allows a value that matches one in a list of values.             |
| 0x4   | Specifies that the data validation checks for and allows date values satisfying the given condition.               |
| 0x5   | Specifies that the data validation checks for and allows time values satisfying the given condition.               |
| 0x6   | Specifies that the data validation checks for and allows text values whose length satisfies the given condition.   |
| 0x7   | Specifies that the data validation uses a custom formula (section <a href="#">2.2.2</a> ) to check the cell value. |

**A - errStyle (3 bits):** An unsigned integer that specifies the style of error alert used for this data validation. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that the data validation error style uses a stop icon in the error alert.         |
| 1     | Specifies that the data validation error style uses a warning icon in the error alert.      |
| 2     | Specifies that the data validation error style uses an information icon in the error alert. |

**B - unused (1 bit):** This value is undefined, and MUST be ignored.

**C - fAllowBlank (1 bit):** A bit that specifies whether the data validation treats empty or blank entries as valid.

**D - fSuppressCombo (1 bit):** A bit that specifies the behavior of the dropdown combo box. Possible values for this field are listed in the following table.

| Value of fSuppressCombo | Value of valType | Meaning                            |
|-------------------------|------------------|------------------------------------|
| 0                       | 3                | Displays the dropdown combo box.   |
| 1                       | 3                | Suppresses the dropdown combo box. |

**mdImeMode (8 bits):** An unsigned integer that specifies the **Input Method Editor (IME)** mode enforced by this data validation. This value MUST be a value from the following table.

| Value | IME Mode    |
|-------|-------------|
| 0x00  | No control. |
| 0x01  | On.         |



| Value | IME Mode                 |
|-------|--------------------------|
| 0x02  | Off (English).           |
| 0x03  | Disabled.                |
| 0x04  | Hiragana.                |
| 0x05  | Full-width katakana.     |
| 0x06  | Half-width katakana.     |
| 0x07  | Full-width alphanumeric. |
| 0x08  | Half-width alphanumeric. |
| 0x09  | Full-width hangul.       |
| 0x0A  | Half-width hangul.       |

**E - fShowInputMsg (1 bit):** A bit that specifies whether to display the input prompt message.

**F - fShowErrorMsg (1 bit):** A bit that specifies whether to display the error alert message.

**G - typOperator (4 bits):** An unsigned integer that specifies the relational operator used with this data validation. If **valType** is equal to 0, 3 or 7, the value of the **typOperator** field is undefined and MUST be ignored. This value MUST be a value from the following table.

| Value | Type of relational operator  |
|-------|------------------------------|
| 0x00  | <b>Between</b>               |
| 0x01  | <b>Not Between</b>           |
| 0x02  | <b>Equal</b>                 |
| 0x03  | <b>Not Equal</b>             |
| 0x04  | <b>Greater Than</b>          |
| 0x05  | <b>Less Than</b>             |
| 0x06  | <b>Greater Than or Equal</b> |
| 0x07  | <b>Less Than or Equal</b>    |

**reserved (8 bits):** This value MUST be 0, and MUST be ignored.

**sqrfx (variable):** A **UncheckedSqRfX** (section [2.5.155](#)) that specifies the ranges over which data validation is applied. The value **sqrfx.crfx** MUST be greater than or equal to 1 and MUST be less than 8,192.

**DValStrings (variable):** A **DValStrings** (section [2.5.36](#)) that specifies the strings used by data validation.

**formula1 (variable):** A **DVParsedFormula** (section [2.5.97.8](#)) specifying the first formula (section [2.2.2](#)) in the data validation drop-down combo box.

If **typOperator** is equal to 0 or 1 and **valType** is not 0, 3, or 7, this formula is used as the lesser of two bounding values and **formula1.cce** MUST be greater than or equal to 1.

If **typOperator** is greater than or equal to 2 or **valType** is equal to 3 or 7, this formula is the only formula for those cases, and **formula1.cce** MUST be greater than or equal to 1.

If the **valType** is equal to 0, this formula MUST be ignored and **formula1.cce** MUST be 0.

**formula2 (variable):** A **DVParsedFormula** (section [2.5.97.8](#)) that specifies the second formula (section [2.2.2](#)) in the data validation drop-down combo box.

If **typOperator** is equal to 0 or 1 and **valType** is not 0, 3, or 7, this formula is used as the greater of two bounding values and **formula2.cce** MUST be greater than or equal to 1.

If **typOperator** is greater than or equal to 2 or **valType** is equal to 0, 3, or 7, this formula MUST be ignored and **formula2.cce** MUST be 0.

#### 2.4.340 BrtDVal14

The **BrtDVal14** record specifies data validation for a range on this sheet. This record is equivalent to **BrtDval** (section [2.4.339](#)) but allows for more than 8,192 ranges to which data validation is applied.

|                        |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10        | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25       | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable)  |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |
| valType                |   | A |   | B |   | C |   | D |   | mdImeMode |    |    |    | E  |    | F  |    | G  |    |    | H  |    | I  |    | reserved |    |    |    |    |    |    |
| DValStrings (variable) |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** flags MUST have the values listed in the following table.

| Field                      | Value  |
|----------------------------|--------|
| <b>FRTHHeader.fRef</b>     | 0      |
| <b>FRTHHeader.fSqref</b>   | 1      |
| <b>FRTHHeader.fFormula</b> | 0 or 1 |
| <b>FRTHHeader.fRelID</b>   | 0      |

The **FRTHHeader.fFormula** MUST be 0 if **fDVMInFmla** equals 0 and **fDVMaxFmla** equals 0.

The **FRTHHeader.fFormula** MUST be 1 if **fDVMInFmla** equals 1 or **fDVMaxFmla** equals 1.

The **sqrfx** of the single **FRTSqref** (section [2.5.65](#)) comprising the array of the **FRTHeader.rgSqrefs** specifies the ranges to which data validation is applied. The **rgSqrefs.csqref** MUST equal 1. The **sqrfx.crfx** of the single **FRTSqref** comprising the **array** of the **rgSqrefs** MUST be greater than or equal to 1.

The value of **FRTHeader.rgFormulas.cformula** MUST be equal to the sum of **fDVMinFmla** + **fDVMaxFmla**.

If **fDVMinFmla** is 1, the **FRTFormula** (section [2.5.58](#)) of the first **FRTDVParsedFormula14** (section [2.5.57](#)) comprising the **array** of the **FRTHeader.rgFormulas** specifies the first formula (section [2.2.2](#)) for the data validation. The following MUST be true:

- If **typOperator** is equal to 0 or 1 and **valType** is not 0, 3, or 7, then this formula is used as the lesser of two bounding values and **frtformula.formula.cce** MUST be greater than or equal to 1.
- If **typOperator** is greater than or equal to 2 or **valType** is equal to 3 or 7, then this formula is the only formula for those cases, and **frtformula.formula.cce** MUST be greater than or equal to 1.

If **fDVMaxFmla** is 1, the **frtformula** of the last **FRTDVParsedFormula14** (section [2.5.57](#)) comprising the **array** of the **FRTHeader.rgFormulas** specifies the second formula (section [2.2.2](#)) for the data validation. The following MUST be true:

- If **typOperator** is equal to 0 or 1 and **valType** is not 0, 3, or 7, then this formula is used as the greater of two bounding values and **frtformula.formula.cce** MUST be greater than or equal to 1.

**valType (4 bits):** An unsigned integer that specifies the type of data validation. This value MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x00  | Specifies that the data validation allows any type of value and does not check for a type or range of values.      |
| 0x01  | Specifies that the data validation checks for and allows whole number values satisfying the given condition.       |
| 0x02  | Specifies that the data validation checks for and allows decimal values satisfying the given condition.            |
| 0x03  | Specifies that the data validation checks for and allows a value that matches one in a list of values.             |
| 0x04  | Specifies that the data validation checks for and allows date values satisfying the given condition.               |
| 0x05  | Specifies that the data validation checks for and allows time values satisfying the given condition.               |
| 0x06  | Specifies that the data validation checks for and allows text values whose length satisfies the given condition.   |
| 0x07  | Specifies that the data validation uses a custom formula (section <a href="#">2.2.2</a> ) to check the cell value. |

**A - errStyle (3 bits):** An unsigned integer that specifies the style of error alert used for this data validation. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | Specifies that the data validation error style uses a stop icon in the error alert.         |
| 0x01  | Specifies that the data validation error style uses a warning icon in the error alert.      |
| 0x02  | Specifies that the data validation error style uses an information icon in the error alert. |

**B - unused (1 bit):** This value is undefined, and MUST be ignored.

**C - fAllowBlank (1 bit):** A bit that specifies whether the data validation treats empty or blank entries as valid.

**D - fSuppressCombo (1 bit):** A bit that specifies the behavior of the drop-down combo box. Possible values for this field are listed in the following table.

| Value of fSuppressCombo | Value of valType | Meaning                            |
|-------------------------|------------------|------------------------------------|
| 0                       | 3                | Displays the dropdown combo box.   |
| 1                       | 3                | Suppresses the dropdown combo box. |

**mdImeMode (8 bits):** An unsigned integer that specifies the Input Method Editor (IME) mode enforced by this data validation. This value MUST be a value from the following table.

| Value | IME Mode                 |
|-------|--------------------------|
| 0x00  | No control.              |
| 0x01  | On.                      |
| 0x02  | Off (English).           |
| 0x03  | Disabled.                |
| 0x04  | Hiragana.                |
| 0x05  | Full-width katakana.     |
| 0x06  | Half-width katakana.     |
| 0x07  | Full-width alphanumeric. |
| 0x08  | Half-width alphanumeric. |
| 0x09  | Full-width Hangul.       |
| 0x0A  | Half-width Hangul.       |

**E - fShowInputMsg (1 bit):** A bit that specifies whether to display the input prompt message.

**F - fShowErrorMsg (1 bit):** A bit that specifies whether to display the error alert message.

**G - typOperator (4 bits):** An unsigned integer that specifies the relational operator used with this data validation. If **valType** is equal to 0, 3, or 7, the value of the **typOperator** field is undefined and MUST be ignored. This value MUST be a value from the following table.

| Value | Type of Relational Operator |
|-------|-----------------------------|
| 0x00  | ▪ Between.                  |
| 0x01  | ▪ Not Between.              |
| 0x02  | ▪ Equal.                    |
| 0x03  | ▪ Not Equal.                |
| 0x04  | ▪ Greater Than.             |
| 0x05  | ▪ Less Than.                |
| 0x06  | ▪ Greater Than or Equal.    |
| 0x07  | ▪ Less Than or Equal.       |

**H - fDVMinFmla (1 bit):** A bit that specifies if there is a first formula (section [2.2.2](#)) for the data validation.

If **typOperator** is equal to 0 or 1 and **valType** is not 0, 3, or 7, then **fDVMinFmla** MUST be 1.

If **typOperator** is greater than or equal to 2 or **valType** is equal to 3 or 7, then **fDVMinFmla** MUST be 1.

If the **valType** is equal to 0, then **fDVMinFmla** MUST be 0.

**I - fDVMaxFmla (1 bit):** A bit that specifies if there is a second formula (section [2.2.2](#)) for the data validation.

If **typOperator** is equal to 0 or 1 and **valType** is not 0, 3, or 7, then **fDVMaxFmla** MUST be 1.

If **typOperator** is greater than or equal to 2 or **valType** is equal to 0, 3 or 7, then **fDVMaxFmla** MUST be 0.

**reserved (6 bits):** This value MUST be 0, and MUST be ignored.

**DValStrings (variable):** A **DValStrings** (section [2.5.36](#)) that specifies the strings used by data validation.

#### 2.4.341 BrtDValList

The **BrtDValList** record specifies a list of data validation entries.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| strDvalList (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**strDvalList (variable):** An **XLWideString** (section 2.5.168) that specifies a formula for data validation. This value replaces the formula specified by the **formula1** attribute in immediately following **BrtDval** (section 2.4.339). This value MUST adhere to the following ABNF:

```

formula = string *string
string = string-constant / string-chars
string-constant = double-quote [string-chars] double-quote
string-chars = string-char *string-char
string-char = escaped-double-quote / character ; MUST NOT be a double-quote
escaped-double-quote = 2double-quote
double-quote = %x22
character = as defined by the production Char in the [W3C-XML] section 2.2

```

### 2.4.342 BrtDXF

The **BrtDXF** record specifies [differential formatting](#) (section 2.2.6.2).

|        |   |   |   |   |   |   |   |   |   |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|--------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12                 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| unused |   |   |   |   |   |   |   |   |   |    | A  | xfprops (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**unused (15 bits):** This value is undefined and MUST be ignored.

**A - fNewBorder (1 bit):** A bit that specifies whether it is possible to specify internal **border formatting** in **XFPProps** (section 2.5.163). Internal border formatting is formatting that applies to borders that lie within a range of cells.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that the internal border formatting cannot be used in <b>xfprops</b> . <b>XFPProp</b> (section 2.5.158) elements of <b>xfprops.xfPropArray</b> MUST NOT have an <b>xfPropType</b> of either 0x000B or 0x000C. |
| 1     | Specifies that the internal border formatting can be used in <b>xfprops</b> .   |

**xfprops (variable):** A **XFPProps** that specifies the formatting properties.

### 2.4.343 BrtDXF14

The **BrtDXF14** record specifies [differential formatting](#) (section 2.2.6.2) referred to by a future record (section 2.1.6).

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused    |   |   |   |   |   |   |   |   |   |    |    |    |    |    | A  | xfprops (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**unused (15 bits):** This value is undefined, and MUST be ignored.

**A - fNewBorder (1 bit):** A bit that specifies whether it is possible to specify internal border formatting in **XFProps** (section [2.5.163](#)). Internal border formatting is formatting that applies to borders that lie between a range of cells.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that the internal border formatting cannot be used in <b>xfprops</b> . <b>XFProp</b> (section <a href="#">2.5.158</a> ) elements of <b>xfprops.xfPropArray</b> MUST NOT have an <b>xfPropType</b> of either 0x000B or 0x000C. |
| 1     | Specifies that the internal border formatting can be used in <b>xfprops</b> .   |

**xfprops (variable):** A **XFProps** (section [2.5.163](#)) that specifies the formatting properties.

#### 2.4.344 BrtDXF15

The **BrtDXF15** record specifies [differential formatting](#) referred to by a [future record](#).

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused    |   |   |   |   |   |   |   |   |   |    |    |    |    |    | A  | xfprops (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An [FRTBlank](#) that specifies the future record information for this record.

**unused (15 bits):** This value is undefined, and MUST be ignored.

**A - fNewBorder (1 bit):** A bit that specifies whether it is possible to specify internal border formatting in **xfprops**. Internal border formatting is formatting that applies to borders that lie between a range of cells.

| Value | Meaning   |
|-------|---|
| 0     | Specifies that the internal border formatting cannot be used in <b>xfprops</b> . <b>XFProp</b> (section |

| Value | Meaning   |
|-------|---|
|       | <a href="#">2.5.158</a> ) elements of <b>xfprops.xfPropArray</b> MUST NOT have an <b>xfPropType</b> of either 0x000B or 0x000C. |
| 1     | Specifies that the internal border formatting can be used in <b>xfprops</b> .   |

**xfprops (variable):** A [XFProps](#) that specifies the formatting properties.

## 2.4.345 BrtDynamicFilter

The **BrtDynamicFilter** record specifies dynamic filter criteria. These criteria are considered dynamic because they can change, either with the data itself (for example, "above average") or with the current system date (for example, show values for "today"). For any cells whose values do not meet the specified criteria, the corresponding rows (2) will be hidden from view when the filter is applied.

| 0   | 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10           | 11        | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----|--------|---|---|---|---|---|---|---|---|--------------|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cft |        |   |   |   |   |   |   |   |   |              |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A   | unused |   |   |   |   |   |   |   |   |              | xNumValue |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |   |   |   |   |   |              |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |   |   |   |   |   | xNumValueMax |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |   |   |   |   |   |              |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |        |   |   |   |   |   |   |   |   |              |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cft (4 bytes):** An unsigned integer that specifies the type of filter to be applied. This MUST be a value from the following table.

| Value      | Enumeration Name | Meaning                              |
|------------|------------------|--------------------------------------|
| 0x00000000 | CFTNIL           | No filter                            |
| 0x00000001 | CFTABOVEAVERAGE  | Shows values that are above average. |
| 0x00000002 | CFTBELOWAVERAGE  | Shows values that are below average. |
| 0x00000008 | CFTTOMORROW      | Shows tomorrow's dates.              |
| 0x00000009 | CFTTODAY         | Shows today's dates.                 |
| 0x0000000A | CFTYESTERDAY     | Shows yesterday's dates.             |
| 0x0000000B | CFTNEXTWEEK      | Shows next week's dates.             |
| 0x0000000C | CFTTHISWEEK      | Shows this week's dates.             |
| 0x0000000D | CFTLASTWEEK      | Shows last week's dates.             |



| <b>Value</b> | <b>Enumeration Name</b> | <b>Meaning</b>  |
|--------------|-------------------------|---|
| 0x0000000E   | CFTNEXTMONTH            | Shows next month's dates.   |
| 0x0000000F   | CFTTHISMONTH            | Shows this month's dates.   |
| 0x00000010   | CFTLASTMONTH            | Shows last month's dates.   |
| 0x00000011   | CFTNEXTQUARTER          | Shows next quarter's dates.   |
| 0x00000012   | CFTTHISQUARTER          | Shows this quarter's dates.   |
| 0x00000013   | CFTLASTQUARTER          | Shows last quarter's dates.   |
| 0x00000014   | CFTNEXTYEAR             | Shows next year's dates.  |
| 0x00000015   | CFTTHISYEAR             | Shows this year's dates.  |
| 0x00000016   | CFTLASTYEAR             | Shows last year's dates.  |
| 0x00000017   | CFTYEARTODATE           | Shows the dates between the beginning of the year and today, inclusive. |
| 0x00000018   | CFTQ1                   | Shows the dates that are in the first quarter, regardless of year.      |
| 0x00000019   | CFTQ2                   | Shows the dates that are in the second quarter, regardless of year.     |
| 0x0000001A   | CFTQ3                   | Shows the dates that are in the third quarter, regardless of year.      |
| 0x0000001B   | CFTQ4                   | Shows the dates that are in the fourth quarter, regardless of year.     |
| 0x0000001C   | CFTM1                   | Shows the dates that are in January, regardless of year.                |
| 0x0000001D   | CFTM2                   | Shows the dates that are in February, regardless of year.               |
| 0x0000001E   | CFTM3                   | Shows the dates that are in March, regardless of year.                  |
| 0x0000001F   | CFTM4                   | Shows the dates that are in April, regardless of year.                  |
| 0x00000020   | CFTM5                   | Shows the dates that are in May, regardless of year.                    |
| 0x00000021   | CFTM6                   | Shows the dates that are in June, regardless of year.                   |
| 0x00000022   | CFTM7                   | Shows the dates that are in July, regardless of year.                   |
| 0x00000023   | CFTM8                   | Shows the dates that are in August, regardless of year.                 |
| 0x00000024   | CFTM9                   | Shows the dates that are in September, regardless of year.              |
| 0x00000025   | CFTM10                  | Shows the dates that are in October, regardless of year.                |
| 0x00000026   | CFTM11                  | Shows the dates that are in November, regardless of year.               |
| 0x00000027   | CFTM12                  | Shows the dates that are in December, regardless of year.               |

**A - fApplied (1 bit):** A bit that specifies whether the range of the filter, as specified by the **rfx** field in the **BrtBeginAFilter** (section [2.4.8](#)) record that begins the collection this record is a part of, has been calculated. A value of 1 specifies that the range of the filter has been calculated. A value of 1 also specifies that **xNumValue** and **xNumValueMax** are correctly calculated, if these values are not ignored. The value of **fApplied** MUST be 0 if **cft** is greater than or equal to 0x00000018 or equal to 0x00000000.

**unused (7 bits):** This value is undefined, and MUST be ignored.

**xNumValue (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies a value for the filter. For **cft** values greater than or equal to 0x00000008 and less than or equal to 0x00000017, this value specifies the minimum value in the range as specified by the **rfx** field in the **BrtBeginAFilter** record that begins the collection of which this record is a part. For **cft** values of 0x00000001 or 0x00000002, this specifies the computed average. The value of **xNumValue** MUST be 0x00000000 and MUST be ignored unless **cft** is greater than or equal to 0x00000001 and less than or equal to 0x00000017.

**xNumValueMax (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the maximum value for this filter. This value MUST be 0x00000000 and MUST be ignored if **cft** is less than 0x00000008 or greater than 0x00000017.

#### 2.4.346 BrtEndActiveXControls

The **BrtEndActiveXControls** record specifies the end of a collection of **BrtActiveX** (section [2.4.4](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrtActiveX** records specifies ActiveX controls embedded in the sheet.

#### 2.4.347 BrtEndAFilter

The **BrtEndAFilter** record specifies the end of a collection of records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies an AutoFilter.

#### 2.4.348 BrtEndAutoSortScope

The **BrtEndAutoSortScope** record specifies the end of a collection of records as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies sort information for the pivot items (section [2.2.5.3.3](#)) of a pivot field (section [2.2.5.3.2](#)).

#### 2.4.349 BrtEndBook

The **BrtEndBook** record specifies the end of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies properties of a workbook.

#### 2.4.350 BrtEndBookViews

The **BrtEndBookViews** record specifies the end of a collection of **BrtBookView** (section [2.4.298](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtBookView** records specifies workbook views.

#### 2.4.351 **BrEndBorders**

The **BrEndBorders** record specifies the end of a collection of **BrBorder** (section [2.4.299](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrBorder** records specifies cell border style.

#### 2.4.352 **BrEndBundleShs**

The **BrEndBundleShs** record specifies the end of a collection of **BrBundleSh** (section [2.4.301](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrBundleSh** records specifies the sheets in the workbook.

#### 2.4.353 **BrEndCellIgnoreECs**

The **BrEndCellIgnoreECs** record specifies the end of a collection of **BrCellIgnoreEC** (section [2.4.306](#)) records as defined by **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrCellIgnoreEC** records specifies the types of cell errors that are to be ignored for specific cell ranges.

#### 2.4.354 **BrEndCellIgnoreECs14**

The **BrEndCellIgnoreECs14** record specifies the end of a collection of **BrCellIgnoreEC14** (section [2.4.307](#)) records as defined by **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrCellIgnoreEC14** records specifies the types of cell errors that are to be ignored for specific cell ranges.

#### 2.4.355 **BrEndCellSmartTag**

The **BrEndCellSmartTag** record specifies the end of a collection of **BrCellSmartTagProperty** (section [2.4.313](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection **BrCellSmartTagProperty** records specifies the smart tag properties of a cell. [<30>](#)

#### 2.4.356 **BrEndCellSmartTags**

The **BrEndCellSmartTags** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the smart tag properties of a cell. [<31>](#)

#### 2.4.357 **BrEndCellStyleXFs**

The **BrEndCellStyleXFs** record specifies the end of a collection of **BrXF** (section [2.4.816](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrXF** records specifies all cell style XFs (section [2.2.6.1.2.1](#)) in the workbook. The collection MUST contain at least 1 and no more than 0xFF96 **BrXF** records.

#### 2.4.358 **BrEndCellWatches**

The **BrEndCellWatches** record specifies the end of a collection of **BrCellWatch** (section [2.4.315](#)) records as defined by **Worksheet** part ABNF (section [2.1.7.61](#)). Each **BrCellWatch** record specifies a reference to a watched cell.

#### 2.4.359 **BrtEndCellXFs**

The **BrtEndCellXFs** record specifies the end of a collection of **BrtXF** (section [2.4.816](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtXF** records specifies all cell XFs (section [2.2.6.1.1](#)) in the workbook. The collection MUST contain at least 1 and no more than 0xFF96 **BrtXF** records.

#### 2.4.360 **BrtEndCFRule**

The **BrtEndCFRule** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a conditional formatting rule used in conditional formatting.

#### 2.4.361 **BrtEndCFRule14**

The **BrtEndCFRule14** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a conditional formatting rule used in conditional formatting.

#### 2.4.362 **BrtEndColBrk**

The **BrtEndColBrk** record specifies the end of a collection of **BrtBrk** (section [2.4.300](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtBrk** records specifies vertical page breaks (2).

#### 2.4.363 **BrtEndColInfos**

The **BrtEndColInfos** record specifies the end of a collection of **BrtColumnInfo** (section [2.4.320](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtColumnInfo** records specifies the column (2) width and formatting for one or more columns (2) of a sheet.

#### 2.4.364 **BrtEndColorPalette**

The **BrtEndColorPalette** record specifies the end of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies the color information associated with this workbook.

#### 2.4.365 **BrtEndColorScale**

The **BrtEndColorScale** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a color scale used in conditional formatting.

#### 2.4.366 **BrtEndColorScale14**

The **BrtEndColorScale14** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a color scale used in conditional formatting.

#### 2.4.367 **BrtEndComment**

The **BrtEndComment** record specifies the end of a **BrtCommentText** (section [2.4.325](#)) record as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. A **BrtCommentText** record specifies the text of a comment.

#### 2.4.368 **BrtEndCommentAuthors**

The **BrtEndCommentAuthors** record specifies the end of a collection of **BrtCommentAuthor** (section [2.4.324](#)) records as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. The collection specifies a list of authors of comments.

#### 2.4.369 **BrtEndCommentList**

The **BrtEndCommentList** record specifies the end of a collection of records as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. The collection specifies a list of comments.

#### 2.4.370 **BrtEndComments**

The **BrtEndComments** record specifies the end of a collection of records as defined by the **Comments** (section [2.1.7.8](#)) part ABNF. The collection of records specifies lists of authors and their comments.

#### 2.4.371 **BrtEndConditionalFormatting**

The **BrtEndConditionalFormatting** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies conditional formatting information for a range.

#### 2.4.372 **BrtEndConditionalFormatting14**

The **BrtEndConditionalFormatting14** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies conditional formatting information for a range.

#### 2.4.373 **BrtEndConditionalFormattings**

The **BrtEndConditionalFormattings** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF. The collection specifies conditional formatting information for the **Worksheet**.

#### 2.4.374 **BrtEndCERrs**

The **BrtEndCERrs** record specifies the end of a collection of **BrtCrashRecErr** (section [2.4.326](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtCrashRecErr** records specifies the errors that occurred during an application fault.

#### 2.4.375 **BrtEndCsView**

The **BrtEndCsView** record specifies the end of an empty collection of records as defined by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies a chart sheet view.

#### 2.4.376 **BrEndCsViews**

The **BrEndCsViews** record specifies the end of a collection of records as defined by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies the chart sheet views of this chart sheet.

#### 2.4.377 **BrEndCustomFilters**

The **BrEndCustomFilters** record specifies the end of a collection of **BrCustomFilter** (section [2.4.332](#)) records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrCustomFilter** records specifies custom filter criteria to be applied to a filter.

#### 2.4.378 **BrEndDatabar**

The **BrEndDatabar** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a data bar used in conditional formatting.

#### 2.4.379 **BrEndDatabar14**

The **BrEndDatabar14** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a data bar used in conditional formatting.

#### 2.4.380 **BrEndDataFeedPr15**

The **BrEndDataFeedPr15** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies properties of a **model data source data feed connection** (section [2.2.8.9.2](#)).

#### 2.4.381 **BrEndDataModel**

The **BrEndDataModel** record specifies the end of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies properties of the spreadsheet data model.

#### 2.4.382 **BrEndDbTables15**

The **BrEndDbTables15** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the list of database tables used by this **model data source OLE DB connection** (section [2.2.8.9.1](#)) or **model data source data feed connection** (section [2.2.8.9.2](#)).

#### 2.4.383 **BrEndDCon**

The **BrEndDCon** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies data consolidation information.

#### 2.4.384 **BrtEndDecoupledPivotCacheIDs**

The **BrtEndDecoupledPivotCacheIDs** record specifies the end of a collection of **PivotCache** identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF rules. The collection of records specifies the **PivotCache** structures that are associated with Non-Worksheet PivotTables (section [2.2.5.5](#)).

#### 2.4.385 **BrtEndDeletedName**

The **BrtEndDeletedName** record specifies the end of an empty collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies a query field that has been deleted from the query table.

#### 2.4.386 **BrtEndDeletedNames**

The **BrtEndDeletedNames** record specifies the end of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies query fields that have been deleted from the query table.

#### 2.4.387 **BrtEndDim**

The **BrtEndDim** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a **PivotCache** (section [2.2.5.2](#)) OLAP dimension (1).

#### 2.4.388 **BrtEndDims**

The **BrtEndDims** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies **PivotTable** (section [2.1.7.40](#)) OLAP dimensions (1).

#### 2.4.389 **BrtEndDRefs**

The **BrtEndDRefs** record specifies the end of a collection of **BrtDRef** (section [2.4.338](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtDRef** records specifies the references used by data consolidation.

#### 2.4.390 **BrtEndDVals**

The **BrtEndDVals** record specifies the end of a collection of **BrtDVal** (section [2.4.339](#)) records as defined in the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrtDVal** records specifies data validation properties of a worksheet.

#### 2.4.391 **BrtEndDVals14**

The **BrtEndDVals14** record specifies the end of a collection of **BrtDVal14** (section [2.4.340](#)) records as defined in the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrtDVal14** records specifies data validation properties of a worksheet.

#### 2.4.392 **BrtEndDXF14s**

The **BrtEndDXF14s** record specifies the end of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies a set of differential formatting (section [2.2.6.2](#)).

#### 2.4.393 **BrEndDXFs**

The **BrEndDXFs** record specifies the end of a collection of **BrDXF** (section [2.4.342](#)) records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF and the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrDXF** records specifies a set of differential formatting (section [2.2.6.2](#)).

#### 2.4.394 **BrEndDXFs15**

The **brEndDxf15** record specifies the end of a collection of records as defined by the [Styles](#) part ABNF. The collection of records specifies a set of differential formatting (section [2.2.6.2](#)).

#### 2.4.395 **BrEndECDBProps**

The **BrEndECDBProps** record specifies the end of an empty collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the properties associated with an ODBC or OLE DB external connection (section [2.2.8](#)).

#### 2.4.396 **BrEndECOLapProps**

The **BrEndECOLapProps** record specifies the end of an empty collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies properties of OLAP connection (section [2.2.8.3.1](#)).

#### 2.4.397 **BrEndECPParam**

The **BrEndECPParam** record specifies the end of an empty collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies parameters of an external connection (section [2.2.8](#)).

#### 2.4.398 **BrEndECPParams**

The **BrEndECPParams** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies connection parameters.

#### 2.4.399 **BrEndECTWFldInfoLst**

The **BrEndECTWFldInfoLst** record specifies the end of a collection of **BrBeginECTwFldInfo** (section [2.4.61](#)) records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies a collection of columns (2) of data in a text file.

#### 2.4.400 **BrEndECTWFldInfoLst15**

The **BrEndECTWFldInfoLst15** record specifies the end of a collection of **BrBeginECTwFldInfo15** (section [2.4.62](#)) records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies a collection of columns (2) of data in a text file.

#### 2.4.401 **BrEndECTxtWiz**

The **BrEndECTxtWiz** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies text import properties.



#### 2.4.402 **BrEndECTxtWiz15**

The **BrEndECTxtWiz15** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the model data source text importation connection properties (section [2.2.8.9.4](#)).

#### 2.4.403 **BrEndECWebProps**

The **BrEndECWebProps** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the properties of a Web connection (section [2.2.8.5](#)).

#### 2.4.404 **BrEndECWPTables**

The **BrEndECWPTables** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection specifies a collection of tables to be returned via a Web query data connection.

#### 2.4.405 **BrEndEsfmd**

The **BrEndEsfmd** record specifies the end of a collection of records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies a future metadata store (section [2.2.4.4](#)).

#### 2.4.406 **BrEndEsmdb**

The **BrEndEsmdb** record specifies the end of a collection of **BrMdb** (section [2.4.673](#)) records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records **MUST** contain [metadata block](#) (section [2.2.4.5](#)) records of the same kind: only cell metadata (section [2.2.4.2](#)) records or only value metadata (section [2.2.4.3](#)) records.

#### 2.4.407 **BrEndEsmdtinfo**

The **BrEndEsmdtinfo** record specifies the end of the collection of **BrMdtinfo** (section [2.4.674](#)) records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies the list of metadata types (section [2.2.4.1](#)).

#### 2.4.408 **BrEndEsmdx**

The **BrEndEsmdx** record specifies the end of a collection of records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies the MDX metadata store (section [2.2.4.4](#)).

#### 2.4.409 **BrEndEsstr**

The **BrEndEsstr** record specifies the end of the collection of **BrStr** (section [2.4.754](#)) records.

#### 2.4.410 **BrEndExtConn14**

The **BrEndExtConn14** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies the OLAP calculated members (3) that are associated with this external connection (section [2.2.8](#)).

#### 2.4.411 **BrEndExtConn15**

The **BrEndExtConn15** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The record specifies the extended properties of an external connection (section [2.2.8](#)).

#### 2.4.412 **BrEndExtConnection**

The **BrEndExtConnection** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF.

#### 2.4.413 **BrEndExtConnections**

The **BrEndExtConnections** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies external connections (section [2.2.8](#)).

#### 2.4.414 **BrEndExternals**

The **BrEndExternals** record specifies the end of a collection of records as defined by **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies a collection of supporting links (section [2.2.7.2](#)) and specifies a collection of **Xti** (section [2.5.172](#)) structures.

#### 2.4.415 **BrEndFills**

The **BrEndFills** record specifies the end of a collection of **BrFill** (section [2.4.644](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrFill** records specifies cell fill styles.

#### 2.4.416 **BrEndFilterColumn**

The **BrEndFilterColumn** record specifies the end of a collection of records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies an AutoFilter column (2).

#### 2.4.417 **BrEndFilters**

The **BrEndFilters** record specifies the end of a collection of records as defined by the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **PivotTable** (section [2.1.7.40](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies information about the filter.

#### 2.4.418 **BrEndFmd**

The **BrEndFmd** record specifies the end of a collection of records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies future records (section [2.1.6](#)).

#### 2.4.419 **BrEndFmts**

The **BrEndFmts** record the end of a collection of **BrFmt** (section [2.4.651](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrFmt** records specifies the properties of the number formats that indicate how to format and render the numeric value of the cells.

#### 2.4.420 **BrtEndFnGroup**

The **BrtEndFnGroup** record specifies the end of a collection of **BrtFnGroup** (section [2.4.652](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtFnGroup** records specifies function category names.

#### 2.4.421 **BrtEndFonts**

The **BrtEndFonts** record specifies the end of a collection of **BrtFont** (section [2.4.653](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtFont** records specifies the fonts for the workbook.

#### 2.4.422 **BrtEndHeaderFooter**

The **BrtEndHeaderFooter** record specifies the end of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), **Chart Sheet** (section [2.1.7.7](#)) part ABNF, **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and **Macro Sheet** (section [2.1.7.32](#)) part ABNF.

#### 2.4.423 **BrtEndIconSet**

The **BrtEndIconSet** record specifies the end of a collection of **BrtCFVO** (section [2.4.318](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtCFVO** records specifies a conditional formatting rule defined using an icon set.

#### 2.4.424 **BrtEndIconSet14**

The **BrtEndIconSet14** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a conditional formatting rule defined using an icon set.

#### 2.4.425 **BrtEndIndexedColors**

The **BrtEndIndexedColors** record specifies the end of a collection of **BrtIndexedColor** (section [2.4.660](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtIndexedColor** records specifies indexed colors.

#### 2.4.426 **BrtEndISXTHCols**

The **BrtEndISXTHCols** record specifies the end of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies references to pivot hierarchies (section [2.2.5.3.4](#)) and any data field (section [2.2.5.3.7.5.2](#)) that appear on the column (2) axis of a PivotTable view (section [2.2.5.3](#)).

#### 2.4.427 **BrtEndISXTHRws**

The **BrtEndISXTHRws** record specifies the end of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies references to pivot hierarchies (section [2.2.5.3.4](#)) and any data fields (section [2.2.5.3.7.5.2](#)) that appear on the row (2) axis of a PivotTable view (section [2.2.5.3](#)).

#### 2.4.428 **BrEndISXVDCols**

The **BrEndISXVDCols** record specifies the end of an empty collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies which pivot fields (section [2.2.5.3.2](#)) appear on the column (2) axis of this PivotTable view (section [2.2.5.3](#)).

#### 2.4.429 **BrEndISXVDRws**

The **BrEndISXVDRws** record specifies the end of an empty collection of records as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies which pivot fields appear on the row (2) axis of this PivotTable view (section [2.2.5.3](#)).

#### 2.4.430 **BrEndISXVIs**

The **BrEndISXVIs** record specifies the end of an empty collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot line entries (section [2.2.5.3.8.4](#)) that occur on a pivot line (section [2.2.5.3.8.3](#)).

#### 2.4.431 **BrEndItemUniqueNames**

The **BrEndItemUniqueNames** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

#### 2.4.432 **BrEndList**

The **BrEndList** record specifies the end of a collection of records as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies a table.

#### 2.4.433 **BrEndListCol**

The **BrEndListCol** record specifies the end of a collection of records, as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies a table column (2).

#### 2.4.434 **BrEndListCols**

The **BrEndListCols** record specifies the end of a collection of records, as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies the set of table columns (2) for a single table.

#### 2.4.435 **BrEndListParts**

The **BrEndListParts** record specifies the end of a collection of **BrListPart** (section [2.4.670](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrListPart** records specifies tables defined in the workbook.

#### 2.4.436 **BrEndListXmlCPr**

The **BrEndListXmlCPr** record specifies the end of an empty collection of records, as defined by the **Table** (section [2.1.7.51](#)) part ABNF and the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection specifies information about the XML map properties of a table column (2).

#### 2.4.437 **BrEndMap**

The **BrEndMap** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the mapping between **BrBeginDim** (section [2.4.49](#)) and **BrBeginMG** (section [2.4.109](#)).

#### 2.4.438 **BrEndMdx**

The **BrEndMdx** record specifies the end of a collection of records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies additional properties for MDX Metadata (section [2.2.4.8](#)).

#### 2.4.439 **BrEndMdxKPI**

The **BrEndMdxKPI** record specifies the end of an empty collection of records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies the properties of MDX Metadata (section [2.2.4.8](#)).

#### 2.4.440 **BrEndMdxMbrProp**

The **BrEndMdxMbrProp** record specifies the end of an empty collection of records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies the properties of an OLAP member.

#### 2.4.441 **BrEndMdxSet**

The **BrEndMdxSet** record specifies the end of a collection of **BrMdxMbrIstr** (section [2.4.675](#)) records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of **BrMdxMbrIstr** records specifies MDX unique names and their properties.

#### 2.4.442 **BrEndMdxTuple**

The **BrEndMdxTuple** record specifies the end of a collection of **BrMdxMbrIstr** (section [2.4.675](#)) records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of **BrMdxMbrIstr** records specifies MDX unique names and their properties.

#### 2.4.443 **BrEndMergeCells**

The **BrEndMergeCells** record specifies the end of a collection of **BrMergeCell** (section [2.4.676](#)) records as defined in the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrMergeCell** records specifies the merged cells for the sheet.

#### 2.4.444 **BrEndMetadata**

The **BrEndMetadata** record specifies the end of a collection of records as defined by the **Metadata** part (section [2.1.7.34](#)) ABNF. The collection of records specifies the metadata (section [2.2.4](#)) associated with the book.

#### 2.4.445 **BrEndMG**

The **BrEndMG** record specifies the end of an empty collection as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a measure group for a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.446 BrtEndMGMaps

The **BrtEndMGMaps** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the mappings between OLAP dimensions (1) and the OLAP measure groups that each OLAP dimension (1) is related to.

#### 2.4.447 BrtEndMGs

The **BrtEndMGs** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies **PivotTable** (section [2.1.7.40](#)) OLAP measure groups.

#### 2.4.448 brtEndModelRelationships

The **BrtEndModelRelationships** record specifies the end of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies relationships in spreadsheet data model.

#### 2.4.449 BrtEndModelTables

The **BrtEndModelTables** record specifies the end of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies properties of tables in spreadsheet data model.

#### 2.4.450 BrtEndMRUColors

The **BrtEndMRUColors** record specifies the end of a collection of **BrtMRUColor** (section [2.4.679](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtMRUColor** records specifies the collection of most recently used colors selected by the user for this workbook.

#### 2.4.451 BrtEndOleDbPr15

The **BrtEndOleDbPr15** record specifies the end of a collection of records as defined by the **External Data Connections** (section [2.1.7.24](#)) part ABNF. The collection of records specifies properties of a **model data source OLE DB connection** (section [2.2.8.9.1](#)).

#### 2.4.452 BrtEndOleObjects

The **BrtEndOleObjects** record specifies the end of a collection of **BrtOleObject** (section [2.4.682](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtOleObject** records specifies information about OLE objects that are embedded in the workbook.

#### 2.4.453 BrtEndPCD14

The **BrtEndPCD14** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

#### 2.4.454 BrtEndPCDCalcItem

The **BrtEndPCDCalcItem** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the locations in the PivotTable view (section [2.2.5.3](#)) to which the calculated item (section [2.2.5.2.6](#))

applies, and a reference to the cache fields (section [2.2.5.2.2](#)) and cache items (section [2.2.5.2.3](#)) that the formula (section [2.2.2](#)) of the calculated item uses.

#### 2.4.455 **BrEndPCDCalcItems**

The **BrEndPCDCalcItems** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of calculated items (section [2.2.5.2.6](#)) in the **PivotCache** (section [2.2.5.2](#)).

#### 2.4.456 **BrEndPCDCalcMem**

The **BrEndPCDCalcMem** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies an OLAP calculated member (3) or a named set (section [2.2.5.2.7.3](#)) in a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.457 **BrEndPCDCalcMem14**

The **BrEndPCDCalcMem14** record specifies the end of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies extended properties of an OLAP calculated member (3).

#### 2.4.458 **BrEndPCDCalcMemExt**

The **BrEndPCDCalcMemExt** record specifies the end of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies the OLAP calculated member (3) that is associated with an external connection (section [2.2.8](#)) that is not associated with a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.459 **BrEndPCDCalcMems**

The **BrEndPCDCalcMems** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the OLAP calculated members (3) in a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.460 **BrEndPCDCalcMemsExt**

The **BrEndPCDCalcMemsExt** record specifies the end of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies the OLAP calculated members (3) that are associated with an external connection (section [2.2.8](#)) that is not associated with a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.461 **BrEndPCDFAtbl**

The **BrEndPCDFAtbl** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of cache items (section [2.2.5.2.3](#)).

#### 2.4.462 **BrEndPCDFGDiscrete**

The **BrEndPCDFGDiscrete** record specifies the end of a collection of **BrPCDIIndex** (section [2.4.699](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of **BrPCDIIndex** records specifies a mapping from a cache item (section [2.2.5.2.3](#)) in the **BrBeginPCDFAtbl** (section [2.4.125](#)) collection of the base field of this grouping field to a cache

item in the **BrtBeginPCDFGItems** (section [2.4.127](#)) collection of the grouping field. The base field and grouping field are specified in grouping (section [2.2.5.2.4](#)).

#### 2.4.463 BrtEndPCDFGItems

The **BrtEndPCDFGItems** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of cache items for a grouping (section [2.2.5.2.4](#)) field.

#### 2.4.464 BrtEndPCDFGRange

The **BrtEndPCDFGRange** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the grouping (section [2.2.5.2.4](#)) properties of a cache field (section [2.2.5.2.2](#)).

#### 2.4.465 BrtEndPCDFGroup

The **BrtEndPCDFGroup** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the relation of this cache fields (section [2.2.5.2.2](#)) and other cache fields (section [2.2.5.2.2](#)) to grouping (section [2.2.5.2.4](#)).

#### 2.4.466 BrtEndPCDField

The **BrtEndPCDField** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a single cache field (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)).

#### 2.4.467 BrtEndPCDFields

The **BrtEndPCDFields** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of cache fields (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)).

#### 2.4.468 BrtEndPCDHFIELDSUsage

The **BrtEndPCDHFIELDSUsage** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. This collection of records specifies the cache fields (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)) that are associated with the cache hierarchy (section [2.2.5.2.7](#)) this record is within.

#### 2.4.469 BrtEndPCDHGLevel

The **BrtEndPCDHGLevel** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies an OLAP grouping level in a **PivotCache** (section [2.2.5.2](#)), as specified in (section [2.2.5.2.8](#)).

#### 2.4.470 BrtEndPCDHGLevels

The **BrtEndPCDHGLevels** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of OLAP grouping levels, as specified in (section [2.2.5.2.8](#)).



#### 2.4.471 **BrEndPCDHGLGMember**

The **BrEndPCDHGLGMember** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies an OLAP member or name of a group in the subsequent OLAP level that is part of an OLAP Grouping (section [2.2.5.2.8](#)).

#### 2.4.472 **BrEndPCDHGLGMembers**

The **BrEndPCDHGLGMembers** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the OLAP members that are part of an OLAP Grouping (section [2.2.5.2.8](#)).

#### 2.4.473 **BrEndPCDHGLGroup**

The **BrEndPCDHGLGroup** record specifies the end a collection as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a group as specified in section [2.2.5.2.8](#).

#### 2.4.474 **BrEndPCDHGLGroups**

The **BrEndPCDHGLGroups** record specifies the end of a collection as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the groups as specified by OLAP grouping (section [2.2.5.2.8](#)) within the preceding cache hierarchy (section [2.2.5.2.7](#)).

#### 2.4.475 **BrEndPCDHierarchies**

The **BrEndPCDHierarchies** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of cache hierarchies (section [2.2.5.2.7](#) in the **PivotCache** (section [2.2.5.2](#)).

#### 2.4.476 **BrEndPCDHierarchy**

The **BrEndPCDHierarchy** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a cache hierarchy (section [2.2.5.2.7](#)) in the **PivotCache** (section [2.2.5.2](#)).

#### 2.4.477 **BrEndPCDIRun**

The **BrEndPCDIRun** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a sequence of cache items (section [2.2.5.2.3](#)) that all have the same data type.

#### 2.4.478 **BrEndPCDKPI**

The **BrEndPCDKPI** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies an OLAP key performance indicator (KPI).

#### 2.4.479 **BrEndPCDKPIs**

The **BrEndPCDKPIs** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the KPIs in a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.480 **BrEndPCDSConsol**

The **BrEndPCDSConsol** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the source data (section [2.2.5.2.1](#)) ranges for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** (section [2.2.5.2](#)) in the workbook.

#### 2.4.481 **BrEndPCDSCPage**

The **BrEndPCDSCPage** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection of values that correspond to cache items (section [2.2.5.2.3](#)) of a cache field (section [2.2.5.2.2](#)) for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** (section [2.2.5.2](#)).

#### 2.4.482 **BrEndPCDSCPAGES**

The **BrEndPCDSCPAGES** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies information for optional cache fields (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified by multiple consolidation ranges (section [2.2.5.2.1.1](#)).

#### 2.4.483 **BrEndPCDSCPIItem**

The **BrEndPCDSCPIItem** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a value that corresponds to a cache item (section [2.2.5.2.3](#)), as specified by multiple consolidation ranges (section [2.2.5.2.1.1](#)).

#### 2.4.484 **BrEndPCDSCSet**

The **BrEndPCDSCSet** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies properties of a range of the source data (section [2.2.5.2.1](#)) for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** (section [2.2.5.2](#)). The workbook containing the source data is either in this workbook or in another workbook.

#### 2.4.485 **BrEndPCDSCSets**

The **BrEndPCDSCSets** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies ranges used as source data for a multiple consolidation ranges (section [2.2.5.2.1.1](#)) **PivotCache** (section [2.2.5.2](#)).

#### 2.4.486 **BrEndPCDSDTCEMember**

The **BrEndPCDSDTCEMember** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a tuple cache entry in the tuple cache.

#### 2.4.487 **BrEndPCDSDTCEMembers**

The **BrEndPCDSDTCEMembers** record specifies the end of a collection of **BrBeginPCDSDTCEMember** records (section [2.4.150](#)) as defined by the **PivotCache Definition**

(section [2.1.7.38](#)) part ABNF. The collection of records specifies tuple cache entries, as specified in section [2.2.5.2.11](#).

#### 2.4.488 **BrEndPCSDTCEntries**

The **BrEndPCSDTCEntries** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a cache of cube values; each of the values is optionally followed by a collection of tuple cache entries, specified in section [2.2.5.2.11](#), used in the value calculation.

#### 2.4.489 **BrEndPCSDTCQueries**

The **BrEndPCSDTCQueries** record specifies the end of a collection of **BrBeginPCSDTCQuery** (section [2.4.155](#)) records.

#### 2.4.490 **BrEndPCSDTCQuery**

The **BrEndPCSDTCQuery** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

#### 2.4.491 **BrEndPCSDTCSet**

The **BrEndPCSDTCSet** record specifies the end of a **BrBeginPCSDTCSet** (section [2.4.156](#)) record as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF.

#### 2.4.492 **BrEndPCSDTCSets**

The **BrEndPCSDTCSets** record specifies the end of a collection as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies the tuple cache set (section [2.2.5.2.11](#)) in the **PivotCache** (section [2.2.5.2](#)).

#### 2.4.493 **BrEndPCSDTtupleCache**

The **BrEndPCSDTtupleCache** record specifies the end of a collection of record as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a tuple cache (section [2.2.5.2.11](#)) within the **PivotCache** (section [2.2.5.2](#)).

#### 2.4.494 **BrEndPCDSFCIEntries**

The **BrEndPCDSFCIEntries** record specifies the end of a collection of **BrPCDSFCIEntry** (section [2.4.703](#)) records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of **BrPCDSFCIEntry** records specifies the number formats provided by an OLAP server for cube values.

#### 2.4.495 **BrEndPCDSsource**

The **BrEndPCDSsource** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies properties of the source data (section [2.2.5.2.1](#)) of a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.496 **BrEndPCDSRange**

The **BrEndPCDSRange** record specifies the properties of the source data (section [2.2.5.2.1](#)) for a **PivotCache** (section [2.2.5.2](#)) contained in the workbook and specifies the end of an empty

collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies source data for a **PivotCache** contained in the workbook.

#### 2.4.497 **BrtEndPivotCacheDef**

The **BrtEndPivotCacheDef** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.498 **BrtEndPivotCacheID**

The **BrtEndPivotCacheID** record specifies the end of an collection of **PivotCache** (section [2.2.5.2](#)) identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of PivotCache identifier records specifies the relationship between a specific **PivotCache** identifier and its associated **PivotCache Definition** (section [2.1.7.38](#)). For more information, see section [2.2.5.3.1](#).

#### 2.4.499 **BrtEndPivotCacheIDs**

The **BrtEndPivotCacheIDs** record specifies the end of a collection of **PivotCache** (section [2.2.5.2](#)) identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the **PivotCache** identifiers for the workbook.

#### 2.4.500 **BrtEndPivotCacheRecords**

The **BrtEndPivotCacheRecords** record specifies the end of a collection of records as defined by the **PivotCache Records** (section [2.1.7.39](#)) part ABNF. The collection of records specifies the cache records (section [2.2.5.2.10](#)) for a **PivotCache** (section [2.2.5.2](#)).

#### 2.4.501 **BrtEndPivotTableRefs**

The **BrtEndPivotTableRefs** record specifies the end of a collection of **PivotTable** identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF rules. The collection of records specifies the Non-Worksheet PivotTables (section [2.2.5.5](#)) in the **Workbook**.

#### 2.4.502 **BrtEndPivotTableUISettings**

The **BrtEndPivotTableUISettings** record specifies the end of a collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies settings for the PivotTable field list.

#### 2.4.503 **BrtEndPName**

The **BrtEndPName** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. This record specifies information used for calculated field (section [2.2.5.2.5](#)) and calculated items (section [2.2.5.2.6](#)). When used for a calculated field, this record specifies a reference to a cache field (section [2.2.5.2.2](#)) used in a calculated field formula (section [2.2.2](#)). When used for a calculated item, this record specifies a reference to a pivot item used in a calculated item formula (section [2.2.2](#)).

#### 2.4.504 **BrtEndPNames**

The **BrtEndPNames** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a collection

of references to cache field (section [2.2.5.2.2](#)) used in a calculated field (section [2.2.5.2.5](#)) formula (section [2.2.2](#)) or pivot items (section [2.2.5.3.3](#)) used in a calculated item (section [2.2.5.2.6](#)) formula (section [2.2.2](#)).

#### 2.4.505 BrtEndPNPair

The **BrtEndPNPair** record specifies the end of an empty collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a reference to a pivot item (section [2.2.5.3.3](#)) used in a calculated item (section [2.2.5.2.6](#)) formula (section [2.2.2](#)).

#### 2.4.506 BrtEndPNPairs

The **BrtEndPNPairs** record specifies the end of a collection of records as defined by the **PivotCache Definition** (section [2.1.7.38](#)) part ABNF. The collection of records specifies a reference to a pivot item (section [2.2.5.3.3](#)), which is used in a calculated item (section [2.2.5.2.6](#)) formula (section [2.2.2](#)).

#### 2.4.507 BrtEndPRFilter

The **BrtEndPRFilter** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the selected pivot field (section [2.2.5.3.2](#)) and the selected pivot items within that pivot field referred within **BrtBeginPRFilters** (section [2.4.174](#)).

#### 2.4.508 BrtEndPRFilter14

The **BrtEndPRFilter14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the set of pivot items (section [2.2.5.3.3](#)), or data items (section [2.2.5.3.7.5.1](#)) included in the filter.

#### 2.4.509 BrtEndPRFilters

The **BrtEndPRFilters** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the selected pivot fields (section [2.2.5.3.2](#)) and the selected pivot items (section [2.2.5.3.3](#)) within those pivot fields.

#### 2.4.510 BrtEndPRFilters14

The **BrtEndPRFilters14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the selected pivot fields (section [2.2.5.3.2](#)) and the selected pivot items (section [2.2.5.3.3](#)) within those pivot fields.

#### 2.4.511 BrtEndPRFItem

The **BrtEndPRFItem** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a pivot item (section [2.2.5.3.3](#)).

#### 2.4.512 BrtEndPRFItem14

The **BrtEndPRFItem14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot item (section [2.2.5.3.3](#)) or data item (section [2.2.5.3.7.5.1](#)) for a **PivotTable** rule (section [2.2.5.3.9](#)).

#### 2.4.513 BrtEndPRule

The **BrtEndPRule** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, **PivotCache Definition** (section [2.1.7.38](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a **PivotTable** rule (section [2.2.5.3.9](#)).

#### 2.4.514 BrtEndPRule14

The **BrtEndPRule14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a [PivotTable rule](#).

#### 2.4.515 BrtEndQSI

The **BrtEndQSI** record specifies the end of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies a query table.

#### 2.4.516 BrtEndQSIF

The **BrtEndQSIF** record specifies the end of an empty collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies properties of a single field of a query table.

#### 2.4.517 BrtEndQSIFs

The **BrtEndQSIFs** record specifies the end of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies the query fields in this query table.

#### 2.4.518 BrtEndQSIR

The **BrtEndQSIR** record specifies the end of a collection of records as defined by the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies information related to the refreshing of query tables.

#### 2.4.519 BrtEndRRSort

The **BrtEndRRSort** record specifies the end of a collection of **BrtRRSortItem** (section [2.4.734](#)) records as defined by the **Sort Map** (section [2.1.7.49](#)) part ABNF. The collection of **BrtRRSortItem** records specifies the sort map (section [2.2.12.10](#)) properties of the specified cell range.

#### 2.4.520 BrtEndRwBrk

The **BrtEndRwBrk** record specifies the end of a collection of **BrtBrk** (section [2.4.300](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of **BrtBrk** records specifies horizontal page breaks (2).

#### 2.4.521 **BrtEndScenMan**

The **BrtEndScenMan** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the Scenario Manager for the sheet.

#### 2.4.522 **BrtEndSct**

The **BrtEndSct** record specifies the end of a collection of **BrtSic** (section [2.4.743](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrtSic** records specifies the cells that are included in the scenario.

#### 2.4.523 **BrtEndSheet**

The **BrtEndSheet** record specifies the end of a collection of records as defined by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF, **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, **Macro Sheet** (section [2.1.7.32](#)) part ABNF, and **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies properties of the sheet.

#### 2.4.524 **BrtEndSheetData**

The **BrtEndSheetData** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies the cell table (section [2.2.1](#)) data for a sheet.

#### 2.4.525 **BrtEndSingleCells**

The **BrtEndSingleCells** record specifies the end of a collection of records as defined by the **Single Cell Tables** (section [2.1.7.46](#)) part ABNF. The collection of records specifies a table.

#### 2.4.526 **BrtEndSlicer**

The **BrtEndSlicer** record specifies the end of an empty collection of records as defined by the **Slicers** (section [2.1.7.48](#)) part ABNF. The collection of records specifies a slicer view (section [2.2.14.2](#)).

#### 2.4.527 **BrtEndSlicerCache**

The **BrtEndSlicerCache** record specifies the end of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies a slicer cache (section [2.2.14.1](#)).

#### 2.4.528 **BrtEndSlicerCacheDef**

The **BrtEndSlicerCacheDef** record specifies the end of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. This collection specifies a slicer cache (section [2.2.14.1](#)).

#### 2.4.529 **BrtEndSlicerCacheID**

The **BrtEndSlicerCacheID** record specifies the end of an empty collection as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies a reference to a slicer cache (section [2.2.14.1](#)) in this workbook.

#### 2.4.530 **BrEndSlicerCacheIDs**

The **BrEndSlicerCacheIDs** record specifies the end of a collection of slicer cache (section [2.2.14.1](#)) identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the slicer cache identifiers for the workbook.

#### 2.4.531 **BrEndSlicerCacheLevelData**

The **BrEndSlicerCacheLevelData** record specifies the end of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies OLAP members that are cached for this OLAP level within the OLAP hierarchy specified by this slicer cache (section [2.2.14.1](#)).

#### 2.4.532 **BrEndSlicerCacheLevelsData**

The **BrEndSlicerCacheLevelsData** record specifies the end of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies OLAP levels of the OLAP hierarchy specified by this slicer cache (section [2.2.14.1](#)).

#### 2.4.533 **BrEndSlicerCacheNative**

The **BrEndSlicerCacheNative** record specifies the end of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies non-OLAP items that are cached within this slicer cache (section [2.2.14.1](#)).

#### 2.4.534 **BrEndSlicerCacheOlapImpl**

The **BrEndSlicerCacheOlapImpl** record specifies the end of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies the associated OLAP **PivotCache** (section [2.2.5.2](#)). See section [2.2.14.1.2](#) for more details.

#### 2.4.535 **BrEndSlicerCacheSelections**

The **BrEndSlicerCacheSelections** record specifies the end of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies the OLAP members from the slicer cache (section [2.2.14.1](#)) that are selected.

#### 2.4.536 **BrEndSlicerCacheSiRange**

The **BrEndSlicerCacheSiRange** record specifies the end of a collection of records as defined by the **slicer cache** part ABNF. The collection of records specifies OLAP members in the OLAP level specified by the **BrBeginSlicerCacheLevelData** (section [2.4.196](#)) record that precedes this record.

#### 2.4.537 **BrEndSlicerCacheSiRanges**

The **BrEndSlicerCacheSiRanges** record specifies the end of a collection of records and collections as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. This collection specifies OLAP members in the OLAP level specified by the **BrBeginSlicerCacheLevelData** (section [2.4.196](#)) that precedes this collection.



#### 2.4.538 **BrEndSlicerCachesPivotCacheID**

The **BrEndSlicerCachesPivotCacheID** record specifies the end of an empty collection as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies a reference to a **PivotCache** (section [2.2.5.2](#)) used by a slicer cache (section [2.2.14.1](#)) with OLAP source data (section [2.2.5.2.1](#)).

#### 2.4.539 **BrEndSlicerCachesPivotCacheIDs**

The **BrEndSlicerCachesPivotCacheIDs** record specifies the end of a collection of **PivotCache** (section [2.2.5.2](#)) identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the PivotCaches used by slicer caches (section [2.2.14.1](#)) with OLAP source data (section [2.2.5.2.1](#)).

#### 2.4.540 **BrEndSlicerEx**

The **BrEndSlicerEx** record specifies the end of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a relationship (section [2.1.3](#)) identifier of the part that contains the slicers (section [2.2.14](#)) in this worksheet.

#### 2.4.541 **BrEndSlicers**

The **BrEndSlicers** record specifies the end of a collection of **BrBeginSlicer** (section [2.4.191](#)) records as defined by the **Slicers** (section [2.1.7.48](#)) part ABNF. The collection of **BrBeginSlicer** records specifies all slicer views (section [2.2.14.2](#)) in the worksheet.

#### 2.4.542 **BrEndSlicersEx**

The **BrEndSlicersEx** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the **Slicers** (section [2.1.7.48](#)) part ABNF identifier for the worksheet.

#### 2.4.543 **BrEndSlicerStyle**

The **BrEndSlicerStyle** record specifies the end of a collection of records and collections as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies the table style (section [2.2.6.3](#)) elements (section [2.2.6.2.2](#)) of the slicer style (section [2.2.6.3.1](#)) that are specific to slicers (section [2.2.14](#)). Together with the base table style, this collection specifies a slicer style.

#### 2.4.544 **BrEndSlicerStyleElements**

The **BrEndSlicerStyleElements** record specifies the end of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies table style elements (section [2.2.6.2.2](#)) of a slicer style (section [2.2.6.3.1](#)) that are specific to slicers (section [2.2.14](#)).

#### 2.4.545 **BrEndSlicerStyles**

The **BrEndSlicerStyles** record specifies the end of a collection of records and collections as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies custom slicer styles (section [2.2.6.3.1](#)).

#### 2.4.546 **BrtEndSmartTags**

The **BrtEndSmartTags** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the smart tag properties of this sheet. <32>

#### 2.4.547 **BrtEndSmartTagTypes**

The **BrtEndSmartTagTypes** record specifies the end of a collection of **BrtSmartTagType** (section [2.4.751](#)) records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of **BrtSmartTagType** records specifies the properties for a smart tag type that contain the identification information for the smart tag. <33>

#### 2.4.548 **BrtEndSortCond**

The **BrtEndSortCond** record specifies the end of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection specifies a sort condition to apply to a range.

#### 2.4.549 **BrtEndSortCond14**

The **BrtEndSortCond14** record specifies the end of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **Table** (section [2.1.7.51](#)) part ABNF, and the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection specifies a sort condition to apply to a range.

#### 2.4.550 **BrtEndSortState**

The **BrtEndSortState** record specifies the end of a collection of records as specified by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Macro Sheet** (section [2.1.7.32](#)) part ABNF, the **Table** part ABNF, and the **Query Table** (section [2.1.7.42](#)) part ABNF. The collection of records specifies the different sort conditions that apply to a range.

#### 2.4.551 **BrtEndSparklineGroup**

The **BrtEndSparklineGroup** record specifies the end of a collection of records and collections as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the properties for this sparkline group.

#### 2.4.552 **BrtEndSparklineGroups**

The **BrtEndSparklineGroups** record specifies the end of a collection of records and collections as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the groups of sparklines on the sheet.

#### 2.4.553 **BrtEndSparklines**

The **BrtEndSparklines** record specifies the end of a collection of **BrtSparkline** (section [2.4.752](#)) records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of **BrtSparkline** records specifies properties for individual sparklines.

#### 2.4.554 **BrtEndSst**

The **BrtEndSst** record specifies the end of a collection of **BrtSSTItem** (section [2.4.753](#)) records as defined by the **Shared Strings** (section [2.1.7.45](#)) part ABNF. The collection of **BrtSSTItem** records specifies a shared string table.

#### 2.4.555 **BrtEndStyles**

The **BrtEndStyles** record specifies the end of a collection of **BrtStyle** (section [2.4.755](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtStyle** records specifies all cell styles (section [2.2.6.1.2](#)) in the workbook. The collection MUST contain at least 1 and no more than 0xFF96 **BrtStyle** records.

#### 2.4.556 **BrtEndStyleSheet**

The **BrtEndStyleSheet** record specifies the end of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies style (section [2.2.6](#)) information for a workbook.

#### 2.4.557 **BrtEndStyleSheetExt14**

The **BrtEndStyleSheetExt14** record specifies the end of a collection of records and collections as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection specifies additional style (section [2.2.6](#)) information for the workbook.

#### 2.4.558 **BrtEndSupBook**

The **BrtEndSupBook** record specifies the end of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies information about the external link (section [2.2.7.4](#)).

#### 2.4.559 **BrtEndSXChange**

The **BrtEndSXChange** record specifies the end of a collection of records and collections as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the value used for **PivotTable** What-if Analysis (section [2.2.5.3.10](#)) calculation and the allocation method for how to apply the value, and specifies a collection of MDX unique names that identifies the original value in the OLAP source data (section [2.2.5.2.1](#)) that was changed.

#### 2.4.560 **BrtEndSXChanges**

The **BrtEndSXChanges** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the values used for **PivotTable** What-if Analysis (section [2.2.5.3.10](#)) calculations and the allocation methods for how to apply the values, and specifies the collections of MDX unique names that identify original values in the OLAP source data (section [2.2.5.2.1](#)) that were changed.

#### 2.4.561 **BrtEndSXCondFmt**

The **BrtEndSXCondFmt** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies details about where this conditional formatting applies in the PivotTable view (section [2.2.5.3](#)).

#### 2.4.562 **BrEndSXCondFmt14**

The **BrEndSXCondFmt14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies details about where this conditional formatting applies in the PivotTable view (section [2.2.5.3](#)).

#### 2.4.563 **BrEndSXCondFmts**

The **BrEndSXCondFmts** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies conditional formats that apply to this **PivotTable** (section [2.1.7.40](#)).

#### 2.4.564 **BrEndSXCondFmts14**

The **BrEndSXCondFmts14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies conditional formats that apply to this **PivotTable** (section [2.1.7.40](#)).

#### 2.4.565 **BrEndSXCrtFormat**

The **BrEndSXCrtFormat** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a reference to a **PivotChart** (section [2.2.3.2](#)) format.

#### 2.4.566 **BrEndSXCrtFormats**

The **BrEndSXCrtFormats** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies references to **PivotChart** (section [2.2.3.2](#)) formats.

#### 2.4.567 **BrEndSXDI**

The **BrEndSXDI** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a data item (section [2.2.5.3.7.5.1](#)) that summarizes data in a PivotTable view (section [2.2.5.3](#)).

#### 2.4.568 **BrEndSXDIIs**

The **BrEndSXDIIs** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF, that specifies the data items (section [2.2.5.3.7.5.1](#)) that appear on the data axis (section [2.2.5.3.7.5](#)) of this PivotTable view (section [2.2.5.3](#)).

#### 2.4.569 **BrEndSXEdit**

The **BrEndSXEdit** record specifies the end of a collection of records and collections as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the user input, related to What-if Analysis (section [2.2.5.3.10](#)), in a single cell of the **PivotTable** data area (section [2.2.5.3.8.1.4](#)), and specifies a collection of MDX unique names that identifies the value in the OLAP source data (section [2.2.5.2.1](#)), and specifies a **PivotTable** rule (section [2.2.5.3.9](#)) that can be used to identify the cell in the **PivotTable** data area.

#### 2.4.570 **BrtEndSXEdits**

The **BrtEndSXEdits** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies user inputs, related to What-if Analysis (section [2.2.5.3.10](#)), to single cells of the **PivotTable** data area (section [2.2.5.3.8.1.4](#)), and specifies the collections of MDX unique names that identify the values in the OLAP source data (section [2.2.5.2.1](#)), and specifies the **PivotTable** rules (section [2.2.5.3.9](#)) that can be used to identify the cells in the **PivotTable** data area.

#### 2.4.571 **BrtEndSXFilter**

The **BrtEndSXFilter** record specifies the end of a collection of records and collections as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a **PivotTable** advanced filter (section [2.2.5.3.6.1](#))

#### 2.4.572 **BrtEndSXFilters**

The **BrtEndSXFilters** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of advanced filters (section [2.2.5.3.6.1](#)) that apply to this PivotTable view (section [2.2.5.3](#)).

#### 2.4.573 **BrtEndSXFormat**

The **BrtEndSXFormat** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the [differential formatting](#) (section [2.2.6.2](#)) to be applied to the PivotTable view (section [2.2.5.3](#)) area identified by a **PivotTable** rule (section [2.2.5.3.9](#)).

#### 2.4.574 **BrtEndSxFormats**

The **BrtEndSxFormats** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of formats that apply to this PivotTable view (section [2.2.5.3](#)).

#### 2.4.575 **BrtEndSXLI**

The **BrtEndSXLI** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot line (section [2.2.5.3.8.3](#)) in a PivotTable view (section [2.2.5.3](#)).

#### 2.4.576 **BrtEndSXLICols**

The **BrtEndSXLICols** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot lines (section [2.2.5.3.8.3](#)) that appear on the column (2) area of the PivotTable view (section [2.2.5.3](#)).

#### 2.4.577 **BrtEndSXLIRws**

The **BrtEndSXLIRws** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot lines (section [2.2.5.3.8.3](#)) that appear on the row (2) area of the PivotTable view (section [2.2.5.3](#)).

#### 2.4.578 BrtEndSXLocation

The **BrtEndSXLocation** record specifies the end of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the location of a PivotTable view (section [2.2.5.3](#)) in a sheet.

#### 2.4.579 BrtEndSXPI

The **BrtEndSXPI** record specifies the end of a collection of records and collections as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot field (section [2.2.5.3.2](#)) or a pivot hierarchy (section [2.2.5.3.4](#)) on the page axis (section [2.2.5.3.7.1](#)) of the **PivotTable**.

#### 2.4.580 BrtEndSXPIs

The **BrtEndSXPIs** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot fields (section [2.2.5.3.2](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view (section [2.2.5.3](#)).

#### 2.4.581 BrtEndSxRow

The **BrtEndSxRow** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF rules. The collection of records specifies a collection of **PivotValueCell** (section [2.2.5.6.1](#)) data units.

#### 2.4.582 BrtEndSxRules

The **BrtEndSxRules** record specifies the end of a collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of **PivotTable** rules (section [2.2.5.3.9](#)).

#### 2.4.583 BrtEndSXRules14

The **BrtEndSXRules14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of **PivotTable** rules (section [2.2.5.3.9](#)).

#### 2.4.584 BrtEndSxSelect

The **BrtEndSxSelect** record specifies end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a **PivotTable** rule (section [2.2.5.3.9](#)) used to identify cells of the selection. This record MUST be ignored if **irstRelID** is NULL or points to an invalid **PivotTable** (section [2.1.7.40](#)) part.

#### 2.4.585 BrtEndSXTDMP

The **BrtEndSXTDMP** record specifies the end of an empty collection of records as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a member (3) property.

#### 2.4.586 BrtEndSXTDMPs

The **BrtEndSXTDMPs** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies member (3) properties in this pivot hierarchy (section [2.2.5.3.4](#)).

#### 2.4.587 **BrEndSxth**

The **BrEndSxth** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot hierarchy (section [2.2.5.3.4](#)).

#### 2.4.588 **BrEndSxthItem**

The **BrEndSxthItem** record specifies the end of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the MDX unique name of an OLAP member to be included or excluded in PivotTable view (section [2.2.5.3](#)) manual filtering (section [2.2.5.3.5](#)).

#### 2.4.589 **BrEndSxthItems**

The **BrEndSxthItems** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the members (3) to be included or excluded in **PivotTable** manual filtering (section [2.2.5.3.5](#)).

#### 2.4.590 **BrEndSxths**

The **BrEndSxths** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies pivot hierarchies (section [2.2.5.3.4](#)) of the PivotTable view (section [2.2.5.3](#)).

#### 2.4.591 **BrEndSXTupleSet**

The **BrEndSXTupleSet** record specifies the end of a collection of records and collections as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies an OLAP named set.

#### 2.4.592 **BrEndSXTupleSetData**

The **BrEndSXTupleSetData** record specifies the end of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies the MDX tuples within the associated OLAP named set.

#### 2.4.593 **BrEndSXTupleSetHeader**

The **BrEndSXTupleSetHeader** record specifies the end of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies the MDX unique names of the OLAP hierarchies and the MDX unique names of the OLAP levels of the OLAP named set.

#### 2.4.594 **BrEndSXTupleSetRow**

The **BrEndSXTupleSetRow** record specifies the end of a collection of records as defined by the Common Productions ABNF (section [2.1.8](#)). The collection of records specifies an MDX tuple within the OLAP named set. The value of the **cRow** field in the **BrBeginSXTupleSet** (section [2.4.256](#)) record that immediately precedes this record MUST be equal to the number of **BrEndSXTupleSetRow** (section [2.4.594](#)) records between the **BrBeginSXTupleSetData** (section [2.4.257](#)) record that immediately precedes this record and the **BrEndSXTupleSetData** record that immediately follows this record.

#### 2.4.595 **BrtEndSxvcells**

The **BrtEndSxvcells** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF rules. The collection of records specifies a collection of **PivotValueCell** (section [2.2.5.6.1](#)) data units.

#### 2.4.596 **BrtEndSXVD**

The **BrtEndSXVD** record specifies the end of a collection of records and collections as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot field (section [2.2.5.3.2](#)) on the PivotTable view (section [2.2.5.3](#)).

#### 2.4.597 **BrtEndSXVDs**

The **BrtEndSXVDs** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies the pivot fields (section [2.2.5.3.2](#)) of the PivotTable view (section [2.2.5.3](#)).

#### 2.4.598 **BrtEndSXVI**

The **BrtEndSXVI** record specifies the end of an empty collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a pivot item (section [2.2.5.3.3](#)).

#### 2.4.599 **BrtEndSXView**

The **BrtEndSXView** record specifies the end of a collection of records and collections as defined in the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a PivotTable view (section [2.2.5.3](#)).

#### 2.4.600 **BrtEndSXView14**

The **BrtEndSXView14** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies additional properties of the PivotTable view (section [2.2.5.3](#)) relating to **PivotTable** What-if Analysis (section [2.2.5.3.10](#)) and conditional formatting.

#### 2.4.601 **BrtEndSXVIs**

The **BrtEndSXVIs** record specifies the end of a collection of records as defined by the **PivotTable** (section [2.1.7.40](#)) part ABNF. The collection of records specifies a collection of pivot items (section [2.2.5.3.3](#)).

#### 2.4.602 **BrtEndTableSlicerCache**

The **BrtEndTableSlicerCache** record specifies the end of a collection of records as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF. The collection of records specifies this table slicer cache (section [2.2.14.1](#)).

#### 2.4.603 **BrtEndTableStyle**

The **BrtEndTableStyle** record specifies the end of a collection of **BrtTableStyleElement** (section [2.4.791](#)) records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of **BrtTableStyleElement** records specifies a table style (section [2.2.6.3](#)).



#### 2.4.604 **BrEndTableStyles**

The **BrEndTableStyles** record specifies the end of a collection of records as defined by the **Styles** (section [2.1.7.50](#)) part ABNF. The collection of records specifies the user-defined table styles (section [2.2.6.3](#)) for the workbook.

#### 2.4.605 **BrEndTimelineCacheID**

The **BrEndTimelineCacheID** record specifies the end of an empty collection as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies a reference to a Timeline cache (section [2.2.15.1](#)) in the workbook.

#### 2.4.606 **BrEndTimelineCacheIDs**

The **BrEndTimelineCacheIDs** record specifies the end of a collection of Timeline cache (section [2.2.15.1](#)) identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the Timeline cache identifiers for the workbook.

#### 2.4.607 **BrEndTimelineCachePivotCacheIDs**

The **BrEndTimelineCachePivotCacheIDs** record specifies the end of a collection of **PivotCache** (section [2.2.5.2](#)) identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the PivotCaches used by Timeline caches (section [2.2.15.1](#)) with OLAP source data (section [2.2.5.2.1](#)).

#### 2.4.608 **BrEndTimelineEx**

The **BrEndTimelineEx** record specifies the end of an empty collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies a relationship (section [2.1.3](#)) identifier of the part that contains the Timelines (section [2.2.15](#)) in this worksheet.

#### 2.4.609 **BrEndTimelinesEx**

The **BrEndTimelinesEx** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)). The collection of records specifies the **Timelines** (section [2.1.7.54](#)) part ABNF identifier for the worksheet.

#### 2.4.610 **BrEndTimelineStyle**

The **BrEndTimelineStyle** record specifies the end of a collection of records and collections as defined by the **Styles** part ABNF. The collection of records specifies the **table style** elements (section [2.2.6.2.2](#)) of the **timeline style** that are specific to **Timelines**. Together with the base table style, this collection specifies a timeline style.

#### 2.4.611 **BrEndTimelineStyleElements**

The **BrEndTimelineStyleElements** record specifies the end of a collection of records as defined by the **Styles** part ABNF. The collection of records specifies **table style elements** of a **timeline style** that are specific to **timelines**.

#### 2.4.612 **BrEndTimelineStyles**

The **BrEndTimelineStyles** record specifies the end of a collection of records and collections as defined by the **Styles** part ABNF. The collection of records specifies custom **timeline styles**.

#### 2.4.613 **BrtEndTimelineStylesheetExt15**

The **BrtEndTimelineStyleSheetExt15** record specifies the end of a collection of records and collections as defined by the [Styles](#) part ABNF. The collection specifies additional [style](#) information for the workbook.

#### 2.4.614 **BrtEndUserCsView**

The **BrtEndUserCsView** record specifies the end of a collection of records as defined by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies settings of a custom view for a chart sheet.

#### 2.4.615 **BrtEndUserCsViews**

The **BrtEndUserCsViews** record specifies the end of a collection of records as defined by the **Chart Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies custom view settings for chart sheets.

#### 2.4.616 **BrtEndUserShView**

The **BrtEndUserShView** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies settings of a custom view for a sheet.

#### 2.4.617 **BrtEndUserShViews**

The **BrtEndUserShViews** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies custom view settings for sheets.

#### 2.4.618 **BrtEndVolDeps**

The **BrtEndVolDeps** record specifies the end of a collection of records as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies dependency information for all cells that depend on either RTD server or cube functions.

#### 2.4.619 **BrtEndVolMain**

The **BrtEndVolMain** record specifies the end of a collection of records as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies dependency information for all RTD topics within a type (section [2.2.13.1](#)) that share the same first string or function argument.

#### 2.4.620 **BrtEndVolTopic**

The **BrtEndVolTopic** record specifies the end of a collection of records and collections as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies a cached returned value (section [2.2.13.4](#)) and subtopics (section [2.2.13.3](#)).

#### 2.4.621 **BrEndVolType**

The **BrEndVolType** record specifies the end of a collection of records as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF. The collection of records specifies dependency information for a set of cells that either all depend on an RTD server or all depend on cube functions.

#### 2.4.622 **BrEndWebExtensions**

The **BrEndWebExtensions** record specifies the end of a collection of records as defined by the WEBEXTENSIONS rule in the **Worksheet** (section [2.1.7.61](#)) part ABNF. The collection of records specifies additional properties for bindings for Web Extensions ([\[MS-OWEXML\]](#) section 1.3) on the worksheet.

#### 2.4.623 **BrEndWebPubItem**

The **BrEndWebPubItem** record specifies the end of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF, **Worksheet** part ABNF (section [2.1.7.61](#)), and **Chart Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies content in the workbook that is published.

#### 2.4.624 **BrEndWebPubItems**

The **BrEndWebPubItems** record specifies the end of a collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF, **Worksheet** part ABNF (section [2.1.7.61](#)), and **Chart Sheet** (section [2.1.7.7](#)) part ABNF. The collection of records specifies the content in this workbook that has been published.

#### 2.4.625 **BrEndWsSortMap**

The **BrEndWsSortMap** record specifies the end of a collection of records as defined by the **Sort Map** (section [2.1.7.49](#)) part ABNF. The collection of records specifies the sort map (section [2.2.12.10](#)) properties of a sheet.

#### 2.4.626 **BrEndWsView**

The **BrEndWsView** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a sheet view.

#### 2.4.627 **BrEndWsViews**

The **BrEndWsViews** record specifies the end of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)), the **Dialog Sheet** (section [2.1.7.20](#)) part ABNF, and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies the sheet views for the current sheet.

#### 2.4.628 **BrEOF**

The **BrEOF** record specifies the end of a collection of records as defined by **Revision Headers** (section [2.1.7.43](#)) part ABNF, **Revision Log** (section [2.1.7.44](#)) part ABNF, and **User Names** (section [2.1.7.55](#)) part ABNF. The collection of records specifies properties for a shared workbook.

### 2.4.629 BrtExternCellBlank

The **BrtExternCellBlank** record specifies an External Cell (section [2.2.7.4.1.2.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)) that does not contain a value.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| col |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) containing this External Cell. The value of this field **MUST** be less than 16384.

### 2.4.630 BrtExternCellBool

The **BrtExternCellBool** record specifies an External Cell (section [2.2.7.4.1.2.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)) that contains a Boolean value.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| col   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| value |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) containing this External Cell. The value of this field **MUST** be less than 16384.

**value (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies the value.

### 2.4.631 BrtExternCellError

The **BrtExternCellError** record specifies an External Cell (section [2.2.7.4.1.2.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)) that contains an error value.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| col    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| bError |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) containing this External Cell. The value of this field **MUST** be less than 16384.

**bError (1 byte):** A **BErr** (section [2.5.97.2](#)) that specifies an error value.

### 2.4.632 BrtExternCellReal

The **BrtExternCellReal** record specifies an External Cell (section [2.2.7.4.1.2.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)) that contains a numeric value.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| col   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| value |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) containing this External Cell. The value of this field **MUST** be less than 16384.

**value (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies a numeric value.

### 2.4.633 BrtExternCellString

The **BrtExternCellString** record specifies an External Cell (section [2.2.7.4.1.2.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)) that contains a string value.

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| col              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| value (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies column (2) containing this External Cell. The value of this field **MUST** be less than 16384.

**value (variable):** An **XLWideString** (section [2.5.168](#)) that specifies a string value. The length of this string **MUST** be less than 32768 characters.

### 2.4.634 BrtExternRowHdr

The **BrtExternRowHdr** record specifies properties of row (2) in an External Cell Cache (section [2.2.7.4.1.2](#)) and specifies the beginning of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies a row (2) in an External Cell Cache. Subsequent External Cell (section [2.2.7.4.1.2.1](#)) records prior to the subsequent **BrtExternRowHdr** (section [2.4.634](#)) record are in this row (2).

|    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rw |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rw (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies a row (2). The value of this field **MUST** be less than 1048576 and **MUST** be less than the **rw** field of any subsequent **BrtExternRowHdr** record in this External Cell Cache.

## 2.4.635 BrtExternSheet

The **BrtExternSheet** record specifies a collection of **Xti** (section [2.5.172](#)) structures.

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cXti             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgXti (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cXti (4 bytes):** An unsigned integer that specifies the count of items in the **rgXti** array. The value of this field **MUST** be less than 65536.

**rgXti (variable):** An array of **Xti** (section [2.5.172](#)). The number of items in the array **MUST** equal the value of **cXti**.

## 2.4.636 BrtExternTableEnd

The **BrtExternTableEnd** record specifies the end of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies an External Cell Cache (section [2.2.7.4.1.2](#)).

## 2.4.637 BrtExternTableStart

The **BrtExternTableStart** record specifies properties of an External Cell Cache (section [2.2.7.4.1.2](#)) and specifies the beginning of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies an External Cell Cache.

|      |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|------|----------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0    | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
| iTab |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| A    | reserved |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |

**iTab (4 bytes):** An unsigned integer that specifies the zero-based index of an item in the **sheetNames** field in the **BrtSupTabs** (section [2.4.771](#)) record in this external link part. The referenced item **MUST** specify the name of a worksheet or macro sheet in the [external workbook](#) (section [2.1.10](#)).

**A - fRefreshError (1 bit):** A bit that specifies that an error occurred during the last refresh of this External Cell Cache.

**reserved (7 bits):** The value of this field **MUST** be 0 and **MUST** be ignored.

## 2.4.638 BrtExternValueMeta

The **BrtExternValueMeta** record specifies a reference to a value metadata (section [2.2.4.3](#)) metadata block (section [2.2.4.5](#)) in the **Metadata** part (section [2.1.7.34](#)) ABNF.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ivmb |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ivmb (4 bytes):** A signed integer that specifies a one-based index of a **BrMdb** (section [2.4.673](#)) record in the collection of all records directly following the **BrtBeginEsmdb** (section [2.4.70](#)) record whose **fCellMeta** field equals 0x00000000. The referenced **BrMdb** specifies a value metadata (section [2.2.4.3](#)) metadata block (section [2.2.4.5](#)) that is associated with the **BrtExternCellBlank** (section [2.4.629](#)), **BrtExternCellReal** (section [2.4.632](#)), **BrtExternCellBool** (section [2.4.630](#)), **BrtExternCellError** (section [2.4.631](#)) or **BrtExternCellString** (section [2.4.633](#)) record that follows **BrtExternValueMeta** (section [2.4.638](#)).

### 2.4.639 BrtFieldListItem

A **BrFieldListItem** record specifies a top-level object in the hierarchy of objects displayed in the PivotTable field list.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| type              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**type (4 bytes):** An unsigned integer which specifies the type of this object. MUST be a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | This object represents a spreadsheet data model (see <a href="#">[MS-XLDM]</a> ) table. |
| 0x00000001 | This object represents a workbook table.  |

**stName (variable):** An **XIWideString** (section [2.5.168](#)) attribute that specifies the following, depending on the value of **type** field:

| Value of type field | Meaning of stName field                              |
|---------------------|--|
| 0x00000000          | MDX unique name of the spreadsheet data model table. |
| 0x00000001          | Name of the workbook table.                          |

## 2.4.640 BrtFileRecover

The **BrtFileRecover** record specifies state of workbook file.

|   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | C | D | E | F |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

- A - fDontAutoRecover (1 bit):** A bit that specifies whether **AutoRecover** is disabled for the workbook.
- B - fSavedDuringRecovery (1 bit):** A bit that specifies whether the workbook was saved during the AutoRecover process.
- C - fCreatedViaMinimalSave (1 bit):** A bit that specifies whether the workbook was created by a **minimal save** during **data recovery**.
- D - fOpenedViaDataRecovery (1 bit):** A bit that specifies whether the workbook was opened by means of data recovery.
- E - fOpenedViaSafeLoad (1 bit):** A bit that specifies whether the workbook was opened in **safe load** mode.
- F - reserved (3 bits):** The value of this field **MUST** be 0, and **MUST** be ignored.

## 2.4.641 BrtFileSharing

The **BrtFileSharing** record specifies file sharing options.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16       | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fReadOnlyRec          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | wResPass |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stUserName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

- fReadOnlyRec (2 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the **read-only recommended** option is selected for this file. If the value is 1, the read-only recommended option is selected for this file.
- wResPass (2 bytes):** An unsigned integer that specifies the password verifier value, which has been calculated as specified in the Password Verifier Algorithm (section [2.2.9](#)) overview, for **write reservation**. If the value is 0, there is no write reservation password.
- stUserName (variable):** A **XLNullableWideString** (section [2.5.166](#)) that specifies the name of the user that added the **write-reservation password**. The length of **stUserName** **MUST** NOT exceed 54 characters.



## 2.4.642 BrtFileSharingIso

The **BrtFileSharingIso** record specifies file sharing options in a manner compatible with ISO/IEC 29500 file sharing records as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.2.12. A **BrtFileSharingIso** record MUST be immediately followed by a **BrtFileSharing** (section [2.4.641](#)) record whose **wResPass** field value MUST be set to 0x0000 and whose **fReadOnlyRec** and **stUserName** fields MUST have the same values as the fields of the same names in the **BrtFileSharingIso** record.

|                            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-----------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                    | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dwSpinCount                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fReadOnlyRec               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | stUserName (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ipdPasswordData (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**dwSpinCount (4 bytes):** An unsigned 32-bit integer that specifies the number of times that the hash function was iterated over the password to generate the **rgbHash** field of **ipdPasswordData**, as described in the Strong Password Verifier Algorithm (section [2.2.10](#)). It MUST NOT be greater than 10,000,000.

**fReadOnlyRec (2 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the read-only recommended option is selected for this file. If the value is 1, the read-only recommended option is selected for this file. It MUST have the same value as the **fReadOnlyRec** field in the following **BrtFileSharing** record.

**stUserName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the name of the user that added the write reservation password. The length of **stUserName** MUST NOT exceed 54 characters. It MUST have the same value as the **stUserName** field in the following **BrtFileSharing** record.

**ipdPasswordData (variable):** An **IsoPasswordData** (section [2.5.79](#)) that specifies the salt, hash algorithm and password hash of the write reservation password, calculated using the Strong Password Verifier Algorithm. The size of the **rgbHash** member of this field MUST NOT be zero.

## 2.4.643 BrtFileVersion

The **BrtFileVersion** record specifies which application and which versions of that application accessed the data contained in the file. When saving, an application can write its name in the **stAppName** field, and the application can use **stLastEdited**, **stLowestEdited** and **stRupBuild** values to track the versions of the application that performed those actions. When opening, application can examine the value of **stAppName** and decide how to interpret the **stLastEdited**, **stLowestEdited**, and **stRupBuild** values.

|                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| guidCodeName (16 bytes)   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stAppName (variable)      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stLastEdited (variable)   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stLowestEdited (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stRupBuild (variable)     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**guidCodeName (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that specifies the **type library** of the application that wrote the **Visual Basic for Applications (VBA)** project in the file. The value SHOULD [<34>](#) be 0x0.

**stAppName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the application name. Other applications SHOULD NOT [<35>](#) use value "xl". The string length MUST be less than or equal to 65535 characters.

**stLastEdited (variable):** An **XLWideString** that specifies the version of the application that last saved the file. The string length MUST be less than or equal to 65535 characters.

**stLowestEdited (variable):** An **XLWideString** that specifies the earliest version of the application that saved the file. The string length MUST be less than or equal to 65535 characters.

**stRupBuild (variable):** An **XLWideString** that specifies the **build number** of the application. The string length MUST be less than or equal to 65535 characters.

#### 2.4.644 BrtFill






The **BrtFill** record specifies an individual cell fill pattern.


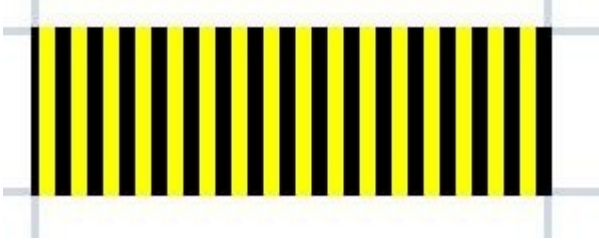



|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fls |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |



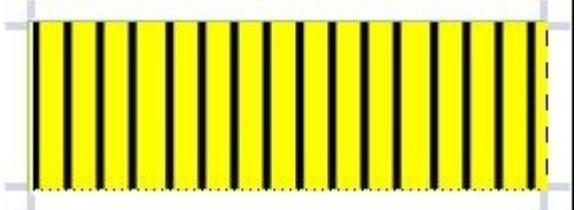

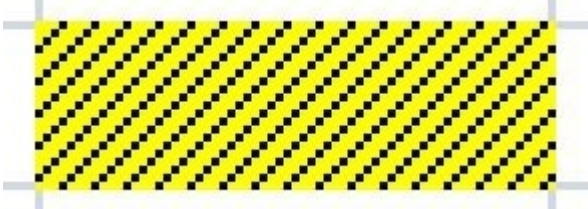
|                              |
|------------------------------|
| brtColorFore                 |
| ...                          |
| brtColorBack                 |
| ...                          |
| iGradientType                |
| xnumDegree                   |
| ...                          |
| xnumFillToLeft               |
| ...                          |
| xnumFillToRight              |
| ...                          |
| xnumFillToTop                |
| ...                          |
| xnumFillToBottom             |
| ...                          |
| cNumStop                     |
| xfillGradientStop (variable) |
| ...                          |





**fls (4 bytes):** An unsigned integer that specifies the type of fill pattern. If **fls** is NOT 0x00000028, the **iGradientType**, **xnumDegree**, **xnumFillToLeft**, **xnumFillToRight**, **xnumFillToTop**, **xnumFillToBottom**, and **cNumStop** field values MUST be 0 and MUST be ignored. If The value of **fls** field is 0x00000028, the **brtColorFore** and **brtColorBack** fields are undefined and MUST be ignored. MUST be a value from the following table:
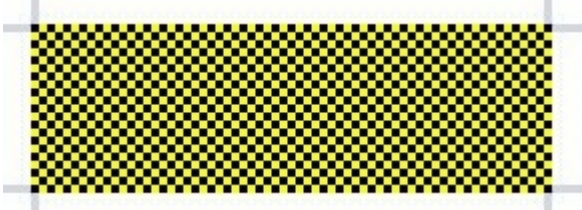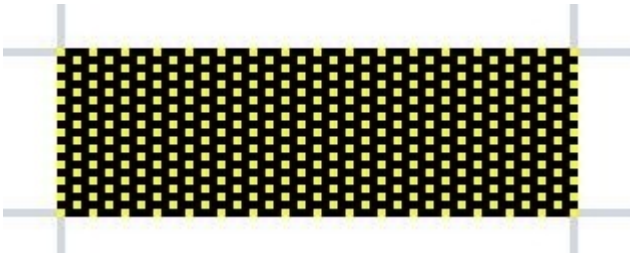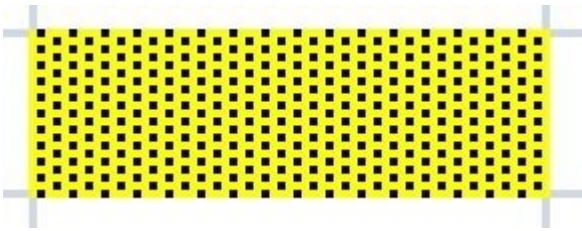
| Value      | Meaning   |
|------------|---|
| 0x00000000 | The fill pattern is none (no fill). When <b>brtColorFore</b> or <b>brtColorBack</b> is specified, a pattern of 'none' overrides and means there is no fill. |

| Value      | Meaning  |
|------------|--|
|            |    |
| 0x00000001 | <p>The fill pattern is solid. When solid is specified, <b>brtColorFore</b> is the only color rendered, even when <b>brtColorBack</b> is also specified.</p>  |
| 0x00000002 | <p>The fill pattern is medium gray.</p>   |
| 0x00000003 | <p>The fill pattern is dark gray.</p>    |
| 0x00000004 | <p>The fill pattern is light gray.</p>   |
| 0x00000005 | <p>The fill pattern is horizontal stripes.</p>   |
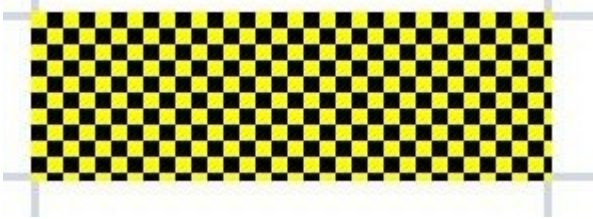
| Value      | Meaning   |
|------------|---|
|            |   |
| 0x00000006 | <p>The fill pattern is vertical stripes.</p>            |
| 0x00000007 | <p>The fill pattern is downward diagonal stripes.</p>  |
| 00000x0008 | <p>The fill pattern is upward diagonal stripes.</p>   |
| 0x00000009 | <p>The fill pattern is grid.</p>                      |
| 0x0000000A | <p>The fill pattern is trellis.</p>   |
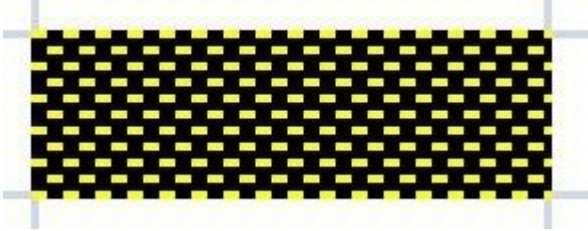
| Value     | Meaning   |
|-----------|---|
|           |   |
| 0x000000B | <p>The fill pattern is light horizontal stripes.</p>  |
| 0x000000C | <p>The fill pattern is light vertical stripes.</p>    |
| 0x000000D | <p>The fill pattern is light down.</p>              |
| 0x000000E | <p>The fill pattern is light up.</p>                |
| 0x000000F | <p>The fill pattern is light grid.</p>  |
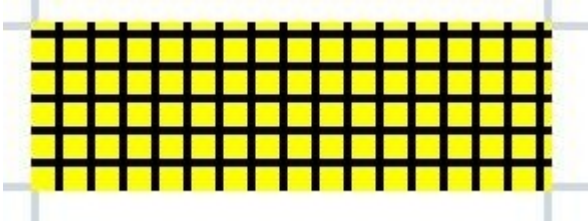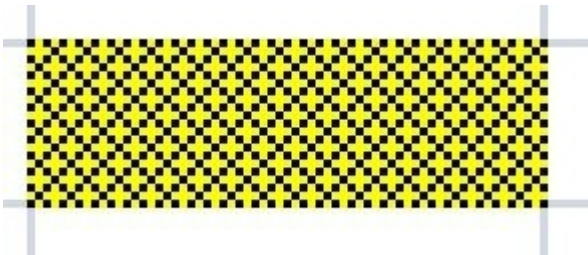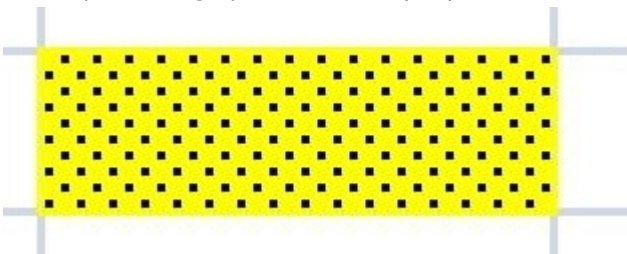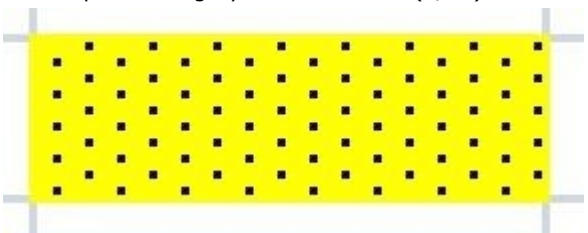
| Value      | Meaning   |
|------------|---|
|            |   |
| 0x00000010 | The fill pattern is light trellis.<br>                      |
| 0x00000011 | The fill pattern is grayscale of 0.125 (1/8) value.<br>    |
| 0x00000012 | The fill pattern is grayscale of 0.0625 (1/16) value.<br> |
| 0x00000028 | The fill pattern is a gradient fill.  |

**brtColorFore (8 bytes):** A **BrtColor** (section [2.4.321](#)) that specifies the foreground color for this cell.

**brtColorBack (8 bytes):** A **BrtColor** that specifies the background color for this cell.

**iGradientType (4 bytes):** An unsigned integer that specifies the type of **gradient fill** used. The value of this field **MUST** be of the values from the following table:

| Value      | Meaning                |
|------------|------------------------|
| 0x00000000 | <b>Linear gradient</b> |

| Value      | Meaning              |
|------------|----------------------|
| 0x00000001 | Rectangular gradient |

**xnumDegree (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the gradient angle in degrees for linear gradient. The gradient angle specifies the angle at which the gradient strokes are drawn.

For example, a value of 90 for **xnumDegree** means that the gradient color starts from the bottom of the cell.



**Figure 19: Gradient angle example**

MUST be used when **iGradientType** is Linear gradient.

**xnumFillToLeft (8 bytes):** An **Xnum** that specifies, as a fraction of the length of the cell, the left edge of the **inner rectangle** of a rectangular gradient. For example, a value of 0 for **xnumFillToLeft** means the left edge of the inner rectangle is the left edge of the cell, and 1 means its right edge of the cell. MUST exist when **iGradientType** is Rectangular gradient. The value of this field MUST be greater than or equal to 0 and less than or equal to 1.

**xnumFillToRight (8 bytes):** An **Xnum** that specifies, as a fraction of the length of the cell, the right edge of the inner rectangle of a rectangular gradient. For example, a value of 0 for **xnumFillToRight** means the right edge of the inner rectangle is on the left edge of the cell, and 1 means it is on the right edge of the cell. MUST exist when **iGradientType** is Rectangular gradient. The value of this field MUST be greater than or equal to 0 and less than or equal to 1.

**xnumFillToTop (8 bytes):** An **Xnum** that specifies, as a fraction of the height of the cell, the top edge of the inner rectangle of a rectangular gradient. For example, a value of 0 for **xnumFillToTop** means the top edge of the inner rectangle is on the top edge of the cell, and 1 means it is on the bottom edge of the cell. MUST exist when **iGradientType** is Rectangular gradient. The value of this field MUST be greater than or equal to 0 and less than or equal to 1.

**xnumFillToBottom (8 bytes):** An **Xnum** that specifies, as a fraction of the height of the cell, the bottom edge of the inner rectangle of a rectangular gradient. For example, a value of 0 for **xnumFillToBottom**, means the bottom edge of the inner rectangle is on the bottom edge of the cell, and 1 means it is on the top edge of the cell. MUST exist when **iGradientType** is Rectangular gradient. The value of this field MUST be greater than or equal to 0 and less than or equal to 1.

**cNumStop (4 bytes):** An unsigned integer that specifies the number of elements in **xfillGradientStop**. The value of this field MUST be greater than or equal to 0 and less than or equal to 256.

**xfillGradientStop (variable):** An array of **GradientStop** (section [2.5.67](#)). The number of elements MUST be equal to **cNumStop**.

## 2.4.645 BrtFilter

The **BrtFilter** record specifies a filter.



|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rgch (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rgch (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the criteria string used in the filter. Cells that contain a string that matches this string criteria case insensitively, and cells that contain a calculation such that the resulting value expressed as a string matches this string criteria case insensitively will have their corresponding rows (2) shown. The value of this field this field MUST be greater than or equal to 1 character in length and less than or equal to 255 characters in length.

#### 2.4.646 BrtFilter14

The **BrtFilter14** record specifies a filter.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rgch (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rgch (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the criteria string used in the filter. Cells that contain a string that matches this string criteria case insensitively, and cells that contain a calculation such that the resulting value expressed as a string matches this string criteria case insensitively will have their corresponding rows (2) shown. The value of this field MUST be greater than or equal to 1 character in length and less than or equal to 32767 characters in length.

#### 2.4.647 BrtFmlaBool

The **BrtFmlaBool** record specifies a cell that contains a formula (section [2.2.2](#)) of which the most recent evaluation resulted in a Boolean value.

|       |   |   |   |   |   |   |   |            |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--------------------|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8          | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24                 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cell  |   |   |   |   |   |   |   |            |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |
| ...   |   |   |   |   |   |   |   |            |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |
| bBool |   |   |   |   |   |   |   | grbitFlags |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    | formula (variable) |    |    |    |    |    |    |    |
| ...   |   |   |   |   |   |   |   |            |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies the cell that contains this formula.

**bBool (1 byte):** A **Boolean** value to which the formula is evaluated.

| Value | Meaning |
|-------|---------|
| 0x00  | False   |
| 0x01  | True    |

**grbitFlags (2 bytes):** A **GrbitFmla** (section [2.5.69](#)) that specifies additional formula data.

**formula (variable):** A **CellParsedFormula** (section [2.5.97.4](#)) that specifies the formula stored in this cell.

#### 2.4.648 BrtFmlaError

The **BrtFmlaError** record specifies a cell that contains a formula (section [2.2.2](#)) of which the most recent evaluation resulted in an error.

|      |   |   |   |   |   |   |   |            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |
|------|---|---|---|---|---|---|---|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--------------------|---|---|---|---|---|---|---|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8          | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4                  | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cell |   |   |   |   |   |   |   |            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |
| ...  |   |   |   |   |   |   |   |            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |
| fErr |   |   |   |   |   |   |   | grbitFlags |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | formula (variable) |   |   |   |   |   |   |   |
| ...  |   |   |   |   |   |   |   |            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies the cell that contains this formula.

**fErr (1 byte):** A **BErr** (section [2.5.97.2](#)) that specifies the error in this formula.

**grbitFlags (2 bytes):** A **GrbitFmla** (section [2.5.69](#)) that specifies additional formula data.

**formula (variable):** A **CellParsedFormula** (section [2.5.97.4](#)) that specifies the formula stored in this cell

#### 2.4.649 BrtFmlaNum

The **BrtFmlaNum** record specifies a cell that contains a formula (section [2.2.2](#)) of which the most recent evaluation resulted in a numeric value.

|      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| cell |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| xnum |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|           |                    |
|-----------|--------------------|
| ...       |                    |
| gbitFlags | formula (variable) |
| ...       |                    |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies the cell that contains this formula.

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the value to which this formula evaluated.

**gbitFlags (2 bytes):** A **GbitFmla** (section [2.5.69](#)) that specifies additional formula data.

**formula (variable):** A **CellParsedFormula** (section [2.5.97.4](#)) that specifies the formula stored in this cell

#### 2.4.650 BrtFmlaString

The **BrtFmlaString** record specifies a cell that contains a formula (section [2.2.2](#)) of which the most recent evaluation resulted in a string value.

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cell             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| value (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| gbitFlags        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | formula (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cell (8 bytes):** A **Cell** (section [2.5.9](#)) that specifies cell information such as the column (2), style, and phonetic information.

**value (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the value to which this formula evaluated. The value of this field **MUST** be less than 32768 characters.

**gbitFlags (2 bytes):** A **GbitFmla** (section [2.5.69](#)) that specifies additional formula data.

**formula (variable):** A **CellParsedFormula** (section [2.5.97.4](#)) that specifies the formula stored in this cell

#### 2.4.651 BrtFmt

The **BrtFmt** record specifies a number format.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                   | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ifmt |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | stFmtCode (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ifmt (2 bytes):** An **Ifmt** (section [2.5.76](#)) that specifies the identifier of the **format string** specified by **stFmtCode**. The value of this field **MUST** be within one of the following ranges:

- 5 to 8
- 23 to 26
- 41 to 44
- 63 to 66
- 164 to 382

**stFmtCode (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the format string for this number format. The format string indicates how to format the numeric value of the cell. The length of this field **MUST** be greater than or equal to 1 character and less than or equal to 255 characters. For more information about how format strings are interpreted, see [\[ISO/IEC29500-1:2011\]](#), section 18.8.31. The ABNF grammar for the format string is specified in [\[MS-XLS\]](#) section 2.4.126.

#### 2.4.652 BrtFnGroup

The **BrtFnGroup** record specifies an individual function category.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| stGroup (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stGroup (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the function category. Its length **MUST** be less than or equal to 32 characters.

#### 2.4.653 BrtFont

The **BrtFont** record specifies the properties of one of the fonts used in the workbook.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16    | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dyHeight |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | grbit |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| bls      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | sss   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|             |                 |          |        |
|-------------|-----------------|----------|--------|
| uls         | bFamily         | bCharSet | unused |
| brtColor    |                 |          |        |
| ...         |                 |          |        |
| bFontScheme | name (variable) |          |        |
| ...         |                 |          |        |

**dyHeight (2 bytes):** An unsigned integer that specifies height of the font in twips. The value of this field MUST be greater than or equal to 0x0014 and less than or equal to 0x1FFF.

**grbit (2 bytes):** A **FontFlags** (section [2.5.52](#)) that specifies the font attributes.

**bls (2 bytes):** An unsigned integer that specifies the weight of the font. The value of this field MUST be greater than or equal to 0x0190 and less than or equal to 0x03E8. The values are 0x0190 for normal text and 0x02BC for bold text.

**sss (2 bytes):** An unsigned integer that specifies whether the font is a subscript or a superscript font. The value of this field MUST be one of the values from the following table:

| Value  | Meaning     |
|--------|-------------|
| 0x0000 | None        |
| 0x0001 | Superscript |
| 0x0002 | Subscript   |

**uls (1 byte):** An unsigned integer that specifies the type of underline to be used. The value of this field MUST be one of the values from the following table:

| Value | Meaning                  |
|-------|--------------------------|
| 0x00  | None                     |
| 0x01  | Single                   |
| 0x02  | Double                   |
| 0x21  | <b>Single accounting</b> |
| 0x22  | <b>Double accounting</b> |

**bFamily (1 byte):** An unsigned integer that specifies the font family to which this font belongs. The value of this field MUST be one of the values from the following table:

| Value | Meaning        |
|-------|----------------|
| 0x00  | Not applicable |
| 0x01  | Roman          |

| Value | Meaning    |
|-------|------------|
| 0x02  | Swiss      |
| 0x03  | Modern     |
| 0x04  | Script     |
| 0x05  | Decorative |

For more information about font family, see the Windows API LOGFONT structure in [\[MSDN-FONTS\]](#).

**bCharSet (1 byte):** An unsigned integer that specifies the **character set (1)**. The value of this field MUST be one of the values from the following table:

| Value | Name                             | Meaning                                |
|-------|----------------------------------|--|
| 0x00  | ANSI_CHARSET                     | English                                |
| 0x01  | DEFAULT_CHARSET                  | System locale based                    |
| 0x02  | SYMBOL_CHARSET                   | Symbol                                 |
| 0x4D  | MAC_CHARSET                      | Macintosh                              |
| 0x80  | SHIFTJIS_CHARSET                 | Japanese                               |
| 0x81  | HANGUL_CHARSET / HANGEUL_CHARSET | Hangul (Hangeul) Korean                |
| 0x82  | JOHAB_CHARSET                    | Johab Korean                           |
| 0x86  | GB2312_CHARSET                   | Simplified Chinese                     |
| 0x88  | CHINESEBIG5_CHARSET              | Traditional Chinese                    |
| 0xA1  | GREEK_CHARSET                    | Greek                                  |
| 0xA2  | TURKISH_CHARSET                  | Turkish                                |
| 0xA3  | VIETNAMESE_CHARSET               | Vietnamese                             |
| 0xB1  | HEBREW_CHARSET                   | Hebrew                                 |
| 0xB2  | ARABIC_CHARSET                   | Arabic                                 |
| 0xBA  | BALTIC_CHARSET                   | Baltic                                 |
| 0xCC  | RUSSIAN_CHARSET                  | Russian                                |
| 0xDE  | THAI_CHARSET                     | Thai                                   |
| 0xEE  | EASTEUROPE_CHARSET               | Eastern European                       |
| 0xFF  | OEM_CHARSET                      | OEM code page (based on system locale) |

For more information about character set (1), see the Windows API LOGFONT structure in [\[MSDN-FONTS\]](#).

**unused (1 byte):** Undefined and MUST be ignored.

**brtColor (8 bytes):** A **BrtColor** (section [2.4.321](#)) that specifies the color of this font.

**bFontScheme (1 byte):** An unsigned integer that specifies the **font scheme** to which this font belongs. When a font is part of a theme as specified in [\[ISO/IEC29500-1:2011\]](#), section 14.2.7, the font is categorized as a **major scheme** or a **minor scheme**. When a new theme is chosen, every font that is part of the theme is updated to use the major scheme or the minor scheme. The value of this field **MUST** be one of the values from the following table:

| Value | Meaning           |
|-------|-------------------|
| 0x00  | None              |
| 0x01  | Major font scheme |
| 0x02  | Minor font scheme |

**name (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the font. The length of this field **MUST** be greater than or equal to 1 and less than or equal to 31.

#### 2.4.654 BrtFRTBegin

The **BrtFRTBegin** record specifies the beginning of a collection of Future Records (section [2.1.6](#)).

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| productVersion |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**productVersion (4 bytes):** An **FRTProductVersion** (section [2.5.61](#)) that specifies the application which created the future records (section [2.1.6](#)).

#### 2.4.655 BrtFRTEnd

The **BrtFRTEnd** record specifies the end of a collection of future records (section [2.1.6](#)).

#### 2.4.656 BrtHLink

The **BrtHLink** record specifies a **hyperlink** that applies to a range of cells.

|                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rfx (16 bytes)      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| relId (variable)    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| location (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|                    |
|--------------------|
| ...                |
| tooltip (variable) |
| ...                |
| display (variable) |
| ...                |

**rfx (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) that specifies the range in the sheet that contains this hyperlink.

**relId (variable):** A **RelID** (section [2.5.114](#)) that specifies the destination URL of this hyperlink. The value of this field MUST be an empty string if and only if the destination is this workbook. MUST NOT be a NULL string.

**location (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the **fragment identifier** of the destination URL specified by **relId**. If **relId** is an empty string, this fragment identifier specifies a location within this workbook. The value of this field MUST be less than 2084 characters.

**tooltip (variable):** An **XLWideString** that specifies the ToolTip for the hyperlink. The value of this field MUST be less than 256 characters.

**display (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the run-time object that implements this hyperlink.

#### 2.4.657 BrtIconFilter

The **BrtIconFilter** record specifies the icon set and particular icon within that set to filter by. Rows (2) with a cell icon that do not match these criteria will be hidden when the filter is applied.

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| iIconSet |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iIcon    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**iIconSet (4 bytes):** A **KPISets** (section [2.5.85](#)) that specifies the icon set used as the filter criteria.

**iIcon (4 bytes):** An **Icon** (section [2.5.74](#)) that specifies the icon to be used as filter criteria. If the **iIconSet** field value is "KPINIL", then the value of the **iIcon** field value MUST be -1. If the **iIconSet** field value is "KPINIL", then this record does not specify a filter and MUST be ignored. If **iIconSet** is not KPINIL, then this value MUST be greater than or equal to 0. If the icon set specified by **iIconSet** has 3 icons, this value MUST be less than or equal to 2. If the icon set specified by **iIconSet** has 4 icons, this value MUST be less than or equal to 3. If the icon set specified by **iIconSet** has 5 icons, this value MUST be less than or equal to 4.



## 2.4.658 BrtIconFilter14

The **BrtIconFilter14** record specifies the icon set and particular icon within that set to filter by. Rows (2) with a cell icon that do not match these criteria will be hidden when the filter is applied. This record is equivalent to **BrtIconFilter** (section [2.4.657](#)) but allows specification of additional values for the **iIconSet** field.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iIconSet |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| iIcon    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iIconSet (4 bytes):** A **KPISets14** (section [2.5.86](#)) that specifies the icon set used as the filter criteria. The value of this field MUST NOT equal KPINIL\_14.

**iIcon (4 bytes):** An Icon (section [2.5.74](#)) that specifies the icon to be used as filter criteria. This value MUST be greater than or equal to 0. If the icon set specified by **iIconSet** has 3 icons, this value MUST be less than or equal to 2. If the icon set specified by **iIconSet** has 4 icons, this value MUST be less than or equal to 3. If the icon set specified by **iIconSet** has 5 icons, this value MUST be less than or equal to 4.

## 2.4.659 BrtIndexBlock

The **BrtIndexBlock** record specifies the minimum and maximum rows (2) in a range within a sheet.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rwMic              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rwMac              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused1            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused2            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused3 (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rwMic (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies a zero-based starting row (2) for the range.

**rwMac (4 bytes):** An unsigned integer that specifies a one-based ending row (2) for the range. The value of this field MUST be less than or equal to the value of the **rwMic** field + 32. The value of the **rwMac** field MUST be less than or equal to 1048576.

**unused1 (4 bytes):** Undefined and MUST be ignored.

**unused2 (4 bytes):** Undefined and MUST be ignored.

**unused3 (variable):** Undefined and MUST be ignored. The size of this field in bytes MUST be equal to the value as specified in the following formula:

$$((\text{rwMac} - \text{rwMic} + 32) / 32) * 4$$

## 2.4.660 BrtIndexedColor

The **BrtIndexedColor** record specifies an indexed color definition in **red-green-blue (RGB)**.

|      |   |   |   |   |   |   |   |   |   |        |    |    |    |    |    |    |    |    |    |       |    |    |    |    |    |          |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|--------|----|----|----|----|----|----|----|----|----|-------|----|----|----|----|----|----------|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10     | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20    | 21 | 22 | 23 | 24 | 25 | 26       | 27 | 28 | 29 | 30 | 31 |
| bRed |   |   |   |   |   |   |   |   |   | bGreen |    |    |    |    |    |    |    |    |    | bBlue |    |    |    |    |    | reserved |    |    |    |    |    |

**bRed (1 byte):** An unsigned integer that specifies the intensity of the color red.

**bGreen (1 byte):** An unsigned integer that specifies the intensity of the color green.

**bBlue (1 byte):** An unsigned integer that specifies the intensity of the color blue.

**reserved (1 byte):** Undefined and MUST be ignored.

## 2.4.661 BrtIndexPartEnd

The **BrtIndexPartEnd** record specifies the end of a collection of **BrtIndexBlock** (section [2.4.659](#)) and **BrtIndexRowBlock** (section [2.4.662](#)) records.

## 2.4.662 BrtIndexRowBlock

The **BrtIndexRowBlock** record specifies the cells that contain data within the range specified by a preceding **BrtIndexBlock** (section [2.4.659](#)) record. This **BrtIndexRowBlock** record provides byte indexes into the **Worksheet** part ABNF (section [2.1.7.61](#)) or **Macro Sheet** (section [2.1.7.32](#)) part for certain cell records that contain data and are within the range corresponding to the preceding **BrtIndexBlock**.

The range specified by the **BrtIndexBlock** is referred to as the block range.

Cell records are records of type **BrtCellBlank** (section [2.4.303](#)), **BrtCellRk** (section [2.4.311](#)), **BrtCellError** (section [2.4.305](#)), **BrtCellBool** (section [2.4.304](#)), **BrtCellReal** (section [2.4.310](#)), **BrtCellSt** (section [2.4.314](#)), **BrtCellIsst** (section [2.4.308](#)), **BrtFmlaString** (section [2.4.650](#)), **BrtFmlaNum** (section [2.4.649](#)), **BrtFmlaBool** (section [2.4.647](#)), **BrtFmlaError** (section [2.4.648](#)), or **BrtCellRString** (section [2.4.312](#)).

This record MUST follow a **BrtIndexBlock** record which specifies the rows (2) which the block range spans.

|              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| grbitRowMask |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                               |
|-------------------------------|
| ibBaseOffset                  |
| ...                           |
| arrayColbitMask (variable)    |
| ...                           |
| arraySubBaseOffset (variable) |
| ...                           |

**grbitRowMask (4 bytes):** An unsigned integer that specifies which rows (2) in the block range contain data. If a row (2) contains data, the bit in **grbitRowMask** corresponding to the one-based row (2) index is set to 1. For example **grbitRowMask** with value 0x00000003 corresponds to a block range where the first and second rows (2) contain data.

**ibBaseOffset (8 bytes):** An unsigned integer that specifies a 64-bit zero-based index to the cell record within the **Worksheet** part ABNF (section [2.1.7.61](#)) or **Macro Sheet** (section [2.1.7.32](#)) part for the first cell in the block range which contains data.

**arrayColbitMask (variable):** An array of 2-byte unsigned integers that specify for every row (2) which ranges of columns (2) contain data in the sheet. Each item in this array corresponds to a row (2) that contains data. The number of items in this array MUST equal the number of bits that are set in **grbitRowMask**. The sheet is divided into 16 equal ranges of columns (2). Each column (2) range is one row (2) by 1024 columns (2) in size. For every row (2) which has a bit set in **grbitRowMask**, the bit corresponding to the one-based index to the column (2) range that contains data in at least one of the cells is set in the corresponding item of **arrayColbitMask**. For example, if **arrayColbitMask**[0] has the value 0x0002, then at least one cell in the first row (2) and the second column (2) range has data.

**arraySubBaseOffset (variable):** An array of 4-byte unsigned integers, each of which specifies the zero-based byte index to the beginning of a cell record within the **Worksheet** part ABNF (section [2.1.7.61](#)) or **Macro Sheet** (section [2.1.7.32](#)) part, for all cells that contain data within the block range when used in the following formula:

**ibBaseOffset + arraySubBaseOffset[x]**

where x is the index of an item in the **arraySubBaseOffset** array.

The number of elements in **arraySubBaseOffset** MUST be equal to the total number of bits set in **arrayColbitMask**.

For example, if **arrayColbitMask**[0] has the value 0x0002, then **ibBaseOffset + arraySubBaseOffset**[0] specifies the byte index to the first cell which contains data in the first row (2) of the block range and is in the second column (2) range.

#### 2.4.663 BrtInfo

The **BrtInfo** record specifies properties of workbook revisions and specifies the beginning of a collection of **BrtrrHeader** (section [2.4.728](#)) records as defined by the **Revision Headers** (section [2.1.7.43](#)) part ABNF. The collection of **BrtrrHeader** records specifies the list of revision headers in a shared workbook (section [2.2.12](#)).

|                  |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |                     |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|------------------|---|---|---|----------|---|---|---|---|---|----|----|----|----|----|----|---------------------|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|
| 0                | 1 | 2 | 3 | 4        | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                  | 17 | 18      | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |
| A                | B | C | D | reserved |   |   |   |   |   |    |    |    |    |    |    | guid (16 bytes)     |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...              |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |                     |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...              |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    | guidRoot (16 bytes) |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...              |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |                     |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...              |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    | revid               |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...              |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    | version             |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| ...              |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    | E                   | F  | unused4 |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| wRevHistInterval |   |   |   |          |   |   |   |   |   |    |    |    |    |    |    |                     |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |

**A - unused1 (1 bit):** The value of this field MUST be 1 and MUST be ignored.

**B - fDiskHasRev (1 bit):** A bit that specifies whether this workbook contains revisions.

**C - unused2 (1 bit):** The value of this field MUST be 1 and MUST be ignored.

**D - unused3 (1 bit):** The value of this field MUST be 1 and MUST be ignored.

**reserved (12 bits):** The value of this field MUST be 0 and MUST be ignored.

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that specifies the last set of revisions. The value of this field MUST match the GUID for the most recent header.

**guidRoot (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that specifies the last set of revisions that was saved to the file. The value of this field MUST match the GUID for one of the revision headers.

**revid (4 bytes):** An unsigned integer that specifies the current revision number of this shared workbook (section [2.2.12](#)).

**version (4 bytes):** A signed integer that specifies the current version of this shared workbook (section [2.2.12](#)). The value of this field MUST be greater than or equal to 1.

**E - fNoRevHist (1 bit):** A bit that specifies whether the **revision history** is kept for this shared workbook (section [2.2.12](#)). If **fNoRevHist** equals 1, the history is not kept.

**F - fProtRev (1 bit):** A bit that specifies whether the change tracking in this shared workbook (section [2.2.12](#)) can be removed. If **fProtRev** is 1, the tracking cannot be removed.

**unused4 (14 bits):** Undefined and MUST be ignored.

**wRevHistInterval (2 bytes):** An unsigned integer that specifies the number of days the change history is kept for this shared workbook (section [2.2.12](#)). The value of this field MUST be

greater than or equal to 0 and less than or equal to 32767. A value of 0 means the default value of 30 days is used, and it is valid only when **fNoRevHist** is 1.

#### 2.4.664 BrtItemUniqueName

The **BrtItemUniqueName** record specifies the MDX unique name for cache item.

|                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| iitem                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stUniqueName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**iitem (4 bytes):** An unsigned integer that specifies a zero-based index of the cache item, in the collection of cache items specified by the **BrtBeginPCDFAtbl** (section [2.4.125](#)) record in this cache field (section [2.2.5.2.2](#)). MUST be unique within collection specified by the **BrtBeginItemUniqueNames** (section [2.4.95](#)) record of this cache field (section [2.2.5.2.2](#)).

**stUniqueName (variable):** An **XLWideString** that specifies the MDX unique name.

#### 2.4.665 BrtKnownFonts

The **BrtKnownFonts** record specifies that typographical descent information is stored in the workbook. This record MUST be present if and only if a **BrtRwDescent** (section [2.4.737](#)) record is stored for every non-empty row (2) in all **Macro Sheet** (section [2.1.7.32](#)) and **Worksheet** parts (section [2.1.7.61](#)) (see section [2.2.1](#) for more information) in the workbook, and if and only if a **BrtWsFmtInfoEx14** (section [2.4.814](#)) record is stored in all **Macro Sheet** and **Worksheet** parts in the workbook.

#### 2.4.666 BrtLegacyDrawing

The **BrtLegacyDrawing** record specifies a link to a VML Drawing Part as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.1 that specifies a drawing for a sheet.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| stRelId (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stRelId (variable):** A **RelID** (section [2.5.114](#)) that specifies the link to the VML Drawing Part.

## 2.4.667 BrtLegacyDrawingHF

The **BrtLegacyDrawingHF** record specifies a link to a VML Drawing Part as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.1 that specifies a drawing for the header or footer of a sheet.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| stRelID (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies the link to the VML Drawing Part.

## 2.4.668 BrtList14

The **BrtList14** record specifies information about the alternate text of a table.

|                             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stAltText (variable)        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stAltTextSummary (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**stAltText (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the alternate text. This string MUST be less than or equal to 25000 characters in length.

**stAltTextSummary (variable):** An **XLNullableWideString** that specifies the alternate text summary. This string MUST be less than or equal to 50000 characters in length.

## 2.4.669 BrtListCCFmla

The **BrtListCCFmla** record specifies information about the calculated column formula (section [2.2.2](#)) of a table column (2).

|   |   |           |   |   |   |   |   |   |                    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|---|---|-----------|---|---|---|---|---|---|--------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0 | 1 | 2         | 3 | 4 | 5 | 6 | 7 | 8 | 9                  | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
| A | B | reserved2 |   |   |   |   |   |   | formula (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |

...

**A - reserved1 (1 bit):** This value MUST be 0 and MUST be ignored.

**B - fArray (1 bit):** A bit that specifies whether this is an array formula.

**reserved2 (6 bits):** This value MUST be 0 and MUST be ignored.

**formula (variable):** A **ListParsedFormula** (section [2.5.97.11](#)) that specifies the formula associated with the table column (2).

#### 2.4.670 BrtListPart

The **BrtListPart** record specifies a reference to a **Table** (section [2.1.7.51](#)) part ABNF.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| stRelID (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**stRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies a **Table** part in this file.

#### 2.4.671 BrtListTrFmla

The **BrtListTrFmla** record specifies information about the total row formula (section [2.2.2](#)) of a table.

|     |   |           |   |   |   |   |   |                    |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|-----------|---|---|---|---|---|--------------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2         | 3 | 4 | 5 | 6 | 7 | 8                  | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | B | reserved2 |   |   |   |   |   | formula (variable) |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |           |   |   |   |   |   |                    |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - reserved1 (1 bit):** This value MUST be 0 and MUST be ignored.

**B - fArray (1 bit):** A bit that specifies whether this is an array formula.

**reserved2 (6 bits):** This value MUST be 0 and MUST be ignored.

**formula (variable):** A **ListParsedFormula** (section [2.5.97.11](#)) that specifies the formula associated with the table column (2). The **ilta** field of the preceding **BrtBeginListCol** (section [2.4.97](#)) record MUST be ILTA\_CUSTOM. If the **crwTotals** field of the preceding **BrtBeginList** (section [2.4.96](#)) record is 1, then the formula specified by this value MUST equal the formula of the cell intersected by the table total row and table column (2).

#### 2.4.672 BrtMargins

The **BrtMargins** record specifies all the page margins for a sheet.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| xnumLeft   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnumRight  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnumTop    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnumBottom |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnumHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnumFooter |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**xnumLeft (8 bytes):** A **Margin** (section [2.5.92](#)) that specifies the left page margin.

**xnumRight (8 bytes):** A **Margin** (section [2.5.92](#)) that specifies the right page margin.

**xnumTop (8 bytes):** A **Margin** that specifies the top page margin.

**xnumBottom (8 bytes):** A **Margin** that specifies the bottom page margin.

**xnumHeader (8 bytes):** A **Margin** that specifies the header page margin.

**xnumFooter (8 bytes):** A **Margin** that specifies the footer page margin.

#### 2.4.673 BrtMdb

The **BrtMdb** record specifies an array of **Mdir** (section [2.5.93](#)) structures.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cMdir             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgMdir (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |



...

**cMdir (4 bytes):** A signed integer that specifies the number of items in the **rgMdir** array. This number MUST be greater than or equal to 1, and MUST be equal to the number of items in the **rgMdir** array.

**rgMdir (variable):** An array of **Mdir** structures. The number of items in the array MUST be equal to the value of **cMdir**. **Mdir** structures in the array MUST be stored in the strictly increasing order of their **iMdt** field.

#### 2.4.674 BrtMdtinfo

The **BrtMdtinfo** record specifies the name and properties of a cell metadata (section [2.2.4.2](#)) or value metadata (section [2.2.4.3](#)) type.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| grbit             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| metadataID        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**grbit (4 bytes):** An **MdtFlags** (section [2.5.94](#)) that specifies the properties of the metadata type.

**metadataID (4 bytes):** An unsigned integer that specifies the version of the application that introduced the metadata type (section [2.2.4.1](#)).

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the metadata type. The name of the metadata type MUST be unique within the collection of metadata types. The length of the name MUST be greater than or equal to 1 character and less than or equal to 65535 characters.

#### 2.4.675 BrtMdxMbrIstr

The **BrtMdxMbrIstr** record specifies an MDX unique name and its properties.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| istr  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| grbit |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**istr (4 bytes):** An **Istr** (section [2.5.80](#)) that specifies the MDX unique name.

**grbit (1 byte):** An **MdxMbrIstrFlags** (section [2.5.95](#)) that specifies the properties of the MDX unique name.

### 2.4.676 BrtMergeCell

The **BrtMergeCell** record specifies a single merged cell.

| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| rwFirst  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rwLast   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colFirst |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colLast  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rwFirst (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the first row (2) of the merged cell. This value MUST NOT be greater than **rwLast**. This value MUST be 0 and **rwLast** MUST be 1048575, or MUST be within the bounds of **Rw** (section [2.5.125](#)).

**rwLast (4 bytes):** An **UncheckedRw** that specifies the last row (2) of the merged cell. This value MUST NOT be less than **rwFirst**. This value MUST be 1048575 and **rwFirst** MUST be 0, or MUST be within the bounds of **Rw**.

**colFirst (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the first column (2) of the merged cell. MUST NOT be greater than **colLast**. This value MUST be 0 and **colLast** MUST be 16383, or MUST be within the bounds of **Col** (section [2.5.22](#)).

**colLast (4 bytes):** An **UncheckedCol** that specifies the last column (2) of the merged cell. MUST NOT be less than **colFirst**. This value MUST be 16383 and **colFirst** MUST be 0, or MUST be within the bounds of **Col**.

### 2.4.677 brtModelRelationship

The **brtModelRelationship** record specifies properties of a single relationship in spreadsheet data model.

| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|---------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| FRTHHeader                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstFromTable (variable)  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstFromColumn (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                         |
|-------------------------|
| irstToTable (variable)  |
| ...                     |
| irstToColumn (variable) |
| ...                     |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**irstFromTable (variable):** Name of the spreadsheet data model (see [\[MS-XLDM\]](#) table to which foreign key column of this relationship belongs.

**irstFromColumn (variable):** Name of the spreadsheet data model (see [\[MS-XLDM\]](#)) table column which is the foreign key column of this relationship.

**irstToTable (variable):** Name of the spreadsheet data model (see [\[MS-XLDM\]](#)) table to which primary key column of this relationship belongs.

**irstToColumn (variable):** Name of the spreadsheet data model (see [\[MS-XLDM\]](#)) table column which is the primary key column of this relationship.

#### 2.4.678 BrtModelTable

The **BrtModelTable** record specifies properties of a single spreadsheet data model table.

|                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstId (variable)         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstName (variable)       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstConnection (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**irstId (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the identifier of the spreadsheet data model table.

**irstName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the spreadsheet data model table.

**irstConnection (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the external connection (section [2.2.8](#)) to which this spreadsheet data model (see [\[MS-XLDM\]](#)) table belongs.

### 2.4.679 BrtMRUColor

The **BrtMRUColor** record specifies the color that the user has most recently used in the workbook.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| colorMRU |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**colorMRU (8 bytes):** A **BrtColor** (section [2.4.321](#)) that specifies the most recently used color. Subfields are further specified in the following table.

| Field                         | Meaning       |
|-------------------------------|---------------|
| <b>colorMRU.fValidRGB</b>     | MUST be 0x1.  |
| <b>colorMRU.xcolorType</b>    | MUST be 0x02. |
| <b>colorMRU.Index</b>         | MUST be 0xFF. |
| <b>colorMRU.nTintAndShade</b> | MUST be 0x00. |
| <b>colorMRU.bAlpha</b>        | MUST be 0xFF. |

### 2.4.680 BrtName

The **BrtName** record specifies a defined name.

|                    |   |   |   |   |   |                 |   |   |   |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|-----------------|---|---|---|----|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6               | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18       | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A                  | B | C | D | E | F | fgrp            |   |   |   |    |    |    |    |    | G  | H  | I  | reserved |    |    |    |    |    |    |    |    |    |    |    |    |    |
| chKey              |   |   |   |   |   | itab            |   |   |   |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   | name (variable) |   |   |   |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |                 |   |   |   |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |
| formula (variable) |   |   |   |   |   |                 |   |   |   |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |                 |   |   |   |    |    |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                          |
|--------------------------|
| comment (variable)       |
| ...                      |
| unusedstring1 (variable) |
| ...                      |
| description (variable)   |
| ...                      |
| helpTopic (variable)     |
| ...                      |
| unusedstring2 (variable) |
| ...                      |

**A - fHidden (1 bit):** A bit that specifies whether the defined name is not visible in the list of defined names.

**B - fFunc (1 bit):** A bit that specifies whether the defined name represents an **XLM macro**. If this bit is 1, then **fProc** MUST also be 1.

**C - fOB (1 bit):** A bit that specifies whether the defined name represents a Visual Basic for Applications (VBA) macro. If this bit is 1, then **fProc** MUST also be 1.

**D - fProc (1 bit):** A bit that specifies whether the defined name represents a macro.

**E - fCalcExp (1 bit):** A bit that specifies whether **formula.rgce** contains a call to a function that can return an array.

**F - fBuiltin (1 bit):** A bit that specifies whether the defined name represents a built-in name.

**fgrp (9 bits):** An **FnGroupID** (section [2.5.51](#)) that specifies the function category for the defined name. This value MUST be less than **iMac** field of **BrtBeginFnGroup** (section [2.4.84](#)) plus the count of **BrtFnGroup** (section [2.4.652](#)) records. If **fProc** is 0, then the value MUST be 0 and MUST be ignored.

**G - fPublished (1 bit):** A bit that specifies whether the defined name was published.

**H - fWorkbookParam (1 bit):** A bit that specifies whether the defined name is a workbook parameter.

**I - fFutureFunction (1 bit):** A bit that specifies whether the defined name is a **future function**. **fFutureFunction** MUST be 0 if one of the following conditions is TRUE: **fHidden** is 0, **fFunc** is 0, **fOB** is 1, **fProc** is 0, **fCalcExp** is 1, **fgrp** is not 0, **fPublished** is 1, **fBuiltin** is 1, **fWorkbookParam** is 1, **comment.cchCharacters** is not 0xFFFFFFFF, or **itab** is not 0xFFFFFFFF.

**reserved (14 bits):** This value MUST be 0, and MUST be ignored.

**chKey (1 byte):** The unsigned integer value of the **ASCII** character that specifies the shortcut key for the macro represented by the defined name. This value MUST be 0 if **fFunc** is 1 or if **fProc** is 0. Otherwise MUST be greater than or equal to 0x20.

**itab (4 bytes):** An unsigned integer that specifies the scope of the defined name. This value MUST be a value from the following table.

| Value   | Meaning   |
|---|---|
| 0xFFFFFFFF  | The scope is entire workbook.   |
| Greater than or equal to 0 and less than 0xFFFFFFFF | Specifies a zero-based index of a <b>BrtBundleSh</b> (section <a href="#">2.4.301</a> ) record in the collection of all records directly following <b>BrtBeginBundles</b> (section <a href="#">2.4.13</a> ). The referenced <b>BrtBundleSh</b> specifies the scope of the defined name. |

**name (variable):** An **XLNameWideString** (section [2.5.165](#)) that specifies the name of the defined name. If **fFutureFunction** is 1, **name** MUST be equal to one of the values in the Future Function table in **Ftab** (section [2.5.97.10](#)).

If **fFutureFunction** is 0, **name** MUST NOT be equal to one of the values in the Future Function table in **Ftab**.

**formula (variable):** A **NameParsedFormula** (section [2.5.97.12](#)) that specifies the formula (section [2.2.2](#)) for the defined name. If **fFutureFunction** is 1, **formula.rgce** MUST consist of a single **PtgErr** (section [2.5.97.39](#)) with a **err** equal to 0x1D.

**comment (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the comment for the defined name. The length of this string MUST be less than 256 characters.

**unusedstring1 (variable):** An **XLNullableWideString** that MUST be a NULL string and MUST be ignored. This value MUST exist if and only if **fProc** is 1.

**description (variable):** An **XLNullableWideString** that specifies the custom menu for the macro represented by the defined name. This value MUST exist if and only if **fProc** is 1. The length of this string MUST be less than 32768 characters.

**helpTopic (variable):** An **XLNullableWideString** that specifies the description for the macro represented by the defined name. This value MUST exist if and only if **fProc** is 1. The length of this string MUST be less than 32768 characters.

**unusedstring2 (variable):** An **XLNullableWideString** that MUST be a NULL string and MUST be ignored. This value MUST exist if and only if **fProc** is 1.

## 2.4.681 BrtNameExt

The **BrtNameExt** record specifies additional properties for a macro named **szName**.

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                      |
|----------------------|
| cArgDescriptions     |
| szName (variable)    |
| ...                  |
| rgArgDesc (variable) |
| ...                  |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**cArgDescriptions (4 bytes):** An unsigned integer that specifies the number of argument descriptions that the associated macro has. This value **MUST** be greater than or equal to 1 and **MUST** be less than or equal to 60.

**szName (variable):** An **XLNameWideString** (section [2.5.165](#)) that specifies the name of the macro associated with this record. **szName** **MUST** be unique within the **BrtNameExt** (section [2.4.681](#)) records in the **Workbook** (section [2.1.7.60](#)) part. At least one of the following conditions **MUST** be true: there exists a **BrtName** (section [2.4.680](#)) record in the **Workbook** (section [2.1.7.60](#)) part such that the **name** field of that **BrtName** record is equal to **szName** and the **fProc** field of that **BrtName** record is equal to 1, or there exists a Visual Basic for Applications (VBA) macro named **szName**.

**rgArgDesc (variable):** An array of **ArgDesc** (section [2.5.2](#)). Each array item specifies the description for an argument of the associated macro. The count of items in this array **MUST** be equal to **cArgDescriptions**. The values of the **iArgDesc** fields of all **ArgDesc** structure items **MUST** be unique within this array.

## 2.4.682 BrtOleObject

The **BrtOleObject** record specifies an **embedded object**.

|                 |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|----------|---|---|---|---|---|---|---|----|----|----|----|----|----|----------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                   | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dwAspect        |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwOleUpdate     |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| shapeId         |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A               | B | reserved |   |   |   |   |   |   |   |    |    |    |    |    |    | strProgID (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| link (variable) |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                     |
|---------------------|
| ...                 |
| strRelID (variable) |
| ...                 |

**dwAspect (4 bytes):** An unsigned integer that specifies how the object is represented when drawing or getting data. This value MUST be a value from the following table.

| Name             | Value      | Meaning  |
|------------------|------------|--|
| DVASPECT_CONTENT | 0x00000001 | Provides a representation of an embedded object's content. |
| DVASPECT_ICON    | 0x00000004 | Provides an iconic representation of an embedded object.   |

**dwOleUpdate (4 bytes):** An unsigned integer that specifies when to update the embedded object's cached data. This value MUST be 0 if **fLinked** is 0; otherwise, MUST be a value from the following table.

| Name             | Value      | Meaning  |
|------------------|------------|--|
| OLEUPDATE_ALWAYS | 0x00000001 | Update the embedded object whenever possible.      |
| OLEUPDATE_ONCALL | 0x00000003 | Update the embedded object only upon user request. |

**shapeId (4 bytes):** An unsigned integer that corresponds to the **spid** attribute, as specified in [\[ISO/IEC29500-4:2011\]](#), section 14.1.2.19, of a shape element in the **VML Drawings** (section [2.1.7.58](#)) part. This value MUST be greater than or equal to 0x00000001 and less than or equal to 0x03FFD7FF. The value of the **ObjectType** attribute of the **ClientData** child element, as specified in [\[ISO/IEC29500-4:2011\]](#), section 14.4.2.12, of the shape element MUST be "Pict" as specified in [\[ISO/IEC29500-4:2011\]](#), section 14.4.3.2. The total number of unique identifiers specified by **shapeId** and **BrtActiveX.shapeId** in a worksheet, macro sheet or dialog sheet MUST NOT exceed 65535.

**A - fLinked (1 bit):** A bit that specifies whether this embedded object is linked.

**B - fAutoLoad (1 bit):** A bit that specifies whether the host application for the embedded object is called to load the object data automatically when the workbook is opened.

**reserved (14 bits):** This value MUST be 0, and MUST be ignored.

**strProgID (variable):** An **XLWideString** (section [2.5.168](#)) that specifies a programmatic identifier associated with this object. This string MUST comply with the following requirements:

- The string MUST have no more than 39 characters.
- The string MUST contain no punctuation (including underscores) except periods.
- The string MUST contain one or more periods.
- The string MUST NOT start with a digit.



- The string MUST be different from the class name of any **OLE1** application, including the OLE1 version of the same application, if there is one.

**link (variable):** An **ObjectParsedFormula** (section [2.5.97.13](#)) that specifies the formula (section [2.2.2](#)) that specifies where the data for this **linked object** can be found. This value MUST exist if and only if **fLinked** is nonzero.

**strRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies a relationship targeting an **OLE Object** (section [2.1.7.36](#)) or an **OLE Package** (section [2.1.7.37](#)) containing data for this object. This value MUST exist if and only if **fLinked** is 0.

#### 2.4.683 BrtOleSize

The **BrtOleSize** record specifies the range of cells to be displayed when this workbook is displayed as an embedded object in another document.

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
| rfx (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

**rfx (16 bytes):** An **UncheckedRFX** (section [2.5.153](#)) that specifies the range of cells to be displayed by the embedded object.

#### 2.4.684 BrtPageSetup

The **BrtPageSetup** record specifies page layout and printing settings for a sheet.

|            |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
|------------|---|---|---|---|---|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|--------------------|---|---|---|---|---|---|---|---|---|---|---|--|--|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
| iPaperSize |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iScale     |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iRes       |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iVRes      |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iCopies    |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iPageStart |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iFitWidth  |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| iFitHeight |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |  |  |
| A          | B | C | D | E | F | G | H | I | J | reserved2 |   |   |   |   |   |   |   |   |   | szRelID (variable) |   |   |   |   |   |   |   |   |   |   |   |  |  |

...

**iPaperSize (4 bytes):** An unsigned integer that specifies the paper size according to the following table. This value **MUST** be greater than or equal to 0 and less than 2147483647. The value 0 or values greater than or equal to 256 specify custom printer paper sizes that can optionally be stored in a **DEVMODE** structure, as described in [\[DEVMODE\]](#). The **DEVMODE** structure allows printer drivers to save height and width information.

Values 119 through 256 are reserved for future use.

| Value | Meaning                        |
|-------|--------------------------------|
| 1     | US Letter 8 1/2 x 11 in        |
| 2     | US Letter Small 8 1/2 x 11 in  |
| 3     | US Tabloid 11 x 17 in          |
| 4     | US Ledger 17 x 11 in           |
| 5     | US Legal 8 1/2 x 14 in         |
| 6     | US Statement 5 1/2 x 8 1/2 in  |
| 7     | US Executive 7 1/4 x 10 1/2 in |
| 8     | A3 297 x 420 mm                |
| 9     | A4 210 x 297 mm                |
| 10    | A4 Small 210 x 297 mm          |
| 11    | A5 148 x 210 mm                |
| 12    | B4 (JIS) 250 x 354             |
| 13    | B5 (JIS) 182 x 257 mm          |
| 14    | Folio 8 1/2 x 13 in            |
| 15    | Quarto 215 x 275 mm            |
| 16    | 10 x 14 in                     |
| 17    | 11 x 17 in                     |
| 18    | US Note 8 1/2 x 11 in          |
| 19    | US Envelope #9 3 7/8 x 8 7/8   |
| 20    | US Envelope #10 4 1/8 x 9 1/2  |
| 21    | US Envelope #11 4 1/2 x 10 3/8 |
| 22    | US Envelope #12 4 3/4 x 11     |
| 23    | US Envelope #14 5 x 11 1/2     |
| 24    | C size sheet                   |

| <b>Value</b> | <b>Meaning</b>                     |
|--------------|------------------------------------|
| 25           | D size sheet                       |
| 26           | E size sheet                       |
| 27           | Envelope DL 110 x 220mm            |
| 28           | Envelope C5 162 x 229 mm           |
| 29           | Envelope C3 324 x 458 mm           |
| 30           | Envelope C4 229 x 324 mm           |
| 31           | Envelope C6 114 x 162 mm           |
| 32           | Envelope C65 114 x 229 mm          |
| 33           | Envelope B4 250 x 353 mm           |
| 34           | Envelope B5 176 x 250 mm           |
| 35           | Envelope B6 176 x 125 mm           |
| 36           | Envelope 110 x 230 mm              |
| 37           | US Envelope Monarch 3.875 x 7.5 in |
| 38           | 6 3/4 US Envelope 3 5/8 x 6 1/2 in |
| 39           | US Std Fanfold 14 7/8 x 11 in      |
| 40           | German Std Fanfold 8 1/2 x 12 in   |
| 41           | German Legal Fanfold 8 1/2 x 13 in |
| 42           | B4 (ISO) 250 x 353 mm              |
| 43           | Japanese Postcard 100 x 148 mm     |
| 44           | 9 x 11 in                          |
| 45           | 10 x 11 in                         |
| 46           | 15 x 11 in                         |
| 47           | Envelope Invite 220 x 220 mm       |
| 48           | RESERVED--DO NOT USE               |
| 49           | RESERVED--DO NOT USE               |
| 50           | US Letter Extra 9 1/2 x 12 in      |
| 51           | US Legal Extra 9 1/2 x 15 in       |
| 52           | US Tabloid Extra 11.69 x 18 in     |
| 53           | A4 Extra 9.27 x 12.69 in           |
| 54           | Letter Transverse 8 1/2 x 11 in    |

| <b>Value</b> | <b>Meaning</b>                                |
|--------------|---|
| 55           | A4 Transverse 210 x 297 mm                    |
| 56           | Letter Extra Transverse 9 1/2 x 12 in         |
| 57           | SuperA/A4 227 x 356 mm                        |
| 58           | SuperB/A3 305 x 487 mm                        |
| 59           | US Letter Plus 8.5 x 12.69 in                 |
| 60           | A4 Plus 210 x 330 mm                          |
| 61           | A5 Transverse 148 x 210 mm                    |
| 62           | B5 (JIS) Transverse 182 x 257 mm              |
| 63           | A3 Extra 322 x 445 mm                         |
| 64           | A5 Extra 174 x 235 mm                         |
| 65           | B5 (ISO) Extra 201 x 276 mm                   |
| 66           | A2 420 x 594 mm                               |
| 67           | A3 Transverse 297 x 420 mm                    |
| 68           | A3 Extra Transverse 322 x 445 mm              |
| 69           | Japanese Double Postcard 200 x 148 mm         |
| 70           | A6 105 x 148 mm                               |
| 71           | Japanese Envelope Kaku #2                     |
| 72           | Japanese Envelope Kaku #3                     |
| 73           | Japanese Envelope Chou #3                     |
| 74           | Japanese Envelope Chou #4                     |
| 75           | Letter Rotated 11 x 8 1/2 11 in               |
| 76           | A3 Rotated 420 x 297 mm                       |
| 77           | A4 Rotated 297 x 210 mm                       |
| 78           | A5 Rotated 210 x 148 mm                       |
| 79           | B4 (JIS) Rotated 364 x 257 mm                 |
| 80           | B5 (JIS) Rotated 257 x 182 mm                 |
| 81           | Japanese Postcard Rotated 148 x 100 mm        |
| 82           | Double Japanese Postcard Rotated 148 x 200 mm |
| 83           | A6 Rotated 148 x 105 mm                       |
| 84           | Japanese Envelope Kaku #2 Rotated             |

| <b>Value</b> | <b>Meaning</b>                       |
|--------------|--------------------------------------|
| 85           | Japanese Envelope Kaku #3 Rotated    |
| 86           | Japanese Envelope Chou #3 Rotated    |
| 87           | Japanese Envelope Chou #4 Rotated    |
| 88           | B6 (JIS) 128 x 182 mm                |
| 89           | B6 (JIS) Rotated 182 x 128 mm        |
| 90           | 12 x 11 in                           |
| 91           | Japanese Envelope You #4             |
| 92           | Japanese Envelope You #4 Rotated     |
| 93           | PRC 16K 146 x 215 mm                 |
| 94           | PRC 32K 97 x 151 mm                  |
| 95           | PRC 32K(Big) 97 x 151 mm             |
| 96           | PRC Envelope #1 102 x 165 mm         |
| 97           | PRC Envelope #2 102 x 176 mm         |
| 98           | PRC Envelope #3 125 x 176 mm         |
| 99           | PRC Envelope #4 110 x 208 mm         |
| 100          | PRC Envelope #5 110 x 220 mm         |
| 101          | PRC Envelope #6 120 x 230 mm         |
| 102          | PRC Envelope #7 160 x 230 mm         |
| 103          | PRC Envelope #8 120 x 309 mm         |
| 104          | PRC Envelope #9 229 x 324 mm         |
| 105          | PRC Envelope #10 324 x 458 mm        |
| 106          | PRC 16K Rotated                      |
| 107          | PRC 32K Rotated                      |
| 108          | PRC 32K(Big) Rotated                 |
| 109          | PRC Envelope #1 Rotated 165 x 102 mm |
| 110          | PRC Envelope #2 Rotated 176 x 102 mm |
| 111          | PRC Envelope #3 Rotated 176 x 125 mm |
| 112          | PRC Envelope #4 Rotated 208 x 110 mm |
| 113          | PRC Envelope #5 Rotated 220 x 110 mm |
| 114          | PRC Envelope #6 Rotated 230 x 120 mm |

| Value | Meaning                               |
|-------|---------------------------------------|
| 115   | PRC Envelope #7 Rotated 230 x 160 mm  |
| 116   | PRC Envelope #8 Rotated 309 x 120 mm  |
| 117   | PRC Envelope #9 Rotated 324 x 229 mm  |
| 118   | PRC Envelope #10 Rotated 458 x 324 mm |

**iScale (4 bytes):** An unsigned integer that specifies the print scale. The value MUST be greater than or equal to 10 and less than or equal to 400, or be equal to 0.

**iRes (4 bytes):** An unsigned integer that specifies the horizontal resolution to use when printing, in DPI.

**iVRes (4 bytes):** An unsigned integer that specifies the vertical resolution to use when printing, in DPI.

**iCopies (4 bytes):** An unsigned integer that specifies the number of copies to print. This value MUST be greater than or equal to 0 and less than or equal to 32767.

**iPageStart (4 bytes):** A signed integer that specifies the page number for the first page being printed. For example, if the value is 6, the first page number will be 6. This value MUST be greater than or equal to -32765 and less than or equal to 32767. This value MUST be ignored if the value of **fUsePage** is 0.

**iFitWidth (4 bytes):** An unsigned integer that specifies the number of horizontal pages to fit the printed output into. For example, if the value is 6, the printed output is fit to a width of 6 pages. If the value is 0, then the printed output is not fit to a specific number of horizontal pages. This value MUST be greater than or equal to 0 or less than or equal to 32767.

**iFitHeight (4 bytes):** An unsigned integer that specifies the number of vertical pages to fit the printed output into. For example, if the value is 6, the printed output is fit to a height of 6 pages. If the value is 0, then the printed output is not fit to a specific number of vertical pages. This value MUST be greater than or equal to 0 or less than or equal to 32767.

**A - fLeftToRight (1 bit):** A bit that specifies the order that multiple pages are sent to the printer for a single sheet, as specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Pages are printed top-to-bottom first and then left-to-right. |
| 1     | Pages are printed left-to-right first and then top-to-bottom. |

**B - fLandscape (1 bit):** A bit that specifies the orientation of the printed page. This bit MUST be ignored if **fNoOrient** has a value of 1. Otherwise, this value is specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Portrait orientation, in which the longest edge of the page is vertical.    |
| 1     | Landscape orientation, in which the longest edge of the page is horizontal. |

**C - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**D - fNoColor (1 bit):** A bit that specifies the color setting of the printed page, as specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | The printer is instructed to print the page in color.           |
| 1     | The printer is instructed to print the page in black and white. |

**E - fDraft (1 bit):** A bit that specifies whether graphics are included on the printed page, as specified in the following table.

| Value | Meaning                                    |
|-------|--|
| 0     | Graphics are included in the printed page. |
| 1     | Graphics are omitted in the printed page.  |

**F - fNotes (1 bit):** A bit that specifies **print settings** for comments, as specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | The comments are not printed.   |
| 1     | The comments are printed. The location of the comments is specified by <b>fEndNotes</b> . |

**G - fNoOrient (1 bit):** A bit that specifies whether orientation of the printed page is determined by **fLandscape** or by the printer, as specified in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The value of <b>fLandscape</b> is used to specify the orientation of the printed page.                       |
| 1     | Application-specific and printer-specific behavior is used to determine the orientation of the printed page. |

**H - fUsePage (1 bit):** A bit that specifies whether **iPageStart** is used to specify the page number of the first page being printed, as specified in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The page numbering will start with a value of 1.   |
| 1     | The value of <b>iPageStart</b> is used to specify the page number of the first page being printed. |

**I - fEndNotes (1 bit):** A bit that specifies the location of printed comments, as specified in the following table. This bit **MUST** be ignored if **fNotes** has a value of 0.

| Value | Meaning                                       |
|-------|---|
| 0     | Comments print as displayed.                  |
| 1     | Comments print after the workbook is printed. |

**J - iErrors (2 bits):** A **PrintErrorsAs** (section [2.5.109](#)) that specifies how to represent cells that contain errors when printing.

**reserved2 (5 bits):** This value MUST be 0, and MUST be ignored.

**szRelID (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the link to the **PrinterSettings** (section [2.1.7.41](#)) part. The length of the **XLNullableWideString** MUST be less than or equal to 260 characters.

## 2.4.685 BrtPane

The **BrtPane** record specifies the sheet panes.

|            |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|----------|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| xnumXSplit |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnumYSplit |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rwTop      |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colLeft    |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| pnnAct     |   |          |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A          | B | reserved |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**xnumXSplit (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the position of the horizontal split, in twips. If **fFrozen** is equal to one or **fFrozenNoSplit** is equal to one, then this value specifies the number of rows (2) in the **frozen panes** and MUST be less than the maximum value of **Rw** (section [2.5.125](#)).

**xnumYSplit (8 bytes):** An **Xnum** that specifies the position of the vertical split, in twips. If **fFrozen** is equal to one or **fFrozenNoSplit** is equal to one, then this value specifies the number of columns (2) in the frozen panes and MUST be less than the maximum value of **Col** (section [2.5.22](#)).

**rwTop (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) of the upper left visible cell in the lower right pane.

**colLeft (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) of the upper left visible cell in the lower right pane.

**pnnAct (4 bytes):** A **Pnn** (section [2.5.107](#)) that specifies the active pane.

**A - fFrozen (1 bit):** A bit that specifies whether the panes are frozen panes and split panes, as specified in the following table. This value MUST NOT be 1 if **fFrozenNoSplit** is 1.



| Value | Meaning   |
|-------|---|
| 0     | Whether the panes are frozen panes or split panes is not specified. |
| 1     | The panes are frozen panes and split panes.                         |

**B - fFrozenNoSplit (1 bit):** A bit that specifies whether the panes are frozen panes but not split panes, as specified in the following table. This value MUST NOT be 1 if **fFrozen** is 1.

| Value | Meaning   |
|-------|---|
| 0     | Whether the panes are frozen panes or split panes is not specified. |
| 1     | The panes are frozen panes but not split panes.                     |

**reserved (6 bits):** This value MUST be 0, and MUST be ignored.

## 2.4.686 BrtPCDCalcMem15

The **BrtPCDCalcMem15** (section [2.4.686](#)) record specifies extended properties of an OLAP calculated member (3) specified by **BrtBeginPCDCalcMem** (section [2.4.120](#)) or **BrtBeginPCDCalcMemExt** (section [2.4.122](#)) that immediately precedes this record and specifies the beginning of a collection of records as defined by the **Common Productions** part (section [2.1.8](#)) ABNF.

|           |   |        |   |   |   |                             |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|--------|---|---|---|-----------------------------|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2      | 3 | 4 | 5 | 6                           | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader |   |        |   |   |   |                             |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A         | B | unused |   |   |   | irstMeasureGroup (variable) |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...       |   |        |   |   |   |                             |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fMeasure (1 bit):** A bit that specifies whether a calculated member (3) belongs to the measure hierarchy of a cube. This field MUST be ignored if the **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** or the **BrtBeginPCDCalcMemExt** record that immediately precedes this record is 1. The possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The member (3) does not belong to a measure hierarchy. |
| 1     | The member (3) does belong to a measure hierarchy.     |

**B - iNumberFormat (2 bits):** Two bits that specify whether the numeric formatting of a calculated member (3) SHOULD be overridden or not. This field MUST be ignored if the **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** or the

**BrtBeginPCDCalcMemExt** record that immediately precedes this record is 1. The possible values for this field are listed in the following table.

| Value | Meaning  |
|-------|--|
| 0     | The numeric formatting of the member (3) will not be overridden.   |
| 1     | The numeric formatting of the member (3) will be overridden to display with a thousands separator and no decimal places. |
| 2     | The numeric formatting of the member (3) will be overridden to display as a percentage with two decimal places.          |
| 3     | Not valid. <b>iNumberFormat</b> will be ignored and numeric formatting will not be overridden.                           |

**unused (5 bits):** This field is unused and MUST be ignored.

**irstMeasureGroup (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the measure group of this calculated measure. The length of this value MUST be less than 65,536 characters. This field MUST be ignored if the **pcdCalcMemCommon.fSet** field in the **BrtBeginPCDCalcMem** or **BrtBeginPCDCalcMemExt** record that immediately precedes this record is 1. This field MUST be ignored if the **fMeasure** field is 0.

## 2.4.687 BrtPCDField14

The **BrtPCDField14** record specifies that the preceding **BrtBeginPCDField** (section [2.4.130](#)) record SHOULD [<36>](#) be ignored.

If this record exists, there MUST exist an **SXDI** (section [2.1.7.40](#)) rule in the PivotTable view (section [2.2.5.3](#)) that is associated with this **PivotCache** (section [2.2.5.2](#)) as specified in section [2.2.5.3.1](#). This SXDI rule MUST have a **BrtBeginSXDI** (section [2.4.232](#)) record with an **isxvdData** field equal to the pivot field (section [2.2.5.3.2](#)) index of a pivot field (section [2.2.5.3.2](#)) associated with this cache field (section [2.2.5.2.2](#)). Additionally, this SXDI rule MUST contain a **BrtSXDI14** (section [2.4.772](#)) record with an **isxvd** field greater than or equal to 0.

The preceding **BrtBeginPCDField** record MUST have the values set as specified in the following table.

| Name                       | Value |
|----------------------------|-------|
| <b>fServerBased</b>        | 0     |
| <b>fCantGetUniqueItems</b> | 0     |
| <b>fSrcField</b>           | 1     |
| <b>fCaption</b>            | 0     |
| <b>fOlapMemPropField</b>   | 0     |
| <b>fLoadFmla</b>           | 0     |
| <b>fLoadPropName</b>       | 0     |
| <b>Ifmt</b>                | 0     |
| <b>wTypeSql</b>            | 0     |

| Name     | Value      |
|----------|------------|
| isxtl    | 0x00007FFF |
| cIsxtmps | 0          |

For more details, see sections [2.2.5.2.7.1 \(Measures\)](#) and [2.4.772 \(BrtSXDI14\)](#).

|            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| reserved   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**reserved (4 bytes):** This value MUST be 1, and MUST be ignored.

## 2.4.688 BrtPCDH14

The **BrtPCDH14** record specifies the extended properties of a named set (section [2.2.5.2.7.3](#)) as specified by the **PCDHIERARCHY** rule (defined in section [2.1.7.38](#)). When this record is present the **fSet** field of the associated **BrtBeginPCDHierarchy** (section [2.4.140](#)) record MUST be 1.

|            |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|---|---|---|---|---|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6                 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHHeader |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A          | B | C | D | E | F | cihdb             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...        |   |   |   |   |   | rgihdb (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...        |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fFlattenHierarchies (1 bit):** A bit that specifies whether to display members (3) from different levels of the same cache hierarchy (section [2.2.5.2.7](#)) of this named set in the same pivot field (section [2.2.5.3.2](#)). This value MUST be 0 if **fIgnorable** is 1. If a **BrtBeginPCDCalcMem14** (section [2.4.121](#)) record that corresponds to the named set exists, this value MUST be equal to the value of **fFlattenHierarchies** field of the **BrtBeginPCDCalcMem14** record, as specified in the following table.

| fIgnorable | fFlattenHierarchies | Meaning   |
|------------|---------------------|---|
| 1          | 0                   | The cache hierarchy associated with this named set as specified by the <b>PCDHIERARCHY</b> rule is discarded. |

| <b>fIgnorable</b> | <b>fFlattenHierarchies</b> | <b>Meaning</b>   |
|-------------------|----------------------------|--|
| 0                 | 0                          | Each member (3) from a different level of the same cache hierarchy of this named set is displayed in a separate pivot field. |
| 0                 | 1                          | All members (3) from different levels of the same cache hierarchy of this named set are displayed in the same pivot field.   |

**B - fMeasureSet (1 bit):** A bit that specifies whether this named set contains measure (section [2.2.5.2.7.1](#)) cache hierarchies (section [2.2.5.2.7](#)) as specified in the following table. This value MUST be 0 if **fIgnorable** is 1.

| <b>fIgnorable</b> | <b>fMeasureSet</b> | <b>Meaning</b>  |
|-------------------|--------------------|---|
| 1                 | 0                  | The cache hierarchy associated with this named set as specified by the <b>PCDHIERARCHY</b> rule is discarded. |
| 0                 | 0                  | The named set does not contain measure cache hierarchies.   |
| 0                 | 1                  | The named set contains measure cache hierarchies.   |

**C - fHierarchizeDistinct (1 bit):** A bit that specifies whether to automatically order and remove duplicates from this named set, as specified in the following table. This value MUST be 0 if **fIgnorable** is 1. If a **BrTBeginPCDCalcMem14** record that corresponds to the named set exists, this value MUST be equal to the value of **fHierarchizeDistinct** field of the **BrTBeginPCDCalcMem14** record.

| <b>fIgnorable</b> | <b>fHierarchizeDistinct</b> | <b>Meaning</b>  |
|-------------------|-----------------------------|---|
| 1                 | 0                           | The cache hierarchy associated with this named set as specified by the <b>PCDHIERARCHY</b> rule is discarded. |
| 0                 | 0                           | Do not automatically order and remove duplicates from this named set.   |
| 0                 | 1                           | Automatically order and remove duplicates from this named set.  |

**D - fIgnorable (1 bit):** A bit that specifies whether the associated cache hierarchy as specified by the **PCDHIERARCHY** rule SHOULD [<37>](#) be ignored. If **fIgnorable** is 1 the **BrTBeginPCDHierarchy** record of this cache hierarchy MUST have the field values as specified in the following table.

| <b>Field</b>               | <b>Value</b> |
|----------------------------|--------------|
| <b>fMeasure</b>            | 1            |
| <b>fSet</b>                | 0            |
| <b>fAttributeHierarchy</b> | 0            |
| <b>fMeasureHierarchy</b>   | 0            |
| <b>fOnlyOneField</b>       | 0            |

| Field                                 | Value  |
|---------------------------------------|--|
| <b>fTimeHierarchy</b>                 | 0  |
| <b>fKeyAttributeHierarchy</b>         | 0  |
| <b>fAttributeMemberValueTypeKnown</b> | 0  |
| <b>fUnbalancedRealKnown</b>           | 0  |
| <b>fUnbalancedReal</b>                | 0  |
| <b>fUnbalancedGroupKnown</b>          | 0  |
| <b>fUnbalancedGroup</b>               | 0  |
| <b>fHidden</b>                        | 0  |
| <b>cLevels</b>                        | 0  |
| <b>isetParent</b>                     | -1   |
| <b>iconSet</b>                        | 0  |
| <b>fLoadDimUnq</b>                    | 0  |
| <b>fLoadDefaultUnq</b>                | 0  |
| <b>fLoadAllUnq</b>                    | 0  |
| <b>fLoadAllDisp</b>                   | 0  |
| <b>fLoadDispFld</b>                   | 0  |
| <b>fLoadMeasGrp</b>                   | 0  |
| <b>wAttributeMemberValueType</b>      | 0  |
| <b>stUnique</b>                       | "DummyN", where N is the text string representing in decimal form the 0-based index of the current <b>BrBeginPCDHierarchy</b> record among other <b>BrBeginPCDHierarchy</b> records with <b>fIgnorable</b> bit of the associated <b>BrPCDH14</b> record equal to 1 in the collection specified by the <b>PCDHierarchies</b> (section <a href="#">2.4.139</a> ) rule. Within the collection all <b>BrBeginPCDHierarchy</b> records with <b>fIgnorable</b> bit of the associated <b>BrPCDH14</b> record equal to 0 MUST precede all <b>BrBeginPCDHierarchy</b> records with <b>fIgnorable</b> bit of the associated <b>BrPCDH14</b> record equal to 1. |

If this field is equal to 1, there MUST exist an **SXDI** (section [2.1.7.40](#)) rule in the **PivotTable** view (section [2.2.5.3](#)) that is associated with this **PivotCache** (section [2.2.5.2](#)). This SXDI rule MUST have a **BrBeginSXDI** (section [2.4.232](#)) record with an **isxvdData** field equal to the pivot field index of a pivot field associated with a cache field (section [2.2.5.2.2](#)) associated with this cache hierarchy (as specified in section [2.2.5.2.7](#)). Additionally, this SXDI rule MUST contain a **BrSXDI14** (section [2.4.772](#)) record with an **isxvd** field greater than or equal to 0.

For more details, see **Measures** (section [2.2.5.2.7.1](#)) and **BrSXDI14** (section [2.4.772](#)).

**E - unused (1 bit):** This value is undefined, and MUST be ignored.

**F - reserved (3 bits):** This value MUST be 0, and MUST be ignored.

**cihdb (4 bytes):** An unsigned integer that specifies the count of items in the **rgihdb** array. **cihdb** MUST be equal to the sum of the **cLevels** fields of the **BrBeginPCDHierarchy** records in the cache hierarchy of this named set.

**rgihdb (variable):** An array of **IHDB** (section [2.5.77](#)) that specifies the collection of references to cache hierarchies. The count of items in this array MUST be equal to **cihdb**.

## 2.4.689 BrtPCDH15

The **BrtPCDH15** record specifies extensions to the **BrBeginPCDHierarchy** (section [2.4.140](#)) record where a measure cache hierarchy can aggregate another cache hierarchy. For this record to be present, **fMeasure** field of the **BrBeginPCDHierarchy** MUST be 1.

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ihdbAggregatedColumn |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**ihdbAggregatedColumn (4 bytes):** An **IHDB** (section [2.5.77](#)) which specifies the cache hierarchy that this measure cache hierarchy aggregates. **fAttributeHierarchy** of the referenced cache hierarchy MUST be 1.

## 2.4.690 BrtPCDIABoolean

The **BrtPCDIABoolean** record specifies a cache item (section [2.2.5.2.3](#)) that contains a **Boolean** (section [2.5.97.3](#)) and additional data.

|     |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10              | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| f   |   |   |   |   |   |   |   |   |   | info (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**f (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies the value of this cache item.

**info (variable):** A **PCDIAddInfo** (section [2.5.99](#)) that specifies additional data associated with this cache item.

## 2.4.691 BrtPCDIADatetime

The **BrtPCDIADatetime** record specifies a cache item (section [2.2.5.2.3](#)) that contains date, time, and additional data.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| datetime        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| info (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**datetime (8 bytes):** A **PCDIDateTime** (section [2.5.100](#)) that specifies the value of this cache item.

**info (variable):** A **PCDIAddInfo** (section [2.5.99](#)) that specifies additional data associated with this cache item.

### 2.4.692 BrtPCDIAError

The **BrtPCDIAError** record specifies a cache item (section [2.2.5.2.3](#)) that contains an error and additional data.

|     |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10              | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| err |   |   |   |   |   |   |   |   |   | info (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**err (1 byte):** A **BErr** (section [2.5.97.2](#)) that specifies the value of this cache item.

**info (variable):** A **PCDIAddInfo** (section [2.5.99](#)) that specifies additional data associated with this cache item.

### 2.4.693 BrtPCDIAMissing

The **BrtPCDIAMissing** record specifies a cache item (section [2.2.5.2.3](#)) with no value and additional data.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| info (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**info (variable):** A **PCDIAddInfo** (section [2.5.99](#)) that specifies additional data associated with this cache item (section [2.2.5.2.3](#)).

## 2.4.694 BrtPCDIANumber

The **BrtPCDIANumber** record specifies a cache item (section [2.2.5.2.3](#)) that contains a number and additional data.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| xnum            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| info (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the value of this cache item.

**info (variable):** A **PCDIAddInfo** (section [2.5.99](#)) that specifies additional data associated with this cache item.

## 2.4.695 BrtPCDIAStrng

The **BrtPCDIAStrng** record specifies a cache item (section [2.2.5.2.3](#)) that contains a string and additional data.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| st (variable)   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| info (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**st (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the value of this cache item. If the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record preceding this record is less than 0x03, then the length of the string specified by this field MUST be less than or equal to 255 characters; otherwise the length of the string specified by this field MUST be less than or equal to 32767 characters.

**info (variable):** A **PCDIAddInfo** (section [2.5.99](#)) that specifies additional data associated with this cache item.

## 2.4.696 BrtPCDIBoolean

The **BrtPCDIBoolean** record specifies a cache item (section [2.2.5.2.3](#)) that contains a **Boolean** (section [2.5.97.3](#)).



|   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| f |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**f (1 byte):** A **Boolean** that specifies the value of this record.

#### 2.4.697 BrtPCDIDatetime

The **BrtPCDIDatetime** record specifies a cache item (section [2.2.5.2.3](#)) that contains a date-time.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| datetime |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**datetime (8 bytes):** A **PCDIDateTime** (section [2.5.100](#)) that specifies the value of this record.

#### 2.4.698 BrtPCDIError

The **BrtPCDIError** record specifies a cache item (section [2.2.5.2.3](#)) that contains an error and any server formatting information.

|     |   |   |   |   |   |   |   |   |   |                         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|-------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10                      | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| err |   |   |   |   |   |   |   |   |   | svxcellextra (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |                         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**err (1 byte):** A **BErr** (section [2.5.97.2](#)) that specifies the value of this record.

**svxcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) that specifies server formatting information associated with this record. This value **MUST** exist if and only if this record is part of a collection of records specified by **BrtBeginPCDSDTCEntries** (section [2.4.153](#)) and **BrtEndPCDSDTCEntries** (section [2.4.488](#)).

#### 2.4.699 BrtPCDIIndex

The **BrtPCDIIndex** record specifies a reference to a cache item (section [2.2.5.2.3](#)) or an HTML table.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iitem |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iitem (4 bytes):** If this record is part of a collection specified by **BrBeginEcWpTables** (section [2.4.68](#)), then this is an unsigned integer that specifies an HTML table by its zero-based index (in order of the <table> tags in the HTML page); otherwise, this is an unsigned integer that specifies a zero-based index of the cache item, in the collection of cache items specified by the **BrBeginPCDFatbl** (section [2.4.125](#)) record in the cache field (section [2.2.5.2.2](#)) associated with this **BrPCDIIndex**, as specified by the **PivotCache** (section [2.2.5.2](#)) overview.

#### 2.4.700 BrtPCDIMissing

The **BrtPCDIMissing** record specifies a cache item (section [2.2.5.2.3](#)) that has no value and any server formatting information.

|                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| sxvcellextra (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**sxvcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) that specifies server formatting information associated with this record. This value MUST exist if and only if this record is part of a collection of records specified by **BrBeginPCSDTCEntries** (section [2.4.153](#)) and **BrEndPCSDTCEntries** (section [2.4.488](#)).

#### 2.4.701 BrtPCDINumber

The **BrtPCDINumber** record specifies a cache item (section [2.2.5.2.3](#)) that contains a number and any server formatting information.

|                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| xnum                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sxvcellextra (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the value of this record.

**sxvcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) that specifies server formatting information associated with this record. This value MUST exist if and only if this record is part of a collection of records specified by **BrBeginPCSDTCEntries** (section [2.4.153](#)) and **BrEndPCSDTCEntries** (section [2.4.488](#)).

#### 2.4.702 BrtPCDIString

The **BrtPCDIString** record specifies an HTML table name, or a cache item (section [2.2.5.2.3](#)) that contains a string, and any server formatting information.

|                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| st (variable)           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sxvcellextra (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**st (variable):** If this record is part of a collection specified by **BrtBeginEcWpTables** (section [2.4.68](#)), then this is an **XLWideString** (section [2.5.168](#)) that specifies the name of an HTML table to be retrieved when a Web query is refreshed. The length of this string MUST be less than or equal to 255 characters. If this record is not part of a collection specified by **BrtBeginEcWpTables**, then this is an **XLWideString** that specifies the value of this record. If the **bVerCacheCreated** of the preceding **BrtBeginPivotCacheDef** (section [2.4.162](#)) is less than 3, the length of this string MUST be less than or equal to 255 characters; otherwise the length of this string MUST be less than or equal to 32767 characters.

**sxvcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) that specifies server formatting information associated with this record. This value MUST exist if and only if this record is part of a collection of records specified by **BrtBeginPCSDTCEntries** (section [2.4.153](#)) and **BrtEndPCSDTCEntries** (section [2.4.488](#)).

### 2.4.703 BrtPCDSFCIEntry

The **BrtPCDSFCIEntry** record specifies the number format provided by the OLAP server for a cube value. The number format is either provided in the **formatString** field or by a currency format defined by the application based on the language information specified by the **languageTag** field.

|                         |   |   |   |   |   |   |   |   |   |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------|---|---|---|---|---|---|---|---|---|------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10                     | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fCurrency               |   |   |   |   |   |   |   |   |   | languageTag (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| formatString (variable) |   |   |   |   |   |   |   |   |   |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**fCurrency (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies whether this is specified by a currency format or a number format, as specified in the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | Specifies that the number format is provided in the <b>formatString</b> field.  |
| 0x01  | Specifies that the currency format is provided in the <b>languageTag</b> field. |

**languageTag (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the language of the currency format to use. This field MUST exist if and only if the value of **fCurrency** is 1. The length of this string MUST be less than 32 characters. The contents of this string MUST [<38>](#) be a language tag as specified by [\[RFC3066\]](#).

**formatString (variable):** An **XLWideString** that specifies the number format to use. This field MUST exist if and only if the value of **fCurrency** is 0. The length of this string MUST be less than 65536 characters.

For information about the syntax of this number format of this field, see [\[MSDN-MDXFS\]](#).

## 2.4.704 BrtPCRRecord

The **BrtPCRRecord** record specifies a single cache records (section [2.2.5.2.10](#)).

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rgb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rgb (variable):** A sequence of items that can be values or indexes to cache items (section [2.2.5.2.3](#)). This sequence specifies a single row (2) in the source data (section [2.2.5.2.1](#)).

An item in this sequence is a 4-byte unsigned integer that specifies a zero-based index of a cache item in the collection of cache items specified by the **BrtBeginPCDFAtbl** (section [2.4.125](#)) record in the cache field (section [2.2.5.2.2](#)) corresponding to this item, if the cache field corresponding to this item contains cache items. Otherwise, the source data value is stored in this item.

If an item in this sequence is not an index to a cache item, and if the **fNumField** field of the **BrtBeginPCDFAtbl** record for the cache field that corresponds to the source data value of the cache record is equal to 1, then the source data value is stored as an **Xnum** (section [2.5.171](#)).

If an item in this sequence is not an index to a cache item, and if the **fDateInField** field of the **BrtBeginPCDFAtbl** record for the cache field that corresponds to the source data value of the cache record is equal to 1, and the **fHasTextItem** field of the same **BrtBeginPCDFAtbl** record is equal to 0, then the source data value is stored as a **PCDIDateTime** (section [2.5.100](#)).

Otherwise, the source data value of the cache record is stored as an **XLWideString** (section [2.5.168](#)). If the **bVerCacheCreated** of the **BrtBeginPivotCacheDef** (section [2.4.162](#)) of a **PivotCache** (section [2.2.5.2](#)) that this cache record is associated with is less than 3, the length of this string MUST be less than or equal to 255 characters; otherwise the length of this string MUST be less than or equal to 32767 characters.

## 2.4.705 BrtPCRRecordDt

The **BrtPCRRecordDt** record specifies the beginning of a collection of records as defined by the **PivotCache** Records (section [2.1.7.39](#)) part ABNF. This collection of records specifies a single cache record (section [2.2.5.2.10](#)).

## 2.4.706 BrtPhoneticInfo

The **BrtPhoneticInfo** record specifies the default formatting for phonetic information in a sheet.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iFmt |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | phType |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | phAli  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iFmt (2 bytes):** An unsigned integer that specifies a zero-based index of a **BrtFont** (section [2.4.653](#)) record in the collection of all records directly following **BrtBeginFonts** (section [2.4.85](#)). The referenced **BrtFont** specifies the default font for **phonetic text runs** in a sheet.

**phType (4 bytes):** An unsigned integer that specifies the default character set (1) used to display phonetic text runs in a sheet. This value **MUST** be a value from the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | The phonetic text run is displayed using the narrow katakana character set (1). This value is ignored if the text is not Japanese. |
| 0x00000001 | The phonetic text run is displayed using the wide katakana character set (1). This value is ignored if the text is not Japanese.   |
| 0x00000002 | The phonetic text run is displayed using the hiragana character set (1). This value is ignored if the text is not Japanese.        |
| 0x00000003 | No character set (1) conversion is performed to the phonetic text run. Text is displayed as entered.                               |

**phAli (4 bytes):** An unsigned integer that specifies the default alignment of phonetic text runs in the sheet. This value **MUST** be a value from the following table.

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Left justify all characters of all phonetic text runs above the entire base text. |
| 0x00000001 | Left justify the characters of each phonetic text run above its <b>text run</b> . |
| 0x00000002 | Center the characters of each phonetic text run above its text run.               |
| 0x00000003 | Distribute the characters of each phonetic text run above its text run.           |

## 2.4.707 BrtPivotCacheConnectionName

The **BrtPivotCacheConnectionName** record specifies the connection as specified by the record **BrtBeginExtConnection** (section [2.4.76](#)) associated with the pivot cache. The pivot cache **MUST** be associated with an OLAP slicer cache (section [2.2.14.1](#)).

|                             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stConnectionName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**stConnectionName (variable):** The name of the connection associated with the pivot cache. It MUST be the same that the field **stConnName** of the **BrtBeginExtConnection** record of the connection associated with this pivot cache.

### 2.4.708 BrtPivotCacheIdVersion

The **BrtPivotCacheIdVersion** record specifies the application version specific properties of the **PivotCache Definition** (section [2.1.7.38](#)) part type. If this record exists it MUST be preceded by a **BrtBeginPCD14** (section [2.4.117](#)) record and the **icacheId** field of the preceding **BrtBeginPCD14** record MUST be equal to one of the following:

- The **pivotCacheId** attribute of the **CT\_TimelineState** ([\[MS-XLSX\]](#) section 2.6.116) child element of a **CT\_TimelineCacheDefinition** ([\[MS-XLSX\]](#) section 2.6.112) element that specifies a [Timeline cache](#).
- The value of the **cacheId** field of a **BrtBeginSxvcells** (section [2.4.260](#)) record in a PivotTable part that specifies a Non-Worksheet PivotTable (section [2.2.5.5](#)).

|                      |   |   |   |   |   |   |   |   |   |                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------------|---|---|---|---|---|---|---|---|---|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| bVerCacheIdSupported |   |   |   |   |   |   |   |   |   | bVerCacheIdCreated |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**bVerCacheIdSupported (1 byte):** A **DataFunctionalityLevel** (section [2.5.28](#)) structure that specifies the minimum data functionality level (section [2.2.5.1](#)) that the applications is required to support in order to ensure uniqueness of the PivotCache (section [2.2.5.2](#)) identifier.

**bVerCacheIdCreated (1 byte):** A **DataFunctionalityLevel** (section [2.5.28](#)) structure that specifies the data functionality level (section [2.2.5.1](#)) that the PivotCache (section [2.2.5.2](#)) was created with.

### 2.4.709 BrtPivotTableRef

The **BrtPivotTableRef** record specifies both a reference to a **PivotTable** (section [2.1.7.40](#)) structure and the beginning of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF rules.

|                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values that are listed in the following table.

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 0     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 1     |

The **FRTHHeader.RelID** specifies a relationship (section [2.1.3](#)) that specifies a **PivotCache** part containing a **PivotCache** structure that is used by a Non-Worksheet PivotTable (section [2.2.5.5](#)).

#### 2.4.710 BrtPlaceholderName

The **BrtPlaceholderName** record specifies the name of a defined name or an **add-in function** defined by an XLL or COM automation add-in. For COM automation add-in functions only, it also specifies the ProgID of the COM **object (3)** that implements the add-in function. (XLL add-in functions do not have their implementing libraries uniquely specified.)

If this record is in a sequence that follows a **BrtSupSame** (section [2.4.769](#)) record, it specifies the name of a defined name. This name is to be matched to the name of a defined name, as specified by a **BrtName** (section [2.4.680](#)) record, that is in the scope of the active sheet in the context of the evaluation of the formula (section [2.2.2](#)).

If this record is in a sequence that follows a **BrtSupAddin** (section [2.4.756](#)) record, it specifies the name of a function defined by a XLL or COM automation add-in.

|                 |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| name (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**name (variable):** An **XLNameWideString** (section [2.5.165](#)) that contains the name of a defined name or an add-in function. If this is the name of an add-in function that is implemented by a COM automation add-in, the name MUST be prefixed by the concatenation of the ProgID of that add-in and the Unicode character 0x002E (FULL STOP).

## 2.4.711 BrtPrintOptions

The **BrtPrintOptions** record specifies options for printing the sheet.

|   |   |   |   |   |          |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|----------|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5        | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | C | D | E | reserved |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fHCenter (1 bit):** A bit that specifies whether to center the printed content horizontally on the page.

**B - fVCenter (1 bit):** A bit that specifies whether to center the printed content vertically on the page.

**C - fPrintHeaders (1 bit):** A bit that specifies whether to print row (2) and column (2) **headers**. If this record is within the **Dialog Sheet** (section [2.1.7.20](#)) part, this value **MUST** be 0.

**D - fPrintGrid (1 bit):** A bit that specifies whether to print gridlines.

**E - unused (1 bit):** This value is undefined and **MUST** be ignored.

**reserved (11 bits):** This value **MUST** be 0, and **MUST** be ignored.

## 2.4.712 BrtQsi15

The **BrtQsi15** record specifies the extended properties of query table.

|          |   |          |   |   |   |   |   |   |   |    |                                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|----------|---|---|---|---|---|---|---|----|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11                               | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeder |   |          |   |   |   |   |   |   |   |    |                                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A        | B | reserved |   |   |   |   |   |   |   |    | irstPPMConnectionName (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...      |   |          |   |   |   |   |   |   |   |    |                                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeder (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fClipped (1 bit):** A bit that specifies whether query table did not fit to worksheet and was clipped.

**B - fDrillThrough (1 bit):** A bit that specifies whether a query table is a result of drillthrough operation on OLAP data source (1).

**reserved (6 bits):** This value **MUST** be 0, and **MUST** be ignored.

**irstPPMConnectionName (variable):** An **XLWideString** (section [2.5.168](#)) that contains the name of the model data source connection (section [2.2.8.9](#)) associated with this query table.



### 2.4.713 BrtRangePr15

The **BrtRangePr15** record specifies properties of a **model data source worksheet connection** (section [2.2.8.9.3](#)).

|                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| irstSourceName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record information (section [2.1.6](#)) for this record.

**irstSourceName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the string identifier of the source cell range for this connection. The string length **MUST** be less than or equal to 65,535 characters.

### 2.4.714 BrtRangeProtection

The **BrtRangeProtection** record specifies a cell range to be protected. The cell range is editable with a password or proper **credentials** when sheet protection is on and the cell is locked.

|                                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16               | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| protPwd                              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | sqRfX (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| RangeProtectionTitleSDRel (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**protPwd (2 bytes):** An unsigned integer that specifies the verifier value of the password required for editing the cell range. If the value is 0x0000 then there is no password. For details on the algorithm to generate the value, see Password Verifier Algorithm (section [2.2.9](#)).

**sqRfX (variable):** An **UncheckedSqRfX** (section [2.5.155](#)) that specifies the cell range to be protected. **sqRfX.crfx** **MUST** be greater than 0 and less than 8192.

**RangeProtectionTitleSDRel (variable):** A **RangeProtectionTitleSDRel** (section [2.5.112](#)) that specifies the title of the cell range and the **security descriptor**.

## 2.4.715 BrtRangeProtection14

The **BrtRangeProtection14** record specifies a cell range to be unprotected. The cell range is editable with a password or proper credentials when sheet protection is on and the cell is locked. This record is equivalent to **BrtRangeProtection** (section [2.4.714](#)) record but allows for 8192 or more cell ranges to be specified.

|                       |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6                                    | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| protPwd               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | RangeProtectionTitleSDRel (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** field flags MUST have the values listed in the following table:

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 1     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 0     |

The **FRTHHeader.rgSqrefs.csqref** MUST equal 1.

The **sqrfx** of the single **FRTSqref** (section [2.5.65](#)) field comprising the **array** of the **FRTHHeader.rgSqrefs** specifies the cell range to be unprotected and the value of the **sqrfx.crfx** field MUST be equal to or greater than 8192.

**protPwd (2 bytes):** An unsigned integer that specifies the verifier value of the password required for editing the cell range. If the field value is 0x0000 then there is no password. For details on the algorithm to generate the value, see Password Verifier Algorithm (section [2.2.9](#)).

**RangeProtectionTitleSDRel (variable):** A **RangeProtectionTitleSDRel** (section [2.5.112](#)) that specifies the title of the cell range and the security descriptor.

## 2.4.716 BrtRangeProtectionIso

The **BrtRangeProtectionIso** record specifies a cell range that can be unprotected in a format compatible with ISO/IEC 29500 cell range protection records as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.3.1.71. The cell range is editable with a password or proper credentials when sheet protection is on and the cell is locked. A **BrtRangeProtectionIso** record MUST be immediately followed by a **BrtRangeProtection** (section [2.4.714](#)) record whose **protPwd** field

value MUST be set to 0x0000 and whose **sqRfX** and **RangeProtectionTitleSDRel** field values MUST be the same as the values of the fields with the same names in the **BrtrangeProtectionIso** record.

|                                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dwSpinCount                          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sqRfX (variable)                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| RangeProtectionTitleSDRel (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ipdPasswordData (variable)           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**dwSpinCount (4 bytes):** An unsigned 32-bit integer that specifies the number of times that the hash function was iterated over the password to generate the **rgbHash** field of **ipdPasswordData**, as described in the Strong Password Verifier Algorithm (section [2.2.10](#)). The value of the **dwSpinCount** field MUST NOT be greater than 10,000,000.

**sqRfX (variable):** An **UncheckedSqRfX** (section [2.5.155](#)) that specifies the cell range to be protected. The value of the **sqRfX.crfx** field MUST be greater than 0. It MUST have the same value as the **sqRFX** field in the following **BrtrangeProtection** (section [2.4.714](#)) record.

**RangeProtectionTitleSDRel (variable):** A **RangeProtectionTitleSDRel** (section [2.5.112](#)) that specifies the title of the cell range and the security descriptor.

**ipdPasswordData (variable):** An **IsoPasswordData** (section [2.5.79](#)) that specifies the salt, hash algorithm and password hash of the password required for editing the cell range, calculated using the Strong Password Verifier Algorithm (section [2.2.10](#)). The size of the **rgbHash** member of this field MUST NOT be zero.

#### 2.4.717 BrtrangeProtectionIso14

The **BrtrangeProtectionIso14** record specifies a cell range that can be unprotected in a format compatible with ISO/IEC 29500 cell range protection records as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.3.1.71. The cell range is editable with a password or proper credentials when sheet protection is on and the cell is locked. A **BrtrangeProtectionIso14** record MUST be immediately followed by a **BrtrangeProtection14** (section [2.4.715](#)) record whose **protPwd** field value MUST be set to 0x0000 and whose **FRTHeader** and **RangeProtectionTitleSDRel** fields MUST have the same values as the fields of the same names in the **BrtrangeProtectionIso14** record.

|                                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader (variable)                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| dwSpinCount                          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| RangeProtectionTitleSDRel (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ipdPasswordData (variable)           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (variable):** An **FRTHHeader** that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** flags MUST have the values listed in the following table:

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 1     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 0     |

The **FRTHHeader.rgSqrefs.csqref** MUST equal 1.

The **sqrfx** field of the single **FRTSqref** (section [2.5.65](#)) structure, which comprises an **array** of **FRTHHeader.rgSqrefs** fields, specifies the cell range that can be unprotected. The value of the **sqrfx.crfx** MUST be equal to or greater than 8192.

**dwSpinCount (4 bytes):** An unsigned 32-bit integer that specifies the number of times that the hash function was iterated over the password to generate the **rgbHash** field of **ipdPasswordData**, as described in the Strong Password Verifier Algorithm (section [2.2.10](#)). It MUST NOT be greater than 10,000,000.

**RangeProtectionTitleSDRel (variable):** A **RangeProtectionTitleSDRel** (section [2.5.112](#)) that specifies the title of the cell range and the security descriptor.

**ipdPasswordData (variable):** An **IsoPasswordData** (section [2.5.79](#)) that specifies the salt, hash algorithm and password hash of the password required for editing the cell range, calculated using the Strong Password Verifier Algorithm. The size of the **rgbHash** member of this field MUST NOT be zero.

## 2.4.718 BrtRowHdr

The **BrtRowHdr** record specifies row (2) information and specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies the beginning of a new row (2).

|       |           |   |   |   |                         |          |   |   |   |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|-----------|---|---|---|-------------------------|----------|---|---|---|----|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1         | 2 | 3 | 4 | 5                       | 6        | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18        | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rw    |           |   |   |   |                         |          |   |   |   |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ixfe  |           |   |   |   |                         |          |   |   |   |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |
| miyRw |           |   |   |   |                         |          |   |   |   |    |    |    |    |    |    | A  | B  | reserved1 |    |    |    |    |    | C  | D  | E  | F  | G  | H  |    |    |
| I     | reserved2 |   |   |   |                         | ccolspan |   |   |   |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...   |           |   |   |   | rgBrtColspan (variable) |          |   |   |   |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...   |           |   |   |   |                         |          |   |   |   |    |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rw (4 bytes):** A **Rw** (section [2.5.125](#)) that specifies the index of the row (2) this record represents. The value of this field MUST be less than 0x00100000 (1048576) and MUST be greater than the value of the **rw** field in any other **BrtRowHdr** (section [2.4.718](#)) records on the same sheet that are specified before this record.

**ixfe (4 bytes):** An unsigned integer that specifies a zero-based index of a **BrtXF** (section [2.4.816](#)) record in the collection of all records directly following the **BrtBeginCellXFs** (section [2.4.20](#)) record in the styles (section [2.1.7.50](#)) part. The referenced **BrtXF** specifies the format to apply as the default format for the row (2). This value MUST be less than the value of the **cxfs** field of the **BrtBeginCellXFs** record in the styles part. MUST be ignored if the value of the **fGhostDirty** field is 0.

**miyRw (2 bytes):** An unsigned integer that specifies the height of the row (2) in twips. The value of this field MUST be less than or equal to 0x2000 (8192) and MUST be ignored if the value of the **fUnsynced** field is 0.

**A - fExtraAsc (1 bit):** A bit that specifies whether to allocate padding for the top of this row (2) for a thick top cell border.

**B - fExtraDsc (1 bit):** A bit that specifies whether to allocate padding for the bottom of this row (2). This padding is for either a medium or thick bottom cell border.

**reserved1 (6 bits):** The value of this field MUST be 0, and MUST be ignored.

**C - iOutLevel (3 bits):** An unsigned integer that specifies the outline level (1) for this row (2).

**D - fCollapsed (1 bit):** A bit that specifies whether the preceding rows (2), which have an **iOutLevel** field value greater than the **iOutLevel** field value of this row (2), are in the **collapsed outline state**.

**E - fDyZero (1 bit):** A bit that specifies whether this row (2) is hidden.

**F - fUnsynced (1 bit):** A bit that specifies whether the row (2) height has been manually specified.

**G - fGhostDirty (1 bit):** A bit that specifies whether the row (2) style as specified by the **ixfe** field is applied.

**H - fReserved (1 bit):** The value of this field MUST be 0, and MUST be ignored.

**I - fPhShow (1 bit):** A bit that specifies whether the cells in this row (2) default to having the **phonetic guide** enabled. <39>

**reserved2 (7 bits):** The value of this field MUST be 0, and MUST be ignored.

**ccolspan (4 bytes):** An unsigned integer that specifies the number of **BrColSpan** (section 2.5.8) elements in **rgBrColspan**. The value of this field MUST be less than or equal to 16.

**rgBrColspan (variable):** An array of **BrColSpan** structures that specify the permissible locations for cells within this row (2). Cells within this row (2) MUST have a column (2) value within the range specified by the union of all of the elements of this array.

## 2.4.719 BrtRRAutoFmt

The **BrtRRAutoFmt** record specifies a revision record (section 2.2.12.4) of a change in AutoFormat information for a table.

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----------------|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16             | 17 | 18 | 19 | 20 | 21 | 22       | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |  |
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | itbl           |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | A              | B  | C  | D  | E  | F  | reserved |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | rfx (16 bytes) |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |

**rrd (14 bytes):** An **RRd** (section 2.5.123) record with the following stipulation:

| Field           | Restriction  |
|-----------------|--|
| <b>rrd.revt</b> | MUST be 0x000C ( <b>REVTAUTOFMT</b> ). See section 2.5.116 for definition. |

**itbl (4 bytes):** A signed integer that specifies which table AutoFormat to apply. The value corresponds to the values specified by **AutoFormatID** (section 2.5.3). The value of this field MUST be greater than or equal to 0, and it MUST be less than or equal to 20.

**A - fAtrNum (1 bit):** A bit that specifies whether to apply legacy table AutoFormat number properties.

**B - fAtrFnt (1 bit):** A bit that specifies whether to apply legacy table AutoFormat font properties.

**C - fAtrAlc (1 bit):** A bit that specifies whether to apply legacy table AutoFormat alignment properties.

**D - fAtrBdr (1 bit):** A bit that specifies whether to apply legacy table AutoFormat border properties.

**E - fAtrPat (1 bit):** A bit that specifies whether to apply legacy table AutoFormat pattern properties.

**F - fAtrWidth (1 bit):** A bit that specifies whether to apply legacy table AutoFormat width and height properties.

**reserved (26 bits):** The value of this field MUST be 0 and MUST be ignored.

**rfx (16 bytes):** An **UncheckedRfX** (section [2.5.153](#)) that specifies the range of cells this record applies to.

## 2.4.720 BrtRRChgCell

The **BrtRRChgCell** record specifies properties of changes to a cell that have moved and specifies the beginning of a collection of records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF. The collection of records specifies changes to a cell.

|                |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    |                |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |
|----------------|---|---|---|---|---|---|---|---|---|----|----|---------|----------|----|----|----------------|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|--|--|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12      | 13       | 14 | 15 | 16             | 17    | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |  |  |  |
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    |                |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    |                |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    | rw             |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    | col            |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    | vt             | vtOld | A  | B  | C  | D  | E  | F  | G  | H  | I  |    |    |    |    |    |  |  |  |  |  |  |  |  |
| ifmtDisp       |   |   |   |   |   |   |   | J | K | L  | M  | unused2 | cbOldVal |    |    |                |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    | rgb (variable) |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |
| ...            |   |   |   |   |   |   |   |   |   |    |    |         |          |    |    |                |       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |  |  |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) record with the following stipulations:

| Field                | Restrictions  |
|----------------------|---|
| <b>rrd.revt</b>      | MUST be 0x0008 ( <b>REVTCHANGECELL</b> ). See section <a href="#">2.5.116</a> for definition. |
| <b>rrd.reserved2</b> | MUST be 0 and MUST be ignored.  |

**rw (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) structure that specifies the row (2) of the cell.

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) structure that specifies the column (2) of the cell.

**vt (3 bits):** An unsigned integer that specifies the type of value in the new cell contents. The value of this field MUST be one of the following values:

| Value | Description  |
|-------|--|
| 0x0   | Specifies a blank cell   |
| 0x1   | Specifies a <b>RkNumber</b> (section <a href="#">2.5.122</a> ) value |
| 0x2   | Specifies a constant real number value                               |
| 0x3   | Specifies a string value   |
| 0x4   | Specifies a Boolean or error value                                   |
| 0x5   | Specifies an expression  |

**vtOld (3 bits):** An unsigned integer that specifies the type of value in the old cell contents. The value of this field MUST be one of the values as specified by the **vt** field.

**A - f123Prefix (1 bit):** A bit that specifies whether a single quote prefix is used. A single quote prefix causes the cell contents to be treated as a string. This value applies only if **vt** is 0x3.

**B - reserved (1 bit):** The value of this field MUST be 0 and MUST be ignored.

**C - fOldFmt (1 bit):** A bit that specifies whether old formatting information is available for this cell. If this value is 1 and **fOldFmtNull** is 0, then the next **BrBeginDXFs** (section [2.4.55](#)) record specifies the old formatting.

**D - fOldFmtNull (1 bit):** A bit that specifies if the old formatting information is empty. The value of this field MUST be ignored if the value of the **fOldFmt** field is 0. If the value of the **fOldFmt** field is 1 and this value is 0, then the next **BrBeginDXFs** record specifies the old formatting.

**E - fXfDxf (1 bit):** A bit that specifies that the affected cells have their format reset to the format defined by the current style before applying any format from the **BrDXF** (section [2.4.342](#)) record, if present.

**F - fStyXfDxf (1 bit):** A bit that specifies that the format of the cell needs to be cleared before applying any format from the **BrDXF** record, if present.

**G - fDxf (1 bit):** A bit that specifies whether there was a formatting change for this cell. If this value is 1 and **fDxfNull** is 0, then there MUST be a **BrBeginDXFs** record sequence that specifies the new formatting. If **fOldFmt** is 1 and **fOldFmtNull** is 0, then the formatting



change will be the second **BrtBeginDXFs** record sequence. Otherwise, it will be the next **BrtBeginDXFs** record sequence.

**H - fDxfNull (1 bit):** A bit that specifies whether the new formatting information is empty. The value of this field MUST be ignored if value of the **fDxf** field is 0. If the value of the **fDxf** field is 1, and this value is 0, then there MUST be a **BrtBeginDXFs** record sequence that specifies the new formatting. If the value of the **fOldFmt** field is 1 and the value of the **fOldFmtNull** field is 0, then the formatting change will be the second **BrtBeginDXFs** record sequence. Otherwise, it will be the next **BrtBeginDXFs** record sequence.

**I - unused1 (2 bits):** Undefined and MUST be ignored.

**ifmtDisp (8 bits):** An **Ifmt** (section [2.5.76](#)) that specifies the number format for this cell. MUST be one of the built-in number formats whose identifier is less than or equal to 59.

**J - fPhShow (1 bit):** A bit that specifies whether the new contents of the cell contain phonetic information.

**K - fPhShowOld (1 bit):** A bit that specifies whether the old contents of the cell contain phonetic information.

**L - fEOLFmlaUpdate (1 bit):** A bit that specifies whether this cell was changed because of an automatic update to the formula (section [2.2.2](#)).

**M - fHaveOldCell (1 bit):** A bit that specifies whether the old cell contents are specified by the next set of records. If this value is 0, then the next record represents the new cell contents. Otherwise, there will be two sets of cell records, of which the first is the old cell contents and the second is the new cell contents.

**unused2 (4 bits):** Undefined and MUST be ignored.

**cbOldVal (4 bytes):** A signed integer that MUST be ignored. If this value is greater than 0, the value of the **fHaveOldCell** field MUST be 1.

**rgb (variable):** An **SqEtxp** (section [2.5.137](#)) that specifies font information for this record.

## 2.4.721 BrtRRConflict

The **BrtRRConflict** record specifies that the revision log (section [2.1.7.44](#)) entry which has the same **rrd.revid** as this **BrtRRConflict** record was undone as the result of a conflict resolution.

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) that specifies common revision information for this record. **rrd** has the following additional stipulations:

| Field                  | Restrictions   |
|------------------------|--|
| <b>rrd.rev</b>         | MUST be 0x0025 ( <b>REVTCONFLICT</b> ). See section <a href="#">2.5.116</a> for definition.              |
| <b>rrd.revid</b>       | MUST be greater than 0.  |
| <b>rrd.fAccepted</b>   | MUST be the same as <b>fUndoAction</b> <40>.   |
| <b>rrd.fUndoAction</b> | When true, specifies this revision occurred because another revision was rejected, and therefore undone. |
| <b>rrd.reserved1</b>   | MUST be 0 and MUST be ignored.   |
| <b>rrd.reserved2</b>   | MUST be 0 and MUST be ignored.   |
| <b>rrd.tabid</b>       | MUST NOT be 0xFFFF.  |

## 2.4.722 BrtRRDefName

The **BrtRRDefName** record specifies a revision record (section [2.2.12.4](#)) associated with a change to a defined name.

| 0                       | 1 | 2        | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10    | 11 | 12 | 13 | 14 | 15 | 16                | 17 | 18 | 19 | 20       | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |
|-------------------------|---|----------|---|---|---|---|---|---|---|-------|----|----|----|----|----|-------------------|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|--|--|
| rrd (14 bytes)          |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    | tabidLocal        |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| A                       | B | reserved |   |   |   |   |   |   |   | grbit |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    | grbitOld |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    | fgrp              |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    | fgrpOld           |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    | stName (variable) |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| rgce (variable)         |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...                     |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |
| stCustommenu (variable) |   |          |   |   |   |   |   |   |   |       |    |    |    |    |    |                   |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |  |  |

|                             |
|-----------------------------|
| ...                         |
| stDescription (variable)    |
| ...                         |
| stHelptopic (variable)      |
| ...                         |
| stStatustext (variable)     |
| ...                         |
| stComment (variable)        |
| ...                         |
| rgceOld (variable)          |
| ...                         |
| stOldCustommenu (variable)  |
| ...                         |
| stOldDescription (variable) |
| ...                         |
| stOldHelptopic (variable)   |
| ...                         |
| stOldStatustext (variable)  |
| ...                         |
| stOldComment (variable)     |
| ...                         |

**rrd (14 bytes):** A **RRd** (section [2.5.123](#)) that specifies shared revision data for this revision record (section [2.2.12.4](#)). The **rrd** field has the following additional stipulations:

| Field                | Restrictions  |
|----------------------|---|
| <b>rrd.rev</b>       | Field value MUST be 0x000A ( <b>REVDEFNAME</b> ) or 0x0022 ( <b>REVTOLDNAME</b> ). See section <a href="#">2.5.116</a> for definitions. |
| <b>rrd.revid</b>     | Field value MUST be greater than or equal to 0.   |
| <b>rrd.reserved2</b> | Field value MUST be 0 and MUST be ignored.  |

**tabidLocal (2 bytes):** A signed integer that specifies the identifier of the sheet to which this defined name belongs. If the value of this field is not equal to 0xFFFF, then this value is defined in a sheet scope and MUST be equal to an **iTabID** field value from the **BrtBeginBundleShs** (section [2.4.13](#)) collection. The value 0xFFFF means that the defined name does not belong to any sheet.

**A - fViewName (1 bit):** A bit that specifies whether this named range belongs to a custom view.

**B - fBuiltin (1 bit):** A bit that specifies whether the name is a built-in name.

**reserved (6 bits):** The value of this field MUST be 0 and MUST be ignored.

**grbit (6 bytes):** A **RRdDnGrbit** (section [2.5.124](#)) that specifies data for the new state of the defined name for this record.

**grbitOld (6 bytes):** A **RRdDnGrbit** that specifies data for the old state of the defined name for this record.

**fgrp (4 bytes):** A **FnGroupID** (section [2.5.51](#)) that specifies the **fgrp** field of **RRdDnGrbit**. The value of this field MUST be the same as the value of the **fgrp** field from **grbit**.

**fgrpOld (4 bytes):** A **FnGroupID** that specifies the function group identifier of the old name, which corresponds to the **fgrp** field of **RRdDnGrbit**. The value of this field MUST be the same as the value of the **fgrp** field from **grbitOld**.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name for the new defined name. The length of this string MUST be less than or equal to 255. This field has the same meaning as the **name** field of **BrtName** (section [2.4.680](#)).

**rgce (variable):** A **NameParsedFormula** (section [2.5.97.12](#)) that specifies the formula (section [2.2.2](#)) of the new name.

**stCustommenu (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the new custom menu text. The length of this string MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fCustommenu** field from **grbit** is 0.

**stDescription (variable):** An **XLNullableWideString** that specifies the new description text. The length of this field MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fDescription** field from **grbit** is 0.

**stHelptopic (variable):** An **XLNullableWideString** that specifies the new help text. The length of this field MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fHelptopic** field from **grbit** is 0.

**stStatustext (variable):** An **XLNullableWideString** that specifies the new status bar text. The length of this field MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fStatustext** field from **grbit** is 0.

**stComment (variable):** An **XLNullableWideString** that specifies the new comment text. The length of this field MUST be less than or equal to 255.

**rgceOld (variable):** A **NameParsedFormula** that specifies the formula of the old name.

**stOldCustommenu (variable):** An **XLNullableWideString** that specifies the old custom menu text. The length of this field MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fCustommenu** field from **grbitOld** is 0.

**stOldDescription (variable):** An **XLNullableWideString** that specifies the old description text. The length of this field MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fDescription** field from **grbitOld** is 0.

**stOldHelptopic (variable):** An **XLNullableWideString** that specifies the old help text. The length of this field MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fHelptopic** field from **grbitOld** is 0.

**stOldStatustext (variable):** An **XLNullableWideString** that specifies the old status bar text. The length of this field MUST be less than or equal to 32767. This field MUST be NULL if the value of the **fStatustext** field from **grbitOld** is 0.

**stOldComment (variable):** An **XLNullableWideString** that specifies the old comment text. The length of this field MUST be less than or equal to 255.

#### 2.4.723 BrtRREndChgCell

The **BrtRREndChgCell** record specifies the end of a collection of records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF. The collection of records specifies changes to a cell.

#### 2.4.724 BrtRREndFormat

The **BrtRREndFormat** record specifies the end of a collection of records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF. The collection of records specifies a formatting change that has been applied to a shared workbook.

#### 2.4.725 BrtRREndInsDel

The **BrtRREndInsDel** record specifies the end of a collection of records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF. The collection of records specifies a row insert, row delete, column insert, or row delete operation.

#### 2.4.726 BrtRREndMove

The **BrtRREndMove** record specifies the end of a collection of records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF. The collection of records specifies revision record (section [2.2.12.4](#)) information about cells that have moved.

#### 2.4.727 BrtRRFormat

The **BrtRRFormat** record specifies a formatting change that has been applied to a shared workbook and specifies the beginning of a collection of records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF. The collection of records specifies a formatting change that has been applied to a shared workbook.

|                |   |   |   |   |   |   |   |   |   |    |    |    |          |    |    |    |    |     |    |    |    |                  |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----------|----|----|----|----|-----|----|----|----|------------------|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13       | 14 | 15 | 16 | 17 | 18  | 19 | 20 | 21 | 22               | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |          |    |    |    |    |     |    |    |    |                  |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |          |    |    |    |    |     |    |    |    |                  |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   | A  | B  | C  | reserved |    |    |    |    | ich |    |    |    |                  |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |          |    |    |    |    |     |    |    |    | cch              |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |          |    |    |    |    |     |    |    |    | cbrfx            |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |          |    |    |    |    |     |    |    |    | rgrfx (variable) |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |          |    |    |    |    |     |    |    |    |                  |    |    |    |    |    |    |    |    |    |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) record with the following stipulations:

| Field                | Restrictions  |
|----------------------|---|
| <b>rrd.revt</b>      | MUST be 0x000B ( <b>REVTFORMAT</b> ). See section <a href="#">2.5.116</a> for definition. |
| <b>rrd.revid</b>     | MUST be 0.  |
| <b>rrd.reserved2</b> | MUST be 0 and MUST be ignored.  |

**A - fXfDxf (1 bit):** A bit that specifies that the affected cells need to have their formats reset to the format defined by the current style before applying any format from the **BrtDXF** (section [2.4.342](#)) record, if present.

**B - fXfDxfNull (1 bit):** A bit that specifies whether a format is associated with this record. MUST be 0 if **fXfDxf** is 0.

| Value | Meaning   |
|-------|---|
| 0     | A format is associated with this record. The next record in the sequence MUST be <b>BrtBeginDXFs</b> (section <a href="#">2.4.55</a> ).   |
| 1     | The format associated with this record is null. If the next record in the sequence is <b>BrtBeginDXFs</b> the associated <b>BrtDXF</b> record MUST be exactly 6 bytes and all fields MUST be 0. |

**C - fStyXfDxf (1 bit):** A bit that specifies that the format of the cells needs to be cleared before applying any format from the **BrtDXF** record, if it is present.

**reserved (5 bits):** This value MUST be 0 and MUST be ignored.

**ich (4 bytes):**

| Value      | Meaning   |
|------------|---|
| 0xFFFFFFFF | The formatting change does not affect the contents of the affected cells. |
| 0x00000000 | The formatting change affects the contents of the affected cells.<41>     |

**cch (4 bytes):**

| Value      | Meaning  |
|------------|--|
| 0xFFFFFFFF | The formatting change does not affect the contents of the affected cells.  |
| 0x00000000 | The effect of the formatting change on cell contents was not evaluated. If the <b>BrtdXF</b> record describes content changes, treat this value as 0x7FFFFFFF; otherwise treat this value as 0xFFFFFFFF. |
| 0x7FFFFFFF | The formatting change affects the contents of the affected cells.  |

**cbrfx (4 bytes):** An unsigned integer that specifies the number of bytes in **rgrfx**. This value MUST NOT be 0xFFFFFFFF, and MUST be the number of **UncheckedRfX** (section [2.5.153](#)) elements in **rgrfx** multiplied by 16.

**rgrfx (variable):** An array of **UncheckedRfX** that specifies the cells to which this format change applies.

## 2.4.728 BrtRRHeader

The **BrtRRHeader** record specifies [metadata](#) about a list of revisions that have been made in shared workbook (section [2.2.12](#)).

| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16              | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | guid (16 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | sdtr            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | tabidMac        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| revidMin       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| revidMax       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                    |
|--------------------|
| stUser (variable)  |
| ...                |
| szRelId (variable) |
| ...                |
| ctabid             |
| rgtabid (variable) |
| ...                |
| crevid             |
| rgrevid (variable) |
| ...                |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) that specifies shared revision data. **rrd** has the following additional stipulations:

| Field              | Restrictions  |
|--------------------|---|
| <b>rrd.unused1</b> | MUST be 0xFFFFFFFF.   |
| <b>rrd.revt</b>    | MUST be 0x0020 ( <b>REVTHEADER</b> ). See section <a href="#">2.5.116</a> for definition. |
| <b>rrd.tabid</b>   | MUST be 0xFFFF.   |

Additionally, all fields of **rrd** other than those specified in the preceding table MUST be 0 and all fields of **rrd** other than **revt** MUST be ignored.

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that specifies this set of revisions.

**sdtr (8 bytes):** A **ShortDtr** (section [2.5.132](#)) that specifies the date and time when this set of revisions was saved.

**tabidMac (2 bytes):** An unsigned integer that specifies the next unused sheet identifier when this set of revisions was saved. A sheet identifier corresponds to the **iTabID** field of a **BrkBundSh** (section [2.4.301](#)) record as specified by the **Workbook** (section [2.1.7.60](#)) part ABNF. A value of 0xFFFF indicates that the next unused sheet identifier is not known.

**revidMin (4 bytes):** An unsigned integer that specifies the lowest revision identifier which is associated with this header. A revision identifier is the **rrd.revid** field of records which begin with an **RRd** (section [2.5.123](#)). This value MUST be 0 if no reviewable revisions are associated with this header; otherwise MUST be greater than 0. A reviewable revision is any record on the revision log (section [2.2.12.3](#)) that has the field **revid** of **RRd** greater than 0. MUST be less than 0xFFFFFFFF.



**revidMax (4 bytes):** An unsigned integer that specifies the highest revision identifier which is associated with this header. A revision identifier is the **rrd.revid** field of records which begin with an **RRd** (section 2.5.123). This value MUST be 0 if no reviewable revisions are associated with this header; otherwise MUST be greater than 0. A reviewable revision is any record on the revision log (section 2.2.12.3) that has the field **revid** of **RRd** (section 2.5.123) greater than 0. MUST be greater than or equal to the value of **revidMin**.

**stUser (variable):** An **XLWideString** (section 2.5.168) that specifies the name of the user responsible for this set of revisions. The length of this string MUST be greater than or equal to 1 and less than or equal to 54.

**szRelId (variable):** An **XLWideString** that specifies the relationship identifier of this set of revisions. A relationship identifier corresponds to RevisionHeaders.bin.rels. This string MUST NOT be null or empty.

**ctabid (4 bytes):** An unsigned integer that specifies the number of sheets present in the workbook when this set of revisions was saved. MUST be greater than 0 and MUST be less than 65536.

**rgtabid (variable):** An array of 2-byte unsigned integers that specifies sheet identifiers, which specify the display order of the sheets when this set of revisions was saved. A sheet identifier corresponds to the **iTabID** field of a **BrtBundleSh** (section 2.4.301) record as specified by the Workbook (section 2.1.7.60) part ABNF. MUST have length equal to **ctabid**. Elements of this array MUST NOT appear more than once and MUST have a value equal to the **iTabID** field of one of the **BrtBundleSh** records for the workbook.

**crevid (4 bytes):** An unsigned integer that specifies the number of revisions associated with this header that have been reviewed. If either **revidMin** or **revidMax** are 0, this value MUST be 0; otherwise it MUST be no greater than the value **revidMax - revidMin + 1**.

**rgrevid (variable):** An array of 32-bit unsigned integers that specifies the revision identifiers associated with this header that have been reviewed. A revision identifier is the **rrd.revid** field of records which begin with an **RRd** (section 2.5.123). The length of this array MUST be **crevid**. The elements of this array MUST NOT appear more than once, each element MUST have a value greater than or equal to **revidMin**, and each element MUST have a value less than or equal to **revidMax**.

## 2.4.729 BrtRRInsDel

The **BrtRRInsDel** record specifies properties of a revision record (section 2.2.12.4) and specifies the beginning of a collection of records as defined by the **Revision Log** (section 2.1.7.44) part ABNF. The collection of records specifies a row insert, row delete, column insert, or column delete operation.

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |                |   |   |   |   |   |   |  |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----------|---|---|---|---|---|---|---|----------------|---|---|---|---|---|---|--|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7        | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5              | 6 | 7 | 8 | 9 | 0 | 1 |  |
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |                |   |   |   |   |   |   |  |
| ...            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |                |   |   |   |   |   |   |  |
| ...            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | A | reserved |   |   |   |   |   |   |   | rfx (16 bytes) |   |   |   |   |   |   |  |

|     |
|-----|
| ... |
| ... |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) for this revision record (section [2.2.12.4](#)). **rrd** has the following additional stipulations:

| Field            | Restrictions   |
|------------------|--|
| <b>rrd.revt</b>  | MUST be 0x0000 ( <b>REVTINSRW</b> ) or 0x0001 ( <b>REVTINSCOL</b> ) or 0x0002 ( <b>REVTDELRW</b> ) or 0x0003 ( <b>REVTDELCOL</b> ). See section <a href="#">2.5.116</a> for definitions. |
| <b>rrd.revid</b> | MUST be greater than or equal to 0.  |
| <b>rrd.tabid</b> | Specifies the sheet identifier for the current sheet.  |

**A - fEndOfList (1 bit):** A bit that specifies that a row (2) was inserted at the bottom of the filled cells range. This field has meaning only if **revt** field of this record is **REVTINSRW**. MUST be 1 if data was inserted at the bottom of the filled cells range. This value MUST be 0 if data was inserted or deleted in any other place.

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

**rfx (16 bytes):** An **UncheckedRFX** (section [2.5.153](#)) that specifies a location of rows (2) or columns (2) that were inserted or deleted. If the delete or insert operation affects a full row (2), then **colFirst** MUST be 0 and **colLast** MUST be 16383. If the delete or insert operation affects a full column (2), then **rwFirst** MUST be 0 and **rwLast** MUST be 1048575.

#### 2.4.730 BrtRRInsertSh

The **BrtRRInsertSh** record specifies that a sheet has been inserted in a shared workbook (section [2.2.12](#)).

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16      | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rrd (14 bytes)    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | itabPos |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) that specifies common revision information for this record. **Rrd** has the following additional stipulations:

| Field                | Restrictions   |
|----------------------|--|
| <b>rrd.revt</b>      | MUST be 0x0005 ( <b>REVTINSERTSH</b> ) See section <a href="#">2.5.116</a> . for definition. |
| <b>rrd.revid</b>     | MUST be greater than 0.  |
| <b>rrd.reserved2</b> | MUST be 0 and MUST be ignored.   |
| <b>rrd.tabid</b>     | Specifies the sheet identifier for the newly inserted sheet. MUST NOT be 0xFFFF.             |

**itabPos (2 bytes):** An unsigned integer that specifies the sheet tab position of the sheet when it was created.

**stName (variable):** A **RevisionLogSheetName** (section [2.5.115](#)) that specifies the name of the sheet when the workbook was first saved. Any subsequent renaming operations on this sheet before the first save will alter the **stName** field of this record as well as generate **BrtRRRenSheet** (section [2.4.733](#)) records.

### 2.4.731 BrtRRMove

The **BrtRRMove** record specifies properties of a range of cells that have moved and specifies the beginning of a collection of records as defined by the **Revision Log** (section [2.1.7.44](#)) part ABNF. The collection of records specifies revision record (section [2.2.12.4](#)) information about cells that have moved.

| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | rfxSrc (16 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | rfxDst (16 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | tabidSrc          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) that specifies shared revision data for this revision record. **rrd** has the following additional stipulations:

| Field                | Restrictions  |
|----------------------|---|
| <b>rrd.revt</b>      | MUST be 0x0004 ( <b>REVTMOVE</b> ). See section <a href="#">2.5.116</a> for definition. |
| <b>rrd.revid</b>     | MUST be greater than or equal to 0.   |
| <b>rrd.reserved2</b> | MUST be 0 and MUST be ignored.  |

**rfxSrc (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) that specifies the original location of the range of cells that have moved. The size of **rfxSrc** MUST be the same as size of **rfxDst**.

**rfxDst (16 bytes):** An **UncheckedRfx** that specifies the location of the range of cells that have moved. Size of **rfxDst** MUST be the same as size of **rfxSrc**.

**tabidSrc (2 bytes):** A signed integer that specifies the identifier of the source sheet. The source sheet is the sheet where the range of cells originally resided. The value of this field MUST be equal to an **itabid** value from the **BrBeginBundles** (section [2.4.13](#)) collection.

## 2.4.732 BrtRRNote

The **BrtRRNote** record specifies a revision record (section [2.2.12.4](#)) for a comment.

|                |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    |                   |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
|----------------|---|-----------|---|---|---|---|---|-----------|---|----|----|----|----|----|----|-------------------|----|-----------|----|----|----|-----------------|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|
| 0              | 1 | 2         | 3 | 4 | 5 | 6 | 7 | 8         | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                | 17 | 18        | 19 | 20 | 21 | 22              | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |  |
| rrd (14 bytes) |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    |                   |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    |                   |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    | rwu               |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    | colu              |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    | A                 | B  | reserved1 |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            | C | reserved2 |   |   |   | D | E | reserved3 |   |    |    |    |    |    |    |                   |    |           |    |    |    | guid (16 bytes) |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    |                   |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    | ichEnd            |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    | cchNote           |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    | author (variable) |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...            |   |           |   |   |   |   |   |           |   |    |    |    |    |    |    |                   |    |           |    |    |    |                 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) that specifies information about the revision record (section [2.2.12.4](#)). The **revt** field of **RRd** MUST be 0x000D

**rwu (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) that contains the comment.

**colu (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) that contains the comment.

**A - bitfDelNote (1 bit):** A bit that specifies whether the comment is being deleted.

**B - bitfAddNote (1 bit):** A bit that specifies whether the comment is being added.

**reserved1 (15 bits):** This value MUST be 0 and MUST be ignored.

**C - fShow (1 bit):** A bit that specifies whether the comment is shown.

**reserved2 (5 bits):** This value MUST be 0 and MUST be ignored.

**D - fRwHidden (1 bit):** A bit that specifies whether the row (2) that contains the comment is hidden.

**E - fColHidden (1 bit):** A bit that specifies whether the column (2) that contains the comment is hidden.

**reserved3 (7 bits):** This value MUST be 0 and MUST be ignored.

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that identifies the comment. If the **guid** field of **BrBeginComment** (section [2.4.28](#)) matches this, then this is referring to the same comment.

**ichEnd (4 bytes):** A signed integer that specifies the length of the comment before the revision.

**cchNote (4 bytes):** A signed integer that specifies the length of the string that was added to the comment.

**author (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the author of the comment.

### 2.4.733 BrtRRRenSheet

The **BrtRRRenSheet** record specifies that a sheet has been renamed in a shared workbook (section [2.2.12](#)).

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                   | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rrd (14 bytes)       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | stOldName (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stNewName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rrd (14 bytes):** An **RRd** (section [2.5.123](#)) that specifies common revision information for this record. **rrd** has the following additional stipulations:

| Field          | Restrictions  |
|----------------|---|
| <b>rrd.rev</b> | MUST be 0x0009 ( <b>REVTRENSHEET</b> ). See section <a href="#">2.5.116</a> for definition. |

| Field                | Restrictions                   |
|----------------------|--------------------------------|
| <b>rrd.revid</b>     | MUST be greater than 0.        |
| <b>rrd.reserved2</b> | MUST be 0 and MUST be ignored. |
| <b>rrd.tabid</b>     | MUST NOT be 0xFFFF.            |

**stOldName (variable):** A **RevisionLogSheetName** (section [2.5.115](#)) that specifies the old name of the sheet.

**stNewName (variable):** A **RevisionLogSheetName** that specifies the new name of the sheet.

#### 2.4.734 BrtRRSortItem

The **BrtRRSortItem** record specifies a single row (2) or column (2) mapping in a sort map (section [2.2.12.10](#)).

| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10      | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|---|---|---|---|---|---|---|---|---|---|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
|   |   |   |   |   |   |   |   |   |   | iNewVal |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|   |   |   |   |   |   |   |   |   |   | iOldVal |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iNewVal (4 bytes):** An unsigned integer that specifies the new row (2) or column (2). If the **fCol** field of the preceding **BrtBeginRRSort** (section [2.4.184](#)) is 0, then this value specifies a row (2) and MUST be less than 1048576. Otherwise, this value specifies a column (2) and MUST be less than 16384.

**iOldVal (4 bytes):** An unsigned integer that specifies the old row (2) or column (2). If the **fCol** field of the preceding **BrtBeginRRSort** is 0, then this value specifies a row (2) index and MUST be less than 1048576. Otherwise, this value specifies a column (2) and MUST be less than 16384.

#### 2.4.735 BrtRRTSIF

The **BrtRRTSIF** record specifies a revision record (section [2.2.12.4](#)) of a changed field in a query table.

| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10             | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20             | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|---|---|---|---|---|---|---|---|---|---|----------------|----|----|----|----|----|----|----|----|----|----------------|----|----|----|----|----|----|----|----|----|----|----|
|   |   |   |   |   |   |   |   |   |   | rrd (14 bytes) |    |    |    |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |
|   |   |   |   |   |   |   |   |   |   | ...            |    |    |    |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |
|   |   |   |   |   |   |   |   |   |   | ...            |    |    |    |    |    |    |    |    |    | rfx (16 bytes) |    |    |    |    |    |    |    |    |    |    |    |
|   |   |   |   |   |   |   |   |   |   | ...            |    |    |    |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |

|     |           |
|-----|-----------|
| ... | dwFieldId |
| ... |           |

**rrd (14 bytes):** A **RRd** (section [2.5.123](#)) that specifies common revision information for this record. **rrd** has the following additional stipulations:

| Field                | Restrictions  |
|----------------------|---|
| <b>rrd.rev</b>       | MUST be 0x002E ( <b>REVTTRASHQTFIELD</b> ). See section <a href="#">2.5.116</a> for definition. |
| <b>rrd.revid</b>     | MUST be greater than or equal to 0.   |
| <b>rrd.reserved2</b> | MUST be 0 and MUST be ignored.  |
| <b>rrd.tabid</b>     | MUST NOT be 0xFFFF.   |

**rfx (16 bytes):** An **UncheckedRfX** (section [2.5.153](#)) that specifies the location of the affected query table.

**dwFieldId (4 bytes):** An unsigned integer that specifies the identifier of the specific field of the query table that was removed. The value of **dwFieldId** MUST be greater than 0x00000000. The value of this field MUST be equal to one of the **idField** values from the collection of **BrtBeginQSIF** (section [2.4.181](#)) records defined for this query table.

## 2.4.736 BrtRRUserView

The **BrtRRUserView** record specifies a revision record (section [2.2.12.4](#)) of adding or removing a custom view to the workbook.

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16              | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rrd (14 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | guid (16 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rrd (14 bytes):** A **RRd** (section [2.5.123](#)) value for this revision record (section [2.2.12.4](#)).

| Field        | Restrictions   |
|--------------|--|
| <b>rev</b>   | MUST be 0x002B ( <b>REVTADDVIEW</b> ) or 0x002C ( <b>REVTDELVIEW</b> ). See section <a href="#">2.5.116</a> for definitions. |
| <b>revid</b> | MUST be greater than or equal to 0.  |

| Field            | Restrictions                   |
|------------------|--------------------------------|
| <b>reserved2</b> | MUST be 0 and MUST be ignored. |

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that specifies the custom view defined by the user. MUST be globally unique. The value of this field MUST be equal to one of the **guid** fields of **BrtBeginUserShView** (section [2.4.282](#)) items in the **BrtBeginUserShViews** (section [2.4.283](#)) collection in the sheet.

### 2.4.737 BrtRwDescent

The **BrtRwDescent** record specifies the vertical distance in **pixels** from the bottom of the cell to the typographical baseline of the cell contents for the current row (2). This record MUST be present for every non-empty row (2) in all **Macro Sheet** (section [2.1.7.32](#)) and **Worksheet** parts (see section [2.2.1](#) for more information) in the workbook if and only if the **BrtKnownFonts** (section [2.4.665](#)) record is present in the workbook, as defined by the **Styles** (section [2.1.7.50](#)) part ABNF.

|           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| dyDescent |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**dyDescent (2 bytes):** An unsigned integer that specifies the vertical distance in pixels from the bottom of the cells in the current row (2) to the typographical baseline of the cell content, if hypothetically the zoom level for the sheet containing this row (2) is 100 and the cell has bottom alignment formatting (see **alcv** in section [2.4.816](#)). For example, if a cell with a particular font has bottom alignment formatting, is viewed at a zoom level of 100, and has a corresponding **dyDescent** value of 5 pixels, then the **dyDescent** value is still 5 pixels if the cell actually has different alignment formatting applied (such as top alignment), or is viewed at a zoom level not equal to 100, but uses the same font, even though the vertical distance onscreen from the typographical baseline to the bottom of the cell is not necessarily 5 pixels. MUST be greater than or equal to 0 and less than or equal to 255. For rows (2) with cells containing different fonts, this value specifies the maximum of all vertical distances in pixels from the bottom to the typographical baseline of each of the cells in the current row (2). For more information about how cells are stored in rows (2), see section [2.2.1](#).

### 2.4.738 BrtSel

The **BrtSel** record specifies cell selection for a sheet.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| pnn      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rwAct    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colAct   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwRfxAct |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |



|                  |
|------------------|
| sqrfx (variable) |
| ...              |

**pnn (4 bytes):** A **Pnn** (section [2.5.107](#)) that specifies the pane to which this selection belongs.

**rwAct (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) of the active cell. The value MUST be the index of a row (2) in the range in **sqrfx** that is specified by **dwRfxAct**.

**colAct (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) of the active cell. The value MUST be the index of a column (2) in the range in **sqrfx** that is specified by **dwRfxAct**.

**dwRfxAct (4 bytes):** An unsigned integer that specifies a zero-based index of a **RfX** (section [2.5.117](#)) structure in the array of **RfX** specified by **sqrfx**. The referenced **RfX** specifies the range that contains the active cell within the collection of all non-contiguous ranges within **sqrfx**. MUST be less than **sqrfx.crfx**.

**sqrfx (variable):** An **UncheckedSqRfx** (section [2.5.155](#)) that specifies a collection of all non-contiguous ranges within the selection. **sqrfx.crfx** MUST be less than or equal to 32767.

#### 2.4.739 BrtSheetCalcProp

The **BrtSheetCalcProp** record specifies sheet calculation properties.

|   |   |   |   |   |   |   |          |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|---|---|---|---|---|---|---|----------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7        | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| A |   |   |   |   |   |   | reserved |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**A - fFullCalcOnLoad (1 bit):** A bit that specifies whether the application recalculates the results of all formulas on this sheet immediately after loading the file.

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

#### 2.4.740 BrtSheetProtection

The **BrtSheetProtection** record specifies protection options for a Worksheet, **Dialog Sheet** (section [2.1.7.20](#)), or **Macro Sheet** (section [2.1.7.32](#)).

|         |   |   |   |   |   |   |   |   |   |              |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|---------|---|---|---|---|---|---|---|---|---|--------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10           | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| protpwd |   |   |   |   |   |   |   |   |   | fLocked      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ...     |   |   |   |   |   |   |   |   |   | fObjects     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ...     |   |   |   |   |   |   |   |   |   | fScenarios   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ...     |   |   |   |   |   |   |   |   |   | fFormatCells |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

|     |                   |
|-----|-------------------|
| ... | fFormatColumns    |
| ... | fFormatRows       |
| ... | fInsertColumns    |
| ... | fInsertRows       |
| ... | fInsertHyperlinks |
| ... | fDeleteColumns    |
| ... | fDeleteRows       |
| ... | fSelLockedCells   |
| ... | fSort             |
| ... | fAutoFilter       |
| ... | fPivotTables      |
| ... | fSelUnlockedCells |
| ... |                   |

**protpwd (2 bytes):** An unsigned integer that specifies the verifier value of the password required for editing the sheet. If the value is 0x0000, then there is no password. The algorithm to generate the verifier value is documented in Password Verifier Algorithm (section [2.2.9](#)).

**fLocked (4 bytes):** A **Boolean** (section [2.5.97.3](#)) with a meaning that depends on the type of sheet. For a worksheet the value specifies whether the worksheet and the contents of locked cells are protected. For a macro sheet the value specifies whether the macro sheet is protected. For a dialog sheet it is undefined and **MUST** be ignored.

For worksheets and macro sheets it **MUST** be a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | The worksheet and contents of locked cells are not protected.<br>The macro sheet is not protected. |
| 0x00000001 | The worksheet and contents of locked cells are protected.<br>The macro sheet is protected.         |

**fObjects (4 bytes):** A **Boolean** with a meaning that depends on the type of sheet. When the sheet is a worksheet or macro sheet and the value of **fLocked** is 0x00000001, this field

specifies whether editing of objects is allowed. Undefined and MUST be ignored if the sheet is a worksheet or macro sheet and **fLocked** is 0x00000000.

When the sheet is a dialog sheet, this field specifies whether the dialog sheet is protected. The value of **fScenarios** MUST be the same as the value of this field.

MUST be a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Editing of objects (3) is not allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is protected. |
| 0x00000001 | Editing of objects (3) is allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is not protected. |

**fScenarios (4 bytes):** A **Boolean** with a meaning that depends on the type of sheet. When the sheet is a worksheet or macro sheet and the value of **fLocked** is 0x00000001, this field specifies whether editing of scenarios is allowed. Undefined and MUST be ignored if the sheet is a worksheet or macro sheet and **fLocked** is 0x00000000.

When the sheet is a dialog sheet, this field specifies whether the dialog sheet is protected. The value of **fObjects** MUST be the same as the value of this field.

MUST be a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Editing of scenarios is not allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is protected. |
| 0x00000001 | Editing of scenarios is allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is not protected. |

**fFormatCells (4 bytes):** A **Boolean** that specifies whether formatting of cells is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Formatting of cells is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Formatting of cells is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fFormatColumns (4 bytes):** A **Boolean** that specifies whether formatting of columns (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Formatting of columns (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Formatting of columns (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fFormatRows (4 bytes):** A **Boolean** that specifies whether formatting of rows (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Formatting of rows (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Formatting of rows (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fInsertColumns (4 bytes):** A **Boolean** that specifies whether insertion of columns (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Insertion of columns (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Insertion of columns (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fInsertRows (4 bytes):** A **Boolean** that specifies whether insertion of rows (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Insertion of rows (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Insertion of rows (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fInsertHyperlinks (4 bytes):** A **Boolean** that specifies whether insertion of hyperlinks is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Insertion of hyperlinks is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Insertion of hyperlinks is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fDeleteColumns (4 bytes):** A **Boolean** that specifies whether deletion of columns (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Deletion of columns (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Deletion of columns (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fDeleteRows (4 bytes):** A **Boolean** that specifies whether deletion of rows (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Deletion of rows (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Deletion of rows (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fSelLockedCells (4 bytes):** A **Boolean** that specifies whether selection of locked cells is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000001 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Selection of locked cells is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Selection of locked cells is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fSort (4 bytes):** A **Boolean** that specifies whether sorting is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Sorting is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Sorting is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fAutoFilter (4 bytes):** A **Boolean** that specifies whether use of AutoFilters is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Use of AutoFilters is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Use of AutoFilters is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fPivotTables (4 bytes):** A **Boolean** that specifies whether use of **PivotTable** (section [2.1.7.40](#)) reports is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Use of <b>PivotTable</b> reports is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Use of <b>PivotTable</b> reports is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fSelUnlockedCells (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether selection of unlocked cells is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. For a macro sheet or dialog sheet, it MUST have a value of 0x00000001 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Selection of unlocked cells is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Selection of unlocked cells is allowed when the value of <b>fLocked</b> is 0x00000001.     |

## 2.4.741 BrtSheetProtectionIso

The **BrtSheetProtectionIso** record specifies protection options for a Worksheet, **Dialog Sheet** (section [2.1.7.20](#)), or **Macro Sheet** (section [2.1.7.32](#)) in a manner compatible with ISO/IEC 29500 sheet protection records as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.3.1.85. A

**BrtSheetProtectionIso** record MUST be immediately followed by a **BrtSheetProtection** (section [2.4.740](#)) record whose **protpwd** field value MUST be set to 0x0000 and whose **fLocked**, **fObjects**, **fScenarios**, **fFormatCells**, **fFormatColumns**, **fFormatRows**, **fInsertColumns**, **fInsertRows**, **fInsertHyperlinks**, **fDeleteColumns**, **fDeleteRows**, **fSelLockedCells**, **fSort**, **fAutoFilter**, **fPivotTables** and **fSelUnlockedCells** fields MUST have the same values as the fields of the same names in the **BrtSheetProtectionIso** record.

|             |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|-------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |  |
| dwSpinCount |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| fLocked     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| fObjects    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

|                            |
|----------------------------|
| fScenarios                 |
| fFormatCells               |
| fFormatColumns             |
| fFormatRows                |
| fInsertColumns             |
| fInsertRows                |
| fInsertHyperlinks          |
| fDeleteColumns             |
| fDeleteRows                |
| fSelLockedCells            |
| fSort                      |
| fAutoFilter                |
| fPivotTables               |
| fSelUnlockedCells          |
| ipdPasswordData (variable) |
| ...                        |

**dwSpinCount (4 bytes):** An unsigned 32-bit integer that specifies the number of times that the hash function was iterated over the password to generate the **rgbHash** field of **ipdPasswordData**, as described in the Strong Password Verifier Algorithm (section [2.2.10](#)). It MUST NOT be greater than 10,000,000.

**fLocked (4 bytes):** A **Boolean** (section [2.5.97.3](#)) with a meaning that depends on the type of sheet. For a worksheet the value specifies whether the worksheet and the contents of locked cells are protected. For a macro sheet the value specifies whether the macro sheet is protected. For a dialog sheet it is undefined and MUST be ignored. It MUST have the same value as the **fLocked** field in the following **BrtSheetProtection** record.

For worksheets and macro sheets it MUST be a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | The worksheet and contents of locked cells are not protected. |

| Value      | Meaning  |
|------------|--|
|            | The macro sheet is not protected.  |
| 0x00000001 | The worksheet and contents of locked cells are protected.<br>The macro sheet is protected. |

**fObjects (4 bytes):** A **Boolean** with a meaning that depends on the type of sheet. When the sheet is a worksheet or macro sheet and the value of **fLocked** is 0x00000001, this field specifies whether editing of objects is allowed. Undefined and MUST be ignored if the sheet is a worksheet or macro sheet and **fLocked** is 0x00000000. It MUST have the same value as the **fObjects** field in the following **BrtSheetProtection** record.

When the sheet is a dialog sheet, this field specifies whether the dialog sheet is protected. The value of **fScenarios** MUST be the same as the value of this field.

MUST be a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Editing of objects is not allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is protected. |
| 0x00000001 | Editing of objects is allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is not protected. |

**fScenarios (4 bytes):** A **Boolean** with a meaning that depends on the type of sheet. When the sheet is a worksheet or macro sheet and the value of **fLocked** is 0x00000001, this field specifies whether editing of scenarios is allowed. Undefined and MUST be ignored if the sheet is a worksheet or macro sheet and **fLocked** is 0x00000000. It MUST have the same value as the **fScenarios** field in the following **BrtSheetProtection** record.

When the sheet is a dialog sheet, this field specifies whether the dialog sheet is protected. The value of **fObjects** MUST be the same as the value of this field.

MUST be a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Editing of scenarios is not allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is protected. |
| 0x00000001 | Editing of scenarios is allowed in the worksheet or macro sheet when the value of <b>fLocked</b> is 0x00000001.<br>The dialog sheet is not protected. |

**fFormatCells (4 bytes):** A **Boolean** that specifies whether formatting of cells is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fFormatCells** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet it MUST have a value from the following table:



| Value      | Meaning  |
|------------|--|
| 0x00000000 | Formatting of cells is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Formatting of cells is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fFormatColumns (4 bytes):** A **Boolean** that specifies whether formatting of columns (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and **MUST** be ignored when the value of **fLocked** is 0x00000000. It **MUST** have the same value as the **fFormatColumns** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it **MUST** have a value of 0x00000000 and **MUST** be ignored. For a worksheet it **MUST** have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Formatting of columns (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Formatting of columns (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fFormatRows (4 bytes):** A **Boolean** that specifies whether formatting of rows (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and **MUST** be ignored when the value of **fLocked** is 0x00000000. It **MUST** have the same value as the **fFormatRows** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it **MUST** have a value of 0x00000000 and **MUST** be ignored. For a worksheet it **MUST** have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Formatting of rows (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Formatting of rows (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fInsertColumns (4 bytes):** A **Boolean** that specifies whether insertion of columns (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and **MUST** be ignored when the value of **fLocked** is 0x00000000. It **MUST** have the same value as the **fInsertColumns** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it **MUST** have a value of 0x00000000 and **MUST** be ignored. For a worksheet it **MUST** have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Insertion of columns (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Insertion of columns (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fInsertRows (4 bytes):** A **Boolean** that specifies whether insertion of rows (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and **MUST** be ignored when the value of **fLocked** is 0x00000000. It **MUST** have the same value as the **fInsertRows** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it **MUST** have a value of 0x00000000 and **MUST** be ignored. For a worksheet, it **MUST** have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Insertion of rows (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Insertion of rows (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fInsertHyperlinks (4 bytes):** A **Boolean** that specifies whether insertion of hyperlinks is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fInsertHyperlinks** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Insertion of hyperlinks is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Insertion of hyperlinks is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fDeleteColumns (4 bytes):** A **Boolean** that specifies whether deletion of columns (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fDeleteColumns** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Deletion of columns (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Deletion of columns (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fDeleteRows (4 bytes):** A **Boolean** that specifies whether deletion of rows (2) is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fDeleteRows** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Deletion of rows (2) is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Deletion of rows (2) is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fSelLockedCells (4 bytes):** A **Boolean** that specifies whether selection of locked cells is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fSelLockedCells** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000001 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Selection of locked cells is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Selection of locked cells is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fSort (4 bytes):** A **Boolean** that specifies whether sorting is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fSort** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Sorting is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Sorting is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fAutoFilter (4 bytes):** A **Boolean** that specifies whether use of AutoFilters is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fAutoFilter** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST be a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Use of AutoFilters is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Use of AutoFilters is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fPivotTables (4 bytes):** A **Boolean** that specifies whether use of **PivotTable** (section [2.1.7.40](#)) reports is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fPivotTables** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000000 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning   |
|------------|---|
| 0x00000000 | Use of <b>PivotTable</b> reports is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Use of <b>PivotTable</b> reports is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**fSelUnlockedCells (4 bytes):** A **Boolean** that specifies whether selection of unlocked cells is allowed in the worksheet when the value of **fLocked** is 0x00000001, and undefined and MUST be ignored when the value of **fLocked** is 0x00000000. It MUST have the same value as the **fSelUnlockedCells** field in the following **BrtSheetProtection** record. For a macro sheet or dialog sheet, it MUST have a value of 0x00000001 and MUST be ignored. For a worksheet, it MUST have a value from the following table:

| Value      | Meaning  |
|------------|--|
| 0x00000000 | Selection of unlocked cells is not allowed when the value of <b>fLocked</b> is 0x00000001. |
| 0x00000001 | Selection of unlocked cells is allowed when the value of <b>fLocked</b> is 0x00000001.     |

**ipdPasswordData (variable):** An **IsoPasswordData** (section 2.5.79) that specifies the salt, hash algorithm and password hash of the password required for editing the sheet, calculated using the Strong Password Verifier Algorithm (section 2.2.10). The size of the **rgbHash** member of this field MUST NOT be zero.

#### 2.4.742 BrtShrFmla

The **BrtShrFmla** record specifies a shared formula (section 2.2.2) as specified in **Worksheet** part ABNF (section 2.1.7.61) and **Macro Sheet** (section 2.1.7.32) part ABNF. A shared formula specifies a formula that is shared across multiple cells. Cells that share this formula each have a formula record that contains a **PtgExp** (section 2.5.97.40) that specifies the row (2) of this cell and a corresponding **PtgExtraCol** (section 2.5.97.42) with a **col** field equal to the column (2) of this cell. It is preceded by a single **BrtFmlaString** (section 2.4.650), **BrtFmlaNum** (section 2.4.649), **BrtFmlaBool** (section 2.4.647), or **BrtFmlaError** (section 2.4.648) record that specifies the first cell in the range that uses this shared formula. This record is used with the preceding **BrtFmlaString**, **BrtFmlaNum**, **BrtFmlaBool**, or **BrtFmlaError** record to optimize storage and memory required for the shared formula.

|                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rfx (16 bytes)     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| formula (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rfx (16 bytes):** An **UncheckedRFX** (section 2.5.153) that specifies the row (2) and column (2) bounds for this shared formula.

**formula (variable):** A **SharedParsedFormula** (section 2.5.97.98) that contains this shared formula.

#### 2.4.743 BrtSlc

The **BrtSlc** record specifies a cell in a scenario.

|    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rw |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|           |                   |
|-----------|-------------------|
| col       |                   |
| fReserved |                   |
| fUnused   |                   |
| ifmt      | strVal (variable) |
| ...       |                   |

**rw (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) of the cell.

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) of the cell.

**fReserved (4 bytes):** This value MUST be 0, and MUST be ignored.

**fUnused (4 bytes):** This value is unused and MUST be ignored.

**ifmt (2 bytes):** An **Ifmt** (section [2.5.76](#)) that specifies the number format used when displaying the value of the cell.

**strVal (variable):** An **XLWideString** (section [2.5.168](#)) used to specify the value of the cell. MUST contain less than 256 characters.

#### 2.4.744 BrtSlicerCacheBookPivotTables

The **BrtSlicerCacheBookPivotTables** record specifies the Non-Worksheet PivotTables (section [2.2.5.5](#)) that will be filtered by the slicer cache (section [2.2.14.1](#)) as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cpivotTables           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| pivotTables (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**cpivotTables (4 bytes):** An unsigned integer that specifies the count of PivotTable views specified by this record. MUST match the number of **SlicerCachePivotTable** (section [2.5.136](#)) structures within the **pivotTables** array.

**pivotTables (variable):** An array of **SlicerCachePivotTable** structures that specify the Non-Worksheet PivotTables (section [2.2.5.5](#)) of this record. The array MUST NOT contain duplicate structures. Field **bVerSxMacro** of **BrtBeginSXView** (section [2.4.264](#)) of each PivotTable view

in this array MUST be greater than or equal to 3. Field **fNotViewCalculatedMembers** of **BrtBeginSXView** of all PivotTable view in this array MUST have the same value. Field of **fCalcMembersInAdvFilters** of **BrtBeginSXView14** in all PivotTable view MUST have the same value. The **PivotTable** (section 2.1.7.40) part specified by each **SlicerCachePivotTable** structure of this array MUST have an explicit relationship, specified by the **BrtPivotTableRef** (section 2.4.709), record with the workbook.

## 2.4.745 BrtSlicerCacheHideItemsWithNoData

The **BrtSlicerCacheHideItemsWithNoData** record specifies the extended properties of the slicer cache for how the slicer items that are used in slicer cross filtering (section 2.2.14.1.5) are displayed.

|                                 |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------------------------------|---------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                               | 1                   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| FRTHHeader                      |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A (optional)                    | reserved (optional) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| cHideItemLevelsCount (optional) |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| rgLevels (variable)             |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                             |                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section 2.5.54) that specifies the future record (section 2.1.6) information for this record.

**A - fHideItemsWithNoData (1 bit):** A **Boolean** (section 2.5.97.3) that specifies whether the non-OLAP slicer items that are used in slicer cross filtering (section 2.2.14.1.5) are displayed. This value is only used for non-**OLAP** slicer cache and MUST be a value from the following table.

| Value | Meaning                                      |
|-------|--|
| 0x00  | The non-OLAP slicer items are displayed.     |
| 0x01  | The non-OLAP slicer items are not displayed. |

**reserved (31 bits):** MUST be 0 and MUST be ignored.

**cHideItemLevelsCount (4 bytes):** An unsigned integer that specifies the number of OLAP levels in this slicer cache, whose OLAP members with no data are not displayed. This value is only used for **OLAP** slicer cache and MUST match the number of **SlicerCacheLevelData** (section 2.5.134) records in the collection.

**rgLevels (variable):** An array of **SlicerCacheLevelData** (section 2.5.134). The number of items in this array MUST be equal to the value of **cHideItemLevelsCount**.

## 2.4.746 BrtSlicerCacheNativeItem

The **BrtSlicerCacheNativeItem** record specifies non- OLAP slicer items (section [2.2.14.1.4.1](#)) for a slicer cache (section [2.2.14.1](#)).

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cItems             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgItems (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cItems (4 bytes):** An unsigned integer that specifies the number of non-OLAP slicer items in the slicer cache.

**rgItems (variable):** An array of **SlicerCacheNativeItem** (section [2.5.135](#)) structures that specifies non-OLAP slicer items for the slicer cache. The number of elements in this array MUST be equal to the value of the **cItems** field. Every **SlicerCacheNativeItem** in this array MUST have a unique **iCache** field. At least one **SlicerCacheNativeItem** in this array MUST have the **fSelected** field value equal to 1.

## 2.4.747 BrtSlicerCacheOlapItem

The **BrtSlicerCacheOlapItem** record specifies an OLAP slicer item (section [2.2.14.1.4.1](#)) of the OLAP level in the OLAP hierarchy specified by the **BrtBeginSlicerCacheLevelData** (section [2.4.196](#)) that precedes this record as defined by the slicer cache (section [2.2.14.1](#)) part ABNF. This record contains a list of all ancestor OLAP members of this OLAP member in the OLAP hierarchy.

|                    |         |   |   |   |   |   |   |   |   |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---------|---|---|---|---|---|---|---|---|-------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1       | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10                | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A                  | cparent |   |   |   |   |   |   |   |   | stName (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |         |   |   |   |   |   |   |   |   |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stTitle (variable) |         |   |   |   |   |   |   |   |   |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |         |   |   |   |   |   |   |   |   |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| parents (variable) |         |   |   |   |   |   |   |   |   |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |         |   |   |   |   |   |   |   |   |                   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fNoData (1 bit):** A bit that specifies whether the OLAP member specified by this record does not have data associated with it. For more information, see section [2.2.14.1.5](#). This bit MUST be 0 if the value of the **fCrossFilterField** field of the **BrtBeginSlicerCacheLevelData** (section [2.4.196](#)) record is equal to 0x0.

**cparent (7 bits):** An unsigned integer that specifies the count of OLAP members that are ancestors of the OLAP member specified by this record in the OLAP hierarchy. For OLAP hierarchies that are not attribute hierarchies this count does not include the **OLAP All member**.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of the OLAP member specified by this record.

**stTitle (variable):** An **XLWideString** that specifies the caption of the OLAP member specified by this record.

**parents (variable):** An array of **XLWideString** that specifies the MDX unique names of the OLAP members that are ancestors of the OLAP member specified by this record. The first element of this array specifies the OLAP member that is the parent of the OLAP member specified by this record in the OLAP hierarchy. Each subsequent element in this array specifies an ancestor OLAP member in the next level up the OLAP hierarchy. The number of elements in this array MUST be equal to **cparent**.

#### 2.4.748 BrtSlicerCachePivotTables

The **BrtSlicerCachePivotTables** record specifies the **PivotTable** views (section [2.2.5.3](#)) that will be filtered by the slicer cache (section [2.2.14.1](#)) as defined by the **Slicer Cache** (section [2.1.7.47](#)) part ABNF rules.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cpivotTables           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| pivotTables (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cpivotTables (4 bytes):** An unsigned integer that specifies the count of **PivotTable** views specified by this record. The value MUST match the number of **SlicerCachePivotTable** (section [2.5.136](#)) structures within the **pivotTables** array.

**pivotTables (variable):** An array of **SlicerCachePivotTable** structures that specify the **PivotTable** views of this record. The array MUST NOT contain duplicate structures. The **bVerSxMacro** field of the **BrtBeginSXView** (section [2.4.264](#)) record of each **PivotTable** view in this array MUST be greater than or equal to 3. The **fNotViewCalculatedMembers** field of the **BrtBeginSXView** record of all **PivotTable** views in this array MUST have the same value. The **fCalcMembersInAdvFilters** field of the **BrtBeginSXView14** (section [2.4.265](#)) record in all **PivotTable** views MUST have the same value.

#### 2.4.749 BrtSlicerCacheSelection

The **BrtSlicerCacheSelection** record specifies an OLAP member in the OLAP hierarchy specified by the **BrtBeginSlicerCacheLevelsData** (section [2.4.197](#)) of the slicer cache (section [2.2.14.1](#)) that is selected. This record also specifies the ancestor OLAP members of this OLAP member in the OLAP hierarchy.



|                         |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|-------------------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| cparent                 |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| stUniqueName (variable) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...                     |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| parents (variable)      |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...                     |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**cparent (4 bytes):** An integer that specifies the count of OLAP members that are ancestors of the OLAP member specified by this record in the OLAP hierarchy. For OLAP hierarchies that are not attribute hierarchies this count does not include the OLAP All member. MUST be greater than or equal to 0. MUST equal the number of items in the **parents** array.

**stUniqueName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of the OLAP member specified by this record.

**parents (variable):** An array of **XLWideString** that specifies the MDX unique names of the OLAP member that are ancestors of the OLAP member specified by this record. The first element of the array specifies the OLAP member that is the parent of the OLAP member specified by this record in the OLAP hierarchy. Each subsequent element in this array specifies an ancestor OLAP member in the next level up the OLAP hierarchy, excluding OLAP All member for OLAP hierarchies that are not attribute hierarchies. The number of elements in this array MUST be equal to **cparent**.

## 2.4.750 BrtSlicerStyleElement

The **BrtSlicerStyleElement** record specifies a table style element (section [2.2.6.2.2](#)) specific to slicer styles (section [2.2.6.3.1](#)).

|            |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| FRTHHeader |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| tseType    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| dxflId     |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**tseType (4 bytes):** A **TSEType** (section [2.5.149](#)) specifying the portion of the slicer view (section [2.2.14.2](#)) to which this table style element applies. MUST be greater than or equal to 0x0000001C. This field MUST be unique within the SLICERSTYLE rule as specified the **Styles** (section [2.1.7.50](#)) part ABNF.

**dxId (4 bytes):** A **DXFId14** (section [2.5.38](#)) that specifies the [differential formatting](#) (section [2.2.6.2](#)) applied to this table style element. The **fNewBorder** field of **BrtdXF14** (section [2.4.343](#)) referenced by this **dxId** MUST be ignored.

## 2.4.751 BrtSmartTagType

The **BrtSmartTagType** record specifies the properties for a smart tag type that contains the identification information for the smart tag. [<42>](#)

| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| NamespaceUri (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Name (variable)         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Url (variable)          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**NamespaceUri (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the **Uniform Resource Identifier (URI)** for this smart tag type used by this application. The length of this string MUST be less than or equal to 2084 characters.

**Name (variable):** An **XLWideString** that specifies the name of this smart tag type. The length of string MUST be less than 256 characters.

**Url (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the URL for a smart tag provided by the smart tag creator, which can be shown in the application to get more information about the smart tag. The length of this string MUST be less than or equal to 2084 characters.

## 2.4.752 BrtSparkline

The **BrtSparkline** record specifies information for a single sparkline.

| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table:

| Field                      | Value  |
|----------------------------|--------|
| <b>FRTHeader.fRef</b>      | 0      |
| <b>FRTHeader.fSqref</b>    | 1      |
| <b>FRTHeader.fFormulas</b> | 0 or 1 |
| <b>FRTHeader.fRelID</b>    | 0      |

The **FRTHeader.rgSqrefs** specifies the cell in which the sparkline is located. The **csqref** of **FRTHeader.rgSqrefs** MUST equal 1. The **crfx** of the **sqrfx** of the single **FRTSqref** (section [2.5.65](#)) comprising the **array** of the **FRTHeader.rgSqrefs** MUST equal 1. The single **UncheckedRfX** (section [2.5.153](#)) comprising the **sqrfx** of the single **FRTSqref** comprising the **array** of **FRTHeader.rgSqrefs** MUST have its **rwFirst** equal to its **rwLast**, and MUST have its **colFirst** equal to its **colLast**.

The **FRTHeader.rgFormulas** specifies the data range for this sparkline. If **FRTHeader.fFormulas** equals 1, then **cformula** of the **FRTHeader.rgFormulas** MUST equal 1 and the formula (section [2.2.2](#)) of the single **FRTFormula** (section [2.5.58](#)) comprising the **array** of the **FRTHeader.rgFormulas** MUST contain only one **Ptg** (section [2.5.97.16](#)) structure, and that **Ptg** structure MUST be either **PtgName** (section [2.5.97.60](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgRef3d** (section [2.5.97.69](#)), or **PtgArea3d** (section [2.5.97.19](#)). If the **Ptg** structure is a **PtgRef3d** or **PtgArea3d**, then the **ixti** of the **PtgRef3d** or **PtgArea3d** MUST specify an **Xti** (section [2.5.172](#)) that MUST have **firstSheet** greater than or equal to 0, and MUST have **lastSheet** equal to **firstSheet**. If the **Ptg** structure is a **PtgArea3d**, then the **area** of the **PtgArea3d** MUST either have **rowFirst** equal to **rowLast** and **columnFirst.fRwRel** equal to **columnLast.fRwRel**, or **columnFirst.col** equal to **columnLast.col** and **columnFirst.fColRel** equal to **columnLast.fColRel**.

#### 2.4.753 BrtSSTItem

The **BrtSSTItem** record specifies an individual string in the shared string table.

|                    |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| richStr (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**richStr (variable):** A **RichStr** (section [2.5.121](#)) that specifies an individual string in the shared string table.

#### 2.4.754 BrtStr

The **BrtStr** (section [2.4.754](#)) record specifies a shared text string referenced by other records in the cell metadata (section [2.2.4.2](#)) and value metadata (section [2.2.4.3](#)) part.

|                   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| stText (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

...

**stText (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the content of the **BrtStr** record. **BrtStr** records within the collection specified by **BrtBeginEsstr** (section [2.4.73](#)) and **BrtEndEsstr** (section [2.4.409](#)) records MUST be unique subject to the content's bitwise comparison.

## 2.4.755 BrtStyle

The **BrtStyle** record specifies a cell style (section [2.2.6.1.2](#)). A record of this type exists for each cell style used in the workbook.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-------------|----|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16          | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24     | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ixf               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |
| gbitObj1          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | iStyBuiltIn |    |    |    |    |    |    |    | iLevel |    |    |    |    |    |    |    |
| stName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |

**ixf (4 bytes):** An unsigned integer that specifies a zero-based index of a **BrtXF** (section [2.4.816](#)) record in the collection of all records directly following **BrtBeginCellStyleXFs** (section [2.4.18](#)). The referenced **BrtXF** specifies the cell formatting for this cell style.

This value MUST be unique with respect to the value of **ixf** in all other **BrtStyle** records in the workbook.

**gbitObj1 (2 bytes):** A **StyleFlags** (section [2.5.144](#)) structure which specifies properties for this cell style.

**iStyBuiltIn (1 byte):** An unsigned integer that specifies a built-in cell style. If this value is nonzero, this cell style is a built-in cell style and **gbitObj1.fBuiltIn** MUST equal 1. If this value is equal to 1 or 2, the value of **iLevel** is needed to specify the built-in cell style. For all other values, **iStyBuiltIn** is sufficient to identify the built-in cell style. To see a list of all built-in cell styles, refer to [\[ISO/IEC29500-1:2011\]](#), section 18.8.7.

**iLevel (1 byte):** An unsigned integer that specifies, in conjunction with **iStyBuiltIn**, a built-in cell style. If **iStyBuiltIn** is equal to 1, the specified built-in cell style is **RowLevel\_n** [\[ISO/IEC29500-1:2011\]](#), section 18.8.7, where n is an integer equal to the value of **iLevel** + 1. Similarly, if **iStyBuiltIn** is equal to 2, the specified built-in cell style is **ColLevel\_n** [\[ISO/IEC29500-1:2011\]](#), section 18.8.7. If **iStyBuiltIn** is equal to 1 or 2, the value of **iLevel** MUST be between 0 and 6 inclusive. If **iStyBuiltIn** is equal to any other value, **iLevel** MUST be ignored.

**stName (variable):** A **CellStyleName** (section [2.5.10](#)) which specifies the name of this cell style. If this cell style is built-in, the name of the cell style is defined by the built-in cell style identified by **iStyBuiltIn** and **iLevel** instead of this value.

## 2.4.756 BrtSupAddin

The **BrtSupAddin** record specifies an Add-in Referencing type of Supporting Link (section [2.2.7.2](#)). The names of all add-in functions implemented by XLL or COM automation add-ins that are referenced by formulas in this workbook MUST be specified in the **BrtPlaceholderName** (section [2.4.710](#)) records that follow this record.

## 2.4.757 BrtSupBookSrc

The **BrtSupBookSrc** record specifies an External Link Referencing type of Supporting Link (section [2.2.7.2](#)).

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| strRelID (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**strRelID (variable):** A **RelID** (section [2.5.114](#)) that specifies an **External Link** (section [2.1.7.25](#)) part ABNF.

## 2.4.758 BrtSupNameBits

The **BrtSupNameBits** record specifies properties of an External Defined Name (section [2.2.7.4.1.1](#)), a DDE Data Item (section [2.2.7.4.2.1](#)), or an OLE Data Item (section [2.2.7.4.3.1](#)).

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| contents |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**contents (7 bytes):** A structure that specifies properties of an External Defined Name, a DDE Data Item, or an OLE Data Item. The structure used is dependent on the type of **External Link** (section [2.1.7.25](#)) specified by the **sbt** field in the preceding **BrtBeginSupBook** (section [2.4.223](#)) record.

| Type of external link | Format of contents  |
|-----------------------|---|
| External Defined Name | <b>ExternalNameProperties</b> (section <a href="#">2.5.42</a> ) |
| DDE Data Item         | <b>DDEItemProperties</b> (section <a href="#">2.5.33</a> )      |
| OLE Data Item         | <b>OLEItemProperties</b> (section <a href="#">2.5.96</a> )      |

## 2.4.759 BrtSupNameBool

The **BrtSupNameBool** record specifies a DDE Data Item (section [2.2.7.4.2.1](#)) or OLE Data Item (section [2.2.7.4.3.1](#)) value that contains a **Boolean** (section [2.5.97.3](#)).

|   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| f |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**f (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies the value.

#### 2.4.760 BrtSupNameEnd

The **BrtSupNameEnd** record specifies the end of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies an external defined name (section [2.2.7.4.1.1](#)), a DDE Data Item (section [2.2.7.4.2.1](#)), or an OLE Data Item (section [2.2.7.4.3.1](#)).

#### 2.4.761 BrtSupNameErr

The **BrtSupNameErr** record specifies a DDE Data Item (section [2.2.7.4.2.1](#)) or OLE Data Item (section [2.2.7.4.3.1](#)) value that contains an error.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| err |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**err (1 byte):** A **BErr** (section [2.5.97.2](#)) enumeration that specifies an error value.

#### 2.4.762 BrtSupNameFmla

The **BrtSupNameFmla** record specifies the formula (section [2.2.2](#)) of an external defined name (section [2.2.7.4.1.1](#)). The formula of an external defined name, if defined, is restricted to the formula types specified by the **val** field.

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cb             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| val (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cb (4 bytes):** An unsigned integer that specifies the size of **val** in bytes. If the external defined name, as specified by the previous **BrtSupNameStart** (section [2.4.766](#)) record, is not defined in the [external workbook](#) (section [2.1.10](#)), this value **MUST** be 0 and **val** **MUST NOT** exist.

**val (variable):** An optional variant of a **Ptg** (section [2.5.97.16](#)) that specifies the formula of an external defined name. This field exists if and only if **cb** is greater than 0. If this field exists, the contents of this field **MUST** be one and only one of the following structures:

- **ExtPtgRef3D** (section [2.5.47](#))

- **ExtPtgArea3D** (section [2.5.44](#))
- **ExtPtgRefErr3D** (section [2.5.48](#))
- **ExtPtgAreaErr3D** (section [2.5.45](#))
- **ExtPtgErr** (section [2.5.46](#))

If the formula cannot be represented correctly with one of the previous variant structures of a **Ptg**, then **val** MUST contain an **ExtPtgErr**.

#### 2.4.763 **BrtsupNameNil**

The **BrtsupNameNil** record specifies a DDE Data Item (section [2.2.7.4.2.1](#)) or OLE Data Item (section [2.2.7.4.3.1](#)) value that represents a null value.

#### 2.4.764 **BrtsupNameNum**

The **BrtsupNameNum** record specifies a DDE Data Item (section [2.2.7.4.2.1](#)) or OLE Data Item (section [2.2.7.4.3.1](#)) value that contains a number.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| xNum |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**xNum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the value of the DDE data value.

#### 2.4.765 **BrtsupNameSt**

The **BrtsupNameSt** record specifies a DDE Data Item (section [2.2.7.4.2.1](#)) or OLE Data Item (section [2.2.7.4.3.1](#)) value that contains a string.

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| str (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**str (variable):** An **XLWideString** (section [2.5.168](#)) that specifies a string value. The length of this string MUST be less than 32768 characters.

#### 2.4.766 **BrtsupNameStart**

The **BrtsupNameStart** record specifies the name of an external defined name (section [2.2.7.4.1.1](#)) and specifies the beginning of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies an External Defined Name, a DDE Data Item (section [2.2.7.4.2.1](#)), or an OLE Data Item (section [2.2.7.4.3.1](#)). Which type is specified by the collection of records is dependent on the type of **External Link** specified by the **sbt** field of the preceding **BrtsupNameBook** (section [2.4.223](#)) record.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| name (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**name (variable):** An **XLNameWideString** (section [2.5.165](#)) that specifies the name of an External Defined Name, the name of a DDE Data Item (section [2.2.7.4.2.1](#)), or the name of an OLE Data Item (section [2.2.7.4.3.1](#)).

#### 2.4.767 BrtSupNameValueEnd

The **BrtSupNameValueEnd** record specifies the end of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies a two-dimensional array of cached DDE Data Item (section [2.2.7.4.2.1](#)) or OLE Data Item (section [2.2.7.4.3.1](#)) values.

#### 2.4.768 BrtSupNameValueStart

The **BrtSupNameValueStart** record specifies properties for a two-dimensional array of cached values for a DDE Data Item (section [2.2.7.4.2.1](#)) or OLE Data Item (section [2.2.7.4.3.1](#))<43>, and specifies the beginning of a collection of records as defined by the **External Link** (section [2.1.7.25](#)) part ABNF. The collection of records specifies the values of the two-dimensional array of cached values. The dimensions of the array are specified by the **cRw** and **cCol** fields. The values MUST be stored in row (2)-major order.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cRw  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cCol |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cRw (4 bytes):** A **DRw** (section [2.5.34](#)) that specifies the number of rows (2) in a DDE data item or OLE data item value array. This value MUST be greater than or equal to 1 and MUST be less than 1048577.

**cCol (4 bytes):** A **DCol** (section [2.5.31](#)) that specifies the number of columns (2) in a DDE data item or OLE data item value array. This value MUST be greater than or equal to 1 and MUST be less than 16385.

#### 2.4.769 BrtSupSame

The **BrtSupSame** record specifies a Same-Sheet Referencing type of Supporting Link (section [2.2.7.2](#)).

#### 2.4.770 BrtSupSelf

The **BrtSupSelf** record specifies a Self-Referencing type of Supporting Link (section [2.2.7.2](#)).



## 2.4.771 BrtSupTabs

The **BrtSupTabs** record specifies the names of the sheets in an external workbook (section [2.2.7.4.1](#)).

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cTab                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sheetNames (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cTab (4 bytes):** An unsigned integer that specifies the count of **XLWideString** (section [2.5.168](#)) items in **sheetNames**.

**sheetNames (variable):** An array of **XLWideString** items. Each item specifies the name of a sheet in the external workbook. Each value MUST comply with the restrictions set on the **strName** field of **BrtBundleSh** (section [2.4.301](#)). The count of items in this array MUST be less than 65535.

## 2.4.772 BrtSXDI14

The **BrtSXDI14** record specifies additional information about a data item (section [2.2.5.3.7.5.1](#)).

|            |          |   |   |   |   |   |   |   |   |    |                             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|----------|---|---|---|---|---|---|---|---|----|-----------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11                          | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |          |   |   |   |   |   |   |   |   |    |                             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| df         |          |   |   |   |   |   |   |   |   |    |                             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| isxvd      |          |   |   |   |   |   |   |   |   |    |                             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A          | reserved |   |   |   |   |   |   |   |   |    | irstUniqueClient (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...        |          |   |   |   |   |   |   |   |   |    |                             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**df (4 bytes):** A **ShowDataAs** (section [2.5.133](#)) that specifies the data display format for this data item. If **isxvd** is equal to -1, then this field MUST be greater than or equal to 0x00000009. If this field is less than or equal to 0x00000008, then the **df** field of the immediately preceding **BrtBeginSXDI** (section [2.4.232](#)) record MUST be equal to the value of this field and MUST be ignored. If this field is greater than or equal to 0x00000009, the **df** field of the immediately preceding **BrtBeginSXDI** record MUST be equal to 0 and MUST be ignored.

If this field is greater than 0x00000000 and less than 0x00000005, or if this field is greater than or equal to 0x0000000B, then the **isxvd** field of the immediately preceding **BrtBeginSXDI** record specifies the pivot field (section [2.2.5.3.2](#)) that the calculations are based on, and the **isxvd** field of the immediately preceding **BrtBeginSXDI** record MUST NOT equal -1 or -2.

If this field is greater than 0x00000000 and less than 0x00000004, then the **isxvi** field of the immediately preceding **BrtBeginSXDI** record specifies the pivot item (section [2.2.5.3.3](#)) that the calculations are based on.

**isxvd (4 bytes):** An **ISXVD** (section [2.5.83](#)) that specifies the pivot field summarized by this data item. A value of -1 specifies that the **isxvdData** field of the immediately preceding **BrtBeginSXDI** record specifies the pivot field summarized by this data item. This field MUST NOT be equal to -2. This field MUST be equal to -1 for non-OLAP PivotTable views.

If this field is not equal to -1, the pivot field specified by the **isxvdData** field of the immediately preceding **BrtBeginSXDI** record MUST contain a **BrtSXVD14** (section [2.4.786](#)) record with an **fIgnoreable** field equal to 1. The pivot hierarchy (section [2.2.5.3.4](#)) associated with that pivot field (as specified in section [2.2.5.3.4](#)) MUST contain a **BrtSXTH14** (section [2.4.776](#)) record. The cache field (section [2.2.5.2.2](#)) associated with that pivot field MUST contain a **BrtPCDField14** (section [2.4.687](#)) record. The cache hierarchy (section [2.2.5.2.7](#)) associated with that cache field (as specified in section [2.2.5.2.7](#)) MUST contain a **BrtPCDH14** (section [2.4.688](#)) record with an **fIgnoreable** field equal to 1.

If this field is not equal to -1, the **isxvdData** field of the immediately preceding **BrtBeginSXDI** record SHOULD [<44>](#) be ignored.

For more details, see section [2.2.5.2.7.1 \(Measures\)](#).

**A - fUniqueClient (1 bit):** A bit that specifies whether the **irstUniqueClient** field exists. This field MUST be equal to 1 if **isxvd** is not equal to -1.

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

**irstUniqueClient (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the unique name for duplicated OLAP measures. This field MUST exist if and only if the value of **fUniqueClient** is 1. This field MUST be unique within the **PivotTable** (section [2.1.7.40](#)) part ABNF. If the string exists, the number of characters MUST be less than or equal to 65535.

### 2.4.773 BrtSXDI15

The **BrtSXDI15** record specifies additional information about a data item (section [2.2.5.3.7.5.1](#)).

|            |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|----------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A          | reserved |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** structure (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fCountDistinct (1 bit):** A bit that specifies that the aggregation function which applies to this data item (section [2.2.5.3.7.5.1](#)) is the count of unique values. If this value is true, the **ifftab** field of the preceding **BrtBeginSXDI** (section [2.4.232](#)) record is ignored.

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

## 2.4.774 BrtSxFilter15

The **BrtSxFilter15** record specifies additional information about a PivotTable (section [2.2.5](#)) advanced filter (section [2.2.5.3.6.1](#)) as specified by the **SXFILTER** rule (defined in section [2.1.7.40](#)).

|   |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| A | reserved |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**A - fWholeDay (1 bit):** A bit that specifies whether the PivotTable (section [2.2.5](#)) advanced filter (section [2.2.5.3.6.1](#)) extended by this record uses whole days in its filtering criteria. MUST be false if the value of the **sxft** field of the preceding **BrtBeginSXFILTER** (section [2.4.236](#)) record is not equal to any of the values specified in Value column of the table that follows. MUST be true if the value of the **irstName** field of the preceding **BrtBeginSXView** (section [2.4.264](#)) record is equal to the value of the **name** ([MS-XLSX] section 2.6.114) attribute of at least one **CT\_TimelineCachePivotTable** ([MS-XLSX] section 2.6.114) element in the **Timeline cache** ([MS-XLSX] section 2.1.7) and the value of the **sxft** field of the preceding **BrtBeginSXFILTER** record is one of the values specified in Value column of the following table.

| Category    | Value      | Meaning                               |
|-------------|------------|---------------------------------------|
| Date Filter | 0x0000001A | "equals" filter for date values       |
| Date Filter | 0x0000001B | "older than" filter for date values   |
| Date Filter | 0x0000001C | "newer than" filter for date values   |
| Date Filter | 0x0000001D | "between" filter for date values      |
| Date Filter | 0x0000001E | "tomorrow" filter for date values     |
| Date Filter | 0x0000001F | "today" filter for date values        |
| Date Filter | 0x00000020 | "yesterday" filter for date values    |
| Date Filter | 0x00000021 | "next week" filter for date values    |
| Date Filter | 0x00000022 | "this week" filter for date values    |
| Date Filter | 0x00000023 | "last week" filter for date values    |
| Date Filter | 0x00000024 | "next month" filter for date values   |
| Date Filter | 0x00000025 | "this month" filter for date values   |
| Date Filter | 0x00000026 | "last month" filter for date values   |
| Date Filter | 0x00000027 | "next quarter" filter for date values |

| Category    | Value      | Meaning   |
|-------------|------------|---|
| Date Filter | 0x00000028 | "this quarter" filter for date values           |
| Date Filter | 0x00000029 | "last quarter" filter for date values           |
| Date Filter | 0x0000002A | "next year" filter for date values              |
| Date Filter | 0x0000002B | "this year" filter for date values              |
| Date Filter | 0x0000002C | "last year" filter for date values              |
| Date Filter | 0x0000002D | "year-to-date" filter for date values           |
| Date Filter | 0x0000002E | "first quarter" filter for date values          |
| Date Filter | 0x0000002F | "second quarter" filter for date values         |
| Date Filter | 0x00000030 | "third quarter" filter for date values          |
| Date Filter | 0x00000031 | "fourth quarter" filter for date values         |
| Date Filter | 0x00000032 | "January" filter for date values                |
| Date Filter | 0x00000033 | "February" filter for date values               |
| Date Filter | 0x00000034 | "March" filter for date values                  |
| Date Filter | 0x00000035 | "April" filter for date values                  |
| Date Filter | 0x00000036 | "May" filter for date values                    |
| Date Filter | 0x00000037 | "June" filter for date values                   |
| Date Filter | 0x00000038 | "July" filter for date values                   |
| Date Filter | 0x00000039 | "August" filter for date values                 |
| Date Filter | 0x0000003A | "September" filter for date values              |
| Date Filter | 0x0000003B | "October" filter for date values                |
| Date Filter | 0x0000003C | "November" filter for date values               |
| Date Filter | 0x0000003D | "December" filter for date values               |
| Date Filter | 0x0000003E | "not equal" filter for date values              |
| Date Filter | 0x0000003F | "older than or equal to" filter for date values |
| Date Filter | 0x00000040 | "newer than or equal to" filter for date values |
| Date Filter | 0x00000041 | "not between" filter for date values            |

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

## 2.4.775 BrtSXTDMPOrder

The **BrtSXTDMPOrder** record specifies a reference to a member (3) property pivot field (section [2.2.5.3.2](#)) for a pivot hierarchy (section [2.2.5.3.4](#)). See Member (3) Properties for more details. The order of these records is used for the order of the member (3) properties.

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| isxvd |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**isxvd (4 bytes):** An **ISXVD** (section [2.5.83](#)) that specifies the member (3) property pivot field. This field MUST NOT be equal to -1 or -2.

## 2.4.776 BrtSXTH14

The **BrtSXTH14** record specifies that the preceding **BrtBeginSXTH** (section [2.4.252](#)) record SHOULD<45> be ignored.

If this record exists, there MUST exist an **SXDI** (section [2.1.7.40](#)) rule as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF which has a **BrtBeginSXDI** (section [2.4.232](#)) record with an **isxvdData** field equal to the pivot field (section [2.2.5.3.2](#)) index of a pivot associated with this pivot hierarchy (section [2.2.5.3.4](#)), as specified in section [2.2.5.3.4](#). Additionally, the **SXDI** rule MUST contain a **BrtSXDI14** (section [2.4.772](#)) record with an **isxvd** field greater than or equal to 0.

The preceding **BrtBeginSXTH** record MUST have values set as specified in the following table.

| Name                            | Value |
|---------------------------------|-------|
| <b>fOutlineMode</b>             | 0     |
| <b>fEnableMultiplePageItems</b> | 0     |
| <b>fSubtotalAtTop</b>           | 0     |
| <b>fDontShowFList</b>           | 0     |
| <b>fDragToRow</b>               | 0     |
| <b>fDragToColumn</b>            | 0     |
| <b>fDragToPage</b>              | 0     |
| <b>fDragToHide</b>              | 0     |
| <b>fDragToData</b>              | 1     |
| <b>fFilterInclusive</b>         | 0     |
| <b>fLoadCap</b>                 | 0     |

For more details, see sections [2.2.5.2.7.1 \(Measures\)](#) and [2.4.772 \(BrtSXDI14\)](#).

|   |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|---|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10        | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A |   |   |   |   |   |   |   |   |   | reserved2 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - reserved1 (1 bit):** This value MUST be 1, and MUST be ignored.

**reserved2 (7 bits):** This value MUST be 0, and MUST be ignored.

### 2.4.777 BrtSXTupleItems

The **BrtSXTupleItems** record specifies a collection of MDX unique names that identifies the value in the OLAP source data (section [2.2.5.2.1](#)) using **PivotTable** What-if Analysis (section [2.2.5.3.10](#)).

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cstTuple             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgStTuple (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**cstTuple (4 bytes):** An unsigned integer that specifies the count of MDX unique names in the **rgStTuple** field. It MUST be greater than 0 and MUST be less than or equal to 0x7FFFFFFF.

**rgStTuple (variable):** An array of **XLWideString** (section [2.5.168](#)). Each **XLWideString** in the array specifies a MDX unique name. The length of each **XLWideString** MUST be greater than 0 and MUST be less than or equal to 65535 characters.

### 2.4.778 BrtSXTupleSetHeaderItem

The **2BrtSXTupleSetHeaderItem** record specifies the MDX unique name of the OLAP hierarchy and the MDX unique name of the OLAP level of the associated OLAP named set. The value of the **cCol** field in the **BrtBeginSXTupleSet** (section [2.4.256](#)) record that immediately precedes this record MUST be equal to the number of **BrtSXTupleSetHeaderItem** records between the **BrtBeginSXTupleSetHeader** (section [2.4.258](#)) record that immediately precedes this record and the **BrtEndSXTupleSetHeader** (section [2.4.593](#)) record that immediately follows this record.

|                       |   |        |   |   |   |   |   |   |   |    |    |                       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|--------|---|---|---|---|---|---|---|----|----|-----------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2      | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12                    | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (optional) |   |        |   |   |   |   |   |   |   |    |    |                       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A                     | B | unused |   |   |   |   |   |   |   |    |    | irstUnique (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                     |
|---------------------|
| ...                 |
| irstHier (variable) |
| ...                 |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record. This field exists if and only if the size of this record is greater than 4.

**A - fUnique (1 bit):** A bit that specifies whether the **irstUnique** field exists.

**B - fHier (1 bit):** A bit that specifies whether the **irstHier** field exists.

**unused (6 bits):** This field is undefined, and MUST be ignored.

**irstUnique (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of the OLAP level. This field MUST exist if and only if **fUnique** is equal to 1. The length of this field MUST be less than or equal to 65535 characters.

**irstHier (variable):** An **XLWideString** that specifies the MDX unique name of the OLAP hierarchy. This field MUST exist if and only if **fHier** is equal to 1. The length of this field MUST be less than or equal to 65535 characters.

#### 2.4.779 BrtSXTupleSetRowItem

The **BrtSXTupleSetRowItem** record specifies an OLAP member that is part of the OLAP tuple that is specified by the **BrtBeginSXTupleSetRow** (section [2.4.259](#)) that immediately precedes this record. The value of the **cCol** field in the **BrtBeginSXTupleSet** (section [2.4.256](#)) record that immediately precedes this record MUST be equal to the number of **BrtSXTupleSetRowItem** records between the **BrtBeginSXTupleSetRow** record that immediately precedes this record and the **BrtEndSXTupleSetRow** (section [2.4.594](#)) record that immediately follows this record.

|                        |   |   |   |        |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
|------------------------|---|---|---|--------|---|---|---|---|---|-----------------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|--|--|
| 0                      | 1 | 2 | 3 | 4      | 5 | 6 | 7 | 8 | 9 | 10                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |  |  |
| FRTHeader (optional)   |   |   |   |        |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
| A                      |   | B |   | unused |   |   |   |   |   | irstUnique (variable) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
| ...                    |   |   |   |        |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
| irstDisplay (variable) |   |   |   |        |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |
| ...                    |   |   |   |        |   |   |   |   |   |                       |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |  |  |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record. This field exists if and only if the size of this record is greater than 4.

**A - fUnique (1 bit):** A bit that specifies whether the **irstUnique** field exists after the fixed sized portion of the record.

**B - fDisplay (1 bit):** A bit that specifies whether the **irstDisplay** field exists after the fixed sized portion of the record.


**unused (6 bits):** This field is undefined, and MUST be ignored.

**irstUnique (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of this OLAP member. This field MUST exist if and only if The value of the **fUnique** field is equal to 1. The length of this field MUST be less than or equal to 65535 characters.

**irstDisplay (variable):** An **XLWideString** that specifies a display name for this OLAP member. This field MUST exist if and only if **fDisplay** is equal to 1. The length of this field MUST be less than or equal to 65535 characters.

#### 2.4.780 BrtSxvcellBool

The **BrtSxvcellBool** record specifies a **PivotValueCell** (section [2.2.5.6.1](#)) that contains a date and time as well as any server formatting information. If this record exists, it MUST be part of a collection of records that is specified by the **BrtBeginSxRow** (section [2.4.246](#)) and **BrtEndSxRow** (section [2.4.581](#)) records.

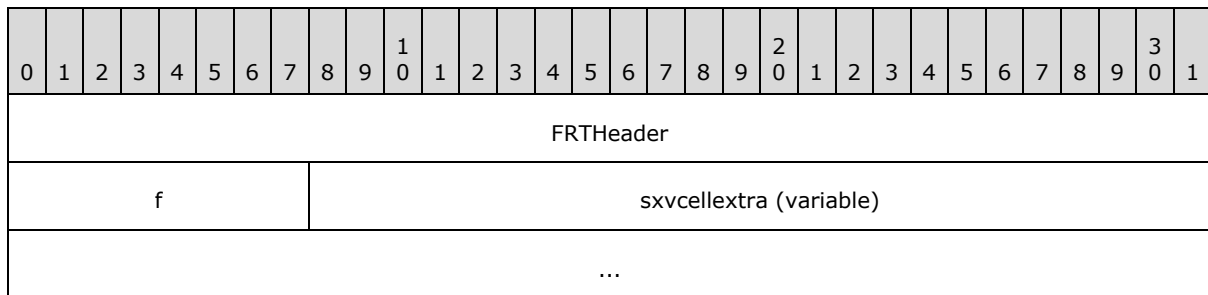


**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**f (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies the value of this cache item.

**sxvcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) that specifies server formatting information associated with this record.

#### 2.4.781 BrtSxvcellDate

The **BrtSxvcellDate** record specifies a **PivotValueCell** (section [2.2.5.6.1](#)) that contains a date and time as well as any server formatting information. If this record exists, it MUST be part of a collection of records that is specified by the **BrtBeginSxRow** (section [2.4.246](#)) and **BrtEndSxRow** (section [2.4.581](#)) records.

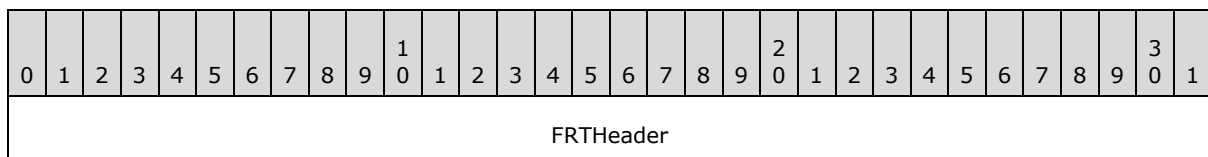



|                         |
|-------------------------|
| xnum                    |
| ...                     |
| sxvcellextra (variable) |
| ...                     |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**xnum (8 bytes):** A **DateAsXnum** (section [2.5.29](#)) structure that specifies the date and time specified by this record.

**sxvcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) structure that specifies server formatting information associated with this record.

### 2.4.782 BrtSxvcellErr

The **BrtSxvcellErr** record specifies a **PivotValueCell** (section [2.2.5.6.1](#)) that contains an error value and any server formatting information. If this record exists, it **MUST** be part of a collection of records that is specified by the **BrtBeginSxRow** (section [2.4.246](#)) and **BrtEndSxRow** (section [2.4.581](#)) records.

|           |   |   |   |   |   |   |   |   |   |                         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|-------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10                      | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHeader |   |   |   |   |   |   |   |   |   |                         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| err       |   |   |   |   |   |   |   |   |   | sxvcellextra (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...       |   |   |   |   |   |   |   |   |   |                         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**err (1 byte):** An unsigned integer that specifies an error value. The value **MUST** be one of those listed in the following table.

| Value | Meaning   |
|-------|---|
| 0x07  | #DIV/0!. Divide by zero.                            |
| 0x0F  | #VALUE!. Value (for example, "hello" + 1).          |
| 0x24  | #NUM!. Problem with a number.                       |
| 0x2A  | #N/A. No value available.                           |
| 0x2B  | #GETTING_DATA. Waiting for data.                    |
| 0x30  | Blank. Bogus value used in SX to leave cells blank. |

**svcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) structure that specifies server formatting information associated with this record. This value MUST be 0 if the value of **err** is 0x30.

### 2.4.783 BrtSxvcellNil

The **BrtSxvcellNil** record specifies an empty **PivotValueCell** (section [2.2.5.6.1](#)) and any server formatting information. If this record exists, it MUST be part of a collection of records that is specified by the **BrtBeginSxRow** (section [2.4.246](#)) and **BrtEndSxRow** (section [2.4.581](#)) records.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| svcellextra (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**svcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) structure that specifies server formatting information associated with this record.

### 2.4.784 BrtSxvcellNum

The **BrtSxvcellNum** record specifies a **PivotValueCell** (section [2.2.5.6.1](#)) that contains an **Xnum** (section [2.5.171](#)) value and any server formatting information. If this record exists, it MUST be part of a collection of records that is specified by the **BrtBeginSxRow** (section [2.4.246](#)) and **BrtEndSxRow** (section [2.4.581](#)) records.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xnum                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| svcellextra (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the numeric value specified by this record.

**svcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) structure that specifies server formatting information associated with this record.

## 2.4.785 BrtSxvcellStr

The **BrtSxvcellStr** record specifies a **PivotValueCell** (section [2.2.5.6.1](#)) that contains an **XLWideString** (section [2.5.168](#)) value and any server formatting information. If this record exists, it MUST be part of a collection of records that is specified by the **BrtBeginSxRow** (section [2.4.246](#)) and **BrtEndSxRow** (section [2.4.581](#)) records.

| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| FRTHHeader             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| st (variable)          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| svcellextra (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) structure that specifies the future record (section [2.1.6](#)) information for this record.

**st (variable):** An **XLWideString** (section [2.5.168](#)) structure that specifies the string value specified by this record. The length of this string MUST be less than or equal to 32,767 characters.

**svcellextra (variable):** A **PCDISrvFmt** (section [2.5.101](#)) structure that specifies server formatting information associated with this record.

## 2.4.786 BrtSXVD14

The **BrtSXVD14** record specifies additional properties of a pivot field (section [2.2.5.3.2](#)) as specified by the **SXVD** rule (defined in section [2.1.7.40](#)).

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| FRTHHeader      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fFillDownLabels |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fIgnorable      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**fFillDownLabels (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether the pivot item labels are repeated for this pivot field. This field is ignored when **fCompactData** field and the **fOutlineData** field of the **BrtBeginSXView** (section [2.4.264](#)) record are both equal to 0x1. This field is ignored if the pivot field is not on the row (2) axis or the column (2) axis. For more details, see section [2.2.5.3.8.3](#). This value MUST be one of the values specified in the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | The item labels are not repeated.                  |
| 0x00000001 | The item labels are repeated for each nested item. |

**fIgnorable (4 bytes):** A **Boolean** that specifies whether the pivot field as specified by the instance of the **SXVD** rule (defined in section [2.1.7.40](#)) that contains this record SHOULD<46> be ignored.

If this field is equal to 1, there MUST exist an **SXDI** (section [2.1.7.40](#)) rule as specified by the **PivotTable** (section [2.1.7.40](#)) part ABNF which has a **BrtBeginSXDI** (section [2.4.232](#)) record with an **isxvdData** field equal to the pivot field index of this pivot field. Additionally, this **SXDI** rule MUST contain a **BrtSXDI14** (section [2.4.772](#)) record with an **isxvd** field greater than or equal to 0.

The preceding **BrtBeginSXVD** record (section [2.4.261](#)) MUST have an **sxaxis.sxaxisData** field equal to 1, and all other fields MUST be equal to 0.

For more details, see sections [2.2.5.2.7.1](#) (**Measures**) and [2.4.772](#) (**BrtSXDI14**).

## 2.4.787 BrtTable

The **BrtTable** record specifies properties of a data table (1) and specifies the beginning of a collection of records as defined by the **Worksheet** part ABNF (section [2.1.7.61](#)) and the **Macro Sheet** (section [2.1.7.32](#)) part ABNF. The collection of records specifies a **one-variable data table** or a **two-variable data table**.

| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| rfx (16 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rwInput1       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colInput1      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rwInput2       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colInput2      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A              | B | C | D | E | F |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rfx (16 bytes):** An **Rfx** (section [2.5.117](#)) that specifies the row (2) and column (2) bounds of the cells in the data table (1). Every cell in the range specified by **rfx** MUST be a data table (1) member (3). **rfx.rwFirst** MUST be greater than 0, and **rfx.ColFirst** MUST be greater than 0.

**rwInput1 (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) of the first **input cell** for the data table (1).

This field MUST be ignored if **fDeleted1** is 1.

If **fTable2** is 1, then **rwInput1** and **colInput1** MUST specify a cell outside the bounds specified by **rfx.rwFirst - 1**, **rfx.rwLast**, **rfx.colFirst - 1**, and **rfx.colLast**.

If **fTable2** is 0, then exactly one of the following statements applies:

- **rwInput1** and **colInput1** MUST specify a cell outside the bounds specified by **rfx.rwFirst - 1**, **rfx.rwLast**, **rfx.colFirst - 1**, and **rfx.colLast**.
- **rwInput1** and **colInput1** MUST be equal to **rfx.rwFirst - 1** and **rfx.colFirst - 1** respectively.

**colInput1 (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) of the first input cell for the data table (1). This field MUST be ignored if **fDeleted1** is 1.

**rwInput2 (4 bytes):** An **UncheckedRw** that specifies the row (2) of the second input cell for a two-variable data table. **rwInput2** and **colInput2** MUST specify a cell outside the bounds specified by **rfx.rwFirst - 1**, **rfx.rwLast**, **rfx.colFirst - 1**, and **rfx.colLast**. This field MUST be ignored if **fDeleted2** is 1 or if **fTable2** is 0.

**colInput2 (4 bytes):** An **UncheckedCol** that specifies the column (2) of the second input cell for a two-variable data table. This field MUST be ignored if **fDeleted2** is 1 or if **fTable2** is 0.

**A - fRow (1 bit):** A bit that specifies whether the first input cell is a row (2) input cell or a column (2) input cell. The value of this field MUST be one of the values specified in the following table.

| Value | Meaning                                    |
|-------|--|
| 0     | The input cell is a column (2) input cell. |
| 1     | The input cell is a row (2) input cell.    |

This value MUST be 1 if **fTable2** is 1.

**B - fTable2 (1 bit):** A bit that specifies if the data table (1) is a two-variable data table or a one-variable data table. This field MUST be one of the values specified in the following table.

| Value | Meaning                            |
|-------|------------------------------------|
| 0     | This is a one-variable data table. |
| 1     | This is a two-variable data table. |

**C - fDeleted1 (1 bit):** A bit that specifies whether the first input cell for the data table (1) has been deleted.

**D - fDeleted2 (1 bit):** A bit that specifies whether the second input cell for a two-variable data table has been deleted. This value MUST be 0 if **fTable2** is 0.

**E - fAlwaysCalc (1 bit):** A bit that specifies whether the data table (1) formula (section [2.2.2](#)) needs to be calculated as part of the next recalculation. This field MUST be one of the values from the following table.

| Value | Meaning  |
|-------|--|
| 0     | The data table (1) formula does not need to be calculated as part of the next recalculation. |
| 1     | The data table (1) formula needs to be calculated as part of the next recalculation.         |

**F - reserved (3 bits):** This value MUST be 0 and MUST be ignored.

#### 2.4.788 BrtTableSlicerCacheID

The **BrtTableSlicerCacheID** record specifies a reference to a slicer cache (section [2.2.14.1](#)) in this workbook and specifies the beginning of an empty collection of records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table.

| Field                      | Value |
|----------------------------|-------|
| <b>FRTHHeader.fRef</b>     | 0     |
| <b>FRTHHeader.fSqref</b>   | 0     |
| <b>FRTHHeader.fFormula</b> | 0     |
| <b>FRTHHeader.fRelID</b>   | 1     |

The **FRTHHeader.RelID** specifies a relationship (section [2.1.3](#)) that specifies a slicer cache part in this workbook.

#### 2.4.789 BrtTableSlicerCacheIDs

The **BrtTableSlicerCacheIDs** record specifies the beginning of a collection of slicer cache identifier records as defined by the **Workbook** (section [2.1.7.60](#)) part ABNF. The collection of records specifies the slicer cache identifiers for the workbook.

#### 2.4.790 BrtTableStyleClient

The **BrtTableStyleClient** record specifies information about the table style applied to a table or **PivotTable** (section [2.1.7.40](#)).

|     |   |   |   |   |   |          |   |   |   |    |    |    |    |    |    |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|----------|---|---|---|----|----|----|----|----|----|------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6        | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | B | C | D | E | F | reserved |   |   |   |    |    |    |    |    |    | stStyleName (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |          |   |   |   |    |    |    |    |    |    |                        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

- A - fFirstColumn (1 bit):** A bit that specifies whether any table style elements (section [2.2.6.2.2](#)) (as specified by **BrTableStyleElement** in section [2.4.791](#)) with a **tseType** field equal to 0x00000003 will be applied. This field MUST be ignored for PivotTables.
- B - fLastColumn (1 bit):** A bit that specifies whether any table style elements (as specified by **BrTableStyleElement**) with a **tseType** field equal to 0x00000004 will be applied.
- C - fRowStripes (1 bit):** A bit that specifies whether any table style elements (as specified by **BrTableStyleElement**) with a **tseType** field equal to 0x00000005 or 0x00000006 will be applied.
- D - fColumnStripes (1 bit):** A bit that specifies whether any table style elements (as specified by **BrTableStyleElement**) with a **tseType** field equal to 0x00000007 or 0x00000008 will be applied.
- E - fRowHeaders (1 bit):** A bit that specifies whether any table style elements (as specified by **BrTableStyleElement**) with a **tseType** field equal to 0x00000003, 0x00000017, 0x00000018, or 0x00000019 will be applied. This field MUST be ignored for tables.
- F - fColumnHeaders (1 bit):** A bit that specifies whether any table style elements (as specified by **BrTableStyleElement**) with a **tseType** field equal to 0x00000001, 0x00000014, 0x00000015, or 0x00000016 will be applied. This field MUST be ignored for tables.
- reserved (10 bits):** This value MUST be 0, and MUST be ignored.
- stStyleName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the name of the table style applied to this table or **PivotTable**. This field MUST be less than 256 characters long. This field MUST be either null, equal to the **strName** field of one of the **BrBeginTableStyle** (section [2.4.268](#)) records in the **Styles** (section [2.1.7.50](#)) part ABNF, or equal to a built-in table style name as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.8.40.

## 2.4.791 BrTableStyleElement

The **BrTableStyleElement** record specifies a table style element (section [2.2.6.2.2](#)).

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| tseType |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| size    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dxId    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**tseType (4 bytes):** A **TSEType** (section [2.5.149](#)) that specifies the bounds of this table style element. This field MUST be less than or equal to 0x0000001B. This field MUST be unique within the TABLESTYLE rule as specified the **Styles** (section [2.1.7.50](#)) part ABNF.

**size (4 bytes):** An unsigned integer that specifies the number of rows (2) or columns (2) to include in a single **stripe band** of **stripe formatting** if **tseType** is equal to 0x00000005, 0x00000006, 0x00000007, or 0x00000008. For other values of **tseType**, this value is undefined and MUST be ignored. This field MUST be greater than or equal to 1, and MUST be less than or equal to 9.

**dxflId (4 bytes):** A **DXFlId** (section [2.5.37](#)) that specifies the **differential formatting** (section [2.2.6.2](#)) applied to this table style element.

## 2.4.792 BrtTextPr15

The **BrtTextPr15** record specifies additional properties of a **model data source text importation connection**, as specified in section [2.2.8.9.4](#).

|            |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|----------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| A          | reserved |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (4 bytes):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record information (section [2.1.6](#)) for this record.

**A - fDataHasHeaders (1 bit):** Specifies whether data imported by this connection has column headers.

**reserved (7 bits):** This value MUST be zero, and MUST be ignored.

## 2.4.793 BrtTimelineCachePivotCacheID

The **BrtTimelineCachePivotCacheID** record specifies a reference to a **PivotCache** (section [2.2.5.2](#)) used by a **Timeline cache** (section [2.2.15.1](#)).

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| idSx                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section [2.5.60](#)) that specifies the future record (section [2.1.6](#)) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table.



| Field                     | Value |
|---------------------------|-------|
| <b>FRTHeader.fRef</b>     | 0     |
| <b>FRTHeader.fSqref</b>   | 0     |
| <b>FRTHeader.fFormula</b> | 0     |
| <b>FRTHeader.fRelID</b>   | 1     |

The **FRTHeader.RelID** specifies a relationship (section [2.1.3](#)) that specifies a **PivotCache** part containing a **PivotCache** used by a **Timeline cache** with OLAP **Timeline source data** (section [2.2.15.1.1](#)).

**idSx (4 bytes)**: An unsigned integer that specifies the identifier for the **PivotCache Definition** (section [2.1.7.38](#)) used by a **Timeline cache**.

## 2.4.794 BrtTimelineStyleElement

The **BrtTimelineStyleElement** record specifies a table style element (section [2.2.6.2.2](#)) specific to timeline styles (section [2.2.6.3.2](#)).

|           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHeader |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| tseType   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| dxId      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHeader (4 bytes)**: An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**tseType (4 bytes)**: A **TSEType** (section [2.5.149](#)) specifying the portion of the timeline view (see section [2.2.15.2](#)) to which this table style element applies. MUST be 0x00000000, 0x00000001, greater than or equal to 0x00000024. This field MUST be unique within the TIMELINESTYLE rule as specified the **Styles** (section [2.1.7.50](#)) part ABNF.

**dxId (4 bytes)**: A **DXFId14** (section [2.5.38](#)) that specifies the [differential formatting](#) (section [2.2.6.2](#)) applied to this table style element. The **fNewBorder** field of **BrtDXF15** (section [2.4.344](#)) referenced by this **dxId** MUST be ignored.

## 2.4.795 BrtTop10Filter

The **BrtTop10Filter** record specifies the criteria for a top N filter.

|   |   |   |          |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|----------|---|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0 | 1 | 2 | 3        | 4 | 5 | 6 | 7 | 8 | 9         | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| A | B | C | reserved |   |   |   |   |   | xNumValue |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|     |            |
|-----|------------|
| ... |            |
| ... | xNumFilter |
| ... |            |
| ... |            |

**A - fTop (1 bit):** A bit that specifies whether the top or bottom items are displayed. This field MUST be one of the values specified in the following table.

| Value | Meaning                     |
|-------|-----------------------------|
| 0     | Bottom items are displayed. |
| 1     | Top items are displayed.    |

**B - fPercent (1 bit):** A bit that specifies whether a percentage of top or bottom items are displayed, or a set number of top or bottom items are displayed. This field MUST be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | Top or bottom n items are displayed.            |
| 1     | Top or bottom n percent of items are displayed. |

**C - fApplied (1 bit):** A bit that specifies whether the filter has been applied. This field MUST be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | <b>xNumFilter</b> needs to be recalculated, and the filter is not applied.                                      |
| 1     | <b>xNumFilter</b> exists among the range of cells and is correctly calculated value, and the filter is applied. |

**reserved (5 bits):** This value MUST be 0, and MUST be ignored.

**xNumValue (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the value applied in the filter. This value specifies the top or bottom **xNumValue** number or percent of items that will be displayed when the filter is applied. For example, if this filter is a "top 13 items" filter, then the value of this field would be 13. If this filter is applied to a **PivotTable** (section [2.1.7.40](#)) then this value MUST be greater than or equal to 0. Otherwise this value MUST be greater than or equal to 1 and less than or equal to 500.

**xNumFilter (8 bytes):** An **Xnum** that specifies the cell value in the range of cells that is used to perform the comparison for this filter. This value is calculated at the time the filter is applied. For example, if the filter is a top filter, then all items greater than or equal to the value stored in this field are displayed. If it is a bottom filter, all items less than or equal to this value are displayed. If **fApplied** is 1, this value MUST be a valid value in the range of cells which the filter is applied to.

## 2.4.796 BrtUCR

The **BrtUCR** record specifies undo information for row (2) or column (2) deletion and move operations when affected formulas (section 2.2.2) (section 2.2.2) or named ranges reference the deleted rows (2), columns (2), or moved range. This record is not applicable for insert revisions.

|                       |   |   |   |   |   |   |   |   |   |    |                |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----------------|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11             | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19        | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iptg                  |   |   |   |   |   |   |   |   |   |    | ptg            |    |    |    |    |    | A  | B  | reserved1 |    |    |    |    |    |    |    |    |    |    |    |    |
| reserved2             |   |   |   |   |   |   |   |   |   |    |                |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |
| rfxChanged (16 bytes) |   |   |   |   |   |   |   |   |   |    |                |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |                |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |
| rw                    |   |   |   |   |   |   |   |   |   |    |                |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |
| col                   |   |   |   |   |   |   |   |   |   |    |                |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |
| tabid                 |   |   |   |   |   |   |   |   |   |    | rgb (variable) |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |                |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |

**iptg (16 bits):** An unsigned integer that specifies a zero-based index of a **Ptg** (section 2.5.97.16) record in the **Rgce** (section 2.5.97.88) **Ptg** of the affected formula. The referenced **Ptg** specifies the affected element of the formula. If **fLbl** is 1, this value MUST be 0 and MUST be ignored.

**ptg (8 bits):** An unsigned integer that specifies the type of expression that was adjusted in the affected formula or named range. The value MUST be one of the values specified in the following table.

| Value | Meaning  |
|-------|--|
| 0x24  | Specifies a reference to a single cell.  |
| 0x25  | Specifies a reference to a rectangular area of cells.                                  |
| 0x26  | Specifies a reference to a fixed set of cells.   |
| 0x2A  | Specifies an invalid reference to a cell.  |
| 0x2B  | Specifies an invalid reference to a cell range.  |
| 0x3A  | Specifies a reference to a single cell on the referenced sheet.                        |
| 0x3B  | Specifies a reference to a rectangular area of cells on the referenced sheet.          |
| 0x3C  | Specifies an invalid reference to a single cell on the referenced sheet.               |
| 0x3D  | Specifies an invalid reference to a rectangular area of cells on the referenced sheet. |

| Value | Meaning   |
|-------|---|
| 0x44  | Specifies a value-typed reference to a single cell.   |
| 0x45  | Specifies a value-typed reference to a rectangular area of cells.                             |
| 0x46  | Specifies a value-typed reference to a fixed set of cells.                                    |
| 0x4A  | Specifies a value-typed invalid reference to a cell.  |
| 0x4B  | Specifies a value-typed invalid reference to a cell range.                                    |
| 0x5A  | Specifies a value-typed reference to a single cell on the referenced sheet.                   |
| 0x5B  | Specifies a value-typed reference to a rectangular area of cells on the referenced sheet.     |
| 0x5C  | Specifies a value-typed invalid reference to a single cell on the referenced sheet.           |
| 0x5D  | Specifies a value-typed invalid reference to a rectangular area of cells on the given sheet.  |
| 0x64  | Specifies an array-typed reference to a single cell.  |
| 0x65  | Specifies an array-typed reference to a rectangular area of cells.                            |
| 0x66  | Specifies an array-typed reference to a fixed set of cells.                                   |
| 0x6A  | Specifies an array-typed invalid reference to a cell.   |
| 0x6B  | Specifies an array-typed invalid reference to a cell range.                                   |
| 0x7A  | Specifies an array-typed reference to a single cell on the given sheet.                       |
| 0x7B  | Specifies an array-typed reference to a rectangular area of cells on the given sheet.         |
| 0x7C  | Specifies an array-typed invalid reference to a single cell on the given sheet.               |
| 0x7D  | Specifies an array-typed invalid reference to a rectangular area of cells on the given sheet. |

**A - fLbI (1 bit):** A bit that specifies whether this record applies to a formula or a named range. If this value is 0, then this record applies to a formula. Otherwise, this record applies to a named range.

**B - fUseSh2 (1 bit):** A bit that specifies whether the expression was on a different sheet.

**reserved1 (6 bits):** This value MUST be 0 and MUST be ignored.

**reserved2 (4 bytes):** This value MUST be 0 and MUST be ignored.

**rfxChanged (16 bytes):** An **RfXRel** (section [2.5.118](#)) that specifies the range that is referenced by the affected formula or named range.

**rw (4 bytes):** A **RwNullable** (section [2.5.127](#)) that specifies the row (2) of the cell of the formula that referenced the deleted cell range. If **fLbI** equals 1, then this value MUST be 0xFFFFFFFF and MUST be ignored.

**col (4 bytes):** A **ColNullable** (section [2.5.23](#)) that specifies the column (2) of the cell of the formula that referenced the deleted cell range. If **fLbI** equals 1, then this value MUST be 0xFFFFFFFF and MUST be ignored.

**tabid (2 bytes):** A signed integer that specifies the identifier of the sheet that contained the formula that referenced the deleted cell range. If **tabid** equals -1, then **tabid** is ignored. This value MUST be greater than or equal to -1.

**rgb (variable):** An **XLNameWideString** (section [2.5.165](#)) that specifies the named range that references the deleted cells. This value MUST NOT be present if **fLbl** equals 0. This value MUST be present if **fLbl** equals 1.

## 2.4.797 BrtUserBookView

The **BrtUserBookView** record specifies the general custom view settings that apply to a whole workbook. There are accompanying **BrtBeginUserShView** (section [2.4.282](#)) and **BrtBeginUserCsView** (section [2.4.279](#)) records that specify individual custom view settings of each sheet. The set of this record and the accompanying **BrtBeginUserShView** and **BrtBeginUserCsView** records share the same GUID.

|                 |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------------|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0               | 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |   |   |
| xLeft           |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| xRight          |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| yTop            |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| yBot            |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iTabid          |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| iTabRatio       |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| guid (16 bytes) |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...             |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| wMergeInterval  |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | A                 | B | C | D | E | F | G | H | I | J | K | L | M | N |
| O               | unused |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | stName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...             |        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**xLeft (4 bytes):** A signed integer that specifies the X coordinate for the left side of the window that contains the workbook, relative to the left side of the workbook window. The unit of measurement for this value is twips.

**xRight (4 bytes):** A signed integer that specifies the X coordinate for the right side of the window that contains the workbook, relative to the left side of the workbook window. The unit of measurement for this value is twips.

**yTop (4 bytes):** A signed integer that specifies the Y coordinate for the top of the window that contains the workbook, relative to the top of the workbook window. The unit of measurement for this value is twips.

**yBot (4 bytes):** A signed integer that specifies the Y coordinate for the bottom of the window that contains the workbook, relative to the top of the workbook window. The unit of measurement for this value is twips.

**iTabid (4 bytes):** An unsigned integer that specifies the active sheet in this custom view. **iTabid** MUST be equal to the value of the **iTabID** in a **BrtBundleSh** (section [2.4.301](#)) in this workbook. This field MUST be greater than or equal to one and less than or equal to 65535.

**iTabRatio (4 bytes):** An unsigned integer that specifies the ratio of the window area used to display sheet tabs and the window area used to display the horizontal scroll bar. **iTabRatio** MUST be greater than or equal to 0 and less than or equal to 1000. A value of 0 specifies that only the horizontal scroll bar is displayed. A value of 1000 specifies that only sheet tabs are displayed.

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that specifies the identity of this custom view.

**wMergeInterval (2 bytes):** A signed integer that specifies the automatic-update interval in minutes. This field is undefined and MUST be ignored if **fTimedUpdate** equals 0. This field MUST be greater than or equal to 5 and less than or equal to 1440 when **fTimedUpdate** equals 1.

**A - fIconic (1 bit):** A bit that specifies whether the window that contains the workbook is minimized. **fIconic** and **fZoom** MUST NOT both be 1. This field MUST be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | The window that contains the workbook is not minimized. |
| 1     | The window that contains the workbook is minimized.     |

**B - fDspHScroll (1 bit):** A bit that specifies whether the horizontal scrollbar is displayed in the window that contains the workbook. This field MUST be one of the values specified in the following table.

| Value | Meaning                                |
|-------|--|
| 0     | Horizontal scrollbar is not displayed. |
| 1     | Horizontal scrollbar is displayed.     |

**C - fDspVScroll (1 bit):** A bit that specifies whether the vertical scrollbar is displayed in the window that contains the workbook. This field MUST be one of the values specified in the following table.

| Value | Meaning                              |
|-------|--------------------------------------|
| 0     | Vertical scrollbar is not displayed. |
| 1     | Vertical scrollbar is displayed.     |

**D - fBotAdornment (1 bit):** A bit that specifies whether sheet tabs are displayed in the window that contains the workbook. This field MUST be one of the values specified in the following table.

| Value | Meaning                       |
|-------|-------------------------------|
| 0     | Sheet tabs are not displayed. |
| 1     | Sheet tabs are displayed.     |

**E - fZoom (1 bit):** A bit that specifies whether the window that contains the workbook is maximized. **fIconic** and **fZoom** MUST NOT both be 0x1. This field MUST be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | The window that contains the workbook is not maximized. |
| 1     | The window that contains the workbook is maximized.     |

**F - fDspFmlaBar (1 bit):** A bit that specifies whether the **formula bar** is displayed. This field MUST be one of the values specified in the following table.

| Value | Meaning                       |
|-------|-------------------------------|
| 0     | Formula bar is not displayed. |
| 1     | Formula bar is displayed.     |

**G - fDspStatus (1 bit):** A bit that specifies whether the status bar is displayed. This field MUST be one of the values specified in the following table.

| Value | Meaning                      |
|-------|------------------------------|
| 0     | Status bar is not displayed. |
| 1     | Status bar is displayed.     |

**H - mdDspNote (2 bits):** An unsigned integer that specifies how comments are displayed in the window that contains the workbook. This field MUST be one of the values specified in the following table.:

| Value | Meaning  |
|-------|--|
| 0     | Comments are not displayed in this custom view.                            |
| 1     | Comments are displayed in this custom view.                                |
| 2     | Comment indicators are displayed in the window that contains the workbook. |

**I - mdHideObj (2 bits):** An unsigned integer that specifies whether ActiveX objects, OLE objects, and **drawing objects** are displayed in the window that contains the workbook. This field MUST be one of the values specified in the following table.:

| Value | Meaning  |
|-------|--|
| 0     | ActiveX objects, OLE objects, and drawing objects are displayed in the window that contains the workbook.                          |
| 1     | Placeholders are displayed in place of ActiveX objects, OLE objects, and drawing objects in the window that contains the workbook. |
| 2     | ActiveX objects, OLE objects, and drawing objects are not displayed in the window that contains the workbook.                      |

**J - fPrintIncl (1 bit):** A bit that specifies that custom print settings are included in this custom view. This field MUST be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | No custom print settings exist for this custom view.  |
| 1     | <p>Custom print settings exist in a <b>BrtBeginUserShView</b> (section <a href="#">2.4.282</a>) record that has a <b>guid</b> field value equal to the <b>guid</b> of this <b>BrtUserBookView</b> record.</p> <p>Additionally, <b>print titles</b> and print areas are specified by <b>BrtName</b> (section <a href="#">2.4.680</a>) records, each of which has a <b>name</b> containing the <b>guid</b> of this <b>BrtUserBookView</b>, using the following form, where <i>guid</i> matches the value of <b>guid</b> with each occurrence of the characters left brace ("{"), right brace ("}"), and dash ("-") in <b>guid</b> replaced by an underscore ("_") character:</p> <ul style="list-style-type: none"> <li>▪ Print titles: <i>Zguid.wvu.PrintTitles</i></li> <li>▪ Print area: <i>Zguid.wvu.PrintArea</i></li> </ul> |

**K - fRowColIncl (1 bit):** A bit that specifies that hidden rows, hidden columns, or filter settings are included in this custom view. MUST be one of the following:

| Value | Meaning  |
|-------|--|
| 0     | No hidden rows, hidden columns, or filter settings exist for this custom view.   |
| 1     | <p>Hidden rows, hidden columns, or filter settings exist in a <b>BrtBeginUserShView</b> (section <a href="#">2.4.282</a>) record that has a <b>guid</b> field value equal to the <b>guid</b> of this <b>BrtUserBookView</b> record.</p> <p>Additionally, hidden rows and hidden columns are specified by <b>BrtName</b> records, each of which has a <b>name</b> containing the <b>guid</b> of this <b>BrtUserBookView</b>, using the following form, where <i>guid</i> matches the value of <b>guid</b> with each occurrence of the characters left brace ("{"), right brace ("}"), and dash ("-") in <b>guid</b> replaced by an underscore ("_") character:</p> <ul style="list-style-type: none"> <li>▪ Hidden rows: <i>Zguid.wvu.Rows</i></li> <li>▪ Hidden columns: <i>Zguid.wvu.Cols</i></li> </ul> <p>Filter settings are also specified by <b>BrtName</b> records, each of which has a <b>name</b> containing the value of <b>guid</b> for this <b>BrtUserBookView</b> record, and by <b>BrtBeginAFilter</b> (section <a href="#">2.4.8</a>) in a <b>BrtBeginUserShView</b> (section <a href="#">2.4.282</a>) with a <b>guid</b> field value equal to the <b>guid</b> of this <b>BrtUserBookView</b> record, using the following form, where <i>guid</i> matches the value of <b>guid</b> with each occurrence of the characters left brace ("{"), right brace ("}"), and dash ("-") in <b>guid</b> replaced by an underscore ("_") character:</p> |



| Value | Meaning  |
|-------|--|
|       | <ul style="list-style-type: none"> <li>▪ Range being filtered: <i>Zguid.wvu.FilterData</i></li> <li>▪ Range containing filter criteria: <i>Zguid.wvu.FilterCriteria</i></li> </ul> |

**L - fTimedUpdate (1 bit):** A bit that specifies whether changes to the workbook will be automatically saved and changes made to the workbook by other users will be automatically loaded at the interval specified by the **wMergeInterval**. This value MUST be 0 and MUST be ignored if **fPersonalView** equals 0. This field MUST be one of the values specified in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Changes to the shared workbook (section <a href="#">2.2.12</a> ) will not be automatically saved or updated. |
| 1     | Changes to the shared workbook will be automatically saved and updated.                                      |

**M - fAllMemChanges (1 bit):** A bit that specifies that changes made to the workbook in the current **session (2)** take precedence over conflicting changes that exist in the persisted version of the workbook when the current session (2) is persisted to disk. This value MUST be 0 and MUST be ignored if **fPersonalView** equals 0. This field MUST be one of the values specified in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Changes to the current session (2) do not take precedence. |
| 1     | Changes to the current session (2) do take precedence.     |

**N - fOnlySync (1 bit):** A bit that specifies whether the workbook will only be synchronized at the interval specified by **wMergeInterval**. This value MUST be 0 and MUST be ignored if **fPersonalView** equals 0. This field MUST be one of the values specified in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Save changes from the current session (2) and synchronize the shared workbook (section <a href="#">2.2.12</a> ). |
| 1     | Only synchronize the shared workbook.  |

**O - fPersonalView (1 bit):** A bit that specifies that this custom view is a personal custom view for a shared workbook (section [2.2.12](#)) user. A personal custom view specifies print and filter settings for a single user of a shared workbook. This field is undefined and MUST be ignored if this is not a shared workbook. This field MUST be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0     | This custom view is not a personal custom view. |
| 1     | This custom view is a personal custom view.     |

**unused (15 bits):** This value is undefined and MUST be ignored.

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the custom view. The length of this field MUST be greater than or equal to 1 and less than or equal to 255 characters.

## 2.4.798 BrtUsr

The **BrtUsr** record specifies information about a user that is currently editing the shared workbook (section [2.2.12](#)).

| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| iUsrId             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| guid (16 bytes)    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| sdtr               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| strName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iUsrId (4 bytes):** An unsigned integer that specifies a unique identifier for this user. The **iUsrId** value MUST be distinct from the **iUsrId** value in every other **BrtUsr** (section [2.4.798](#)) in the document.

**guid (16 bytes):** A GUID as specified by [\[MS-DTYP\]](#) section 2.3.2 that specifies the revision of the shared workbook (section [2.2.12](#)) to which the user is currently synchronized.

**sdtr (8 bytes):** A **ShortDtr** (section [2.5.132](#)) that specifies the date and time the user opened the shared workbook (section [2.2.12](#)). The date and time are stored in the user's local time.

**strName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the display name of the user. This field MUST be greater than 0 characters and less than or equal to 54 characters.

## 2.4.799 BrtValueMeta


The **BrtValueMeta** record specifies a reference to a value metadata (section [2.2.4.3](#)) [metadata block](#) (section [2.2.4.5](#)) in the **Metadata** part (section [2.1.7.34](#)) ABNF .

| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| ivmb |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ivmb (4 bytes):** A signed integer that specifies a one-based index of a **BrTMdb** (section [2.4.673](#)) record in the collection of all records directly following the **BrTBeginEsmdb** (section [2.4.70](#)) record whose **fCellMeta** field equals 0x00000000. The referenced **BrTMdb** specifies a value metadata block that is associated with the **BrTCellBlank** (section [2.4.303](#)), **BrTCellRk** (section [2.4.311](#)), **BrTCellError** (section [2.4.305](#)), **BrTCellBool** (section [2.4.304](#)), **BrTCellReal** (section [2.4.310](#)), **BrTCellIsst** (section [2.4.308](#)), **BrTCellSt** (section [2.4.314](#)), **BrTFmlaString** (section [2.4.650](#)), **BrTFmlaNum** (section [2.4.649](#)), **BrTFmlaBool** (section [2.4.647](#)), or **BrTFmlaError** (section [2.4.648](#)) record that follows **BrTValueMeta** (section [2.4.799](#)).

### 2.4.800 BrtVolBool


The **BrtVolBool** record specifies a cached returned value (section [2.2.13.4](#)) that is a **Boolean** (section [2.5.97.3](#)).

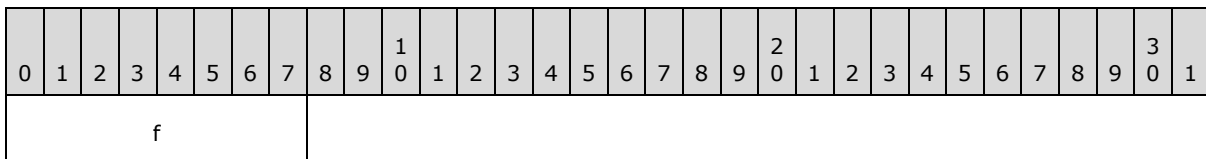

**f (1 byte):** A **Boolean** that specifies the value.

### 2.4.801 BrtVolErr


The **BrtVolErr** record specifies a cached returned value (section [2.2.13.4](#)) that is an error.

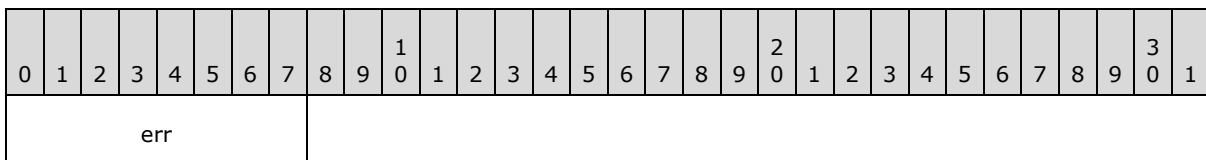

**err (1 byte):** A **BErr** (section [2.5.97.2](#)) that specifies the error.

### 2.4.802 BrtVolNum

The **BrtVolNum** record specifies a cached returned value (section [2.2.13.4](#)) that is a number.

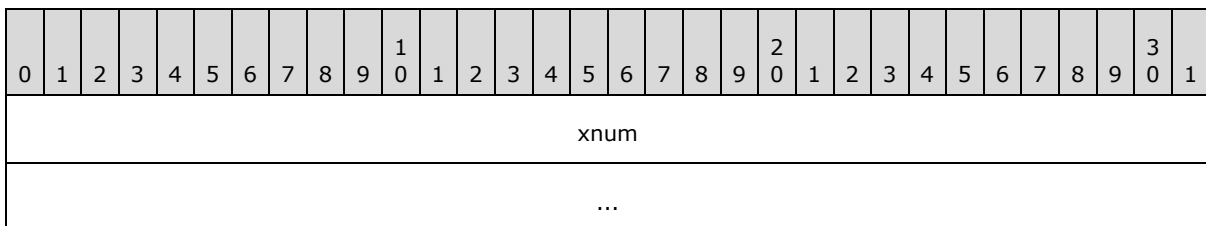

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) that specifies the number.

### 2.4.803 BrtVolRef

The **BrtVolRef** record specifies a cell that is specified by the volatile dependency (section [2.2.13](#)) containing this record as defined by the **Volatile Dependencies** (section [2.1.7.59](#)) part ABNF.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rw  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| col |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ish |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rw (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) of the dependent cell.

**col (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) that specifies the column (2) of the dependent cell.

**ish (4 bytes):** An unsigned integer that specifies a zero-based index of a **BrtBundleSh** (section [2.4.301](#)) record in the collection of all records directly following **BrtBeginBundleShs** (section [2.4.13](#)). The referenced **BrtBundleSh** specifies the sheet that contains the dependent cell.

#### 2.4.804 BrtVolStr

The **BrtVolStr** record specifies a cached returned value (section [2.2.13.4](#)) that is a text string.

|               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| st (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**st (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the string.

#### 2.4.805 BrtVolSubtopic

The **BrtVolSubtopic** record specifies a subtopics (section [2.2.13.3](#)).

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| subtopic (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**subtopic (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the subtopic string.

#### 2.4.806 BrtWbFactoid

The **BrtWbFactoid** record specifies a collection of properties for smart tags that control the run-time visibility and save-time persistence of smart tags in the workbook. [<47>](#)

|   |   |        |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|--------|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2      | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | unused |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fEmbedFactoids (1 bit):** A bit that specifies whether smart tags are saved with the workbook. **BrtBeginSmartTags** (section [2.4.211](#)) is present if and only if this bit is set to 0.

**B - mdFactoidDisplay (2 bits):** An unsigned integer that specifies whether a **smart tag actions button** or **smart tag indicator** is visible at run-time. This field **MUST** be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | The application will display the smart tag actions button and the smart tag indicator.                          |
| 0x1   | The application will display the smart tag actions button only. The smart tag indicators will not be displayed. |
| 0x2   | The application will not display the smart tag actions button or the smart tag indicator.                       |

**unused (5 bits):** This field is undefined and **MUST** be ignored.

## 2.4.807 BrtWbProp

The **BrtWbProp** record specifies properties of a workbook.

|                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17     | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A                  | B | C | D | E | F | G | H | I | J | K  | L  | M  | N  | O  | P  | Q  | unused |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwThemeVersion     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| strName (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - f1904 (1 bit):** A bit that specifies the **date system** used in the workbook. This field **MUST** be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | Workbook uses the 1900 date base system as specified by <a href="#">[ISO/IEC29500-1:2011]</a> section 18.17.4.                    |
| 0x1   | Workbook uses the 1904 backwards-compatibility date system as specified by <a href="#">[ISO/IEC29500-1:2011]</a> section 18.17.4. |

**B - reserved1 (1 bit):** This value **MUST** be 0, and **MUST** be ignored.

**C - fHideBorderUnsellLists (1 bit):** A bit that specifies whether table borders are visible when a table is not active.

**D - fFilterPrivacy (1 bit):** A bit that specifies whether personally identifying information is removed from the workbook when it is saved.

**E - fBuggedUserAboutSolution (1 bit):** A bit that specifies whether a warning is requested before loading a **smart document** manifest file.

**F - fShowInkAnnotation (1 bit):** A bit that specifies whether **ink** comments are visible in the workbook.

**G - fBackup (1 bit):** A bit that specifies whether the backup feature is enabled for the workbook.

**H - fNoSaveSup (1 bit):** A bit that specifies whether **external link** values are cached with the workbook when it is saved.

**I - grbitUpdateLinks (2 bits):** An unsigned integer that specifies how embedded OLE links in the workbook are to be updated. This field **MUST** be one of the values specified in the following table.

| Value | Meaning  |
|-------|--|
| 0x0   | The link update behavior is application specific.                |
| 0x1   | The links are not automatically updated.                         |
| 0x2   | The links are automatically updated <a href="#">&lt;48&gt;</a> . |

**J - fHidePivotTableFList (1 bit):** A bit that specifies whether the PivotTable field list is hidden.

**K - fPublishedBookItems (1 bit):** A bit that specifies whether this workbook is published. This field **MUST** be one of the values specified in the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | Each sheet is published according to its own publishing state as specified by the field <b>fPublish</b> of the <b>BrtWsProp</b> (section <a href="#">2.4.815</a> ) structure. |
| 0x1   | Individual items in a sheet specify their own publishing states.  |

**L - fCheckCompat (1 bit):** A bit that specifies whether the **file format compatibility checker** is enabled for the workbook.

**M - mdDspObj (2 bits):** An unsigned integer that specifies how shapes in the workbook are displayed. The meaning of each value is specified in the following table.

| Value | Meaning   |
|-------|---|
| 0x0   | The shapes are visible.                               |
| 0x1   | <b>Placeholders</b> are shown in place of the shapes. |
| 0x2   | The shapes are not visible.                           |

**N - fShowPivotChartFilter (1 bit):** A bit that specifies whether the **PivotChart filter pane** is visible.

**O - fAutoCompressPictures (1 bit):** A bit that specifies whether pictures in the workbook are compressed when the workbook is saved.

**P - reserved2 (1 bit):** This value MUST be 0, and MUST be ignored.

**Q - fRefreshAll (1 bit):** A bit that specifies whether all external data in the workbook are refreshed when the workbook is opened.

**unused (13 bits):** This field is undefined and MUST be ignored.

**dwThemeVersion (4 bytes):** An unsigned integer that specifies the version number of the theme applied to the workbook. When the value is 0, the version number of the theme is specified by the **Theme** (section [2.1.7.52](#)) part ABNF.

**strName (variable):** A **CodeName** (section [2.5.21](#)) for the workbook<49>.

## 2.4.808 BrtWbProp14

The **BrtWbProp14** record specifies options for a workbook.

|            |          |   |   |   |   |   |                 |           |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
|------------|----------|---|---|---|---|---|-----------------|-----------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| 0          | 1        | 2 | 3 | 4 | 5 | 6 | 7               | 8         | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |
| FRTHHeader |          |   |   |   |   |   |                 |           |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| A          | reserved |   |   |   |   |   |                 | iImageDPI |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...        |          |   |   |   |   |   | accuracyVersion |           |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |
| ...        |          |   |   |   |   |   |                 |           |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record.

**A - fDiscardImgEditData (1 bit):** A bit that specifies whether all **imgProps** elements as defined in [\[MS-ODRAWXML\]](#) section 2.3.1.9, and cropped out areas of images in the workbook are not saved.

**reserved (7 bits):** This value MUST be 0, and MUST be ignored.

**iImageDPI (4 bytes):** An unsigned integer that specifies the default resolution in which images in the workbook are saved, in DPI, when the **fAutoCompressPictures** field of **BrtWbProp** is "TRUE" and the **useLocalDpi** element as defined in [\[MS-ODRAWXML\]](#) section 2.3.1.13 is "FALSE". This field MUST be equal to 96, 150, or 220.

**accuracyVersion (4 bytes):** An unsigned integer that specifies how functions are calculated in the workbook. This field SHOULD be equal to 0.<50>

## 2.4.809 BrtWebExtension

The **BrtWebExtension** record specifies a binding for a web extension ([MS-OWEXML] section 1.3) on the worksheet. This record specifies additional properties for a **CT\_OsfWebExtensionBinding** record specified by [MS-OWEXML] section 2.2.3.

|                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| FRTHHeader (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| appRef (variable)     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**FRTHHeader (variable):** An **FRTHHeader** (section 2.5.60) that specifies the future record (section 2.1.6) information for this record.

The **FRTHHeader** fields MUST have the values listed in the following table:

| Field                       | Value |
|-----------------------------|-------|
| <b>FRTHHeader.fRef</b>      | 0     |
| <b>FRTHHeader.fSqref</b>    | 0     |
| <b>FRTHHeader.fFormulas</b> | 1     |
| <b>FRTHHeader.fRelID</b>    | 0     |

**FRTHHeader.rgFormulas** specifies the data range for this Binding. The **cformula** of the **FRTHHeader.rgFormulas** MUST equal 1 and the formula (section 2.2.2) of the single **FRTHFormula** (section 2.5.58) comprising the **array** of the **FRTHHeader.rgFormulas** MUST NOT contain any of the following **Ptg** (section 2.5.97.16) structures: **PtgArea** (section 2.5.97.18), **PtgAreaErr** (section 2.5.97.20), **PtgRef** (section 2.5.97.68), **PtgRefErr** (section 2.5.97.70). If the **Ptg** structure is a **PtgRef3d** (section 2.5.97.69) or **PtgArea3d** (section 2.5.97.19), then the **ixti** of the **PtgRef3d** or **PtgArea3d** MUST specify an **Xti** (section 2.5.172) that MUST have **firstSheet** greater than or equal to zero, and MUST have **lastSheet** equal to **firstSheet**.

The root node of the parse tree of this field MUST NOT be a VALUE\_TYPE state, as described in section 2.5.97.88.

**appRef (variable):** ) : An **XLWideString** (section 2.5.168) value that specifies a unique identifier for the Binding. This value MUST be equal to the **appref** field of a **CT\_OsfWebExtensionBinding** element as specified by [MS-OWEXML] section 2.3.3.

## 2.4.810 BrtWebOpt

The **BrtWebOpt** record specifies the options for saving the file as a Web page.



|     |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |            |   |   |   |   |   |                 |   |            |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|------------|---|---|---|---|---|-----------------|---|------------|---|---|---|---|---|---|---|
| 0   | 1 | 2 | 3 | 4 | 5 | 6         | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6          | 7 | 8 | 9 | 0 | 1 | 2               | 3 | 4          | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| A   | B | C | D | E | F | reserved2 |   |   |   |   |   |   |   |   |   | screenSize |   |   |   |   |   | dwPixelsPerInch |   |            |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |            |   |   |   |   |   |                 |   | uiCodePage |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |            |   |   |   |   |   |                 |   |            |   |   |   |   |   |   |   |

**A - fRelyOnCSS (1 bit):** A bit that specifies whether **cascading style sheets (CSS)** are used for font formatting when viewing the saved file in a Web browser.

**B - fOrganizeInFolder (1 bit):** A bit that specifies whether all supporting files, such as background textures and graphics, are organized in a separate **folder** when saving the file as a Web page. The value **MUST** be one of the values specified in the following table.

| Value | Meaning  |
|-------|--|
| 0     | All supporting files are saved in the same folder as the Web page. |
| 1     | All supporting files are organized in a separate folder.           |

**C - fUseLongFileNames (1 bit):** A bit that specifies whether **long file names** are used when saving the file as a Web page.

**D - reserved1 (1 bit):** This value **MUST** be 0, and **MUST** be ignored.

**E - fRelyOnVML (1 bit):** A bit that specifies whether **VML** is to be used to display graphics in a Web browser.

**F - fAllowPNG (1 bit):** A bit that specifies whether Portable Network Graphics (PNG) format is allowed as an image format when saving file as a Web page.

**reserved2 (10 bits):** This value **MUST** be 0, and **MUST** be ignored.

**screenSize (1 byte):** A **WebScreenSizeEnum** as specified in [\[MS-OSHARED\]](#) section 2.2.1.4 that specifies the ideal minimum screen size of the target monitor used to view the saved file in a Web browser.

**dwPixelsPerInch (4 bytes):** An unsigned integer that specifies the resolution, in pixels per inch, of graphics images and table cells when saving the file as a Web page. The value **MUST** be greater than or equal to 19 and less than or equal to 480.

**uiCodePage (4 bytes):** An unsigned integer that specifies the **code page**. The value specifies the code page value to be used by the Web browser when viewing the saved file. For more information about code pages, see [\[CODEPG\]](#).

### 2.4.811 BrtWorkbookPr15

The **BrtWorkbookPr15** record specifies options for a workbook.

|            |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|------------|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0          | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| FRTHHeader |          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| A          | reserved |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**FRTHHeader (4 bytes):** An **FRTBlank** (section [2.5.54](#)) that specifies the future record (section [2.1.6](#)) information for this record

**A - fChartTrackingRefBased (1 bit):** A bit value that indicates if data point (2) properties and formatting for all charts (section [2.2.3](#)) in this workbook follow the cell reference of the point or the index of the point in the chart series.

**reserved (7 bits):** This value MUST be 0, and MUST be ignored

### 2.4.812 BrtWsDim

The **BrtWsDim** record specifies the used range of the sheet. It specifies the row (2) and column (2) bounds of used cells in the sheet. Used cells include all cells that contain formulas (section [2.2.2](#)) or data. Used cells also include all cells that have formatting applied directly to the cell. Cells can also be formatted by default row (2) or column (2) formatting. If a row (2) has default formatting, then the used range includes that row (2) in its row (2) bounds, but does not affect the used range column (2) bounds, unless the used range would otherwise be empty, in which case the column (2) bounds are set to include the first column (2). If a column (2) has default formatting, then the used range includes that column (2) in its column (2) bounds, but does not affect the used range row (2) bounds, unless the used range would otherwise be empty, in which case the row (2) bounds are set to include the first row (2).

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| rfx (16 bytes) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rfx (16 bytes):** An **UncheckedRFX** (section [2.5.153](#)) that specifies the row (2) and column (2) bounds of all the used cells in the sheet. If no cells are used in the sheet, then this value MUST be 0.

### 2.4.813 BrtWsFmtInfo

The **BrtWsFmtInfo** record specifies sheet formatting properties.

|                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5              | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| dxGCol         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| cchDefColWidth |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   | miyDefRwHeight |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|   |   |   |   |          |             |              |
|---|---|---|---|----------|-------------|--------------|
| A | B | C | D | reserved | iOutLevelRw | iOutLevelCol |
|---|---|---|---|----------|-------------|--------------|

**dxGCol (4 bytes):** An unsigned integer that specifies the default column (2) width. For the purposes of this field specification, a standard digit is defined to be the widest digit in the Normal style (section [2.2.6.1.2.2](#)) font. The default column (2) width is measured in the number of standard digits that fit in the column (2) multiplied by 256 and rounded down. The value MUST be less than or equal to 65535 or be equal to 0xFFFFFFFF. If the value is 0xFFFFFFFF, this value MUST be ignored.

**chDefColWidth (2 bytes):** An unsigned integer that specifies the default column (2) width when **dxGCol** is 0xFFFFFFFF. For the purposes of this field specification, a standard digit is defined to be the widest digit in the normal style font. This value is measured in number of standard digits. This value MUST be ignored if **dxGCol** is not 0xFFFFFFFF. This value MUST be less than or equal to 255. When this record is contained in a dialog sheet (section [2.1.7.20](#)), this value MUST be less than 255 and MUST be ignored.

**miyDefRwHeight (2 bytes):** An unsigned integer that specifies the default row (2) height, measured in twips. This value MUST be ignored if **fUnsynced** is 0.

**A - fUnsynced (1 bit):** A bit that specifies whether **miyDefRwHeight** has been manually set or is different from the default.

**B - fDyZero (1 bit):** A bit that specifies whether rows (2) are hidden by default.

**C - fExAsc (1 bit):** A bit that specifies whether rows (2) have a thick top border by default.

**D - fExDesc (1 bit):** A bit that specifies whether rows (2) have a thick bottom border by default.

**reserved (12 bits):** This value MUST be 0, and MUST be ignored.

**iOutLevelRw (8 bits):** An unsigned integer that specifies the highest number of outline levels (1) for rows (2) in this sheet. This value MUST be greater than or equal to 0 and MUST be less than or equal to 7.

**iOutLevelCol (8 bits):** An unsigned integer that specifies the highest number of outline levels (1) for columns (2) in this sheet. This value MUST be greater than or equal to 0 and MUST be less than or equal to 7.

#### 2.4.814 BrtWsFmtInfoEx14

The **BrtWsFmtInfoEx14** record specifies, for a cell in the current sheet with Normal style (section [2.2.6.1.2.2](#)) formatting applied, the vertical distance in pixels from the bottom of that cell to the typographical baseline of that cell's contents. This record MUST be present in all **Macrosheet** (section [2.1.7.32](#)) and **Worksheet** part (section [2.1.7.61](#)) in the workbook if and only if the **BrtKnownFonts** (section [2.4.665](#)) record is present in the workbook, as defined by the **Styles** (section [2.1.7.50](#)) part ABNF.

|           |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| dyDescent |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**dyDescent (2 bytes):** An unsigned integer that specifies the vertical distance in pixels from the bottom of a cell in the current sheet to the typographical baseline of the cell content if



**G - fColSumsRight (1 bit):** A bit that specifies the location of summary columns (2) relative to detailed data columns (2) when an outline is applied. If the value is 1, then the summary columns (2) appear to the right, if the sheet is displayed left-to-right, or appear to the left, if the sheet is displayed right-to-left. If the value is 0, then the summary columns (2) appear to the left, if the sheet is displayed left-to-right, or appear to the right, if the sheet is displayed right-to-left. If this record appears within a collection of records as defined by the **Dialog Sheet** part ABNF, this value MUST be 1 and MUST be ignored.

**H - fFitToPage (1 bit):** A bit that specifies whether to fit the printable contents to a single page when printing the sheet.

**I - reserved2 (1 bit):** This value MUST be 0, and MUST be ignored.

**J - fShowOutlineSymbols (1 bit):** A bit that specifies whether the outline symbols of the sheet are visible. If this record appears within a collection of records as defined by the **Dialog Sheet** part ABNF, this value MUST be 1 and MUST be ignored.

**K - reserved3 (1 bit):** This value MUST be 0, and MUST be ignored.

**L - fSyncHoriz (1 bit):** A bit that specifies whether horizontal scrolling is synchronized across multiple windows displaying the sheet.

**M - fSyncVert (1 bit):** A bit that specifies whether vertical scrolling is synchronized across multiple windows displaying the sheet.

**N - fAltExprEval (1 bit):** A bit that specifies whether the sheet uses **transition formula evaluation**.

**O - fAltFormulaEntry (1 bit):** A bit that specifies whether the sheet uses **transition formula entry**.

**P - fFilterMode (1 bit):** A bit that specifies whether the sheet has one or more AutoFilters. If this record appears within a collection of records as defined by the **Dialog Sheet** part ABNF or **Macro Sheet** part ABNF, this value MUST be 0 and MUST be ignored.

**Q - fCondFmtCalc (1 bit):** A bit that specifies whether the conditional formatting calculations are to be evaluated. This field MUST be one of the values specified in the following table.

| Value | Meaning  |
|-------|--|
| 0     | Conditional formatting is not evaluated normally and all the existing conditional formatting will not be updated as cells associated with the conditional formatting change. |
| 1     | Conditional formatting is evaluated normally and all the existing conditional formatting will be updated as the cells associated with the conditional formatting change.     |

**reserved4 (6 bits):** This value MUST be 0, and MUST be ignored.

**brtcolorTab (8 bytes):** A **BrColor** (section [2.4.321](#)) that specifies a background color of the sheet tab.

**rwSync (4 bytes):** A **RwNullable** (section [2.5.127](#)) that specifies an anchor row (2) for synchronous vertical scrolling if **fSyncHoriz** or **fSyncVert** are 1; otherwise, MUST be 0xFFFFFFFF, and MUST be ignored.

**colSync (4 bytes):** A **ColNullable** (section [2.5.23](#)) that specifies an anchor column (2) for synchronous horizontal scrolling if **fSyncHoriz** or **fSyncVert** are 1; otherwise, MUST be 0xFFFFFFFF, and MUST be ignored.

**strName (variable):** A **CodeName** (section [2.5.21](#)) for the sheet. If this record appears within a collection of records as defined by the **Dialog Sheet** part ABNF or **Macro Sheet** part ABNF, this value MUST be a 32-bit zero (0x00000000) and MUST be ignored.

## 2.4.816 BrtXF

The **BrtXF** record specifies the formatting for cells. This record can specify a **cell XF** (section [2.2.6.1.1](#)) or a cell style XF (section [2.2.6.1.2.1](#)). The total number of **BrtXF** records in the workbook which are not built-in MUST NOT exceed 0xFF96. A **BrtXF** record is considered to be built-in if it is referenced by a built-in **BrtStyle** (section [2.4.755](#)) record. A **BrtStyle** record is considered to be built-in if the **fBuiltIn** member of **grbitObj1** equals 1.

|            |   |   |   |      |   |   |   |   |   |    |    |    |    |    |    |       |            |    |    |    |    |    |    |        |        |    |    |    |    |    |    |  |
|------------|---|---|---|------|---|---|---|---|---|----|----|----|----|----|----|-------|------------|----|----|----|----|----|----|--------|--------|----|----|----|----|----|----|--|
| 0          | 1 | 2 | 3 | 4    | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16    | 17         | 18 | 19 | 20 | 21 | 22 | 23 | 24     | 25     | 26 | 27 | 28 | 29 | 30 | 31 |  |
| ixfeParent |   |   |   |      |   |   |   |   |   |    |    |    |    |    |    | iFmt  |            |    |    |    |    |    |    |        |        |    |    |    |    |    |    |  |
| iFont      |   |   |   |      |   |   |   |   |   |    |    |    |    |    |    | iFill |            |    |    |    |    |    |    |        |        |    |    |    |    |    |    |  |
| ixBorder   |   |   |   |      |   |   |   |   |   |    |    |    |    |    |    | trot  |            |    |    |    |    |    |    | indent |        |    |    |    |    |    |    |  |
| alc        |   |   |   | alcv |   |   |   | A | B | C  | D  | E  | F  | G  | H  | I     | xfGrbitAtr |    |    |    |    |    |    |        | unused |    |    |    |    |    |    |  |

**ixfeParent (2 bytes):** An unsigned integer that specifies whether this record is a cell style XF or a cell XF. If this record specifies a cell style XF, the value MUST be 0xFFFF. If the record specifies a cell XF, the value is a zero-based index to another **BrtXF** record in the collection of all records directly following **BrtBeginCellStyleXFs** (section [2.4.18](#)) which is a cell style XF.

**iFmt (2 bytes):** An **Ifmt** (section [2.5.76](#)) that specifies the number format used when displaying the value of the cell.

**iFont (2 bytes):** An unsigned integer that specifies a zero-based index of a **BrtFont** (section [2.4.653](#)) record in the collection of records directly following a **BrtBeginFonts** (section [2.4.85](#)) record. The referenced **BrtFont** specifies the font properties for the cell.

**iFill (2 bytes):** An unsigned integer that specifies a zero-based index of a **BrtFill** (section [2.4.644](#)) record in the collection of records directly following a **BrtBeginFills** (section [2.4.79](#)) record. The referenced **BrtFill** specifies the fill properties for the cell.

**ixBorder (2 bytes):** An unsigned integer that specifies a zero-based index of a **BrtBorder** (section [2.4.299](#)) record in the collection of records directly following a **BrtBeginBorders** (section [2.4.12](#)) record. The referenced **BrtBorder** specifies the border properties for the cell.

**trot (1 byte):** An unsigned integer that specifies the text rotation in cells. This field represents an angle that is specified in degrees. The first letter of the text is considered the center-point of the arc. This field MUST be one of the values specified in the following table.

| Value  | Meaning                                       |
|--------|---|
| 0-90   | Text rotated counterclockwise 0 to 90 degrees |
| 91-180 | Text rotated clockwise 1 to 90 degrees        |
| 254    | Text rotation is context dependent            |
| 255    | Vertical text                                 |

**indent (1 byte):** An unsigned integer that specifies the **indentation level** for text in a cell. The **indent** value with respect to the number of space characters is calculated according to the following formula:

$$\text{indent} = \text{number of space characters} / 3$$

**indent** MUST be greater than or equal to 0 and less than or equal to 250.

**alc (3 bits):** An unsigned integer that specifies the type of horizontal alignment for text in the cell. The possible values for this attribute are defined in the following table.

| Value | Meaning                                  |
|-------|--|
| 0     | <b>General alignment</b>                 |
| 1     | Left alignment                           |
| 2     | Center alignment                         |
| 3     | Right alignment                          |
| 4     | <b>Fill alignment</b>                    |
| 5     | Justify alignment                        |
| 6     | <b>Center-across-selection alignment</b> |
| 7     | Distributed alignment                    |

**alcv (3 bits):** An unsigned integer that specifies the type of vertical alignment for text in the cell. The possible values for this attribute are defined in the following table.

| Value | Meaning               |
|-------|-----------------------|
| 0     | Top alignment         |
| 1     | Center alignment      |
| 2     | Bottom alignment      |
| 3     | Justify alignment     |
| 4     | Distributed alignment |

**A - fWrap (1 bit):** A bit that specifies whether the text in a cell is line-wrapped within the cell.

**B - fJustLast (1 bit):** A bit that specifies whether the justified or **distributed alignment** of the cell is used on the last line of text. (Setting the value of this field to 1 is typical for East Asian text but not typical in other contexts.)

**C - fShrinkToFit (1 bit):** A bit that specifies whether the displayed text in the cell is **shrink to fit**.

**D - fMergeCell (1 bit):** A bit that specifies whether this cell is part of a merged cell.

**E - iReadingOrder (2 bits):** An unsigned integer that specifies the **reading order** of the cell. The possible values for this attribute are defined in the following table.

| Value | Meaning           |
|-------|-------------------|
| 0     | Context dependent |
| 1     | Left-to-right     |
| 2     | Right-to-left     |

**F - fLocked (1 bit):** A bit that specifies whether the **locked protection** property is set to true.

**G - fHidden (1 bit):** A bit that specifies whether the **hidden protection** property is set to true.

**H - fSxButton (1 bit):** A bit that specifies whether the cell has a **PivotTable** (section [2.1.7.40](#)) dropdown button.

**I - f123Prefix (1 bit):** A bit that specifies whether the text string in a cell is prefixed by a single quote mark.

**xfGrbitAtr (6 bits):** An unsigned integer that specifies how to interpret the formatting properties defined in other fields. Each bit represents one set of related formatting properties. The meaning of the values of the bits varies based on whether this record specifies a cell XF or a cell style XF according to the following table.

| Bit | Context       | Value | Meaning  |
|-----|---------------|-------|--|
| 0   | Cell Style XF | 0     | Number formatting, as specified in the <b>iFmt</b> field, is included in this cell style (section <a href="#">2.2.6.1.2</a> ).             |
| 0   | Cell Style XF | 1     | Number formatting, as specified in the <b>iFmt</b> field, MUST be ignored.   |
| 0   | Cell XF       | 0     | If the number format of the cell style XF record referenced by <b>ixfParent</b> changes, that number format is set in this XF as well.     |
| 0   | Cell XF       | 1     | If the number format of the cell style XF record referenced by <b>ixfParent</b> changes, the number format in this XF MUST NOT be changed. |
| 1   | Cell Style XF | 0     | Font formatting, as specified in the <b>iFont</b> field, is included in this cell style (section <a href="#">2.2.6.1.2</a> ).              |
| 1   | Cell Style XF | 1     | Font formatting, as specified in the <b>iFont</b> field, MUST be ignored.  |
| 1   | Cell XF       | 0     | If the font formatting of the cell style XF record referenced by <b>ixfParent</b> changes, that font formatting is set in this XF as well. |



| Bit | Context       | Value | Meaning  |
|-----|---------------|-------|--|
| 1   | Cell XF       | 1     | If the font formatting of the cell style XF record referenced by <b>ixfParent</b> changes, the font formatting in this XF MUST NOT be changed.   |
| 2   | Cell Style XF | 0     | Alignment properties, as specified in the <b>trot</b> , <b>indent</b> , <b>alc</b> , <b>alcv</b> , <b>fWrap</b> , <b>fJustLast</b> , <b>fShrinkToFit</b> , <b>fMergeCell</b> , and <b>iReadingOrder</b> fields, are included in this cell style. |
| 2   | Cell Style XF | 1     | Alignment properties, as specified in the <b>trot</b> , <b>indent</b> , <b>alc</b> , <b>alcv</b> , <b>fWrap</b> , <b>fJustLast</b> , <b>fShrinkToFit</b> , <b>fMergeCell</b> , and <b>iReadingOrder</b> fields, MUST be ignored.                 |
| 2   | Cell XF       | 0     | If the alignment properties of the cell style XF record referenced by <b>ixfParent</b> change, those alignment properties are set in this XF as well.  |
| 2   | Cell XF       | 1     | If the alignment properties of the cell style XF record referenced by <b>ixfParent</b> change, the alignment properties in this XF MUST NOT be changed.  |
| 3   | Cell Style XF | 0     | Border formatting, as specified in the <b>ixBorder</b> field, is included in this cell style.  |
| 3   | Cell Style XF | 1     | Border formatting, as specified in the <b>ixBorder</b> field, MUST be ignored.   |
| 3   | Cell XF       | 0     | If the border formatting of the cell style XF record referenced by <b>ixfParent</b> changes, that border formatting is set in this XF as well.   |
| 3   | Cell XF       | 1     | If the border formatting of the cell style XF record referenced by <b>ixfParent</b> changes, the border formatting in this XF MUST NOT be changed.   |
| 4   | Cell Style XF | 0     | Fill formatting, as specified in the <b>iFill</b> field, is included in this cell style.   |
| 4   | Cell Style XF | 1     | Fill formatting, as specified in the <b>iFill</b> field, MUST be ignored.  |
| 4   | Cell XF       | 0     | If the fill formatting of the cell style XF record referenced by <b>ixfParent</b> changes, that fill formatting is set in this XF as well.   |
| 4   | Cell XF       | 1     | If the fill formatting of the cell style XF record referenced by <b>ixfParent</b> changes, the fill formatting in this XF MUST NOT be changed.   |
| 5   | Cell Style XF | 0     | Protection properties, as specified in the <b>fLocked</b> and <b>fHidden</b> fields, are included in this cell style.  |
| 5   | Cell Style XF | 1     | Protection properties, as specified in the <b>fLocked</b> and <b>fHidden</b> fields, MUST be ignored.  |
| 5   | Cell XF       | 0     | If the protection properties of the cell style XF record referenced by <b>ixfParent</b> change, those protection properties are set in this XF as well.  |
| 5   | Cell XF       | 1     | If the protection properties of the cell style XF record referenced by <b>ixfParent</b> change, the protection properties in this XF MUST NOT be changed.  |

**unused (10 bits):** Undefined and MUST be ignored.

## 2.5 Structures

### 2.5.1 ACProductVersion

The **ACProductVersion** structure specifies an application and its version or versions that can process this alternate content block as specified by the future record (section [2.1.6](#)).

The following packet diagram specifies this structure.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16          | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fileVersion |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | fileProduct |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A  |

**fileVersion (2 bytes):** An unsigned integer that specifies the version of the application. [<51>](#)

**fileProduct (15 bits):** An unsigned integer that specifies the application. [<52>](#)

**A - fileExtension (1 bit):** Specifies which version of the application specified by **fileProduct** can process this alternate content block. The value of this field MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | The application specified by <b>fileProduct</b> with a version specified by <b>fileVersion</b> can process this alternate content block.             |
| 1     | The application specified by <b>fileProduct</b> with a version greater than or equal to <b>fileVersion</b> can process this alternate content block. |

### 2.5.2 ArgDesc

The **ArgDesc** structure specifies an argument description for a macro.

The following packet diagram specifies this structure.

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| iArgDesc             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stArgDesc (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**iArgDesc (4 bytes):** An unsigned integer that specifies the zero-based index of the argument of the associated macro, the argument description of which is specified by **stArgDesc**. The value of this field MUST be less than the total number of arguments of the associated macro.

**stArgDesc (variable):** An **XLWideString** (section [2.5.168](#)) string that specifies the description of the argument at zero-based index **iArgDesc** of the associated macro. **MUST** have length less than or equal to 255 and greater than or equal to 1.

### 2.5.3 AutoFormatID

The **AutoFormatID** structure is a 2-byte unsigned integer that specifies the AutoFormat to be applied. The value of this structure **MUST** be a value from the following table. [<53>](#)

| Value        | Meaning  |       |       |       |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
|--------------|--|-------|-------|-------|-----|-------|-------------|------|------|------|-------|-------------|---|---|---|----|--------------|---|---|---|----|--------------|-------|-------|-------|-------|
| 0x0000       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td><b>Total</b></td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>                         |       | Jan   | Feb   | Mar | Total | East        | 7    | 7    | 5    | 19    | West        | 6 | 4 | 7 | 17 | South        | 8 | 7 | 9 | 24 | <b>Total</b> | 21    | 18    | 21    | 60    |
|              | Jan  | Feb   | Mar   | Total |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| East         | 7  | 7     | 5     | 19    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| West         | 6  | 4     | 7     | 17    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| South        | 8  | 7     | 9     | 24    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>Total</b> | 21   | 18    | 21    | 60    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| 0x0001       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td><b>Total</b></td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>                         |       | Jan   | Feb   | Mar | Total | East        | 7    | 7    | 5    | 19    | West        | 6 | 4 | 7 | 17 | South        | 8 | 7 | 9 | 24 | <b>Total</b> | 21    | 18    | 21    | 60    |
|              | Jan  | Feb   | Mar   | Total |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| East         | 7  | 7     | 5     | 19    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| West         | 6  | 4     | 7     | 17    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| South        | 8  | 7     | 9     | 24    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>Total</b> | 21   | 18    | 21    | 60    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| 0x0002       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td><b>East</b></td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td><b>West</b></td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td><b>South</b></td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td><b>Total</b></td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>    |       | Jan   | Feb   | Mar | Total | <b>East</b> | 7    | 7    | 5    | 19    | <b>West</b> | 6 | 4 | 7 | 17 | <b>South</b> | 8 | 7 | 9 | 24 | <b>Total</b> | 21    | 18    | 21    | 60    |
|              | Jan  | Feb   | Mar   | Total |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>East</b>  | 7  | 7     | 5     | 19    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>West</b>  | 6  | 4     | 7     | 17    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>South</b> | 8  | 7     | 9     | 24    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>Total</b> | 21   | 18    | 21    | 60    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| 0x0003       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td><b>East</b></td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td><b>West</b></td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td><b>South</b></td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td><b>Total</b></td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>    |       | Jan   | Feb   | Mar | Total | <b>East</b> | 7    | 7    | 5    | 19    | <b>West</b> | 6 | 4 | 7 | 17 | <b>South</b> | 8 | 7 | 9 | 24 | <b>Total</b> | 21    | 18    | 21    | 60    |
|              | Jan  | Feb   | Mar   | Total |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>East</b>  | 7  | 7     | 5     | 19    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>West</b>  | 6  | 4     | 7     | 17    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>South</b> | 8  | 7     | 9     | 24    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>Total</b> | 21   | 18    | 21    | 60    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| 0x0004       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>\$ 7</td> <td>\$ 7</td> <td>\$ 5</td> <td>\$ 19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td><b>Total</b></td> <td>\$ 21</td> <td>\$ 18</td> <td>\$ 21</td> <td>\$ 60</td> </tr> </tbody> </table> |       | Jan   | Feb   | Mar | Total | East        | \$ 7 | \$ 7 | \$ 5 | \$ 19 | West        | 6 | 4 | 7 | 17 | South        | 8 | 7 | 9 | 24 | <b>Total</b> | \$ 21 | \$ 18 | \$ 21 | \$ 60 |
|              | Jan  | Feb   | Mar   | Total |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| East         | \$ 7   | \$ 7  | \$ 5  | \$ 19 |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| West         | 6  | 4     | 7     | 17    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| South        | 8  | 7     | 9     | 24    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>Total</b> | \$ 21  | \$ 18 | \$ 21 | \$ 60 |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| 0x0005       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>\$ 7</td> <td>\$ 7</td> <td>\$ 5</td> <td>\$ 19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td><b>Total</b></td> <td>\$ 21</td> <td>\$ 18</td> <td>\$ 21</td> <td>\$ 60</td> </tr> </tbody> </table> |       | Jan   | Feb   | Mar | Total | East        | \$ 7 | \$ 7 | \$ 5 | \$ 19 | West        | 6 | 4 | 7 | 17 | South        | 8 | 7 | 9 | 24 | <b>Total</b> | \$ 21 | \$ 18 | \$ 21 | \$ 60 |
|              | Jan  | Feb   | Mar   | Total |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| East         | \$ 7   | \$ 7  | \$ 5  | \$ 19 |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| West         | 6  | 4     | 7     | 17    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| South        | 8  | 7     | 9     | 24    |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |
| <b>Total</b> | \$ 21  | \$ 18 | \$ 21 | \$ 60 |     |       |             |      |      |      |       |             |   |   |   |    |              |   |   |   |    |              |       |       |       |       |

| Value        | Meaning  |              |              |              |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
|--------------|--|--------------|--------------|--------------|-----|-------|------|------|------|------|-------|------|---|---|---|----|-------|---|---|---|----|--------------|--------------|--------------|--------------|--------------|
| 0x0006       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>\$ 7</td> <td>\$ 7</td> <td>\$ 5</td> <td>\$ 19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td><b>Total</b></td> <td><b>\$ 21</b></td> <td><b>\$ 18</b></td> <td><b>\$ 21</b></td> <td><b>\$ 60</b></td> </tr> </tbody> </table> |              | Jan          | Feb          | Mar | Total | East | \$ 7 | \$ 7 | \$ 5 | \$ 19 | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | <b>Total</b> | <b>\$ 21</b> | <b>\$ 18</b> | <b>\$ 21</b> | <b>\$ 60</b> |
|              | Jan  | Feb          | Mar          | Total        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| East         | \$ 7   | \$ 7         | \$ 5         | \$ 19        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| West         | 6  | 4            | 7            | 17           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| South        | 8  | 7            | 9            | 24           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| <b>Total</b> | <b>\$ 21</b>   | <b>\$ 18</b> | <b>\$ 21</b> | <b>\$ 60</b> |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| 0x0007       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>\$ 7</td> <td>\$ 7</td> <td>\$ 5</td> <td>\$ 19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>\$ 21</td> <td>\$ 18</td> <td>\$ 21</td> <td>\$ 60</td> </tr> </tbody> </table>                                    |              | Jan          | Feb          | Mar | Total | East | \$ 7 | \$ 7 | \$ 5 | \$ 19 | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total        | \$ 21        | \$ 18        | \$ 21        | \$ 60        |
|              | Jan  | Feb          | Mar          | Total        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| East         | \$ 7   | \$ 7         | \$ 5         | \$ 19        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| West         | 6  | 4            | 7            | 17           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| South        | 8  | 7            | 9            | 24           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| Total        | \$ 21  | \$ 18        | \$ 21        | \$ 60        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| 0x0008       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>  |              | Jan          | Feb          | Mar | Total | East | 7    | 7    | 5    | 19    | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total        | 21           | 18           | 21           | 60           |
|              | Jan  | Feb          | Mar          | Total        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| East         | 7  | 7            | 5            | 19           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| West         | 6  | 4            | 7            | 17           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| South        | 8  | 7            | 9            | 24           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| Total        | 21   | 18           | 21           | 60           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| 0x0009       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>  |              | Jan          | Feb          | Mar | Total | East | 7    | 7    | 5    | 19    | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total        | 21           | 18           | 21           | 60           |
|              | Jan  | Feb          | Mar          | Total        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| East         | 7  | 7            | 5            | 19           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| West         | 6  | 4            | 7            | 17           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| South        | 8  | 7            | 9            | 24           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| Total        | 21   | 18           | 21           | 60           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| 0x000A       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>  |              | Jan          | Feb          | Mar | Total | East | 7    | 7    | 5    | 19    | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total        | 21           | 18           | 21           | 60           |
|              | Jan  | Feb          | Mar          | Total        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| East         | 7  | 7            | 5            | 19           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| West         | 6  | 4            | 7            | 17           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| South        | 8  | 7            | 9            | 24           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| Total        | 21   | 18           | 21           | 60           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| 0x000B       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>  |              | Jan          | Feb          | Mar | Total | East | 7    | 7    | 5    | 19    | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total        | 21           | 18           | 21           | 60           |
|              | Jan  | Feb          | Mar          | Total        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| East         | 7  | 7            | 5            | 19           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| West         | 6  | 4            | 7            | 17           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| South        | 8  | 7            | 9            | 24           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| Total        | 21   | 18           | 21           | 60           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| 0x000C       | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>  |              | Jan          | Feb          | Mar | Total | East | 7    | 7    | 5    | 19    | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total        | 21           | 18           | 21           | 60           |
|              | Jan  | Feb          | Mar          | Total        |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| East         | 7  | 7            | 5            | 19           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| West         | 6  | 4            | 7            | 17           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| South        | 8  | 7            | 9            | 24           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |
| Total        | 21   | 18           | 21           | 60           |     |       |      |      |      |      |       |      |   |   |   |    |       |   |   |   |    |              |              |              |              |              |

| Value  | Meaning   |     |     |       |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
|--------|---|-----|-----|-------|-----|-------|------|---|---|---|----|------|---|---|---|----|-------|---|---|---|----|-------|----|----|----|----|
| 0x000D | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table> |     | Jan | Feb   | Mar | Total | East | 7 | 7 | 5 | 19 | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total | 21 | 18 | 21 | 60 |
|        | Jan   | Feb | Mar | Total |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| East   | 7   | 7   | 5   | 19    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| West   | 6   | 4   | 7   | 17    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| South  | 8   | 7   | 9   | 24    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| Total  | 21  | 18  | 21  | 60    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 0x000E | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table> |     | Jan | Feb   | Mar | Total | East | 7 | 7 | 5 | 19 | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total | 21 | 18 | 21 | 60 |
|        | Jan   | Feb | Mar | Total |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| East   | 7   | 7   | 5   | 19    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| West   | 6   | 4   | 7   | 17    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| South  | 8   | 7   | 9   | 24    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| Total  | 21  | 18  | 21  | 60    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 0x000F | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table> |     | Jan | Feb   | Mar | Total | East | 7 | 7 | 5 | 19 | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total | 21 | 18 | 21 | 60 |
|        | Jan   | Feb | Mar | Total |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| East   | 7   | 7   | 5   | 19    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| West   | 6   | 4   | 7   | 17    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| South  | 8   | 7   | 9   | 24    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| Total  | 21  | 18  | 21  | 60    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 0x0010 | <table border="1"> <thead> <tr> <th></th> <th>Jan</th> <th>Feb</th> <th>Mar</th> <th>Total</th> </tr> </thead> <tbody> <tr> <td>East</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>West</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>South</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>Total</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table> |     | Jan | Feb   | Mar | Total | East | 7 | 7 | 5 | 19 | West | 6 | 4 | 7 | 17 | South | 8 | 7 | 9 | 24 | Total | 21 | 18 | 21 | 60 |
|        | Jan   | Feb | Mar | Total |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| East   | 7   | 7   | 5   | 19    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| West   | 6   | 4   | 7   | 17    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| South  | 8   | 7   | 9   | 24    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| Total  | 21  | 18  | 21  | 60    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 0x0011 | <table border="1"> <thead> <tr> <th></th> <th>1月</th> <th>2月</th> <th>3月</th> <th>合計</th> </tr> </thead> <tbody> <tr> <td>東</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>西</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>南</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>合計</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>                    |     | 1月  | 2月    | 3月  | 合計    | 東    | 7 | 7 | 5 | 19 | 西    | 6 | 4 | 7 | 17 | 南     | 8 | 7 | 9 | 24 | 合計    | 21 | 18 | 21 | 60 |
|        | 1月  | 2月  | 3月  | 合計    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 東      | 7   | 7   | 5   | 19    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 西      | 6   | 4   | 7   | 17    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 南      | 8   | 7   | 9   | 24    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 合計     | 21  | 18  | 21  | 60    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 0x0012 | <table border="1"> <thead> <tr> <th></th> <th>1月</th> <th>2月</th> <th>3月</th> <th>合計</th> </tr> </thead> <tbody> <tr> <td>東</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>西</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>南</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>合計</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>                    |     | 1月  | 2月    | 3月  | 合計    | 東    | 7 | 7 | 5 | 19 | 西    | 6 | 4 | 7 | 17 | 南     | 8 | 7 | 9 | 24 | 合計    | 21 | 18 | 21 | 60 |
|        | 1月  | 2月  | 3月  | 合計    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 東      | 7   | 7   | 5   | 19    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 西      | 6   | 4   | 7   | 17    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 南      | 8   | 7   | 9   | 24    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 合計     | 21  | 18  | 21  | 60    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 0x0013 | <table border="1"> <thead> <tr> <th></th> <th>1月</th> <th>2月</th> <th>3月</th> <th>合計</th> </tr> </thead> <tbody> <tr> <td>東</td> <td>7</td> <td>7</td> <td>5</td> <td>19</td> </tr> <tr> <td>西</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>南</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>合計</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>                    |     | 1月  | 2月    | 3月  | 合計    | 東    | 7 | 7 | 5 | 19 | 西    | 6 | 4 | 7 | 17 | 南     | 8 | 7 | 9 | 24 | 合計    | 21 | 18 | 21 | 60 |
|        | 1月  | 2月  | 3月  | 合計    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 東      | 7   | 7   | 5   | 19    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 西      | 6   | 4   | 7   | 17    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 南      | 8   | 7   | 9   | 24    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |
| 合計     | 21  | 18  | 21  | 60    |     |       |      |   |   |   |    |      |   |   |   |    |       |   |   |   |    |       |    |    |    |    |

| Value  | Meaning   |       |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|--------|---|-------|-------|------|------|-----|----|---|---|---|-----|---|------|---|---|-----|---|---|-----|---|-----|----|----|----|----|-----|--|--|--|----|-----|--|--|-----|-------|-----|--|------|-------|----|-----|
| 0x0014 | <table border="1"> <thead> <tr> <th></th> <th>1月</th> <th>2月</th> <th>3月</th> <th>合計</th> </tr> </thead> <tbody> <tr> <td>W</td> <td>7</td> <td>7</td> <td>6</td> <td>19</td> </tr> <tr> <td>S</td> <td>6</td> <td>4</td> <td>7</td> <td>17</td> </tr> <tr> <td>R</td> <td>8</td> <td>7</td> <td>9</td> <td>24</td> </tr> <tr> <td>合計</td> <td>21</td> <td>18</td> <td>21</td> <td>60</td> </tr> </tbody> </table>  |       | 1月    | 2月   | 3月   | 合計  | W  | 7 | 7 | 6 | 19  | S | 6    | 4 | 7 | 17  | R | 8 | 7   | 9 | 24  | 合計 | 21 | 18 | 21 | 60  |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | 1月  | 2月    | 3月    | 合計   |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| W      | 7   | 7     | 6     | 19   |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| S      | 6   | 4     | 7     | 17   |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| R      | 8   | 7     | 9     | 24   |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 合計     | 21  | 18    | 21    | 60   |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 0x1000 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>JPN</td> <td></td> <td>555</td> </tr> <tr> <td></td> <td></td> <td></td> <td>SE</td> <td>555</td> </tr> </tbody> </table>    | Qtr   | Crop  | Area | Zone | Rev | 3Q |   |   |   | 888 |   | Corn |   |   | 888 |   |   | USA |   | 333 |    |    |    | NE | 111 |  |  |  | NW | 222 |  |  | JPN |       | 555 |  |      |       | SE | 555 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       | 888  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  |       |       | 888  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   |       | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | JPN   |       | 555  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | SE    | 555  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 0x1001 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td>Total</td> <td>333</td> </tr> <tr> <td></td> <td>Corn</td> <td>Total</td> <td></td> <td>333</td> </tr> </tbody> </table> | Qtr   | Crop  | Area | Zone | Rev | 3Q |   |   |   |     |   | Corn |   |   |     |   |   | USA |   |     |    |    |    | NE | 111 |  |  |  | NW | 222 |  |  | USA | Total | 333 |  | Corn | Total |    | 333 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  |       |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   | Total | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  | Total |       | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 0x1002 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>JPN</td> <td></td> <td>555</td> </tr> <tr> <td></td> <td></td> <td></td> <td>SE</td> <td>555</td> </tr> </tbody> </table>    | Qtr   | Crop  | Area | Zone | Rev | 3Q |   |   |   | 888 |   | Corn |   |   | 888 |   |   | USA |   | 333 |    |    |    | NE | 111 |  |  |  | NW | 222 |  |  | JPN |       | 555 |  |      |       | SE | 555 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       | 888  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  |       |       | 888  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   |       | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | JPN   |       | 555  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | SE    | 555  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 0x1003 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td>Total</td> <td>333</td> </tr> <tr> <td></td> <td>Corn</td> <td>Total</td> <td></td> <td>333</td> </tr> </tbody> </table> | Qtr   | Crop  | Area | Zone | Rev | 3Q |   |   |   |     |   | Corn |   |   |     |   |   | USA |   |     |    |    |    | NE | 111 |  |  |  | NW | 222 |  |  | USA | Total | 333 |  | Corn | Total |    | 333 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  |       |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   | Total | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  | Total |       | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 0x1004 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td>Total</td> <td>333</td> </tr> <tr> <td></td> <td>Corn</td> <td>Total</td> <td></td> <td>333</td> </tr> </tbody> </table> | Qtr   | Crop  | Area | Zone | Rev | 3Q |   |   |   |     |   | Corn |   |   |     |   |   | USA |   |     |    |    |    | NE | 111 |  |  |  | NW | 222 |  |  | USA | Total | 333 |  | Corn | Total |    | 333 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  |       |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   |       |      |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   | Total | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  | Total |       | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 0x1005 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>JPN</td> <td></td> <td>555</td> </tr> <tr> <td></td> <td></td> <td></td> <td>SE</td> <td>555</td> </tr> </tbody> </table>    | Qtr   | Crop  | Area | Zone | Rev | 3Q |   |   |   | 888 |   | Corn |   |   | 888 |   |   | USA |   | 333 |    |    |    | NE | 111 |  |  |  | NW | 222 |  |  | JPN |       | 555 |  |      |       | SE | 555 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       | 888  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        | Corn  |       |       | 888  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | USA   |       | 333  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   | JPN   |       | 555  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |
|        |   |       | SE    | 555  |      |     |    |   |   |   |     |   |      |   |   |     |   |   |     |   |     |    |    |    |    |     |  |  |  |    |     |  |  |     |       |     |  |      |       |    |     |

| Value  | Meaning   |       |       |      |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|--------|---|-------|-------|------|------|-----|------|------|-----|------|-----|-----|------|-----|-----|-----|--|----|-----|-----|-----|-----|-------|-----|-----|-----|-----|----|-----|-----|-----|--|----|-----|-------|-----|--|------|-------|----|-----|
| 0x1006 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td>Total</td> <td>333</td> </tr> <tr> <td></td> <td>Corn</td> <td>Total</td> <td></td> <td>333</td> </tr> </tbody> </table> | Qtr   | Crop  | Area | Zone | Rev | 3Q   |      |     |      |     |     | Corn |     |     |     |  |    | USA |     |     |     |       |     | NE  | 111 |     |    |     | NW  | 222 |  |    | USA | Total | 333 |  | Corn | Total |    | 333 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       |      |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | Corn  |       |       |      |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | USA   |       |      |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | USA   | Total | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | Corn  | Total |       | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 0x1007 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td>Total</td> <td>333</td> </tr> <tr> <td></td> <td>Corn</td> <td>Total</td> <td></td> <td>333</td> </tr> </tbody> </table> | Qtr   | Crop  | Area | Zone | Rev | 3Q   |      |     |      |     |     | Corn |     |     |     |  |    | USA |     |     |     |       |     | NE  | 111 |     |    |     | NW  | 222 |  |    | USA | Total | 333 |  | Corn | Total |    | 333 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       |      |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | Corn  |       |       |      |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | USA   |       |      |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | USA   | Total | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | Corn  | Total |       | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 0x1008 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>JPN</td> <td></td> <td>555</td> </tr> <tr> <td></td> <td></td> <td></td> <td>SE</td> <td>555</td> </tr> </tbody> </table>    | Qtr   | Crop  | Area | Zone | Rev | 3Q   |      |     |      | 888 |     | Corn |     |     | 888 |  |    | USA |     | 333 |     |       |     | NE  | 111 |     |    |     | NW  | 222 |  |    | JPN |       | 555 |  |      |       | SE | 555 |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       | 888  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | Corn  |       |       | 888  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | USA   |       | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | JPN   |       | 555  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | SE    | 555  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 0x1009 | <table border="1"> <thead> <tr> <th>Qtr</th> <th>Crop</th> <th>Area</th> <th>Zone</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>3Q</td> <td></td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td>Corn</td> <td></td> <td></td> <td>888</td> </tr> <tr> <td></td> <td></td> <td>USA</td> <td></td> <td>333</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NE</td> <td>111</td> </tr> <tr> <td></td> <td></td> <td></td> <td>NW</td> <td>222</td> </tr> <tr> <td></td> <td></td> <td>JPN</td> <td></td> <td>555</td> </tr> </tbody> </table>  | Qtr   | Crop  | Area | Zone | Rev | 3Q   |      |     |      | 888 |     | Corn |     |     | 888 |  |    | USA |     | 333 |     |       |     | NE  | 111 |     |    |     | NW  | 222 |  |    | JPN |       | 555 |  |      |       |    |     |
| Qtr    | Crop  | Area  | Zone  | Rev  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 3Q     |   |       |       | 888  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | Corn  |       |       | 888  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | USA   |       | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NE    | 111  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   |       | NW    | 222  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        |   | JPN   |       | 555  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 0x100A | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td></td> <td>NW</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td>USA</td> <td>Total</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td></td> <td>SW</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table>                             |       |       | 3Q   |      | 4Q  | Area | Zone | Rev | Cost | Rev | USA | NE   | 111 | 111 | 111 |  | NW | 222 | 222 | 222 | USA | Total | 333 | 333 | 333 | JPN | SE | 333 | 333 | 333 |  | SW | 555 | 555   | 555 |  |      |       |    |     |
|        |   | 3Q    |       | 4Q   |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| Area   | Zone  | Rev   | Cost  | Rev  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| USA    | NE  | 111   | 111   | 111  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | NW  | 222   | 222   | 222  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| USA    | Total   | 333   | 333   | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| JPN    | SE  | 333   | 333   | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | SW  | 555   | 555   | 555  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 0x100B | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td></td> <td>NW</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td>USA</td> <td>Total</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td></td> <td>SW</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table>                             |       |       | 3Q   |      | 4Q  | Area | Zone | Rev | Cost | Rev | USA | NE   | 111 | 111 | 111 |  | NW | 222 | 222 | 222 | USA | Total | 333 | 333 | 333 | JPN | SE | 333 | 333 | 333 |  | SW | 555 | 555   | 555 |  |      |       |    |     |
|        |   | 3Q    |       | 4Q   |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| Area   | Zone  | Rev   | Cost  | Rev  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| USA    | NE  | 111   | 111   | 111  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | NW  | 222   | 222   | 222  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| USA    | Total   | 333   | 333   | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| JPN    | SE  | 333   | 333   | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | SW  | 555   | 555   | 555  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| 0x100C | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td></td> <td>NW</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td>USA</td> <td>Total</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td></td> <td>SW</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table>                             |       |       | 3Q   |      | 4Q  | Area | Zone | Rev | Cost | Rev | USA | NE   | 111 | 111 | 111 |  | NW | 222 | 222 | 222 | USA | Total | 333 | 333 | 333 | JPN | SE | 333 | 333 | 333 |  | SW | 555 | 555   | 555 |  |      |       |    |     |
|        |   | 3Q    |       | 4Q   |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| Area   | Zone  | Rev   | Cost  | Rev  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| USA    | NE  | 111   | 111   | 111  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | NW  | 222   | 222   | 222  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| USA    | Total   | 333   | 333   | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
| JPN    | SE  | 333   | 333   | 333  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |
|        | SW  | 555   | 555   | 555  |      |     |      |      |     |      |     |     |      |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |       |     |  |      |       |    |     |

| Value            | Meaning  |            |            |            |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|------------------|--|------------|------------|------------|--|----|------|------|-----|------|-----|-----|----|-----|-----|-----|----|-----|-----|-----|------------------|--|------------|------------|------------|-----|----|-----|-----|-----|----|-----|-----|-----|
| 0x100D           | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td rowspan="2">USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td colspan="2"><b>USA Total</b></td> <td><b>333</b></td> <td><b>333</b></td> <td><b>333</b></td> </tr> <tr> <td rowspan="2">JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>Sw</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table> |            |            | 3Q         |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 | Nw | 222 | 222 | 222 | <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> | JPN | SE | 333 | 333 | 333 | Sw | 555 | 555 | 555 |
|                  |  | 3Q         |            | 4Q         |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| Area             | Zone   | Rev        | Cost       | Rev        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| USA              | NE   | 111        | 111        | 111        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Nw   | 222        | 222        | 222        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| JPN              | SE   | 333        | 333        | 333        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Sw   | 555        | 555        | 555        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| 0x100E           | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td rowspan="2">USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td colspan="2"><b>USA Total</b></td> <td><b>333</b></td> <td><b>333</b></td> <td><b>333</b></td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table>   |            |            | 3Q         |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 | Nw | 222 | 222 | 222 | <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> | JPN | SE | 555 | 555 | 555 |    |     |     |     |
|                  |  | 3Q         |            | 4Q         |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| Area             | Zone   | Rev        | Cost       | Rev        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| USA              | NE   | 111        | 111        | 111        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Nw   | 222        | 222        | 222        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| JPN              | SE   | 555        | 555        | 555        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| 0x100F           | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td rowspan="2">USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td colspan="2"><b>USA Total</b></td> <td><b>333</b></td> <td><b>333</b></td> <td><b>333</b></td> </tr> <tr> <td rowspan="2">JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>Sw</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table> |            |            | 3Q         |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 | Nw | 222 | 222 | 222 | <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> | JPN | SE | 333 | 333 | 333 | Sw | 555 | 555 | 555 |
|                  |  | 3Q         |            | 4Q         |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| Area             | Zone   | Rev        | Cost       | Rev        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| USA              | NE   | 111        | 111        | 111        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Nw   | 222        | 222        | 222        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| JPN              | SE   | 333        | 333        | 333        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Sw   | 555        | 555        | 555        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| 0x1010           | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td rowspan="2">USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td colspan="2"><b>USA Total</b></td> <td><b>333</b></td> <td><b>333</b></td> <td><b>333</b></td> </tr> <tr> <td rowspan="2">JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>Sw</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table> |            |            | 3Q         |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 | Nw | 222 | 222 | 222 | <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> | JPN | SE | 333 | 333 | 333 | Sw | 555 | 555 | 555 |
|                  |  | 3Q         |            | 4Q         |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| Area             | Zone   | Rev        | Cost       | Rev        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| USA              | NE   | 111        | 111        | 111        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Nw   | 222        | 222        | 222        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| JPN              | SE   | 333        | 333        | 333        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Sw   | 555        | 555        | 555        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| 0x1011           | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td rowspan="2">USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td colspan="2"><b>USA Total</b></td> <td><b>333</b></td> <td><b>333</b></td> <td><b>333</b></td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table>   |            |            | 3Q         |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 | Nw | 222 | 222 | 222 | <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> | JPN | SE | 555 | 555 | 555 |    |     |     |     |
|                  |  | 3Q         |            | 4Q         |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| Area             | Zone   | Rev        | Cost       | Rev        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| USA              | NE   | 111        | 111        | 111        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Nw   | 222        | 222        | 222        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| JPN              | SE   | 555        | 555        | 555        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| 0x1012           | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td rowspan="2">USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td colspan="2"><b>USA Total</b></td> <td><b>333</b></td> <td><b>333</b></td> <td><b>333</b></td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table>   |            |            | 3Q         |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 | Nw | 222 | 222 | 222 | <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> | JPN | SE | 555 | 555 | 555 |    |     |     |     |
|                  |  | 3Q         |            | 4Q         |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| Area             | Zone   | Rev        | Cost       | Rev        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| USA              | NE   | 111        | 111        | 111        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Nw   | 222        | 222        | 222        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| JPN              | SE   | 555        | 555        | 555        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| 0x1013           | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td rowspan="2">USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td colspan="2"><b>USA Total</b></td> <td><b>333</b></td> <td><b>333</b></td> <td><b>333</b></td> </tr> <tr> <td rowspan="2">JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>Sw</td> <td>555</td> <td>555</td> <td>555</td> </tr> </tbody> </table> |            |            | 3Q         |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 | Nw | 222 | 222 | 222 | <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> | JPN | SE | 333 | 333 | 333 | Sw | 555 | 555 | 555 |
|                  |  | 3Q         |            | 4Q         |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| Area             | Zone   | Rev        | Cost       | Rev        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| USA              | NE   | 111        | 111        | 111        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Nw   | 222        | 222        | 222        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| <b>USA Total</b> |  | <b>333</b> | <b>333</b> | <b>333</b> |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
| JPN              | SE   | 333        | 333        | 333        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |
|                  | Sw   | 555        | 555        | 555        |  |    |      |      |     |      |     |     |    |     |     |     |    |     |     |     |                  |  |            |            |            |     |    |     |     |     |    |     |     |     |




| Value  | Meaning   |     |      |     |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
|--------|---|-----|------|-----|--|----|------|------|-----|------|-----|-----|----|-----|-----|-----|--|----|-----|-----|-----|-----|-------|-----|-----|-----|-----|----|-----|-----|-----|--|----|-----|-----|-----|-----|-------|-----|-----|-----|
| 0x1014 | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td></td> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td>USA</td> <td>Total</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td></td> <td>Sw</td> <td>555</td> <td>555</td> <td>555</td> </tr> <tr> <td>JPN</td> <td>Total</td> <td>888</td> <td>888</td> <td>888</td> </tr> </tbody> </table> |     |      | 3Q  |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 |  | Nw | 222 | 222 | 222 | USA | Total | 333 | 333 | 333 | JPN | SE | 333 | 333 | 333 |  | Sw | 555 | 555 | 555 | JPN | Total | 888 | 888 | 888 |
|        |   | 3Q  |      | 4Q  |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| Area   | Zone  | Rev | Cost | Rev |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| USA    | NE  | 111 | 111  | 111 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
|        | Nw  | 222 | 222  | 222 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| USA    | Total   | 333 | 333  | 333 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| JPN    | SE  | 333 | 333  | 333 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
|        | Sw  | 555 | 555  | 555 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| JPN    | Total   | 888 | 888  | 888 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| 0x1015 | <table border="1"> <thead> <tr> <th colspan="2"></th> <th colspan="2">3Q</th> <th>4Q</th> </tr> <tr> <th>Area</th> <th>Zone</th> <th>Rev</th> <th>Cost</th> <th>Rev</th> </tr> </thead> <tbody> <tr> <td>USA</td> <td>NE</td> <td>111</td> <td>111</td> <td>111</td> </tr> <tr> <td></td> <td>Nw</td> <td>222</td> <td>222</td> <td>222</td> </tr> <tr> <td>USA</td> <td>Total</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td>JPN</td> <td>SE</td> <td>333</td> <td>333</td> <td>333</td> </tr> <tr> <td></td> <td>Sw</td> <td>555</td> <td>555</td> <td>555</td> </tr> <tr> <td>JPN</td> <td>Total</td> <td>888</td> <td>888</td> <td>888</td> </tr> </tbody> </table> |     |      | 3Q  |  | 4Q | Area | Zone | Rev | Cost | Rev | USA | NE | 111 | 111 | 111 |  | Nw | 222 | 222 | 222 | USA | Total | 333 | 333 | 333 | JPN | SE | 333 | 333 | 333 |  | Sw | 555 | 555 | 555 | JPN | Total | 888 | 888 | 888 |
|        |   | 3Q  |      | 4Q  |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| Area   | Zone  | Rev | Cost | Rev |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| USA    | NE  | 111 | 111  | 111 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
|        | Nw  | 222 | 222  | 222 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| USA    | Total   | 333 | 333  | 333 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| JPN    | SE  | 333 | 333  | 333 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
|        | Sw  | 555 | 555  | 555 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |
| JPN    | Total   | 888 | 888  | 888 |  |    |      |      |     |      |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |     |    |     |     |     |  |    |     |     |     |     |       |     |     |     |

## 2.5.4 Blxf

The **Blxf** structure specifies a reference to a border definition.

The following packet diagram specifies this structure.

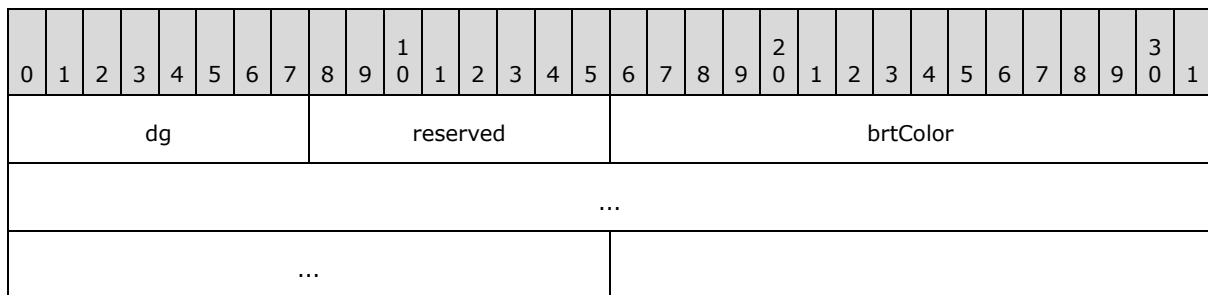

**dg (1 byte):** An unsigned integer that specifies the type of border. The value of this field **MUST** be a value from the following table.

| Value | Meaning       |
|-------|---------------|
| 0x00  | None          |
| 0x01  | Thin          |
| 0x02  | Medium        |
| 0x03  | Dashed        |
| 0x04  | Dotted        |
| 0x05  | Thick         |
| 0x06  | Double        |
| 0x07  | Hairline      |
| 0x08  | Medium Dashed |

| Value | Meaning             |
|-------|---------------------|
| 0x09  | Dash Dot            |
| 0x0A  | Medium Dash Dot     |
| 0x0B  | Dash Dot Dot        |
| 0x0C  | Medium Dash Dot Dot |
| 0x0D  | Slant Dash Dot      |

**reserved (1 byte):** This value MUST be 0 and MUST be ignored.

**brtColor (8 bytes):** A **BrColor** (section [2.4.321](#)) structure that specifies the border color.

### 2.5.5 Bold

The **Bold** enumeration specifies the **font face weight**.[<54>](#)


The value of this enumeration MUST be a value from the following table.

| Name             | Value  | Meaning            |
|------------------|--------|--------------------|
| <b>BLSNORMAL</b> | 0x0190 | Normal font weight |
| <b>BLSBOLD</b>   | 0x02BC | Bold font weight   |

### 2.5.6 BookProtectionFlags

The **BookProtectionFlags** structure specifies what aspects of a workbook are protected.

The following packet diagram specifies this structure.

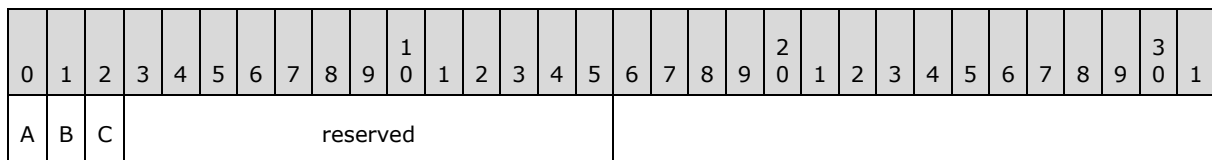

**A - fLockStructure (1 bit):** A bit that specifies whether the structure of the workbook is protected from user change.

**B - fLockWindow (1 bit):** A bit that specifies whether the windows of the workbook are protected from user change.

**C - fLockRevision (1 bit):** A bit that specifies whether change-tracking information is protected from user change.

**reserved (13 bits):** This value MUST be 0 and MUST be ignored.

### 2.5.7 BorderStyle

The **BorderStyle** enumeration specifies the border line style.

The value of this enumeration MUST be a value from the following table.

| Name                    | Value  | Meaning                   |
|-------------------------|--------|---------------------------|
| <b>NONE</b>             | 0x0000 | No border                 |
| <b>THIN</b>             | 0x0001 | Thin line                 |
| <b>MEDIUM</b>           | 0x0002 | Medium line               |
| <b>DASHED</b>           | 0x0003 | Dashed line               |
| <b>DOTTED</b>           | 0x0004 | Dotted line               |
| <b>THICK</b>            | 0x0005 | Thick line                |
| <b>DOUBLE</b>           | 0x0006 | Double line               |
| <b>HAIR</b>             | 0x0007 | Hairline                  |
| <b>MEDIUMDASHED</b>     | 0x0008 | Medium dashed line        |
| <b>DASHDOT</b>          | 0x0009 | Dash-dot line             |
| <b>MEDIUMDASHDOT</b>    | 0x000A | Medium dash-dot line      |
| <b>DASHDOTDOT</b>       | 0x000B | Dash-dot-dot line         |
| <b>MEDIUMDASHDOTDOT</b> | 0x000C | Medium dash-dot-dot line  |
| <b>SLANTDASHDOT</b>     | 0x000D | Slanted dash-dot-dot line |


## 2.5.8 BrtColSpan

The **BrtColSpan** structure specifies the index of the first and last columns (2) that contain data for a single segment of the containing **BrtRowHdr** (section 2.4.718) structure. Each **BrtRowHdr** structure is divided into 16 segments; each segment contains 1,024 contiguous columns (2) where the **column** field of each **Cell** (section 2.5.9) record in the segment results in the same value for the following formula (section 2.2.2) via integer division:

$$\text{column} / 1024$$

A **BrtColSpan** structure exists only if a **Cell** record exists for one or more columns (2) within the segment.

The following packet diagram specifies this structure.

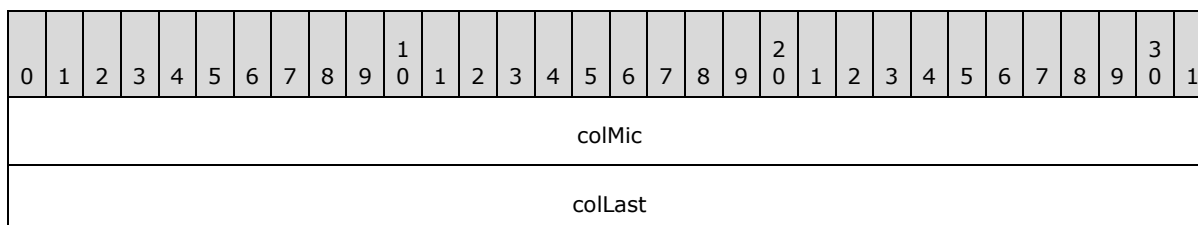

**colMic (4 bytes):** A **Col** (section 2.5.22) structure that specifies the column (2) index of the first cell logically contained in this segment. The value of this field MUST be less than 0x00004000 (16384), MUST be equal to the smallest value of the **column** field of the **Cell** records logically

contained in this segment, and MUST be a value that satisfies the following condition under integer division:

$$\text{colMic} / 1024 = \text{colLast} / 1024$$


**colLast (4 bytes):** A **Col** structure that specifies the column (2) index of the last cell logically contained in this segment. The value of this field MUST be greater than or equal to the value of **colMic**, MUST be less than 0x00004000 (16384), MUST be equal to the largest value of the **column** field of the **Cell** records logically contained in this segment, and MUST be a value that satisfies the following condition under integer division:

$$\text{colLast} / 1024 = \text{colMic} / 1024$$

### 2.5.9 Cell

The **Cell** structure specifies some information for a cell, such as its column (2) number, style, and phonetic information. Many cell record types share this structure.

The following packet diagram specifies this structure.

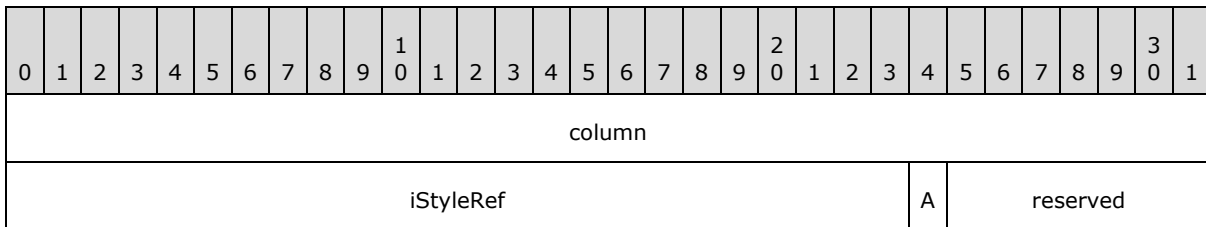

**column (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) structure that specifies the column (2) that contains this cell.

**iStyleRef (24 bits):** An unsigned integer that specifies a zero-based index of a **BrtXF** (section [2.4.816](#)) record in the collection of all records directly following the **BrtBeginCellXFs** (section [2.4.20](#)) record in the **Styles** (section [2.1.7.50](#)) part ABNF. The referenced **BrtXF** record specifies the cell formatting for this cell. This value MUST be less than the total number of **BrtXF** records between **BrtBeginCellXFs** and **BrtEndCellXFs** (section [2.4.359](#)).

**A - fPhShow (1 bit):** A bit that specifies whether the application shows phonetic information for this cell. The value of this field MUST be a value from the following table.

| Value | Meaning                                      |
|-------|--|
| 0     | The cell does not show phonetic information. |
| 1     | The cell shows phonetic information.         |

This value MUST be 0 if the cell exists in the **Revision Log** (section [2.1.7.44](#)) part ABNF.

**reserved (7 bits):** This value MUST be 0 and MUST be ignored.

### 2.5.10 CellStyleName

The **CellStyleName** structure is an **XLNullableWideString** (section [2.5.166](#)) structure that specifies the name of a cell style (section [2.2.6.1.2](#)). The length of the string MUST be less than or

equal to 255. The value of this structure MUST be a null string or MUST match the name of a cell style defined by a **BrtStyle** (section [2.4.755](#)) record.

### 2.5.11 CFDateOper

The **CFDateOper** enumeration specifies the valid types of date comparisons used in conditional formatting rules. All of these comparisons evaluate to False (0) if the cell does not contain a date.


The value of this enumeration MUST be a value from the following table.

| Name                           | Value      | Meaning   |
|--------------------------------|------------|---|
| <b>CF_TIMEPERIOD_TODAY</b>     | 0x00000000 | This rule evaluates to True (1) when the date specified by the cell is today's date.  |
| <b>CF_TIMEPERIOD_YESTERDAY</b> | 0x00000001 | This rule evaluates to True (1) when the date specified by the cell is yesterday's date.  |
| <b>CF_TIMEPERIOD_LAST7DAYS</b> | 0x00000002 | This rule evaluates to True (1) when the date specified by the cell is today's date or a day up to six days prior to today's date.      |
| <b>CF_TIMEPERIOD_THISWEEK</b>  | 0x00000003 | This rule evaluates to True (1) when the date specified by the cell is a day in the one-week period beginning with the previous Sunday. |
| <b>CF_TIMEPERIOD_LASTWEEK</b>  | 0x00000004 | This rule evaluates to True (1) when the date specified by the cell is a day in the one-week period ending with the previous Saturday.  |
| <b>CF_TIMEPERIOD_LASTMONTH</b> | 0x00000005 | This rule evaluates to True (1) when the date specified by the cell is a day in the previous month.                                     |
| <b>CF_TIMEPERIOD_TOMORROW</b>  | 0x00000006 | This rule evaluates to True (1) when the date specified by the cell is tomorrow's date.   |
| <b>CF_TIMEPERIOD_NEXTWEEK</b>  | 0x00000007 | This rule evaluates to True (1) when the date specified by the cell is a day in the one-week period beginning with the next Sunday.     |
| <b>CF_TIMEPERIOD_NEXTMONTH</b> | 0x00000008 | This rule evaluates to True (1) when the date specified by the cell is a day in the next month.   |
| <b>CF_TIMEPERIOD_THISMONTH</b> | 0x00000009 | This rule evaluates to True (1) when the date specified by the cell is a day in the current month.                                      |

### 2.5.12 CFFlag

The **CFFlag** structure specifies an icon within an icon set.

The following packet diagram specifies this structure.

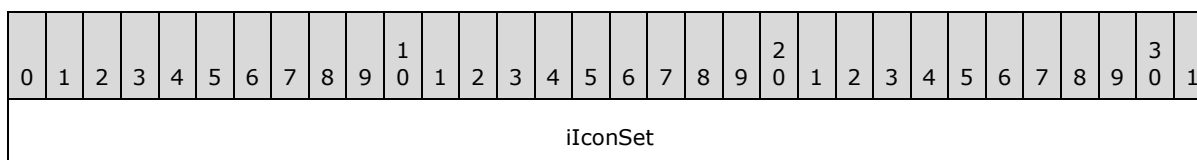

|       |
|-------|
| iIcon |
|-------|


**iIconSet (4 bytes):** A **KPISets** (section [2.5.85](#)) enumeration that specifies the icon set.

**iIcon (4 bytes):** An **Icon** (section [2.5.74](#)) structure that specifies the icon. If **iIconSet** is equal to -1, this value MUST be -1. If **iIconSet** is not equal to -1, this value MUST be greater than or equal to 0. If the icon set specified by **iIconSet** has three icons, this value MUST be less than or equal to 2. If the icon set specified by **iIconSet** has four icons, this value MUST be less than or equal to 3. If the icon set specified by **iIconSet** has five icons, this value MUST be less than or equal to 4.

### 2.5.13 CFFlag14

The **CFFlag14** structure specifies an icon within an icon set.

The following packet diagram specifies this structure.

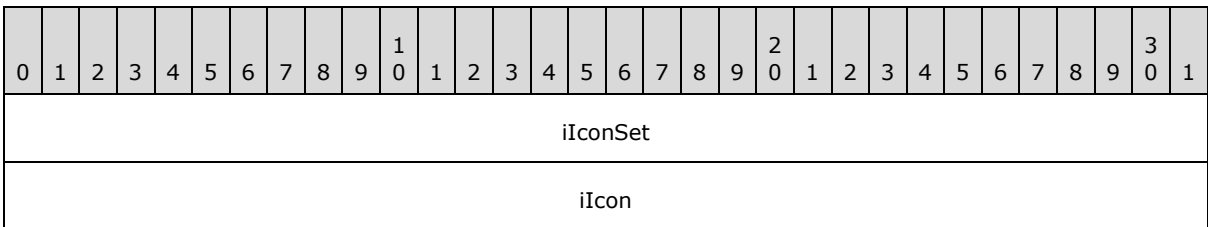

**iIconSet (4 bytes):** A **KPISets14** (section [2.5.86](#)) enumeration that specifies the icon set.

**iIcon (4 bytes):** An **Icon** (section [2.5.74](#)) structure that specifies the icon. If **iIconSet** is equal to -1, this value MUST be -1. If **iIconSet** is not equal to -1, this value MUST be greater than or equal to 0. If the icon set specified by **iIconSet** has three icons, this value MUST be less than or equal to 2. If the icon set specified by **iIconSet** has four icons, this value MUST be less than or equal to 3. If the icon set specified by **iIconSet** has five icons, this value MUST be less than or equal to 4.

### 2.5.14 CFOper

The **CFOper** enumeration specifies the valid types of value comparisons used in conditional formatting rules. The value of the cell is compared against the value calculated by using the formulas (section [2.2.2](#)) stored in the **rgce1** and **rgce2** fields of the **BrtBeginCFRule** (section [2.4.21](#)) record or in the **FRTHeader** field of the **BrtBeginCFRule14** (section [2.4.22](#)) record.

The value of this enumeration MUST be a value from the following table.

| Name              | Value      | Meaning   |
|-------------------|------------|---|
| <b>CF_OPER_BN</b> | 0x00000001 | This rule evaluates to True (1) when the cell's value is greater than or equal to the value specified by <b>rgce1</b> and less than or equal to the value specified by <b>rgce2</b> . |
| <b>CF_OPER_NB</b> | 0x00000002 | This rule evaluates to True (1) when the cell's value is less than the value specified by <b>rgce1</b> or greater than the value specified by <b>rgce2</b> .                          |
| <b>CF_OPER_EQ</b> | 0x00000003 | This rule evaluates to True (1) when the cell's value is equal to the value specified by <b>rgce1</b> .   |

| Name              | Value      | Meaning   |
|-------------------|------------|---|
| <b>CF_OPER_NE</b> | 0x00000004 | This rule evaluates to True (1) when the cell's value is not equal to the value specified by <b>rgce1</b> .             |
| <b>CF_OPER_GT</b> | 0x00000005 | This rule evaluates to True (1) when the cell's value is greater than the value specified by <b>rgce1</b> .             |
| <b>CF_OPER_LT</b> | 0x00000006 | This rule evaluates to True (1) when the cell's value is less than the value specified by <b>rgce1</b> .                |
| <b>CF_OPER_GE</b> | 0x00000007 | This rule evaluates to True (1) when the cell's value is greater than or equal to the value specified by <b>rgce1</b> . |
| <b>CF_OPER_LE</b> | 0x00000008 | This rule evaluates to True (1) when the cell's value is less than or equal to the value specified by <b>rgce1</b> .    |

### 2.5.15 CFTemp

The **CFTemp** enumeration specifies the type of condition that causes conditional formatting to be displayed in cells as part of a conditional formatting rule.

The value of this enumeration MUST be a value from the following table.

| Name                                | Value      | Meaning  |
|-------------------------------------|------------|--|
| <b>CF_TEMPLATE_EXPR</b>             | 0x00000000 | Cells are formatted based on their values.   |
| <b>CF_TEMPLATE_FMLA</b>             | 0x00000001 | Cells are formatted based on the result of a formula (section <a href="#">2.2.2</a> ).   |
| <b>CF_TEMPLATE_GRADIENT</b>         | 0x00000002 | A color scale is used to shade the cells based on their values.  |
| <b>CF_TEMPLATE_DATABAR</b>          | 0x00000003 | A data bar is drawn in each cell.  |
| <b>CF_TEMPLATE_MULTISTATE</b>       | 0x00000004 | An icon is displayed in the cell based on its value.   |
| <b>CF_TEMPLATE_FILTER</b>           | 0x00000005 | Cells are formatted when their values are in the top or bottom of the range of all values in the conditional formatting range. |
| <b>CF_TEMPLATE_BANDEDTABLE</b>      | 0x00000006 | This value is not used.  |
| <b>CF_TEMPLATE_UNIQUEVALUES</b>     | 0x00000007 | Formatting is applied when a cell's value is unique among all other cells in the conditional formatting range.                 |
| <b>CF_TEMPLATE_CONTAINSTEXT</b>     | 0x00000008 | Formatting is applied when the cell's value contains specific text.  |
| <b>CF_TEMPLATE_CONTAINSBLANKS</b>   | 0x00000009 | Formatting is applied when the cell's value is blank.  |
| <b>CF_TEMPLATE_CONTAINSNOBLANKS</b> | 0x0000000A | Formatting is applied when the cell's value is not blank.  |

| Name                                   | Value      | Meaning  |
|--|------------|--|
| <b>CF_TEMPLATE_CONTAINSERRORS</b>      | 0x0000000B | Formatting is applied when the cell contains an error.   |
| <b>CF_TEMPLATE_CONTAINSNOERRORS</b>    | 0x0000000C | Formatting is applied when the cell does not contain an error.   |
| <b>CF_TEMPLATE_CONTAINSFORMULAS</b>    | 0x0000000D | This value is not used.  |
| <b>CF_TEMPLATE_CONTAINSNOFORMULAS</b>  | 0x0000000E | This value is not used.  |
| <b>CF_TEMPLATE_TIMEPERIODTODAY</b>     | 0x0000000F | Formatting is applied when the cell contains a date and that date is today.  |
| <b>CF_TEMPLATE_TIMEPERIODTOMORROW</b>  | 0x00000010 | Formatting is applied when the cell contains a date and that date is tomorrow.   |
| <b>CF_TEMPLATE_TIMEPERIODYESTERDAY</b> | 0x00000011 | Formatting is applied when the cell contains a date and that date is yesterday.  |
| <b>CF_TEMPLATE_TIMEPERIODLAST7DAYS</b> | 0x00000012 | Formatting is applied when the cell contains a date and that date occurred within the last seven days.                     |
| <b>CF_TEMPLATE_TIMEPERIODLASTMONTH</b> | 0x00000013 | Formatting is applied when the cell contains a date and that date occurred last month.                                     |
| <b>CF_TEMPLATE_TIMEPERIODNEXTMONTH</b> | 0x00000014 | Formatting is applied when the cell contains a date and that date occurs next month.                                       |
| <b>CF_TEMPLATE_TIMEPERIODTHISWEEK</b>  | 0x00000015 | Formatting is applied when the cell contains a date and that date occurs this week.  |
| <b>CF_TEMPLATE_TIMEPERIODNEXTWEEK</b>  | 0x00000016 | Formatting is applied when the cell contains a date and that date occurs next week.  |
| <b>CF_TEMPLATE_TIMEPERIODLASTWEEK</b>  | 0x00000017 | Formatting is applied when the cell contains a date and that date occurred last week.                                      |
| <b>CF_TEMPLATE_TIMEPERIODTHISMONTH</b> | 0x00000018 | Formatting is applied when the cell contains a date and that date occurs this month.                                       |
| <b>CF_TEMPLATE_ABOVEAVERAGE</b>        | 0x00000019 | Formatting is applied when the cell's value is above the average value of other cells in the conditional formatting range. |
| <b>CF_TEMPLATE_BELOWAVERAGE</b>        | 0x0000001A | Formatting is applied when the cell's value is below the average value of other cells in the conditional formatting range. |
| <b>CF_TEMPLATE_DUPLICATEVALUES</b>     | 0x0000001B | Formatting is applied when the cell's value matches the value of other cells in  |



| Name                                 | Value      | Meaning   |
|--------------------------------------|------------|---|
|                                      |            | the conditional formatting range.   |
| <b>CF_TEMPLATE_COMPARECOLUMNS</b>    | 0x0000001C | This value is not used.   |
| <b>CF_TEMPLATE_EQUALABOVEAVERAGE</b> | 0x0000001D | Formatting is applied when the cell's value is equal to or greater than the average value of other cells in the conditional formatting range. |
| <b>CF_TEMPLATE_EQUALBELOWAVERAGE</b> | 0x0000001E | Formatting is applied when the cell's value is equal to or less than the average value of other cells in the conditional formatting range.    |

### 2.5.16 CTextOper

The **CTextOper** enumeration specifies the valid types of text comparisons used in conditional formatting rules. The value of the cell is compared against the string stored in the **strParam** field of the **BrtBeginCFRule** (section [2.4.21](#)) or **BrtBeginCFRule14** (section [2.4.22](#)) record.

The value of this enumeration MUST be a value from the following table.

| Name                           | Value      | Meaning  |
|--------------------------------|------------|--|
| <b>CF_TEXTOPER_CONTAINS</b>    | 0x00000000 | This rule evaluates to True (1) when the cell contains the specified text.                   |
| <b>CF_TEXTOPER_NOTCONTAINS</b> | 0x00000001 | This rule evaluates to True (1) when the cell does not contain the specified text.           |
| <b>CF_TEXTOPER_BEGINSWITH</b>  | 0x00000002 | This rule evaluates to True (1) when the cell's text begins with the specified text.         |
| <b>CF_TEXTOPER_ENDSWITH</b>    | 0x00000003 | This rule evaluates to True (1) when the cell's text does not begin with the specified text. |

### 2.5.17 CType

The **CType** enumeration specifies the type of conditional formatting rule applied to a range.

The value of this enumeration MUST be a value from the following table.

| Name                    | Value      | Meaning  |
|-------------------------|------------|--|
| <b>CF_TYPE_CELLIS</b>   | 0x00000001 | Cells are formatted based on their values.   |
| <b>CF_TYPE_EXPRIS</b>   | 0x00000002 | Cells are formatted based on the result of a formula (section <a href="#">2.2.2</a> ) or a <b>CFTemp</b> (section <a href="#">2.5.15</a> ) expression. |
| <b>CF_TYPE_GRADIENT</b> | 0x00000003 | A color scale is used to shade the cells based on their values.  |
| <b>CF_TYPE_DATABAR</b>  | 0x00000004 | A data bar is drawn in each cell.  |
| <b>CF_TYPE_FILTER</b>   | 0x00000005 | Cells are formatted when their values are in the top or bottom of the range of all values in the conditional formatting range.                         |

| Name               | Value      | Meaning  |
|--------------------|------------|--|
| CF_TYPE_MULTISTATE | 0x00000006 | An icon is displayed in the cell based on its value. |

### 2.5.18 CFVotype

The **CFVotype** enumeration specifies how the Conditional Formatting Value Object (CFVO) value is determined. In the following table, *X* represents a parameter value. If the **formula.cce** field of the containing **BrtCFVO** (section [2.4.318](#)) record is greater than 0, *X* is the result of evaluating **formula**. Otherwise, *X* is equal to the value of the **numvalue** field of the containing **BrtCFVO** record. The value of this enumeration MUST be a value from the following table.

| Name           | Value      | Meaning   |
|----------------|------------|---|
| CFVONUM        | 0x00000001 | <i>X</i>  |
| CFVOMIN        | 0x00000002 | The minimum value from the range of cells that the conditional formatting rule applies to.  |
| CFVOMAX        | 0x00000003 | The maximum value from the range of cells that the conditional formatting rule applies to.  |
| CFVOPERCENT    | 0x00000004 | The minimum value in the range of cells that the conditional formatting rule applies to, plus <i>X</i> percent of the difference between the maximum and minimum values in the range of cells that the conditional formatting rule applies to.<br>For example, if the minimum and maximum values in the range are 1 and 10 respectively, and <i>X</i> is 10, the CFVO value is 1.9. |
| CFVOPERCENTILE | 0x00000005 | The minimum value of the cell that is in the <i>X</i> percentile of the range of cells that the conditional formatting rule applies to.   |
| CFVOFMLA       | 0x00000007 | The result of evaluating <b>formula</b> of the containing <b>BrtCFVO</b> record.  |

### 2.5.19 CFVOType14

The **CFVOType14** enumeration specifies how the Conditional Formatting Value Object (CFVO) value is determined. In the following table, *X* represents a parameter value. If the **FRTHeader.fFormula** field of the containing **BrtCFVO14** (section [2.4.319](#)) record is equal to 1, *X* is the result of evaluating the formula (section [2.2.2](#)). Otherwise, *X* is equal to the value of the **numParam** field of the containing **BrtCFVO14** record. The value of this enumeration MUST be a value from the following table.

| Name           | Value      | Meaning   |
|----------------|------------|---|
| CFVONUM_14     | 0x00000001 | <i>X</i>  |
| CFVOMIN_14     | 0x00000002 | The minimum value from the range of cells that the conditional formatting rule applies to.  |
| CFVOMAX_14     | 0x00000003 | The maximum value from the range of cells that the conditional formatting rule applies to.  |
| CFVOPERCENT_14 | 0x00000004 | The minimum value in the range of cells that the conditional formatting rule applies to, plus <i>X</i> percent of the difference between the maximum and minimum values in the range of |

| Name                     | Value      | Meaning  |
|--------------------------|------------|--|
|                          |            | cells that the conditional formatting rule applies to.<br>For example, if the minimum and maximum values in the range are 1 and 10 respectively, and X is 10, the CFVO value is 1.9. |
| <b>CFVOPERCENTILE_14</b> | 0x00000005 | The minimum value of the cell that is in the X percentile of the range of cells that the conditional formatting rule applies to.   |
| <b>CFVOFMLA_14</b>       | 0x00000007 | The result of evaluating the formula of the containing <b>BrCFVO14</b> record.   |
| <b>CFVOAUTOMIN_14</b>    | 0x00000008 | The smaller of 0 or the minimum value from the range of cells that the conditional formatting rule applies to.   |
| <b>CFVOAUTOMAX_14</b>    | 0x00000009 | The larger of 0 or the maximum value from the range of cells that the conditional formatting rule applies to.  |

## 2.5.20 CmdType

The **CmdType** enumeration specifies the meaning of the **stCmd** field of the **BrtBeginECdbProps** (section [2.4.57](#)) record.

The value of this enumeration MUST be a value from the following table.

| Name              | Value      | Meaning  |
|-------------------|------------|--|
| <b>CMDNULL</b>    | 0x00000000 | The <b>stCmd</b> field of the <b>BrtBeginECdbProps</b> record is not specified.  |
| <b>CMDCUBE</b>    | 0x00000001 | The <b>stCmd</b> field of the <b>BrtBeginECdbProps</b> record specifies the name of a cube within an OLAP database.          |
| <b>CMDSQL</b>     | 0x00000002 | The <b>stCmd</b> field of the <b>BrtBeginECdbProps</b> record specifies a Structured Query Language (SQL) statement.         |
| <b>CMDTABLE</b>   | 0x00000003 | The <b>stCmd</b> field of the <b>BrtBeginECdbProps</b> record specifies a database table name.                               |
| <b>CMDDEFAULT</b> | 0x00000004 | The <b>stCmd</b> field of the <b>BrtBeginECdbProps</b> record specifies a statement in the default language of the database. |
| <b>CMDSPLIST</b>  | 0x00000005 | The <b>stCmd</b> field of the <b>BrtBeginECdbProps</b> record specifies a list from a Web-based data provider.               |

## 2.5.21 CodeName

The **CodeName** structure is an **XLWideString** (section [2.5.168](#)) structure that specifies a name to be used in a scripting application. The length of this string MUST NOT exceed 31 characters. If this string is not empty, it MUST contain only the characters that can be mapped from Unicode to a multibyte **American National Standards Institute (ANSI) character set** specified by the system locale. If the system locale is Chinese, Japanese, or Korean, the fullwidth characters in the resulting ANSI string are further mapped to corresponding halfwidth characters where applicable.

In the resulting ANSI string, the first character MUST be either a letter, a single-byte character with a code greater than 0x7F, or a multibyte character. The subsequent characters in the resulting ANSI string MUST be either a letter, a digit, an underscore, a single-byte character with a code greater than 0x7F, or a multibyte character.

If the system locale is Japanese, the original Unicode string MUST NOT contain a character with a code equal to 0xFFE3.

## 2.5.22 Col

The **Col** structure is a signed 32-bit integer that specifies a single column (2) in a sheet by using a zero-based index. The value of this structure MUST be between 0 and 16383 (inclusive) and MUST be between **colFirst** and **colLast** (inclusive) on the **UncheckedRfx** (section [2.5.153](#)) structure specified by the **rfx** field on the sheet's **BrtWsDim** (section [2.4.812](#)) record.

## 2.5.23 ColNullable

The **ColNullable** structure is a signed 32-bit integer that specifies a single column (2) in a sheet.


The following table specifies values of this structure.

| Value       | Meaning  |
|-------------|--|
| 0xFFFFFFFFL | Null value   |
|             | All other values are interpreted as an <b>UncheckedCol</b> (section <a href="#">2.5.152</a> ) structure. |

## 2.5.24 ColRel

The **ColRel** structure specifies a single column (2) in a sheet. There is a row (2) associated with this column (2); it is determined in the context of the containing **RfxRel** (section [2.5.118](#)) structure. This structure specifies whether the associated row (2)/column (2) pair is a **relative reference** with respect to rows (2) or columns (2).

The following packet diagram specifies this structure.

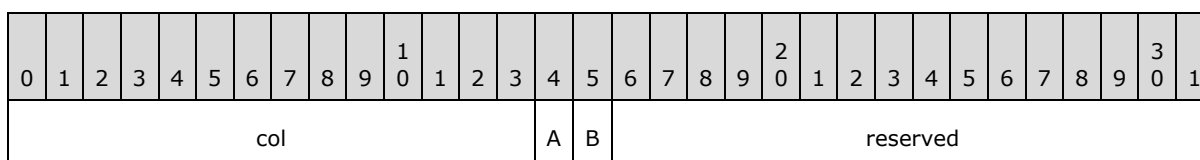

**col (14 bits):** An unsigned integer that specifies the zero-based index of the column (2).

**A - fColRel (1 bit):** A bit that specifies whether the associated row (2)/column (2) pair is a relative reference with respect to columns (2).


**B - fRwRel (1 bit):** A bit that specifies whether the associated row (2)/column (2) pair is a relative reference with respect to rows (2).

**reserved (16 bits):** This value MUST be 0 and MUST be ignored.

## 2.5.25 ColRelShort

The **ColRelShort** structure specifies a single column (2) in a sheet. There is a row (2) associated with this column (2); it is determined in the context of the containing structure. This structure specifies whether the associated row (2)/column (2) pair is a relative reference with respect to rows (2) or columns (2).

The following packet diagram specifies this structure.

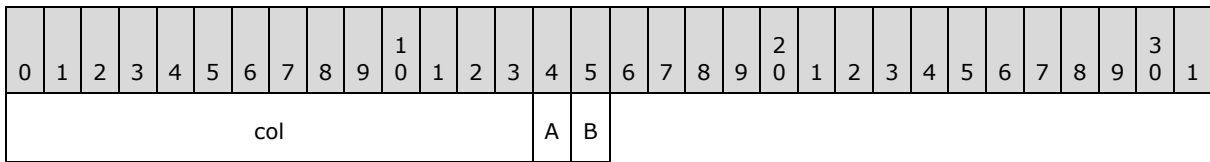

**col (14 bits):** An unsigned integer that specifies the zero-based index of the column (2).


**A - fColRel (1 bit):** A bit that specifies whether the associated row (2)/column (2) pair is a relative reference with respect to columns (2).

**B - fRwRel (1 bit):** A bit that specifies whether the associated row (2)/column (2) pair is a relative reference with respect to rows (2).

### 2.5.26 ColShort

The **ColShort** structure specifies a single column (2) in a sheet.

The following packet diagram specifies this structure.

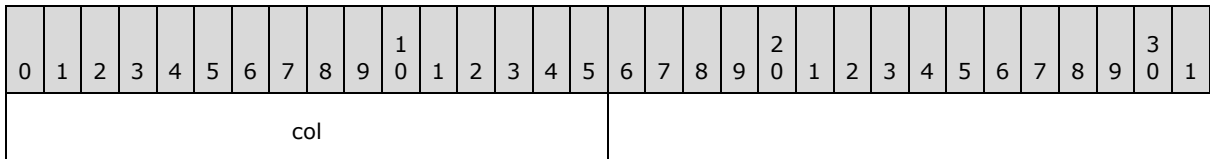

**col (2 bytes):** An unsigned integer that specifies a single column (2) in a sheet by using a zero-based index. The value of this field **MUST** be less than or equal to 16383.

### 2.5.27 DataConsolidationFunction

The **DataConsolidationFunction** enumeration specifies the valid values of the data consolidation function in the **BrtBeginSXDI** (section [2.4.232](#)) record.

The value of this enumeration **MUST** be a value from the following table.

| Name            | Value      | Meaning  |
|-----------------|------------|--|
| <b>SUM</b>      | 0x00000000 | The sum of the values.   |
| <b>COUNT</b>    | 0x00000001 | The count of data values.  |
| <b>AVERAGE</b>  | 0x00000002 | The average of the values.   |
| <b>MAX</b>      | 0x00000003 | The largest value.   |
| <b>MIN</b>      | 0x00000004 | The smallest value.  |
| <b>PRODUCT</b>  | 0x00000005 | The product of the values.   |
| <b>COUNTNUM</b> | 0x00000006 | The count of data values that are numbers.   |
| <b>STDDEV</b>   | 0x00000007 | An estimate of the standard deviation of a population, where the data to be summarized is a subset of the entire population. |
| <b>STDDEVP</b>  | 0x00000008 | The standard deviation of a population, where the population is all of the data to be summarized.                            |

| Name           | Value      | Meaning  |
|----------------|------------|--|
| <b>STDVAR</b>  | 0x00000009 | An estimate of the variance of a population, where the data to be summarized is a subset of the entire population. |
| <b>STDVARP</b> | 0x0000000A | The variance of a population, where the population is all of the data to be summarized.                            |


### 2.5.28 DataFunctionalityLevel

The **DataFunctionalityLevel** structure is a 1-byte unsigned integer that specifies a data functionality level (section [2.2.5.1](#)). [<55>](#) The value of this structure MUST be greater than or equal to 0 and less than or equal to 4.

### 2.5.29 DateAsXnum

The **DateAsXnum** structure specifies a date and time.

The following packet diagram specifies this structure.

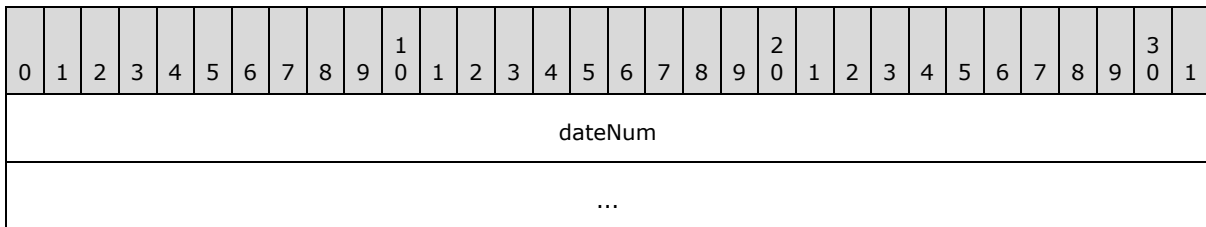

**dateNum (8 bytes):** An **Xnum** (section [2.5.171](#)) structure that specifies a date and time. The value of this field MUST be greater than or equal to 0.

If the **f1904** field in the **BrtWbProp** (section [2.4.807](#)) record is equal to 1, the value of **Xnum** MUST be less than 2958466, and the integer part of the **Xnum** specifies the date as a sequential number of days following January 1, 1904.

If the **f1904** field in the **BrtWbProp** record is equal to 0 and the value of **Xnum** is less than 60, the integer part of **Xnum** specifies the date as a sequential number of days following December 31, 1899.

If the **f1904** field in the **BrtWbProp** record is equal to 0 and the integer part of **Xnum** is greater than 60, the value of **Xnum** MUST be less than 2957004, and the integer part of **Xnum** specifies the date as a sequential number of days following December 30, 1899.

If the **f1904** field in the **BrtWbProp** record is equal to 0 and the integer part of **Xnum** is equal to 60, no date is specified. [<56>](#)

The fractional part of **Xnum** specifies the time of the day as a fraction of the 24-hour day.

### 2.5.30 DBType

The **DBType** enumeration specifies the data source (1) type of an external connection (section [2.2.8](#)). The **BrtBeginExtConnection** (section [2.4.76](#)) record uses it.

The value of this enumeration MUST be a value from the following table.

| Name                | Value      | Meaning  |
|---------------------|------------|--|
| <b>DBTODBC</b>      | 0x00000001 | ODBC data source (1).  |
| <b>DBTDAO</b>       | 0x00000002 | DAO data source (1).   |
| <b>DBTWEB</b>       | 0x00000004 | HTML data source (1).  |
| <b>DBTOLEDB</b>     | 0x00000005 | OLE DB data source (1).  |
| <b>DBTTEXT</b>      | 0x00000006 | Text data source (1).  |
| <b>DBTADO</b>       | 0x00000007 | <b>ActiveX Data Objects (ADO)</b> record set.                    |
| <b>DBTOLEDBPP</b>   | 0x00000064 | OLE DB data source (1) created by the Spreadsheet Data Model.    |
| <b>DBTDATAFEED</b>  | 0x00000065 | Data feed data source (1) created by the Spreadsheet Data Model. |
| <b>DBTWORKSHEET</b> | 0x00000066 | Worksheet data source (1) created by the Spreadsheet Data Model. |
| <b>DBTTEXTPP</b>    | 0x00000067 | Text data source (1) created by the Spreadsheet Data Model.      |

### 2.5.31 DCol

The **DCol** structure is a signed 32-bit integer that specifies a column (2) count or offset. The value of this structure MUST be between 0 and 16384, inclusive.


### 2.5.32 DColShort

The **DColShort** structure is a signed integer that specifies a column (2) count or offset. The value of this structure MUST be between 0 and 16384, inclusive.

### 2.5.33 DDEItemProperties

The **DDEItemProperties** structure specifies properties of a DDE Data Item (section [2.2.7.4.2.1](#)).

The following packet diagram specifies this structure.

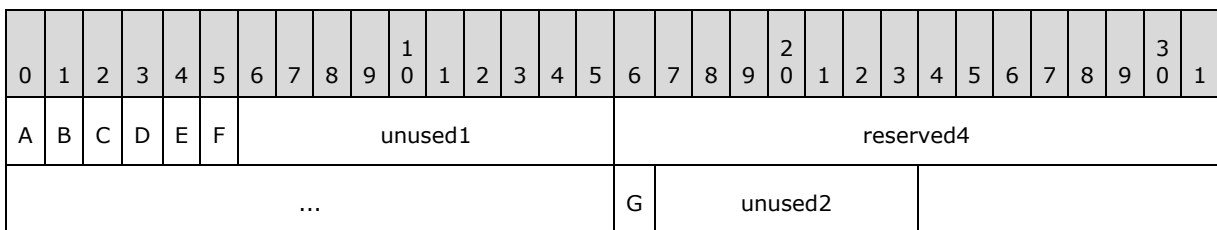

**A - reserved1 (1 bit):** MUST be 0 and MUST be ignored.

**B - fWantAdvise (1 bit):** A bit that specifies whether the application requests that the data source (1) provide a notification when the data changes.

**C - fWantPict (1 bit):** A bit that specifies whether this DDE data item uses a picture-based data format.

**D - fOLE (1 bit):** A bit that specifies whether this DDE data item is used to support object linking. If the value is 1, the name of the DDE data item, as specified by the **name** attribute in

the preceding **BrtSupNameStart** (section [2.4.766](#)) record, MUST be "StdDocumentName" (this name is case-sensitive).

**E - reserved2 (1 bit):** MUST be 0 and MUST be ignored.

**F - reserved3 (1 bit):** MUST be 0 and MUST be ignored.

**unused1 (10 bits):** Undefined and MUST be ignored.

**reserved4 (4 bytes):** MUST be 0x00000000 and MUST be ignored.

**G - reserved5 (1 bit):** MUST be 1 and MUST be ignored.

**unused2 (7 bits):** Undefined and MUST be ignored.

### 2.5.34 DRw

The **DRw** structure is a signed 32-bit integer that specifies a row (2) count or offset. The value of this structure MUST be between 0 and 1048576, inclusive.

### 2.5.35 DVals

The **DVals** structure specifies data validation properties of a worksheet that are used by the user interface of the application.

The following packet diagram specifies this record.

|   |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|----------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16      | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | reserved |   |   |   |   |   |   |   |   |    |    |    |    |    |    | xLeft   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|   |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    | yTop    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|   |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    | unused3 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|   |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    | idvMac  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|   |          |   |   |   |   |   |   |   |   |    |    |    |    |    |    | ...     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fWnClosed (1 bit):** A bit that specifies whether all data validation input prompts are disabled for this sheet.

**reserved (15 bits):** This value MUST be 0 and MUST be ignored.

**xLeft (4 bytes):** An unsigned integer that specifies the x-coordinate (relative to the Application window) of the top-left corner of the data validation input prompt, measured in pixels. This value MUST be less than or equal to 65535. [<57>](#)

**yTop (4 bytes):** An unsigned integer that specifies the y-coordinate (relative to the application window) of the top-left corner of the data validation input prompt, measured in pixels. This value MUST be less than or equal to 65535. [<58>](#)

**unused3 (4 bytes):** This value MUST be 0 and MUST be ignored.




**idvMac (4 bytes):** An unsigned integer that specifies the number of **BrtdVal** (section [2.4.339](#)) records that follow the **BrtdBeginDVals** (section [2.4.52](#)) record, or **BrtdVal14** (section [2.4.340](#)) records that follow the **BrtdBeginDVals14** (section [2.4.53](#)) record, as defined by **Worksheet** part ABNF (section [2.1.7.61](#)). This value MUST be less than or equal to 65534.

### 2.5.36 DValStrings

The **DValStrings** record specifies the strings that data validation uses.

The following packet diagram specifies this record.

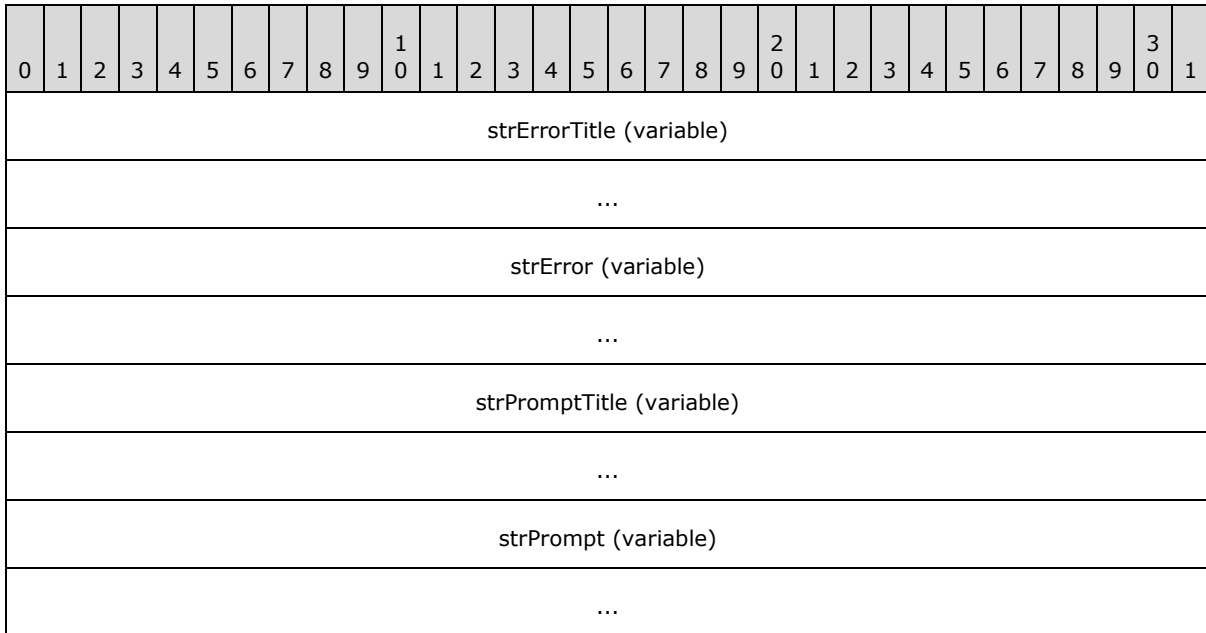

**strErrorTitle (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the text of the title bar of the error alert. If this is not the NULL string, the length of this string MUST be less than or equal to 32 characters.

**strError (variable):** An **XLNullableWideString** that specifies the message text of the error alert. If this is not the NULL string, the length of this string MUST be less than or equal to 225 characters.

**strPromptTitle (variable):** An **XLNullableWideString** that specifies the text of the title bar of the input prompt. If this is not the NULL string, the length of this string MUST be less than or equal to 32 characters.

**strPrompt (variable):** An **XLNullableWideString** that specifies the message text of the input prompt. If this is not the NULL string, the length of this string MUST be less than or equal to 255 characters.

### 2.5.37 DXFId

The **DXFId** structure is a 4-byte unsigned integer that specifies a zero-based index of a **BrtdDXF** (section [2.4.342](#)) record in the collection of all records directly following the **BrtdBeginDXFs** (section [2.4.55](#)) record in the **Styles** (section [2.1.7.50](#)) part ABNF. A value of 0xFFFFFFFF means no **BrtdDXF** record is used.

## 2.5.38 DXFId14

The **DXFId14** structure is a 4-byte unsigned integer that specifies a zero-based index of a **BrtdXF14** (section [2.4.343](#)) record in the collection of all records directly following the **BrtdBeginDXF14s** (section [2.4.54](#)) record in the **Styles** (section [2.1.7.50](#)) part ABNF. A value of 0xFFFFFFFF means no **BrtdXF14** record is used.

## 2.5.39 ECTwFldInfoData

The **ECTwFldInfoData** record specifies field settings for text importation common for **BrtdBeginECTwFldInfo** (section [2.4.61](#)) and **BrtdBeginECTwFldInfo15** (section [2.4.62](#)).

|            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| fieldType  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fieldStart |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**fieldType (4 bytes):** An unsigned integer that specifies the field type. Types are specified by the user, or determined algorithmically via heuristics and text analysis. This value **MUST** be one of the values in the following table.

| Value      | Meaning  |
|------------|--|
| 0x00000000 | General: The application decides how to handle the field.                                |
| 0x00000001 | Text: The field contains strings.  |
| 0x00000002 | MDY: The field contains a date in the order of month, day, and year.                     |
| 0x00000003 | DMY: The field contains a date in the order of day, month, and year.                     |
| 0x00000004 | YMD: The field contains a date in the order of year, month, and day.                     |
| 0x00000005 | MYD: The field contains a date in the order of month, year, and day.                     |
| 0x00000006 | DYM: The field contains a date in the order of day, year, and month.                     |
| 0x00000007 | YDM: The field contains a date in the order of year, day, and month.                     |
| 0x00000008 | Skip: Do not import this field.  |
| 0x00000009 | EMD: This field contains an East Asian date in the order of EA era year, month, and day. |

**fieldStart (4 bytes):** An unsigned integer that specifies, for fixed-length fields, the zero-based character position where the field begins. The subsequent **BrtdBeginECTwFldInfo** (section [2.4.61](#)) records or carriage return characters in the text stream separate the subsequent text fields.

## 2.5.40 ECTxtWizData

The **ECTxtWizData** record specifies text importation properties common for **BrtdBeginECTxtWiz** (section [2.4.65](#)) and **BrtdBeginECTxtWiz15** (section [2.4.66](#)) records.

|          |          |   |   |   |   |   |   |   |   |    |    |    |    |    |            |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |
|----------|----------|---|---|---|---|---|---|---|---|----|----|----|----|----|------------|----|----|----|----|----|------------|----|----|----|----|----|----|----|----|----|----|
| 0        | 1        | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15         | 16 | 17 | 18 | 19 | 20 | 21         | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A        | iCpidNew |   |   |   |   |   |   |   |   |    | B  | C  | D  | E  | F          | G  | H  | I  | J  | K  | reserved2  |    |    |    |    |    |    |    |    |    |    |
| chCustom |          |   |   |   |   |   |   |   |   |    |    |    |    |    | rowStartAt |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |
| ...      |          |   |   |   |   |   |   |   |   |    |    |    |    |    | chDecimal  |    |    |    |    |    | chThousSep |    |    |    |    |    |    |    |    |    |    |

**A - iCpid (2 bits):** An unsigned integer that specifies the type of character set (1) to use during importation. This value MUST be one of the values in the following table.

| Value | Meaning        |
|-------|----------------|
| 0x00  | Macintosh      |
| 0x01  | Windows (ANSI) |
| 0x02  | MS-DOS (PC-8)  |

The value of **iCpid** is used to determine the code page associated with the text file if **iCpidNew** is less than 3, otherwise **iCpidNew** is used.

**iCpidNew (10 bits):** An unsigned integer that specifies application-specific code page information that exists for text importation purposes.

**B - fDelimited (1 bit):** A bit that specifies whether the file is tab or character delimited. If the value is 0, then **fTab**, **fSpace**, **fComma**, **fSemiColon**, **fCustom**, and **chCustom** MUST be ignored. The following table specifies the meaning of each value.

| Value | Meaning  |
|-------|--|
| 0     | The file is parsed according to fixed length fields. |
| 1     | The file is tab or character delimited.              |

**C - fTab (1 bit):** A bit that specifies whether tabs are used as field delimiters.

**D - fSpace (1 bit):** A bit that specifies whether space characters are used as field delimiters.

**E - fComma (1 bit):** A bit that specifies whether comma characters are used as field delimiters.

**F - fSemiColon (1 bit):** A bit that specifies whether semicolon characters are used as field delimiters.

**G - fConsecutive (1 bit):** A bit that specifies whether consecutive delimiters are treated as just one delimiter.

**H - fTextDelim (2 bits):** An unsigned integer that specifies the character used as the text string qualifier. The following table specifies the meaning of each value.

| Value | Meaning      |
|-------|--------------|
| 0x00  | Double Quote |

| Value | Meaning      |
|-------|--------------|
| 0x01  | Single Quote |
| 0x02  | None         |
| 0x03  | None         |

**I - reserved1 (1 bit):** MUST be 1 and MUST be ignored

**J - fPromptForFile (1 bit):** A bit that specifies whether the user selected to receive a prompt for the file name on refresh. This value MUST be 1 if the length of the string specified by **stFile** is equal to 0 characters. <59>

**K - fCustom (1 bit):** A bit that specifies whether the custom delimiter character **chCustom** is used as a field delimiter.

**reserved2 (9 bits):** This value MUST be 0, and MUST be ignored.

**chCustom (2 bytes):** An unsigned integer that specifies the Unicode character to be treated as a field delimiter.

**rowStartAt (4 bytes):** An unsigned integer that specifies at what row (2) of the file to start the data importation. This value MUST be greater than 0 and less than 100000000.


**chDecimal (1 byte):** An unsigned integer that specifies the decimal separator character in ISO-8859-1 [ISO-8859-1] encoding.

**chThousSep (1 byte):** An unsigned integer that specifies the thousands separator character in ISO-8859-1 [ISO-8859-1] encoding.

## 2.5.41 Etxp

The **Etxp** structure specifies font information for a **BrRRChgCell** (section 2.4.720) record.

The following packet diagram specifies this structure.

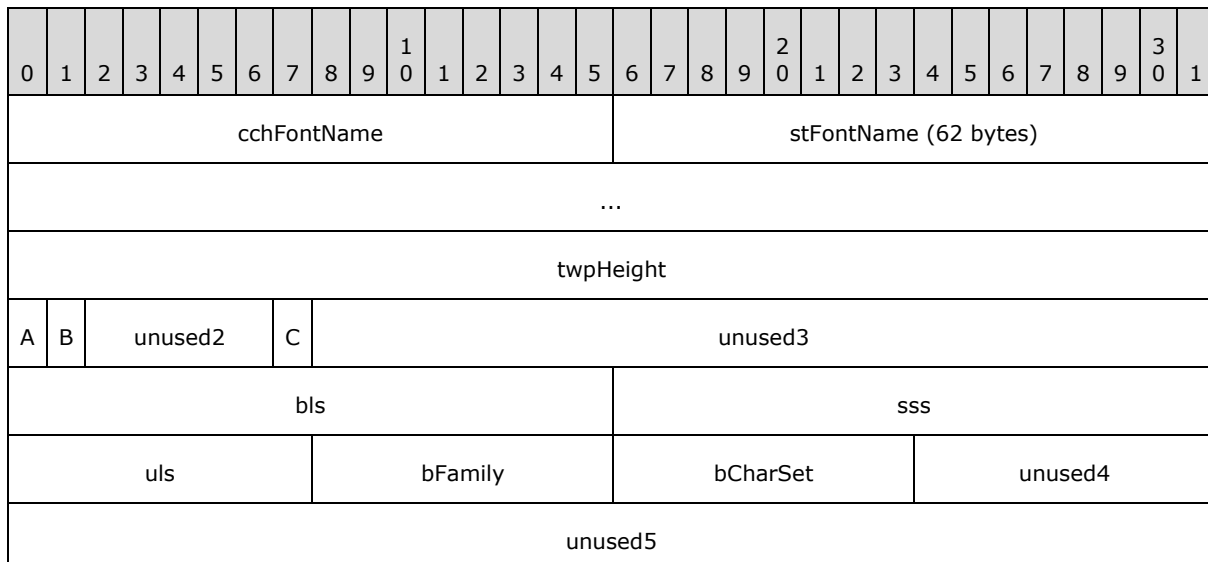

|             |
|-------------|
| reserved    |
| ifontScheme |
| xclrText    |
| ...         |

**cchFontName (2 bytes):** An unsigned integer that specifies the length of **stFontName**. The value of this field **MUST** be less than or equal to 31.

**stFontName (62 bytes):** A Unicode string that specifies the name of the font. Only the number of characters specified by **cchFontName** are used. Other characters, if they exist, **MUST** be 0x0000 and **MUST** be ignored.

**twpHeight (4 bytes):** An unsigned integer that specifies the height of the font in twips. The value **MUST** be greater than or equal to 0x0014 and **MUST** be less than or equal to 0x1FFF.

**A - unused1 (1 bit):** Undefined and **MUST** be ignored.

**B - ftsItalic (1 bit):** A bit that specifies whether the font is italic.

**unused2 (5 bits):** Undefined and **MUST** be ignored.

**C - ftsStrikeout (1 bit):** A bit that specifies whether a strikeout line is drawn through the horizontal middle of the text.

**unused3 (24 bits):** Undefined and **MUST** be ignored.

**bls (2 bytes):** An unsigned integer that specifies the weight of the font. The value **MUST** be greater than or equal to 0x0190 and less than or equal to 0x03E8. The value for normal text is 0x0190, and the value for bold text is 0x02BC.

**sss (2 bytes):** An unsigned integer that specifies whether subscript or superscript is used. The value of this field **MUST** be a value from the following table.

| Value  | Meaning     |
|--------|-------------|
| 0x0000 | None        |
| 0x0001 | Superscript |
| 0x0002 | Subscript   |

**uls (1 byte):** An unsigned integer that specifies the type of underline to use. The value of this field **MUST** be a value from the following table.

| Value | Meaning |
|-------|---------|
| 0x00  | None    |
| 0x01  | Single  |
| 0x02  | Double  |

| Value | Meaning           |
|-------|-------------------|
| 0x21  | Single accounting |
| 0x22  | Double accounting |

**bFamily (1 byte):** An unsigned integer that specifies the font family that this font belongs to. The value of this field MUST be a value from the following table.

| Value | Meaning        |
|-------|----------------|
| 0x00  | Not applicable |
| 0x01  | Roman          |
| 0x02  | Swiss          |
| 0x03  | Modern         |
| 0x04  | Script         |
| 0x05  | Decorative     |

**bCharSet (1 byte):** An unsigned integer that specifies the character set (1) of this font. The value of this field MUST be a value from the following table.

| Value | Meaning             |
|-------|---------------------|
| 0x00  | ANSI_CHARSET        |
| 0x01  | DEFAULT_CHARSET     |
| 0x02  | SYMBOL_CHARSET      |
| 0x4D  | MAC_CHARSET         |
| 0x80  | SHIFTJIS_CHARSET    |
| 0x81  | HANGEUL_CHARSET     |
| 0x81  | HANGUL_CHARSET      |
| 0x82  | JOHAB_CHARSET       |
| 0x86  | GB2312_CHARSET      |
| 0x88  | CHINESEBIG5_CHARSET |
| 0xA1  | GREEK_CHARSET       |
| 0xA2  | TURKISH_CHARSET     |
| 0xA3  | VIETNAMESE_CHARSET  |
| 0xB1  | HEBREW_CHARSET      |
| 0xB2  | ARABIC_CHARSET      |
| 0xBA  | BALTIC_CHARSET      |

| Value | Meaning            |
|-------|--------------------|
| 0xCC  | RUSSIAN_CHARSET    |
| 0xDE  | THAI_CHARSET       |
| 0xEE  | EASTEUROPE_CHARSET |
| 0xFF  | OEM_CHARSET        |

**unused4 (1 byte):** This value undefined and MUST be ignored.

**unused5 (4 bytes):** This value is undefined and MUST be ignored.

**reserved (4 bytes):** This value MUST be 0 and MUST be ignored.

**ifontScheme (4 bytes):** An unsigned integer that specifies the font scheme to which this font belongs. When a font is part of a theme, as specified in [\[ISO/IEC29500-1:2011\]](#) section 14.2.7, the font is categorized as a major scheme or a minor scheme. When a new theme is chosen, every font that is part of the theme is updated to use the major scheme or the minor scheme. The value of this field MUST be a value from the following table.


| Value | Meaning      |
|-------|--------------|
| 0x00  | None         |
| 0x01  | Major scheme |
| 0x02  | Minor scheme |

**xclrText (8 bytes):** A **BrColor** (section [2.4.321](#)) structure that specifies the color of this font.

## 2.5.42 ExternalNameProperties

The **ExternalNameProperties** structure specifies properties of an external defined name (section [2.2.7.4.1.1](#)).

The following packet diagram specifies this structure.

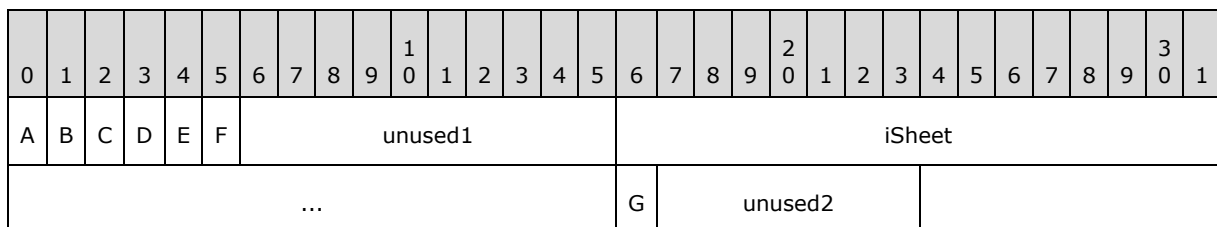

**A - fBuiltIn (1 bit):** A bit that specifies whether the application defines this external defined name. Otherwise, the user defines the external defined name.

**B - reserved1 (1 bit):** This value MUST be 0 and MUST be ignored.

**C - reserved2 (1 bit):** This value MUST be 0 and MUST be ignored.

**D - reserved3 (1 bit):** This value MUST be 0 and MUST be ignored.

**E - reserved4 (1 bit):** This value MUST be 0 and MUST be ignored.

**F - reserved5 (1 bit):** This value MUST be 0 and MUST be ignored.

**unused1 (10 bits):** This value is undefined and MUST be ignored.

**iSheet (4 bytes):** An unsigned integer that specifies the scope of this external defined name.

The value of this field MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0     | The external defined name has a workbook-level scope.  |
| >0    | The external defined name has a sheet-level scope. This value MUST specify a one-based index of an element in the array of <b>XLWideString</b> (section <a href="#">2.5.168</a> ) structures specified by the <b>sheetNames</b> field of the <b>BrtSupTabs</b> (section <a href="#">2.4.771</a> ) record in this <b>External Link</b> (section <a href="#">2.1.7.25</a> ) part ABNF. The referenced string specifies the name of the sheet that is in scope. |

**G - reserved6 (1 bit):** This value MUST be 0 and MUST be ignored.

**unused2 (7 bits):** This value is undefined and MUST be ignored.

### 2.5.43 ExternalReferenceType


The **ExternalReferenceType** enumeration specifies a type of external link (section [2.2.7.4](#)). The value of this enumeration MUST be a value from the following table.

| Name            | Value  | Meaning   |
|-----------------|--------|---|
| <b>WORKBOOK</b> | 0x0000 | The associated external link type is external workbook link (section <a href="#">2.2.7.4.1</a> ). |
| <b>DDE</b>      | 0x0001 | The associated external link type is DDE data source (section <a href="#">2.2.7.4.2</a> ).        |
| <b>OLE</b>      | 0x0002 | The associated external link type is <b>OLE data source</b> (section <a href="#">2.2.7.4.3</a> ). |

### 2.5.44 ExtPtgArea3D

The **ExtPtgArea3D** structure is a variation of the **PtgArea3d** structure that formulas (section [2.2.2](#)) use in external defined names (section [2.2.7.4.1.1](#)). It specifies a rectangular range on one or more sheets.

The following packet diagram specifies this structure.

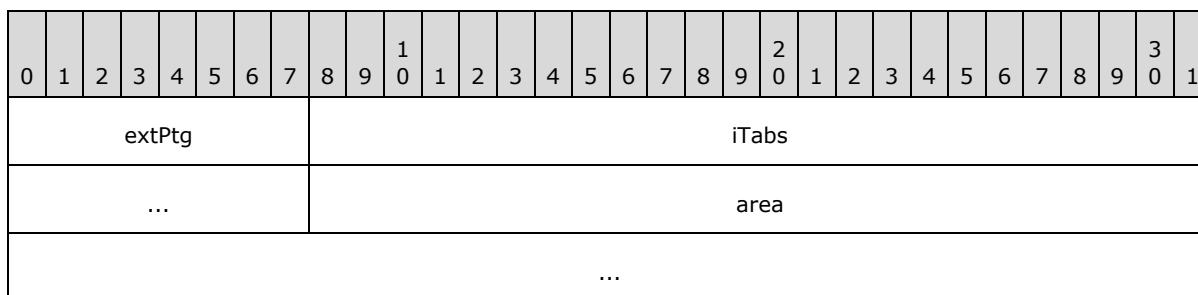



...

**extPtg (1 byte):** An unsigned integer that specifies the identity of this structure. This value MUST be 0x3B.

**iTabs (4 bytes):** An **ExtSheetPair** (section [2.5.49](#)) structure that specifies the sheet or sheets that contain the range.

**area (8 bytes):** An **RgceAreaSmall** (section [2.5.119](#)) structure that specifies the location of the range of cells within a sheet.

### 2.5.45 ExtPtgAreaErr3D

The **ExtPtgAreaErr3D** structure is a variation of the **PtgAreaErr3d** structure that formulas (section [2.2.2](#)) use in external defined names (section [2.2.7.4.1.1](#)). It specifies an invalid reference to a rectangular range of cells on one or more sheets.

The following packet diagram specifies this structure.

|        |   |   |   |   |   |   |   |   |   |         |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|---------|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10      | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20      | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| extPtg |   |   |   |   |   |   |   |   |   | iTabs   |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   | unused1 |    |    |    |    |    |    |    |    |    | unused2 |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   | unused3 |    |    |    |    |    |    |    |    |    | unused4 |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |         |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |

**extPtg (1 byte):** An unsigned integer that specifies the identity of this structure. This value MUST be 0x3D.

**iTabs (4 bytes):** An **ExtSheetPair** (section [2.5.49](#)) structure that specifies the sheet or sheets that contain the target of this reference.

**unused1 (2 bytes):** Undefined and MUST be ignored.

**unused2 (2 bytes):** Undefined and MUST be ignored.


**unused3 (2 bytes):** Undefined and MUST be ignored.

**unused4 (2 bytes):** Undefined and MUST be ignored.

### 2.5.46 ExtPtgErr

The **ExtPtgErr** structure is a variation of the **PtgErr** (section [2.5.97.39](#)) structure that formulas (section [2.2.2](#)) use in external defined names (section [2.2.7.4.1.1](#)). It specifies a cell reference that is not valid.

The following packet diagram specifies this structure.

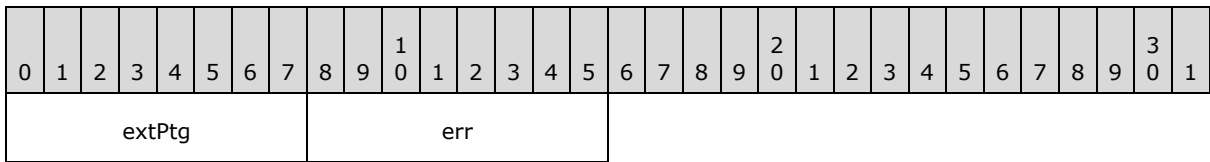


**extPtg (1 byte):** An unsigned integer that specifies the identity of this structure. This value MUST be 0x1C.

**err (1 byte):** A **BErr** structure (section [2.5.97.2](#)) that specifies the value of this error. This value MUST be 0x17.

### 2.5.47 ExtPtgRef3D

The **ExtPtgRef3D** structure is a variation of the **PtgRef3d** structure that formulas (section [2.2.2](#)) use in external defined names (section [2.2.7.4.1.1](#)). It specifies the location of a single cell on one or more sheets.

The following packet diagram specifies this structure.

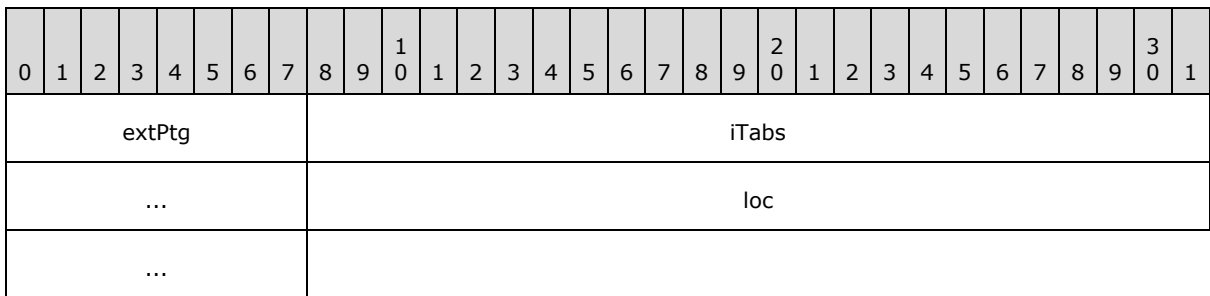

**extPtg (1 byte):** An unsigned integer that specifies the identity of this structure. This value MUST be 0x3A.


**iTabs (4 bytes):** An **ExtSheetPair** (section [2.5.49](#)) structure that specifies the sheet or sheets that contain the cell.

**loc (4 bytes):** An **RgceLocSmall** (section [2.5.120](#)) structure that specifies the location of a cell within a sheet.

### 2.5.48 ExtPtgRefErr3D

The **ExtPtgRefErr3D** structure is a variation of the **PtgRefErr3d** structure that formulas (section [2.2.2](#)) use in external defined names (section [2.2.7.4.1.1](#)). It specifies an invalid single cell reference on one or more sheets.

The following packet diagram specifies this structure.

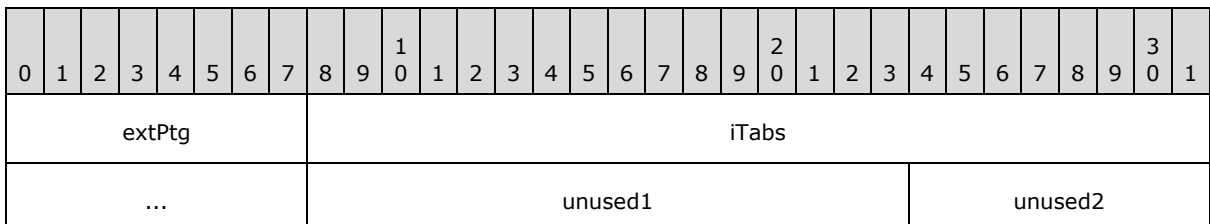

...

**extPtg (1 byte):** An unsigned integer that specifies the identity of this structure. This value MUST be 0x3C.

**iTabs (4 bytes):** An **ExtSheetPair** (section [2.5.49](#)) structure that specifies the sheet or sheets that contain the target of this reference.


**unused1 (2 bytes):** Undefined and MUST be ignored.

**unused2 (2 bytes):** Undefined and MUST be ignored.

### 2.5.49 ExtSheetPair

The **ExtSheetPair** structure specifies the sheet portion of a reference to a worksheet or macro sheet, or it specifies a range of worksheets or macro sheets in an **external workbook** (section [2.1.10](#)). Formulas (section [2.2.2](#)) use it in external defined names (section [2.2.7.4.1.1](#)). The worksheets and macro sheets are in the collection of sheets in an external workbook, as specified by the **BrtSupTabs** (section [2.4.771](#)) record.

The following packet diagram specifies this structure.

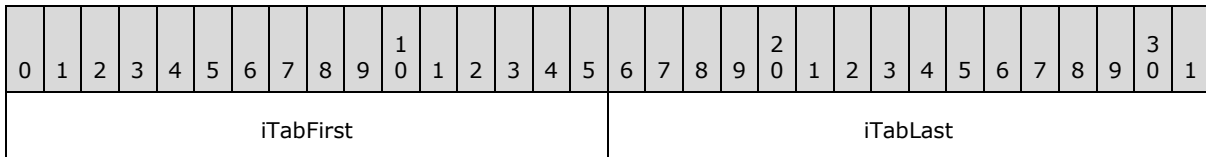

**iTabFirst (2 bytes):** A signed integer that specifies the first sheet of a single or multisheet reference. The value of this field MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| -1    | Specifies that the first sheet of this reference cannot be found.   |
| >= 0  | Specifies the zero-based index of an <b>XLWideString</b> (section <a href="#">2.5.168</a> ) type in the array specified by the <b>sheetNames</b> field in the <b>BrtSupTabs</b> record in this <b>External Link</b> (section <a href="#">2.1.7.25</a> ) part ABNF. The referenced <b>XLWideString</b> (section <a href="#">2.5.168</a> ) type MUST specify the name of a worksheet or macro sheet in the external workbook. |

**iTabLast (2 bytes):** A signed integer that specifies the last sheet of a single or multisheet reference. The value of this field MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| -1    | Specifies that the last sheet of this reference cannot be found.  |
| >= 0  | Specifies the zero-based index of an <b>XLWideString</b> type in the array specified by the <b>sheetNames</b> field in the <b>BrtSupTabs</b> record in this <b>External Link</b> part. The referenced <b>XLWideString</b> type MUST specify the name of a worksheet or macro sheet in the external workbook. The value of this field MUST be greater than the value of <b>iTabFirst</b> . |

### 2.5.50 FillPattern

The **FillPattern** enumeration specifies the fill pattern. [<60>](#)

The value of this enumeration MUST be a value from the following table.

| Name                | Value | Meaning                      |
|---------------------|-------|------------------------------|
| <b>FLSNUL</b>       | 0x00  | No fill pattern              |
| <b>FLSSOLID</b>     | 0x01  | Solid                        |
| <b>FLSMEDGRAY</b>   | 0x02  | 50% gray                     |
| <b>FLSDKGRAY</b>    | 0x03  | 75% gray                     |
| <b>FLSLTGRAY</b>    | 0x04  | 25% gray                     |
| <b>FLSDKHOR</b>     | 0x05  | Horizontal stripe            |
| <b>FLSDKVER</b>     | 0x06  | Vertical stripe              |
| <b>FLSDKDOWN</b>    | 0x07  | Reverse diagonal stripe      |
| <b>FLSDKUP</b>      | 0x08  | Diagonal stripe              |
| <b>FLSDKGRID</b>    | 0x09  | Diagonal crosshatch          |
| <b>FLSDKTRELLIS</b> | 0x0A  | Thick diagonal crosshatch    |
| <b>FLSLTHOR</b>     | 0x0B  | Thin horizontal stripe       |
| <b>FLSLTVER</b>     | 0x0C  | Thin vertical stripe         |
| <b>FLSLTDOWN</b>    | 0x0D  | Thin reverse diagonal stripe |
| <b>FLSLTUP</b>      | 0x0E  | Thin diagonal stripe         |
| <b>FLSLTGRID</b>    | 0x0F  | Thin horizontal crosshatch   |
| <b>FLSLTTRELLIS</b> | 0x10  | Thin diagonal crosshatch     |
| <b>FLSGRAY125</b>   | 0x11  | 12.5% gray                   |
| <b>FLSGRAY0625</b>  | 0x12  | 6.25% gray                   |

### 2.5.51 FnGroupID

The **FnGroupID** structure is an unsigned integer used to classify functions into conceptual groups. For example, functions in the same group can be searched or selected from the application's user interface. Or, for example, it can be used to filter the list of all functions to enable the user to choose from functions used for financial data. The value of this structure MUST be a value from the following table.


| Value of FnGroupID | Function group classification |
|--------------------|-------------------------------|
| 0                  | (reserved)                    |
| 1                  | Financial                     |
| 2                  | Date and Time                 |
| 3                  | Math and Trig                 |

| Value of FnGroupID  | Function group classification  |
|---|--|
| 4   | Statistical  |
| 5   | Lookup & Reference   |
| 6   | Database   |
| 7   | Text   |
| 8   | Logical  |
| 9   | Information  |
| 10  | Commands   |
| 11  | Customizing  |
| 12  | Macro Control  |
| 13  | DDE/External   |
| 14  | User Defined   |
| 15  | Engineering  |
| 16  | Cube   |
| Any value that is greater than 16 and also less than the value of the <b>iMac</b> field of <b>BrtBeginFnGroup</b> (section <a href="#">2.4.84</a> ).  | (reserved)   |
| Any value that is greater than the value of the <b>iMac</b> field of the <b>BrtBeginFnGroup</b> record and less than or equal to the value of the <b>iMac</b> field of <b>BrtBeginFnGroup</b> plus the count of the <b>BrtFnGroup</b> (section <a href="#">2.4.652</a> ) records. | User-definable function groups, names of which are defined in <b>BrtFnGroup</b> records. |

## 2.5.52 FontFlags

The **FontFlags** structure specifies the attributes of the font.

The following packet diagram specifies this structure.

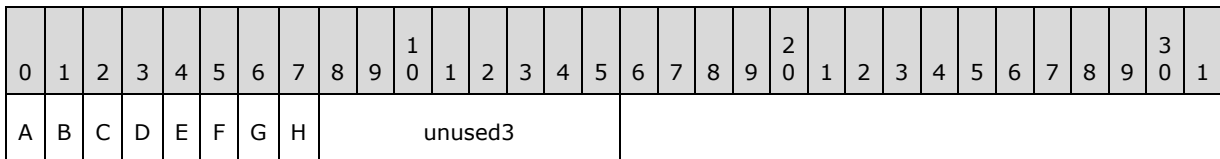

**A - unused1 (1 bit):** Undefined and MUST be ignored.

**B - fItalic (1 bit):** A bit that specifies whether the text is italic.

**C - unused2 (1 bit):** Undefined and MUST be ignored.

**D - fStrikeout (1 bit):** A bit that specifies whether a strikethrough line is drawn through the horizontal middle of the text.

**E - fOutline (1 bit):** A bit that specifies whether only the inner and outer borders of the characters are displayed.

**F - fShadow (1 bit):** A bit that specifies a Macintosh compatibility setting. If this bit is set, the effect is to render a shadow behind, beneath, and to the right of the text on a Macintosh operating system.

**G - fCondense (1 bit):** A bit that specifies a Macintosh compatibility setting. If this bit is set, the effect is to condense the text (squeeze it together).

**H - fExtend (1 bit):** A bit that specifies a Macintosh compatibility setting. If this bit is set, the effect is to extend or stretch out the text.

**unused3 (8 bits):** Undefined and MUST be ignored.

### 2.5.53 FontScheme

The **FontScheme** enumeration specifies the font scheme to which this font belongs. When a font is part of a theme, as specified in [\[ISO/IEC29500-1:2011\]](#) section 14.2.7, the font is categorized as a major scheme or a minor scheme.


The value of this enumeration MUST be a value from the following table.

| Name            | Value | Meaning              |
|-----------------|-------|----------------------|
| <b>XFSNONE</b>  | 0x00  | No font scheme       |
| <b>XFSMAJOR</b> | 0x01  | Major scheme         |
| <b>XFSMINOR</b> | 0x02  | Minor scheme         |
| <b>XFSNIL</b>   | 0xFF  | <b>Ninched</b> state |

### 2.5.54 FRTBlank

The **FRTBlank** structure is a future record (section [2.1.6](#)) header that specifies that no future record attribute exists for the record that contains this structure. An application that does not support the containing record's content does not need to load or adjust any of its content during run-time operations. Such an application can write the containing record during save without modification.

The following packet diagram specifies this structure.

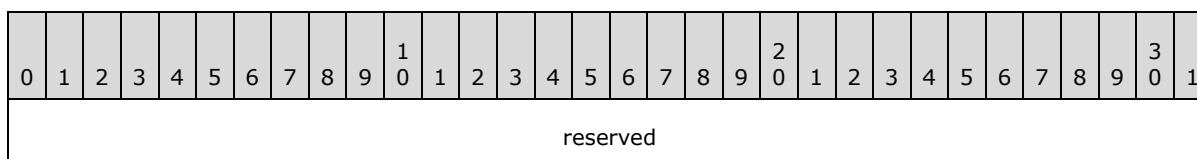


**reserved (4 bytes):** This value MUST be 0 and MUST be ignored.

### 2.5.55 FRTCFParsedFormula14

The **FRTCFParsedFormula14** structure specifies a formula (section [2.2.2](#)) used by a future record (section [2.1.6](#)) that is used in a conditional formatting rule.

The following packet diagram specifies this structure.

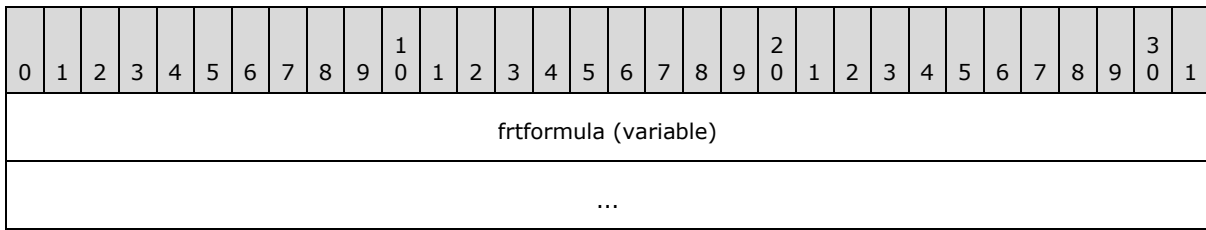

**frtformula (variable):** An **FRTFormula** (section 2.5.58) structure that specifies the formula.


**frtformula.rgce** is an **Rgce** (section 2.5.97.88) structure that specifies the sequence of **Ptg** (section 2.5.97.16) structures for the formula. It MUST NOT contain the **PtgExp** (section 2.5.97.40), **PtgList** (section 2.5.97.52), **PtgSxName** (section 2.5.97.76), **PtgIsect** (section 2.5.97.50), **PtgUnion** (section 2.5.97.78), **PtgArray** (section 2.5.97.23), **PtgMemArea** (section 2.5.97.54), or **PtgMemNoMem** (section 2.5.97.57) structure. A **PtgArea** (section 2.5.97.18), **PtgAreaN** (section 2.5.97.22), or **PtgArea3d** (section 2.5.97.19) structure MUST NOT be the only **Ptg** structure in the sequence.

The root node of the parse tree of this field MUST be a VALUE\_TYPE state, as described in section 2.5.97.88.

### 2.5.56 FRTCFVOParsedFormula14

The **FRTCFVOParsedFormula14** structure specifies a formula (section 2.2.2) without relative references used by a future record (section 2.1.6) that is used in a conditional formatting rule.

The following packet diagram specifies this structure.

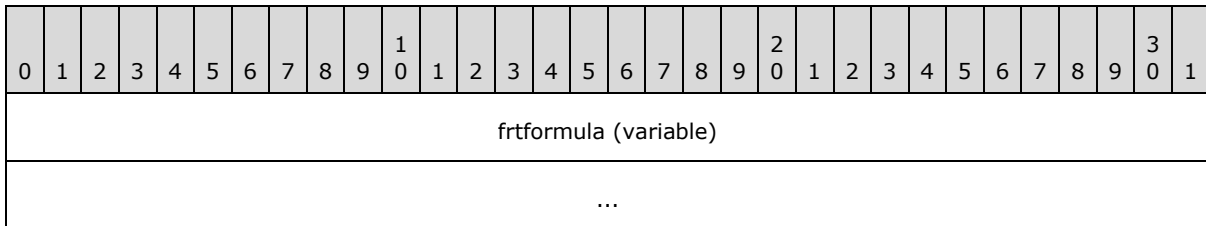

**frtformula (variable):** An **FRTFormula** (section 2.5.58) structure that specifies the formula.

**frtformula.rgce** is an **Rgce** (section 2.5.97.88) structure that specifies the sequence of **Ptg** (section 2.5.97.16) structures for the formula. It MUST NOT contain a **PtgExp** (section 2.5.97.40), **PtgList** (section 2.5.97.52), **PtgSxName** (section 2.5.97.76), **PtgIsect** (section 2.5.97.50), **PtgUnion** (section 2.5.97.78), **PtgArray** (section 2.5.97.23), **PtgMemArea** (section 2.5.97.54), or **PtgMemNoMem** (section 2.5.97.57) structure. A **PtgArea** (section 2.5.97.18), **PtgAreaN** (section 2.5.97.22), or **PtgArea3d** (section 2.5.97.19) structure MUST NOT be the only **Ptg** structure the sequence.

If this field contains a **PtgRef** (section 2.5.97.68) structure, the **loc.column.fColRel** and **loc.column.fRwRel** fields in the **PtgRef** structure MUST be 0.

If this field contains a **PtgRefN** (section 2.5.97.72) structure, the **loc.column.fColRel** and **loc.column.fRwRel** fields in the **PtgRefN** structure MUST be 0.

If this field contains a **PtgRef3d** (section 2.5.97.69) structure, the **loc.column.fColRel** and **loc.column.fRwRel** fields in the **PtgRef3d** structure MUST be 0.

If this field contains a **PtgArea** structure, the **area.columnFirst.fColRel**, **area.columnFirst.fRwRel**, **area.columnLast.fColRel**, and **area.columnLast.fRwRel** fields in the **PtgArea** structure MUST be 0.

If this field contains a **PtgAreaN** structure, the **area.columnFirst.fColRel**, **area.columnFirst.fRwRel**, **area.columnLast.fColRel**, and **area.columnLast.fRwRel** fields in the **PtgAreaN** structure MUST be 0.


If this field contains a **PtgArea3d** structure, the **area.columnFirst.fColRel**, **area.columnFirst.fRwRel**, **area.columnLast.fColRel**, and **area.columnLast.fRwRel** fields in the **PtgArea3d** structure MUST be 0.

The root node of the parse tree of this field MUST be a VALUE\_TYPE state, as described in section [2.5.97.88](#).

## 2.5.57 FRTDVParsedFormula14

The **FRTDVParsedFormula14** structure specifies a formula (section [2.2.2](#)) used in a data validation rule.

The following packet diagram specifies this structure.

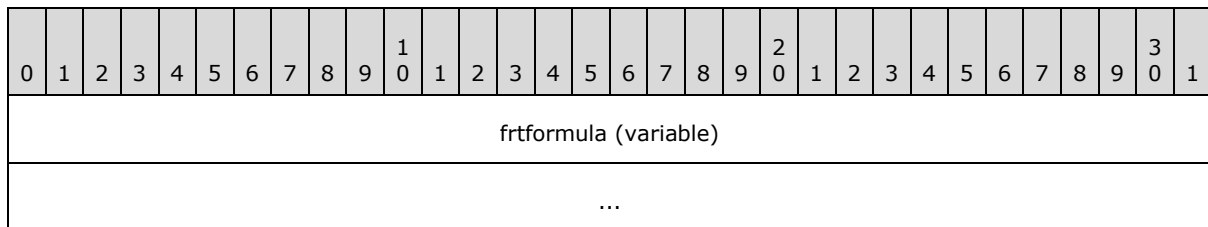

**frtformula (variable):** An **FRTFormula** (section [2.5.58](#)) structure that specifies the formula.

**frtformula.rgce** is an **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. It MUST NOT contain a **PtgExp** (section [2.5.97.40](#)), **PtgList** (section [2.5.97.52](#)), **PtgSxName** (section [2.5.97.76](#)), **PtgIsect** (section [2.5.97.50](#)), **PtgUnion** (section [2.5.97.78](#)), **PtgArray** (section [2.5.97.23](#)), **PtgMemArea** (section [2.5.97.54](#)), or **PtgMemNoMem** (section [2.5.97.57](#)) structure.

If the **BrdDVal14** (section [2.4.340](#)) record that contains the **FRTHeader** (section [2.5.60](#)) structure whose **FRTHeader.rgFormulas.array** contains this **FRTDVParsedFormula14** structure has a **BrdDVal14.valType** attribute not equal to 3, the **BrdDVal14.fDVMInFmla** attribute is 1 and this **FRTDVParsedFormula14** structure is the first formula contained in the **FRTHeader.rgFormulas** array, the following MUST be true:

- A **PtgArea** (section [2.5.97.18](#)), **PtgAreaErr** (section [2.5.97.20](#)), **PtgAreaN** (section [2.5.97.22](#)), **PtgArea3d** (section [2.5.97.19](#)), or **PtgAreaErr3d** (section [2.5.97.21](#)) structure MUST NOT be the only **Ptg** structure in **rgce**.
- The root node of the parse tree of this field MUST be a VALUE\_TYPE state, as described in section [2.5.97.88](#).

If the **BrdDVal14** record that contains the **FRTHeader** structure whose **FRTHeader.rgFormulas.array** contains this **FRTDVParsedFormula14** structure has a **BrdDVal14.valType** equal to 3, **BrdDVal14.fDVMInFmla** is 1 and this **FRTDVParsedFormula14** structure is the first formula contained in the **FRTHeader.rgFormulas** array, the following MUST be true:



- If **rgce** contains a **PtgArea3d**, **PtgAreaErr3d**, **PtgRef3d** (section [2.5.97.69](#)), or **PtgRefErr3d** (section [2.5.97.71](#)) structure, then **PtgArea3d**, **PtgAreaErr3d**, **PtgRef3d**, or **PtgRefErr3d** MUST be the only **Ptg** structure in **rgce**.
- The root node of the parse tree of this field MUST NOT be a VALUE\_TYPE state, as described in section [2.5.97.88](#).


If the **BrtDVal14** record that contains the **FRTHeader** structure whose **FRTHeader.rgFormulas.array** contains this **FRTDVParsedFormula14** structure has a **BrtDVal14.valType** not equal to 3, **BrtDVal14.fDVMaxFmla** is 1 and this **FRTDVParsedFormula14** structure is the last formula contained in the **FRTHeader.rgFormulas** array, the following MUST be true:

- **PtgArea**, **PtgAreaErr**, **PtgAreaN**, **PtgArea3d**, or **PtgAreaErr3d** MUST NOT be the only **Ptg** structure in **rgce**.
- The root node of the parse tree of this field MUST be a VALUE\_TYPE state, as described in section [2.5.97.88](#).

## 2.5.58 FRTFormula

The **FRTFormula** structure specifies a formula (section [2.2.2](#)) that a future record (section [2.1.6](#)) uses.

The following packet diagram specifies this structure.

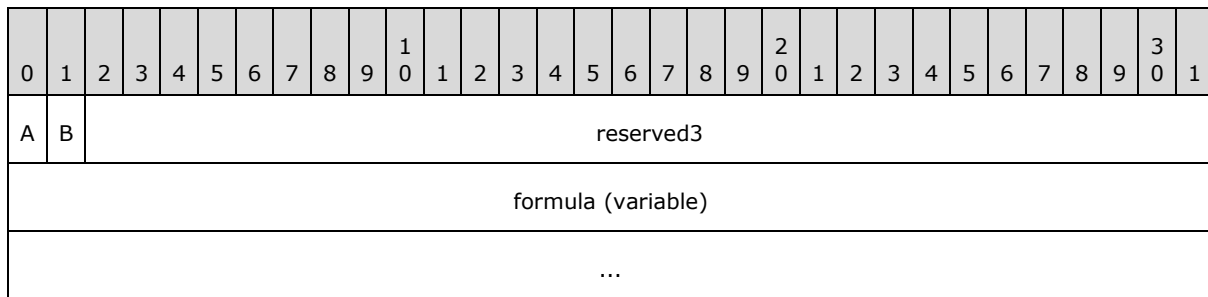

**A - reserved1 (1 bit):** This value MUST be 0 and MUST be ignored.

**B - reserved2 (1 bit):** This value MUST be one and MUST be ignored.


**reserved3 (30 bits):** This value MUST be 0 and MUST be ignored.

**formula (variable):** An **FRTParsedFormula** (section [2.5.97.9](#)) structure that specifies the formula.

## 2.5.59 FRTFormulas

The **FRTFormulas** structure specifies an array of formulas (section [2.2.2](#)) that a future record (section [2.1.6](#)) uses.

The following packet diagram specifies this structure.

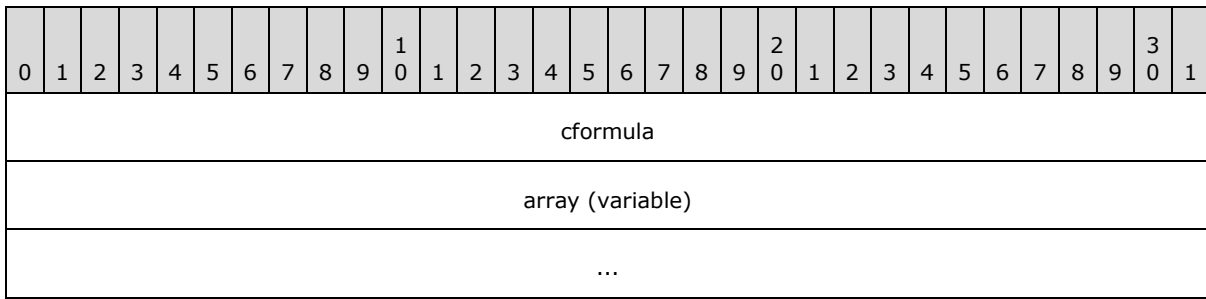


**cformula (4 bytes):** An unsigned integer that specifies the number of elements in the **array** field.

**array (variable):** An array of the **FRTFormula** (section [2.5.58](#)) structure that specifies the array of formulas.

### 2.5.60 FRTHeader

The **FRTHeader** structure specifies attributes of a future record (section [2.1.6](#)).

The following packet diagram specifies this structure.

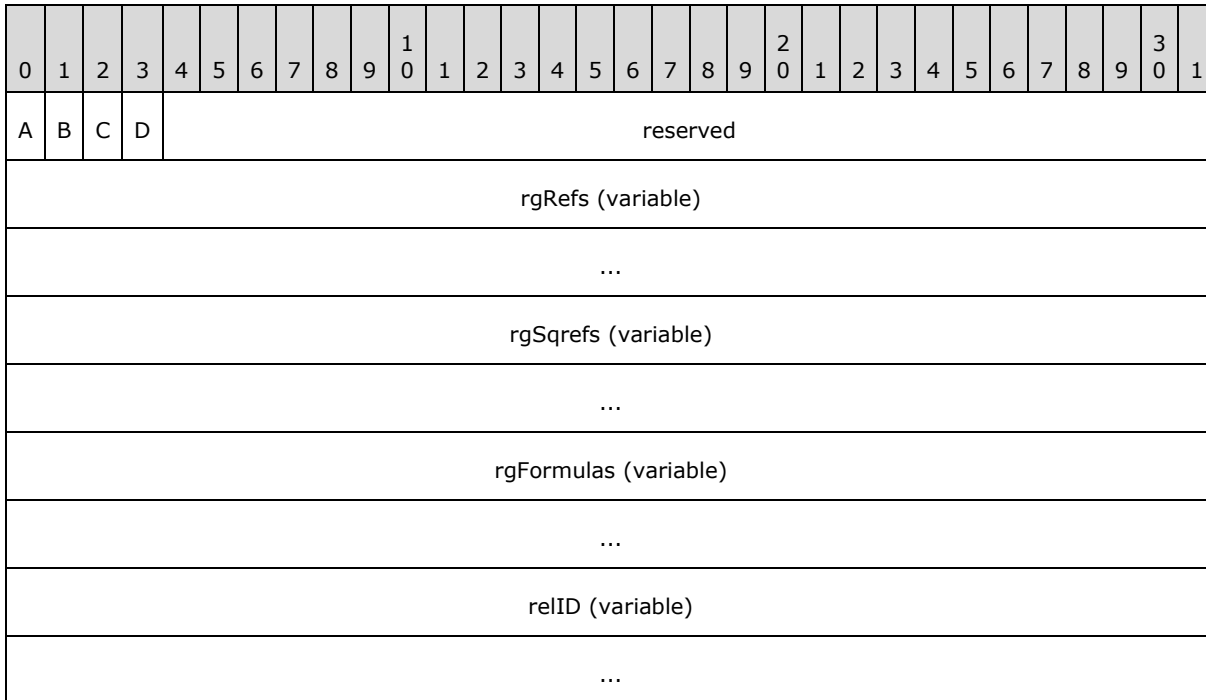

**A - fRef (1 bit):** A bit that specifies whether the **rgRefs** field exists. The value of this field MUST be 0 when the record is not in a **Worksheet** part (section [2.1.7.61](#)) or a part (section [2.1.2](#)) that is the **target** of an implicit or explicit relationship (section [2.1.3](#)) from a Worksheet part.

**B - fSqref (1 bit):** A bit that specifies whether the **rgSqrefs** field exists. The value of this field MUST be 0 when the record is not in a Worksheet part or a part that is the target of an implicit or explicit relationship from a Worksheet part.

**C - fFormula (1 bit):** A bit that specifies whether the **rgFormulas** field exists. The value of this field MUST be 0 when the record is not in a Worksheet part or a part that is the target of an implicit or explicit relationship from a Worksheet part.

**D - fRelID (1 bit):** A bit that specifies whether the **reID** field exists.

**reserved (28 bits):** This value MUST be 0 and MUST be ignored.

**rgRefs (variable):** An **FRTRefs** (section [2.5.63](#)) structure that specifies the array of rectangular range references that the future record uses. It MUST exist only if **fRef** equals 1. An application that does not support the containing record's content can load these references, adjust them during run-time operations, and write the updated references back into the containing record during save.

**rgSqrefs (variable):** An **FRTSqref** (section [2.5.65](#)) structure that specifies the array of range references that the future record uses. It MUST exist only if **fSqref** equals 1. An application that does not support the containing record's content can load these references, adjust them during run-time operations, and write the updated references back into the containing record during save.

**rgFormulas (variable):** An **FRTFormulas** (section [2.5.59](#)) structure that specifies the array of formulas (section [2.2.2](#)) that the future record uses. MUST exist only if **fFormula** equals 1. An application that does not support the containing record's content can load these formulas, adjust them during run-time operations, and write the updated formulas back into the containing record during save.

**reID (variable):** An **FRTReID** (section [2.5.64](#)) structure that specifies a relationship that specifies a part that the future record uses. It MUST exist only if **fRelID** equals 1. An application that does not support the containing record's content can load this relationship and preserve it and the entire part during save.

## 2.5.61 FRTProductVersion

The **FRTProductVersion** structure specifies the application version that created the future record (section [2.1.6](#)) or the sequence of future records.

The following packet diagram specifies this structure.

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15      | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| version |   |   |   |   |   |   |   |   |   |    |    |    |    |    | product |    |    |    |    |    |    |    |    |    |    |    |    |    |    | A  |    |

**version (2 bytes):** An unsigned integer that specifies the version of the application. [<61>](#)

**product (15 bits):** An unsigned integer that specifies the application. [<62>](#)

**A - reserved (1 bit):** This value MUST be 0 and MUST be ignored.

## 2.5.62 FRTRef

The **FRTRef** structure specifies a rectangular range referenced by a future record (section [2.1.6](#)).

The following packet diagram specifies this structure.

|                |   |   |   |           |   |   |   |   |   |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|-----------|---|---|---|---|---|----|----|----|----|----|----|----|-----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4         | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17        | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A              | B | C | D | reserved1 |   |   |   |   |   |    |    |    |    |    |    | E  | reserved2 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rfx (16 bytes) |   |   |   |           |   |   |   |   |   |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |           |   |   |   |   |   |    |    |    |    |    |    |    |           |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fAdjDelete (1 bit):** Specifies that the range reference specified by the **rfx** field was deleted by an application that loaded this record as a future record that the application does not support.

**B - fDoAdjust (1 bit):** MUST be 1. Specifies that the range references specified by **rfx** are modified as cells, rows, and columns (2) and are inserted and deleted by an application that loaded this record as a future record that the application does not support.

**C - fAdjChange (1 bit):** Specifies that the range reference specified by **rfx** was modified because cells, rows (2), and columns (2) were inserted and deleted by an application that loaded this record as a future record that the application does not support.

**D - fEdit (1 bit):** Specifies that at least one cell in the range specified by **rfx** was edited by an application that loaded this record as a future record that the application does not support.

**reserved1 (12 bits):** This value MUST be 0 and MUST be ignored.

**E - unused (1 bit):** This value is undefined and MUST be ignored.

**reserved2 (15 bits):** This value MUST be 0 and MUST be ignored.

**rfx (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) structure that specifies the rectangular range.

### 2.5.63 FRTRefs

The **FRTRefs** structure specifies an array of rectangular ranges that a future record refers to.

The following packet diagram specifies this structure.

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cref             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| array (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cref (4 bytes):** An unsigned integer that specifies the number of elements in the **array** field.


**array (variable):** An array of the **FRTRef** (section [2.5.62](#)) structure that specifies the array of rectangular ranges.

## 2.5.64 FRTRelID

The **FRTRelID** structure specifies a string that specifies a relationship (section 2.1.3) identifier, as specified in [\[ISO/IEC29500-2:2011\]](#) section 9.3. The length of the string **MUST** be greater than 0 and **MUST NOT** exceed 255 characters. The string **MUST NOT** contain a zero character 0x0000.

If the application does not support the future record (section 2.1.6) that contains this structure, the application can cache the relationship from the current part and the part itself. On saving of the future record, the application can write out the relationship and the cached part.

The following packet diagram specifies this structure.

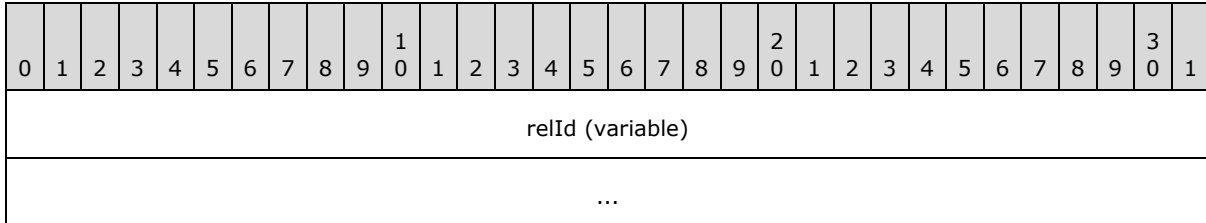


**relId (variable):** A **LPWideString** (section 2.5.91) value that specifies the string.

## 2.5.65 FRTSqref

The **FRTSqref** structure specifies a range that a future record (section 2.1.6) refers to.

The following packet diagram specifies this structure.

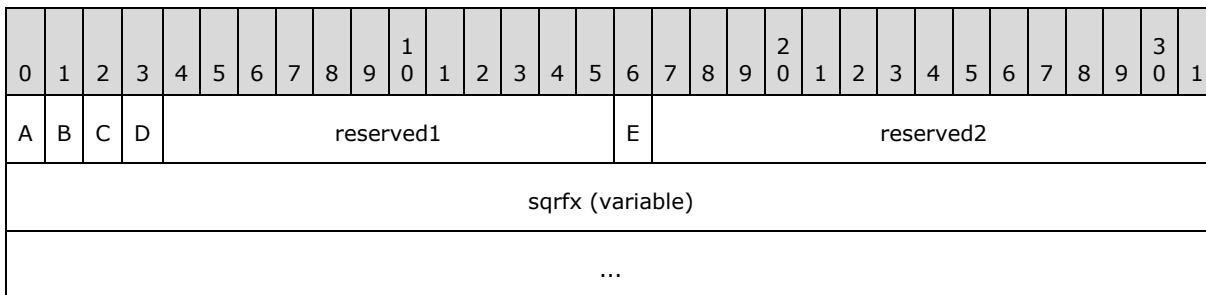

**A - fAdjDelete (1 bit):** Specifies that the ranges specified by the **sqrfx** field were deleted by an application that loaded this record as a future record that the application does not support.

**B - fDoAdjust (1 bit):** **MUST** be 1. Specifies that the range references specified by **sqrfx** are modified as cells, rows (2), and columns (2) and are inserted or deleted by an application that loaded this record as a future record that the application does not support.

**C - fAdjChange (1 bit):** Specifies that the range references specified by **sqrfx** were modified because cells, rows (2), and columns (2) were inserted or deleted by an application that loaded this record as a future record that the application does not support.

**D - fEdit (1 bit):** Specifies that at least one cell in the ranges specified by **sqrfx** was edited by an application that loaded this record as a future record that the application does not support.

**reserved1 (12 bits):** This value **MUST** be 0 and **MUST** be ignored.

**E - unused (1 bit):** Undefined and **MUST** be ignored.


**reserved2 (15 bits):** This value MUST be 0 and MUST be ignored.

**sqrfx (variable):** An **UncheckedSqRfX** (section [2.5.155](#)) structure that specifies the range.

## 2.5.66 FRTSqrfs

The **FRTSqrfs** structure specifies an array of ranges that a future record (section [2.1.6](#)) refers to.

The following packet diagram specifies this structure.

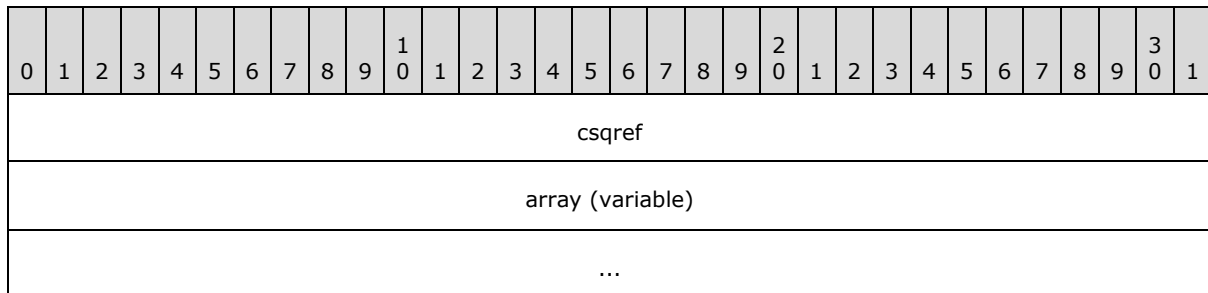


**csqref (4 bytes):** An unsigned integer that specifies the number of elements in the **array** field.

**array (variable):** An array of the **FRTSqrfs** (section [2.5.65](#)) structure that specifies the array of ranges.

## 2.5.67 GradientStop

The **GradientStop** structure specifies a **gradient stop** for the **BrFill** (section [2.4.644](#)) record.

The following packet diagram specifies this structure.

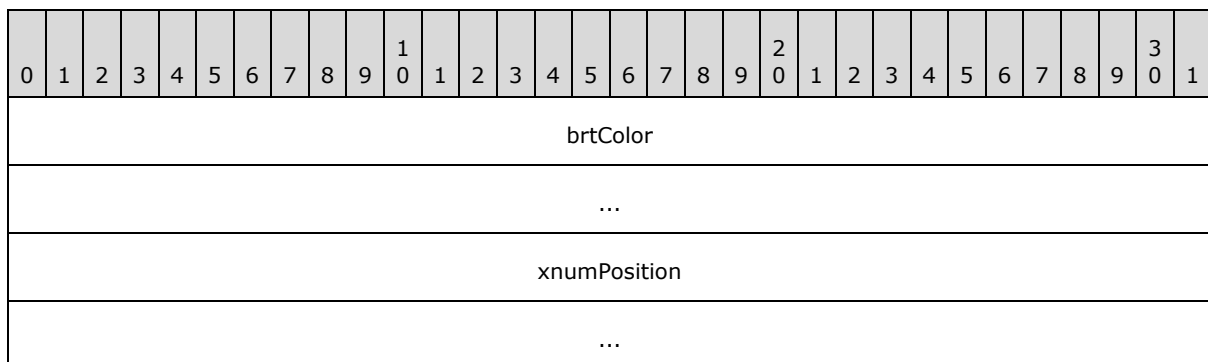

**brtColor (8 bytes):** A **BrColor** (section [2.4.321](#)) structure that specifies the color used for a gradient stop.

**xnumPosition (8 bytes):** An **Xnum** (section [2.5.171](#)) value that specifies the gradient stop as a percentage in decimal notation. The position is specified in [\[ISO/IEC29500-1:2011\]](#) section 18.8.38 **stop** (Gradient stop). The value of this field MUST be greater than or equal to 0 and less than or equal to 1.

## 2.5.68 GrbitBeginSlicer

The **GrbitBeginSlicer** structure specifies properties of a slicer view (section [2.2.14.2](#)).

The following packet diagram specifies this structure.

|   |   |   |   |        |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|--------|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4      | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | C | D | unused |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fCaptionVisible (1 bit):** A bit that specifies whether the caption of the slicer view is displayed.

**B - fHasCaption (1 bit):** A bit that specifies whether the **stCaption** field of the slicer view is used. The value of this field MUST be 1 if **fCaptionVisible** is 1.

**C - fHasStyle (1 bit):** A bit that specifies whether the **stStyle** field of the slicer view is used.

**D - fLockedPosition (1 bit):** A bit that specifies whether the slicer view is locked.

**unused (4 bits):** Undefined and MUST be ignored.

## 2.5.69 GrbitFmla

The **GrbitFmla** structure specifies additional formula (section [2.2.2](#)) data.

The following packet diagram specifies this structure.

|   |   |        |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|--------|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2      | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | unused |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - reserved (1 bit):** This value MUST be 0 and MUST be ignored.

**B - fAlwaysCalc (1 bit):** A bit that specifies whether the formula is reevaluated when the document is loaded.

**unused (14 bits):** This value is undefined and MUST be ignored.

## 2.5.70 GrbitSXTupleSetHeaderItem

The **GrbitSXTupleSetHeaderItem** structure is a bit field used in the **BrtSXTupleSetHeaderItem** (section [2.4.778](#)) record type.

The following packet diagram specifies this structure.

|   |   |        |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|--------|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2      | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | unused |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fUnique (1 bit):** A bit that specifies whether the **irstUnique** field exists in the containing **BrtSXTupleSetHeaderItem** record.


**B - fHier (1 bit):** A bit that specifies whether the **irstHier** field exists in the containing **BrtsXTupleSetHeaderItem** record.

**unused (6 bits):** Undefined and MUST be ignored.

### 2.5.71 GrbitSXTupleSetRowItem

The **GrbitSXTupleSetRowItem** structure is a bit field used in the **BrtsXTupleSetRowItem** (section [2.4.779](#)) record type.

The following packet diagram specifies this structure.

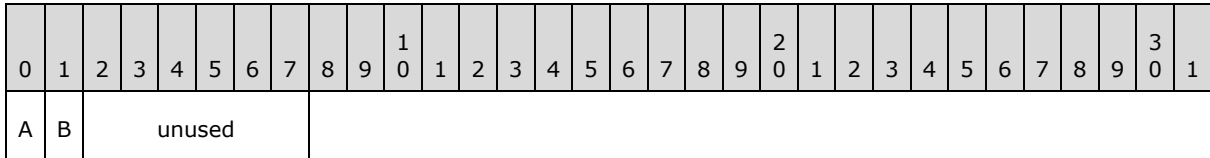

**A - fUnique (1 bit):** A bit that specifies whether the **irstUnique** field exists in the containing **BrtsXTupleSetRowItem** record.

**B - fDisplay (1 bit):** A bit that specifies whether the **irstDisplay** field exists in the containing **BrtsXTupleSetRowItem** record.

**unused (6 bits):** This value is undefined and MUST be ignored.

### 2.5.72 HeaderFooterString

The **HeaderFooterString** structure is an **XLNullableWideString** (section [2.5.166](#)) structure that specifies a header or footer string. The length of the string MUST be less than or equal to 255. Characters within the string MUST be interpreted through the following ABNF grammar for header and footer strings.

The following grammar specifies Unicode characters, starting with the space character (%x0020).

headerfooter = \*(left / pagenum / pagetotal / fontsize / strikethrough / superscript / subscript / center / date / time / filepath / picture / underline / doubleunderline / right / bookpath / sheetname / fontname / fonttype / font / bold / italic / ampersand / emptytoken / UNICHAR)

UNICHAR = %x0020-FFFF

The following grammar specifies a digit between 0 and 9.

DIGIT = %x0030-0039

The following grammar specifies a character between A and F or between a and f.

HEXALPHA = %x0041-0046 / %x0061-0066

The following grammar specifies a double quotation mark.

DQUOTE = %x0022

The following grammar specifies the beginning of the left section. There are three header and footer sections: left, center, and right. When two or more occurrences of this section marker exist, the contents from all markers are concatenated, in the order of appearance, and placed into the left section.



left = "&L"

The following grammar specifies the current page number.

pagenum = "&P"

The following grammar specifies the total number of pages.

pagetotal = "&N" 0\*1(("-" / "+") \*DIGIT)

The following grammar specifies the text font size, where font size is measured in points.

fontsize = "&" 1\*3DIGIT

The following grammar specifies whether the strikethrough text style is on or off. The first occurrence of this grammar MUST turn the strikethrough text style on, and the second occurrence MUST turn it off.

strikethrough = "&S"

The following grammar specifies whether the superscript text style is on or off. The first occurrence of this grammar MUST turn the superscript text style on, and the second occurrence MUST turn it off. The superscript and subscript grammar MUST NOT be on at same time. If both occur in the string, the grammar that occurs first is applied and the second is ignored.

superscript = "&X"

The following grammar specifies whether the subscript text style is on or off. The first occurrence of this grammar MUST turn the subscript text style on, and the second occurrence MUST turn it off. The superscript and subscript grammar MUST NOT be on at same time. If both occur in the string, the grammar that occurs first is applied and the second is ignored.

subscript = "&Y"

The following grammar specifies the beginning of the center section. When two or more occurrences of this section marker exist, the contents from all markers are concatenated, in the order of appearance, and placed into the center section.

center = "&C"

The following grammar specifies a date.

date = "&D"

The following grammar specifies a time.

time = "&T"

The following grammar specifies a picture.

picture = "&G"

The following grammar specifies whether the single underline text style is on or off. The first occurrence of this grammar MUST turn the underline text style on, and the second occurrence MUST turn it off.

underline = "&U"

The following grammar specifies whether the double underline text style is on or off. The first occurrence of this grammar MUST turn the double underline text style on, and the second occurrence MUST turn it off.

doubleunderline = "&E"

The following grammar specifies the beginning of the right section. When two or more occurrences of this section marker exist, the contents from all markers are concatenated, in the order of appearance, and placed into the right section.

right = "&R"

The following grammar specifies a workbook file path.

bookpath = "&Z"

The following grammar specifies a workbook file name.

bookname = "&F"

The following grammar specifies a sheet name.

sheetname = "&A"

The following grammar specifies the text font name. When the font name is a hyphen, no font is specified. This can be a localized string.

fontname = (1\*UNICHAR / "-")

The following grammar specifies the text font type. This can be a localized string.

fonttype = ("italic" / "bold" / "regular" / "italic bold" / "bold italic")

The following grammar specifies the text font.

font = "&" DQUOTE fontname , fonttype DQUOTE

The following grammar specifies whether the bold text style is on or off. The first occurrence of this code MUST turn the bold text style on, and the second occurrence MUST turn it off.

bold = "&B"

The following grammar specifies whether the italic text style is on or off. The first occurrence of this code MUST turn the italic text style on, and the second occurrence MUST turn it off.

italic = "&I"

The following grammar specifies an ampersand character.

ampersand = "&&"

The following grammar specifies an unidentified token. If only "&" appears, or if there is a UNICHAR character specified after "&" and it is not one of the UNICHAR characters listed in the preceding rules, the token is interpreted as empty and nothing is rendered in the header or footer text.

emptytoken = "&" \*1UNICHAR

### 2.5.73 HorizAlign

The **HorizAlign** enumeration specifies the horizontal alignment.

The value of this enumeration MUST be a value from the following table.

| Name              | Value | Meaning                           |
|-------------------|-------|-----------------------------------|
| <b>ALCNIL</b>     | 0xFF  | Alignment not specified           |
| <b>ALCGEN</b>     | 0x00  | General alignment                 |
| <b>ALCLEFT</b>    | 0x01  | Left alignment                    |
| <b>ALCCTR</b>     | 0x02  | Center alignment                  |
| <b>ALCRIGHT</b>   | 0x03  | Right alignment                   |
| <b>ALCFILL</b>    | 0x04  | Fill alignment                    |
| <b>ALCJUST</b>    | 0x05  | Justify alignment                 |
| <b>ALCCONTCTR</b> | 0x06  | Center-across-selection alignment |
| <b>ALCDIST</b>    | 0x07  | Distributed alignment             |

### 2.5.74 Icon

The **Icon** structure is a 32-bit signed integer that specifies the icon in an icon set. The value of this structure MUST be a value from the following table.

| Value | Meaning                     |
|-------|-----------------------------|
| -1    | No icon                     |
| 0     | First icon in the icon set  |
| 1     | Second icon in the icon set |
| 2     | Third icon in the icon set  |
| 3     | Fourth icon in the icon set |
| 4     | Fifth icon in the icon set  |

### 2.5.75 Icv

The **Icv** structure specifies a color. For values less than 64 and if a **BrtBeginIndexedColors** (section [2.4.89](#)) record exists as defined by the **Styles** (section [2.1.7.50](#)) part ABNF, this structure specifies a color from a custom color palette as a zero-based index of a **BrtIndexedColor** (section [2.4.660](#)) record in the collection of all records directly following **BrtBeginIndexedColors**. The referenced **BrtIndexedColor** record specifies the color.

If a **BrtBeginIndexedColors** record does not exist or for values greater than or equal to 64, this structure specifies a color from the default color palette and MUST be a value from the following table, where the default value is in **red-green-blue-alpha (RGBA)**.

| Value | Name                | Default value |
|-------|---------------------|---------------|
| 0x00  | ▪ <b>icvBlack</b>   | 0x000000FF    |
| 0x01  | ▪ <b>icvWhite</b>   | 0xFFFFFFFF    |
| 0x02  | ▪ <b>icvRed</b>     | 0xFF0000FF    |
| 0x03  | ▪ <b>icvGreen</b>   | 0x00FF00FF    |
| 0x04  | ▪ <b>icvBlue</b>    | 0x0000FFFF    |
| 0x05  | ▪ <b>icvYellow</b>  | 0xFFFF00FF    |
| 0x06  | ▪ <b>icvMagenta</b> | 0xFF00FFFF    |
| 0x07  | ▪ <b>icvCyan</b>    | 0x00FFFFFF    |
| 0x08  | ▪ <b>icvPlt1</b>    | 0x000000FF    |
| 0x09  | ▪ <b>icvPlt2</b>    | 0xFFFFFFFF    |
| 0x0A  | ▪ <b>icvPlt3</b>    | 0xFF0000FF    |
| 0x0B  | ▪ <b>icvPlt4</b>    | 0x00FF00FF    |
| 0x0C  | ▪ <b>icvPlt5</b>    | 0x0000FFFF    |
| 0x0D  | ▪ <b>icvPlt6</b>    | 0xFFFF00FF    |
| 0x0E  | ▪ <b>icvPlt7</b>    | 0xFF00FFFF    |
| 0x0F  | ▪ <b>icvPlt8</b>    | 0x00FFFFFF    |
| 0x10  | ▪ <b>icvPlt9</b>    | 0x800000FF    |
| 0x11  | ▪ <b>icvPlt10</b>   | 0x008000FF    |

| Value | Name              | Default value |
|-------|-------------------|---------------|
| 0x12  | ▪ <b>icvPIt11</b> | 0x000080FF    |
| 0x13  | ▪ <b>icvPIt12</b> | 0x808000FF    |
| 0x14  | ▪ <b>icvPIt13</b> | 0x800080FF    |
| 0x15  | ▪ <b>icvPIt14</b> | 0x008080FF    |
| 0x16  | ▪ <b>icvPIt15</b> | 0xC0C0C0FF    |
| 0x17  | ▪ <b>icvPIt16</b> | 0x808080FF    |
| 0x18  | ▪ <b>icvPIt17</b> | 0x9999FFFF    |
| 0x19  | ▪ <b>icvPIt18</b> | 0x993366FF    |
| 0x1A  | ▪ <b>icvPIt19</b> | 0xFFFFCCFF    |
| 0x1B  | ▪ <b>icvPIt20</b> | 0xCCFFFFFF    |
| 0x1C  | ▪ <b>icvPIt21</b> | 0x660066FF    |
| 0x1D  | ▪ <b>icvPIt22</b> | 0xFF8080FF    |
| 0x1E  | ▪ <b>icvPIt23</b> | 0x0066CCFF    |
| 0x1F  | ▪ <b>icvPIt24</b> | 0xCCCCFFFF    |
| 0x20  | ▪ <b>icvPIt25</b> | 0x000080FF    |
| 0x21  | ▪ <b>icvPIt26</b> | 0xFF00FFFF    |
| 0x22  | ▪ <b>icvPIt27</b> | 0xFFFF00FF    |
| 0x23  | ▪ <b>icvPIt28</b> | 0x00FFFFFF    |

| Value | Name              | Default value |
|-------|-------------------|---------------|
| 0x24  | ▪ <b>icvPIt29</b> | 0x800080FF    |
| 0x25  | ▪ <b>icvPIt30</b> | 0x800000FF    |
| 0x26  | ▪ <b>icvPIt31</b> | 0x008080FF    |
| 0x27  | ▪ <b>icvPIt32</b> | 0x0000FFFF    |
| 0x28  | ▪ <b>icvPIt33</b> | 0x00CCFFFF    |
| 0x29  | ▪ <b>icvPIt34</b> | 0xCCFFFFFF    |
| 0x2A  | ▪ <b>icvPIt35</b> | 0xCCFFCCFF    |
| 0x2B  | ▪ <b>icvPIt36</b> | 0xFFFF99FF    |
| 0x2C  | ▪ <b>icvPIt37</b> | 0x99CCFFFF    |
| 0x2D  | ▪ <b>icvPIt38</b> | 0xFF99CCFF    |
| 0x2E  | ▪ <b>icvPIt39</b> | 0xCC99FFFF    |
| 0x2F  | ▪ <b>icvPIt40</b> | 0xFFCC99FF    |
| 0x30  | ▪ <b>icvPIt41</b> | 0x3366FFFF    |
| 0x31  | ▪ <b>icvPIt42</b> | 0x33CCCCFF    |
| 0x32  | ▪ <b>icvPIt43</b> | 0x99CC00FF    |
| 0x33  | ▪ <b>icvPIt44</b> | 0xFFCC00FF    |
| 0x34  | ▪ <b>icvPIt45</b> | 0xFF9900FF    |
| 0x35  | ▪ <b>icvPIt46</b> | 0xFF6600FF    |


| Value | Name                   | Default value   |
|-------|------------------------|---|
| 0x36  | ▪ <b>icvPlt47</b>      | 0x666699FF  |
| 0x37  | ▪ <b>icvPlt48</b>      | 0x969696FF  |
| 0x38  | ▪ <b>icvPlt49</b>      | 0x003366FF  |
| 0x39  | ▪ <b>icvPlt50</b>      | 0x339966FF  |
| 0x3A  | ▪ <b>icvPlt51</b>      | 0x003300FF  |
| 0x3B  | ▪ <b>icvPlt52</b>      | 0x333300FF  |
| 0x3C  | ▪ <b>icvPlt53</b>      | 0x993300FF  |
| 0x3D  | ▪ <b>icvPlt54</b>      | 0x993366FF  |
| 0x3E  | ▪ <b>icvPlt55</b>      | 0x333399FF  |
| 0x3F  | ▪ <b>icvPlt56</b>      | 0x333333FF  |
| 0x40  | ▪ <b>icvForeground</b> | System color for text in windows.   |
| 0x41  | ▪ <b>icvBackground</b> | System color for window background.   |
| 0x42  | ▪ <b>icvFrame</b>      | System color for window frame.  |
| 0x43  | ▪ <b>icv3D</b>         | System-defined face color for three-dimensional display elements and for dialog box backgrounds.          |
| 0x44  | ▪ <b>icv3DText</b>     | System color for text on push buttons.  |
| 0x45  | ▪ <b>icv3DHilite</b>   | System highlight color for three-dimensional display elements (for edges facing the light source).        |
| 0x46  | ▪ <b>icv3DShadow</b>   | System shadow color for three-dimensional display elements (for edges facing away from the light source). |

| Value | Name                   | Default value   |
|-------|------------------------|---|
| 0x47  | ▪ <b>icvHilite</b>     | System color for items selected in a control.           |
| 0x48  | ▪ <b>icvCtlText</b>    | System color for text in windows.                       |
| 0x49  | ▪ <b>icvCtlScrl</b>    | System color for scroll bar gray area.                  |
| 0x4A  | ▪ <b>icvCtlInv</b>     | Bitwise inverse of the RGB value of <b>icvCtlScrl</b> . |
| 0x4B  | ▪ <b>icvCtlBody</b>    | System color for window background.                     |
| 0x4C  | ▪ <b>icvCtlFrame</b>   | System color for window frame.                          |
| 0x4D  | ▪ <b>icvCrtFore</b>    | System color for text in windows.                       |
| 0x4E  | ▪ <b>icvCrtBack</b>    | System color for window background.                     |
| 0x4F  | ▪ <b>icvCrtNeutral</b> | 0x000000FF  |
| 0x50  | ▪ <b>icvInfoBk</b>     | System background color for tooltip controls.           |
| 0x51  | ▪ <b>icvInfoText</b>   | System text color for tooltip controls.                 |

### 2.5.76 Ifmt

The **Ifmt** structure specifies the identifier of a number format.

The following packet diagram specifies this structure.

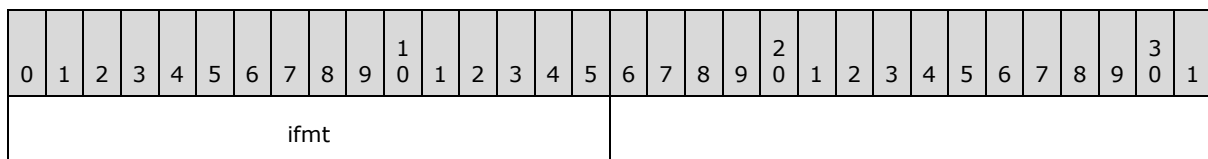

**ifmt (2 bytes):** An unsigned integer that specifies the identifier of a number format. The identifier specified through this field MUST be a valid built-in number format identifier or the identifier of a custom number format defined through a **BrtFmt** (section [2.4.651](#)) record in the **Styles** (section [2.1.7.50](#)) part ABNF. The built-in number formats are listed in [\[ISO/IEC29500-1:2011\]](#) section 18.8.30.



## 2.5.77 IHDB

The **IHDB** structure is a 4-byte signed integer that specifies a reference to a cache hierarchy. The value of this structure **MUST** be a value from the following table.

| Value                      | Meaning   |
|----------------------------|---|
| -2                         | Specifies that the measure (section <a href="#">2.2.5.2.7.1</a> ) cache hierarchy is used.  |
| -1                         | Specifies that no cache hierarchy is used.  |
| greater than or equal to 0 | Specifies a cache hierarchy index, as specified in section <a href="#">2.2.5.2.7</a> . The referenced <b>BrtBeginPCDHierarchy</b> (section <a href="#">2.4.140</a> ) record specifies the cache hierarchy that is used. This value <b>MUST</b> be less than the number of <b>BrtBeginPCDHierarchy</b> records in the <b>BrtBeginPCDHierarchies</b> collection (section <a href="#">2.4.139</a> ). |

## 2.5.78 IIFtab

The **IIFtab** enumeration specifies the valid mathematical aggregator functions that data consolidation uses.

The value of this enumeration **MUST** be a value from the following table.

| Name                 | Value | Meaning   |
|----------------------|-------|---|
| <b>IIFTABAVERAGE</b> | 0x00  | Consolidate by using the <b>AVERAGE</b> function. |
| <b>IIFTABCOUNT</b>   | 0x01  | Consolidate by using the <b>COUNT</b> function.   |
| <b>IIFTABCOUNTA</b>  | 0x02  | Consolidate by using the <b>COUNTA</b> function.  |
| <b>IIFTABMAX</b>     | 0x03  | Consolidate by using the <b>MAX</b> function.     |
| <b>IIFTABMIN</b>     | 0x04  | Consolidate by using the <b>MIN</b> function.     |
| <b>IIFTABPRODUCT</b> | 0x05  | Consolidate by using the <b>PRODUCT</b> function. |
| <b>IIFTABSTDEV</b>   | 0x06  | Consolidate by using the <b>STDEV</b> function.   |
| <b>IIFTABSTDEVP</b>  | 0x07  | Consolidate by using the <b>STDEVP</b> function.  |
| <b>IIFTABSUM</b>     | 0x08  | Consolidate by using the <b>SUM</b> function.     |
| <b>IIFTABVAR</b>     | 0x09  | Consolidate by using the <b>VAR</b> function.     |
| <b>IIFTABVARP</b>    | 0x0A  | Consolidate by using the <b>VARP</b> function.    |

## 2.5.79 IsoPasswordData

The **IsoPasswordData** structure specifies the variable-sized fields necessary to verify a password hash created through the Strong Password Verifier Algorithm (section [2.2.10](#)).

The following packet diagram specifies this structure.

|                      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| rgbHash (variable)   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| rgbSalt (variable)   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| szAlgName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rgbHash (variable):** An **LPByteBuf** (section [2.5.90](#)) that specifies a password hash, calculated as specified by the Strong Password Verifier Algorithm. If the size of this field is nonzero, the **szAlgName** field MUST contain at least one character.

**rgbSalt (variable):** An **LPByteBuf** that specifies the salt used to calculate **rgbHash**, as specified by the Strong Password Verifier Algorithm. If the size of this field is zero, no salt was used when **rgbHash** was calculated. If the size of this field is nonzero, **rgbHash** and **szAlgName** MUST also be non-empty.

**szAlgName (variable):** An **XLNullableWideString** (section [2.5.166](#)) that specifies the name of the hash algorithm used to calculate **rgbHash**, as specified by the Strong Password Verifier Algorithm. If the size of this field is nonzero, **rgbHash** MUST also be non-empty.

## 2.5.80 Istr

The **Istr** structure is a 4-byte signed integer that specifies a zero-based index of a **BrtStr** (section [2.4.754](#)) record in the collection of all records directly following **BrtBeginEsstr** (section [2.4.73](#)).

## 2.5.81 ISXDI

The **ISXDI** structure is a 4-byte signed integer that specifies a reference to a data item (section [2.2.5.3.7.5.1](#)). The value of this structure MUST be a value from the following table.

| Value                      | Meaning   |
|----------------------------|---|
| -1                         | Specifies that no data item is used.  |
| greater than or equal to 0 | Specifies that a data item index, as specified in section <a href="#">2.2.5.3.7.5.1</a> , is used. The referenced <b>BrtBeginSXDI</b> (section <a href="#">2.4.232</a> ) record specifies the data item that is used. |

## 2.5.82 ISXTH

The **ISXTH** structure is a 4-byte signed integer that specifies a reference to a pivot hierarchy (section [2.2.5.3.4](#)). The value of this structure MUST be a value from the following table.

| Value                      | Meaning  |
|----------------------------|--|
| -2                         | Specifies that the data field (section <a href="#">2.2.5.3.7.5.2</a> ) is used.  |
| -1                         | Specifies that no pivot hierarchy is used.   |
| greater than or equal to 0 | Specifies a pivot hierarchy index, as specified in section <a href="#">2.2.5.3.4</a> ). The referenced <b>BrBeginSXT</b> (section <a href="#">2.4.252</a> ) record specifies the pivot hierarchy that is used. |

### 2.5.83 ISXVD

The **ISXVD** structure is a 4-byte signed integer that specifies a reference to a pivot field (section [2.2.5.3.2](#)) or the data field (section [2.2.5.3.7.5.2](#)). The value of this structure MUST be a value from the following table.

| Value                      | Meaning   |
|----------------------------|---|
| -2                         | <b>ISXVD</b> specifies a reference to the data field in a PivotTable view (section <a href="#">2.2.5.3</a> ). |
| -1                         | <b>ISXVD</b> does not specify a reference to any pivot field or the data field.                               |
| greater than or equal to 0 | <b>ISXVD</b> specifies a pivot field index, as specified by Pivot Fields.                                     |

### 2.5.84 KPIProp

The **KPIProp** enumeration specifies the valid Key Performance Indicator (KPI) properties of MDX KPI metadata (section [2.2.4.8.4](#)).

The value of this enumeration MUST be a value from the following table.

| Name                            | Value      | Meaning                                    |
|---------------------------------|------------|--|
| <b>KPIPROPVALUE</b>             | 0x00000001 | The actual value.                          |
| <b>KPIPROPGOAL</b>              | 0x00000002 | A target value.                            |
| <b>KPIPROPSTATUS</b>            | 0x00000003 | The state of the KPI at a specific moment. |
| <b>KPIPROPTREND</b>             | 0x00000004 | A measure of the value over time.          |
| <b>KPIPROPWEIGHT</b>            | 0x00000005 | A relative importance assigned to the KPI. |
| <b>KPIPROPCURRENTTIMEMEMBER</b> | 0x00000006 | A temporal context for the KPI.            |

### 2.5.85 KPISets

The **KPISets** enumeration specifies an icon set. The value of this enumeration MUST be a value from the following table.

| Name          | Value      | Meaning     |
|---------------|------------|-------------|
| <b>KPINIL</b> | 0xFFFFFFFF | No icon set |

| Name                      | Value      | Meaning |
|---------------------------|------------|---------|
| <b>KPI3ARROWS</b>         | 0x00000000 |         |
| <b>KPI3ARROWSGRAY</b>     | 0x00000001 |         |
| <b>KPI3FLAGS</b>          | 0x00000002 |         |
| <b>KPI3TRAFFICLIGHTS1</b> | 0x00000003 |         |
| <b>KPI3TRAFFICLIGHTS2</b> | 0x00000004 |         |
| <b>KPI3SIGNS</b>          | 0x00000005 |         |
| <b>KPI3SYMBOLS</b>        | 0x00000006 |         |
| <b>KPI3SYMBOLS2</b>       | 0x00000007 |         |
| <b>KPI4ARROWS</b>         | 0x00000008 |         |
| <b>KPI4ARROWSGRAY</b>     | 0x00000009 |         |
| <b>KPI4REDTOBLACK</b>     | 0x0000000A |         |
| <b>KPI4RATING</b>         | 0x0000000B |         |
| <b>KPI4TRAFFICLIGHTS</b>  | 0x0000000C |         |
| <b>KPI5ARROWS</b>         | 0x0000000D |         |
| <b>KPI5ARROWSGRAY</b>     | 0x0000000E |         |
| <b>KPI5RATING</b>         | 0x0000000F |         |
| <b>KPI5QUARTERS</b>       | 0x00000010 |         |

## 2.5.86 KPISets14

The **KPISets14** enumeration specifies an icon set. The value of this enumeration MUST be a value from the following table.

| Name                     | Value      | Meaning     |
|--------------------------|------------|-------------|
| <b>KPINIL_14</b>         | 0xFFFFFFFF | No icon set |
| <b>KPI3ARROWS_14</b>     | 0x00000000 |             |
| <b>KPI3ARROWSGRAY_14</b> | 0x00000001 |             |

| Name                  | Value      | Meaning  |
|-----------------------|------------|--|
| KPI3FLAGS_14          | 0x00000002 |    |
| KPI3TRAFFICLIGHTS1_14 | 0x00000003 |    |
| KPI3TRAFFICLIGHTS2_14 | 0x00000004 |    |
| KPI3SIGNS_14          | 0x00000005 |    |
| KPI3SYMBOLS_14        | 0x00000006 |    |
| KPI3SYMBOLS2_14       | 0x00000007 |    |
| KPI4ARROWS_14         | 0x00000008 |    |
| KPI4ARROWSGRAY_14     | 0x00000009 |    |
| KPI4REDTOBLACK_14     | 0x0000000A |    |
| KPI4RATING_14         | 0x0000000B |    |
| KPI4TRAFFICLIGHTS_14  | 0x0000000C |   |
| KPI5ARROWS_14         | 0x0000000D |  |
| KPI5ARROWSGRAY_14     | 0x0000000E |  |
| KPI5RATING_14         | 0x0000000F |  |
| KPI5QUARTERS_14       | 0x00000010 |  |
| KPI3STARS_14          | 0x00000011 |  |
| KPI3TRIANGLES_14      | 0x00000012 |  |
| KPI5BOXES_14          | 0x00000013 |  |

## 2.5.87 ListTotalRowFunction

The **ListTotalRowFunction** enumeration specifies the index of a list total aggregate (ILTA) operation to perform on the data region of a column (2) in a table.

The values `ILTA_AVERAGE`, `ILTA_COUNT`, `ILTA_COUNTNUM`, `ILTA_MAX`, `ILTA_MIN`, `ILTA_STDDEV`, `ILTA_SUM`, and `ILTA_VAR` specify the function number and reference parameters of the subtotal formula (section [2.2.2](#)). The function number is a 2-byte unsigned integer that specifies the aggregation operation to perform. The reference is a **PtgList** (section [2.5.97.52](#)) or **PtgArea** (section [2.5.97.18](#)) structure that designates the data region of the column (2) in a table.

The Parsed Expression (section [2.5.97](#)) ABNF for the subtotal formula is as follows.

subtotal-formula = PtgInt function-number reference PtgFuncVar

reference = PtgList / PtgArea

The following non-reserved fields of **PtgList** MUST be equal to 0 with the following exceptions:

- The **ixti** field MUST specify the **Xti** (section [2.5.172](#)) structure that identifies the sheet that contains the table.
- The **columns** field MUST equal 0x01.
- The **listIndex** field MUST equal the associated **idList** field of the **BrtBeginList** (section [2.4.96](#)) record.
- The **colFirst** field MUST equal the zero-based index of the table column (2) within the **BrtBeginList** record.
- The **colLast** field MUST be equal to the **colFirst** field.

The following non-reserved fields of **PtgArea** MUST have the following values:

- The **rowFirst** field MUST equal the first sheet row (2) of the data region of the table column (2).
- The **rowLast** field MUST equal the last sheet row (2) of the data region of the table column (2).
- The **columnFirst** field MUST equal the sheet column (2) of the data region of the table column (2).
- The **columnLast** field MUST equal **columnFirst**.
- The **type**, **columnFirstRelative**, **rowFirstRelative**, **columnLastRelative**, and **rowLastRelative** fields MUST equal 0x01.

The following non-reserved fields of the **PtgFuncVar** (section [2.5.97.46](#)) structure MUST equal 0, with the following exceptions:

- The **type** field MUST equal 0x02.
- The **cparams** field MUST equal 0x02.
- The **tab** field MUST equal 0x0158.
- The **fCeFunc** field MUST equal 0x00.

The following table specifies the values of this enumeration and the value and meaning of the function number.

| Name                  | Value      | Meaning  |
|-----------------------|------------|--|
| <b>ILTA_NONE</b>      | 0x00000000 | Specifies that no operation is performed.  |
| <b>ILTA_AVERAGE</b>   | 0x00000001 | Specifies to calculate the arithmetic mean. The function number of the subtotal formula is 101.  |
| <b>ILTA_COUNT</b>     | 0x00000002 | Specifies to count the non-empty cells. The function number of the subtotal formula is 103.  |
| <b>ILTA_COUNTNUMS</b> | 0x00000003 | Specifies to count the cells that contain numbers. The function number of the subtotal formula is 102.   |
| <b>ILTA_MAX</b>       | 0x00000004 | Specifies to calculate the largest value. The function number of the subtotal formula is 104.  |
| <b>ILTA_MIN</b>       | 0x00000005 | Specifies to calculate the smallest value. The function number of the subtotal formula is 105.   |
| <b>ILTA_SUM</b>       | 0x00000006 | Specifies to calculate the arithmetic sum. The function number of the subtotal formula is 109.   |
| <b>ILTA_STDDEV</b>    | 0x00000007 | Specifies to calculate the estimated standard deviation. The function number of the subtotal formula is 107.   |
| <b>ILTA_VAR</b>       | 0x00000008 | Specifies to calculate the estimated variance. The function number of the subtotal formula is 110.   |
| <b>ILTA_CUSTOM</b>    | 0x00000009 | Specifies to use the formula specified by the <b>BrtListTrFmla</b> (section <a href="#">2.4.671</a> ) child record of the <b>BrtBeginListCol</b> (section <a href="#">2.4.97</a> ) record. |

### 2.5.88 ListType

The **ListType** enumeration specifies the type of a table.


The value of this enumeration MUST be a value from the following table.

| Name             | Value      | Meaning                     |
|------------------|------------|-----------------------------|
| <b>LTRANGE</b>   | 0x00000000 | Specifies a standard table. |
| <b>LTXML</b>     | 0x00000002 | Specifies an XML table.     |
| <b>LTEXTDATA</b> | 0x00000003 | Specifies a query table.    |

### 2.5.89 LongRGBA

The **LongRGBA** structure specifies a color as a combination of red, green, blue, and alpha values.

The following packet diagram specifies this structure.

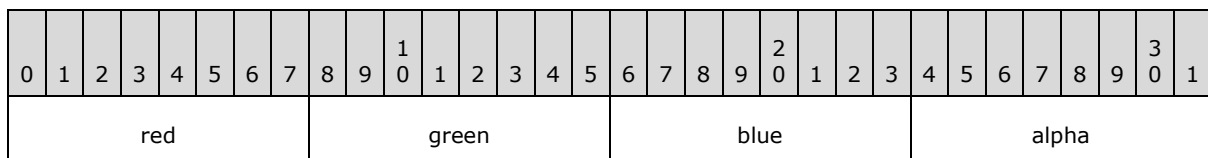

**red (1 byte):** An unsigned integer that specifies the relative intensity of red.

**green (1 byte):** An unsigned integer that specifies the relative intensity of green.


**blue (1 byte):** An unsigned integer that specifies the relative intensity of blue.

**alpha (1 byte):** An unsigned integer that specifies the alpha value.

### 2.5.90 LPByteBuf

The **LPByteBuf** type specifies an array of bytes that is prefixed by a length.

The following packet diagram specifies this type.

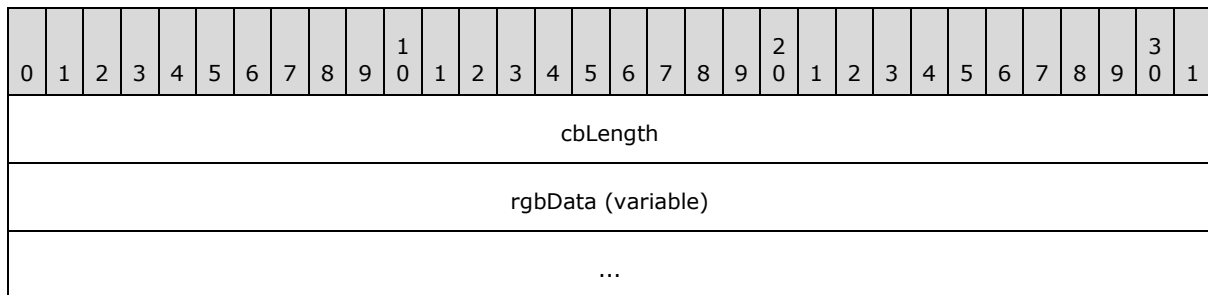


**cbLength (4 bytes):** An unsigned integer that specifies the number of bytes.

**rgbData (variable):** Binary data that specifies the contents of the array. There MUST be **cbLength** bytes of data.

### 2.5.91 LPWideString

The **LPWideString** type specifies a Unicode string that is prefixed by a length.

The following packet diagram specifies this type.

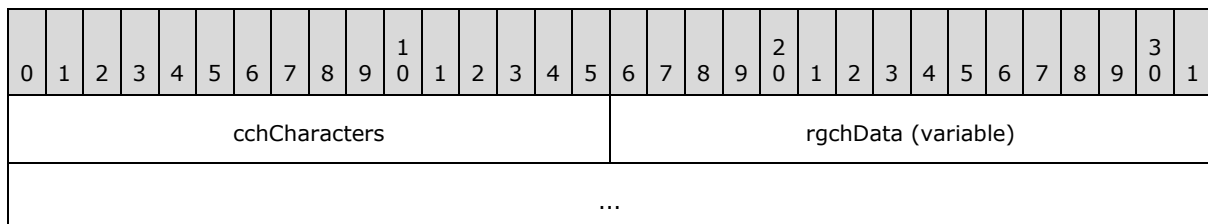

**cchCharacters (2 bytes):** An unsigned integer that specifies the number of characters.

**rgchData (variable):** An array of Unicode characters that specifies the characters of the string. The size of this array in bytes MUST equal the following formula (section [2.2.2](#)):


$$\text{cchCharacters} * 2$$

### 2.5.92 Margin

The **Margin** structure specifies a single page margin.

The following packet diagram specifies this structure.



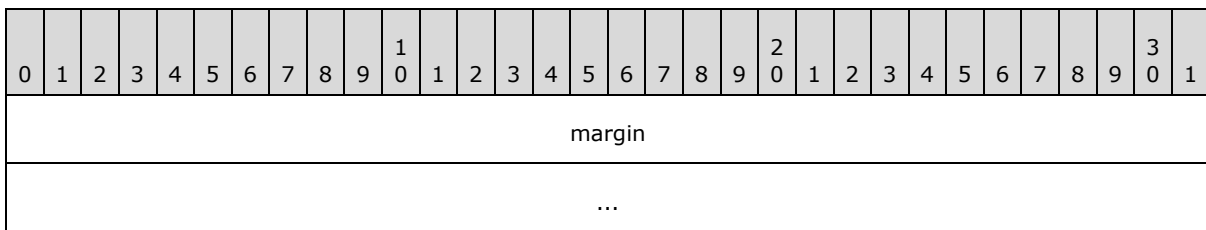


**margin (8 bytes):** An **Xnum** (section [2.5.171](#)) value that specifies a page margin size in inches. The value of this field MUST be greater than or equal to 0 and less than 49.

### 2.5.93 Mdir

The **Mdir** structure specifies a reference to a metadata type (section [2.2.4.1](#)) and a corresponding metadata record.

The following packet diagram specifies this structure.

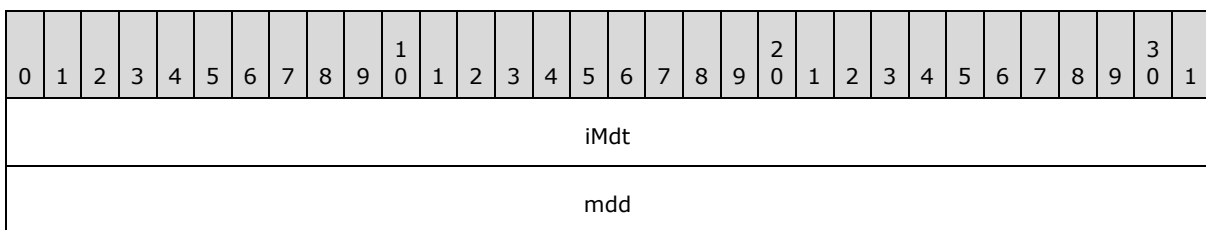

**iMdt (4 bytes):** A signed integer that specifies a one-based index to a **BrtMdtinfo** (section [2.4.674](#)) record in the collection of all records directly following a **BrtBeginEsmdtinfo** (section [2.4.71](#)) record.

**mdd (4 bytes):** If the value of the **stName** field of the **BrtMdtinfo** record indexed by **iMdt** is "XLMDX", then **mdd** specifies a zero-based index to a **BrtBeginMdx** (section [2.4.102](#)) record in the collection of **BrtBeginMdx** records directly following the **BrtBeginEsmdx** (section [2.4.72](#)) record. The referenced **BrtBeginMdx** record specifies the beginning of an MDX Metadata (section [2.2.4.8](#)) record. Otherwise, **mdd** specifies a zero-based index to a **BrtBeginFmd** (section [2.4.82](#)) record in the collection of **BrtBeginFmd** records directly following the **BrtBeginEsfmd** (section [2.4.69](#)) record whose **stName** field matches the **stName** field of the **BrtMdtinfo** record indexed by **iMdt**. The referenced **BrtBeginFmd** record specifies the beginning of a future metadata (section [2.2.4.9](#)) record.

### 2.5.94 MdtFlags

The **MdtFlags** structure specifies properties and behaviors of a cell metadata (section [2.2.4.2](#)) or value metadata (section [2.2.4.3](#)) type. In general, the behaviors specify that when operations are performed on a cell, the metadata remains associated with the cell or with the value stored in this cell. [<63>](#)

The following packet diagram specifies this structure.



- P - fSplitFirst (1 bit):** A bit that specifies whether, when a cell is split, the metadata is copied to the cell with the smallest row number and the smallest column (2) number. If **fSplitAll** is set to 1, this field **MUST** be ignored.
- Q - fSplitAll (1 bit):** A bit that specifies whether, when a cell is split, the metadata is copied to all the resulting cells.
- R - fRwColShift (1 bit):** A bit that specifies whether the metadata is preserved when the cell is shifted because of row or column (2) deletion or insertion.
- S - fClearAll (1 bit):** A bit that specifies whether the metadata is preserved when the contents, formatting, and comments of the cell are cleared.
- T - fClearFmts (1 bit):** A bit that specifies whether the metadata is preserved when the formatting of the cell is cleared.
- U - fClearContents (1 bit):** A bit that specifies whether the metadata is preserved when the contents of the cell are cleared. The value of this field **MUST** be equal to **fDelete**.
- V - fClearComments (1 bit):** A bit that specifies whether the metadata is preserved when the comments of the cell are cleared.
- W - fAssign (1 bit):** A bit that specifies whether the metadata is preserved when the cell value is propagated through an assignment operation or by a function that returns one of the referenced values. [<64>](#)
- X - reserved1 (4 bits):** This value **MUST** be 0 and **MUST** be ignored.
- Y - reserved2 (1 bit):** This value **MUST** be 0 and **MUST** be ignored. [<65>](#)
- Z - fCanCoerce (1 bit):** A bit that specifies whether the metadata is preserved when the cell value is cast to a different type. If the value of this bit is 0, the metadata is not preserved, and the destination cell value is set to the **BErr** (section [2.5.97.2](#)) #VALUE! (0x0F) error.
- a - fAdjust (1 bit):** A bit that specifies whether the metadata is updated when the cell location is changed.
- b - fCellMeta (1 bit):** A bit that specifies whether this metadata type (section [2.2.4.1](#)) is cell metadata or value metadata (section [2.2.4.3](#)).

The following table specifies values for this bit.

| Value | Meaning                     |
|-------|-----------------------------|
| 0     | Metadata is value metadata. |
| 1     | Metadata is cell metadata.  |

- c - reserved3 (1 bit):** **MUST** be 1 and **MUST** be ignored.

## 2.5.95 MdxMbrIstrFlags

The **MdxMbrIstrFlags** structure specifies properties of a **BrtMdxMbrIstr** (section [2.4.675](#)) record.

The following packet diagram specifies this structure.

|   |        |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|--------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | unused |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fCubeSet (1 bit):** A bit that specifies whether the **istr** field of the associated **BrtMdxMbrIstr** record represents a set of OLAP members (3).

**unused (7 bits):** Undefined and MUST be ignored.

## 2.5.96 OLEItemProperties

The **OLEItemProperties** structure specifies properties of an OLE Data Item (section [2.2.7.4.3.1](#)).

The following packet diagram specifies this structure.

|     |   |   |   |   |   |         |   |   |   |    |    |    |    |    |    |           |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---------|---|---|---|----|----|----|----|----|----|-----------|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6       | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16        | 17      | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | B | C | D | E | F | unused1 |   |   |   |    |    |    |    |    |    | reserved4 |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |         |   |   |   |    |    |    |    |    |    | G         | unused2 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - reserved1 (1 bit):** This value MUST be 0 and MUST be ignored.

**B - fWantAdvise (1 bit):** A bit that specifies whether the application requests that the data source (1) provides a notification when the data changes.

**C - fWantPict (1 bit):** A bit that specifies whether this OLE data item uses a picture-based data format.

**D - reserved2 (1 bit):** This value MUST be 0 and MUST be ignored.

**E - reserved3 (1 bit):** MUST be 1 and MUST be ignored.

**F - fIcon (1 bit):** A bit that specifies that this OLE data item is displayed as an icon.

**unused1 (10 bits):** Undefined and MUST be ignored.

**reserved4 (4 bytes):** This value MUST be 0 and MUST be ignored.

**G - reserved5 (1 bit):** This value MUST be 1 and MUST be ignored.

**unused2 (7 bits):** Undefined and MUST be ignored.

## 2.5.97 Parsed Expressions

### 2.5.97.1 ArrayParsedFormula

This structure specifies an array formula (section [2.2.2](#)).

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgRefN** (section [2.5.97.72](#)), **PtgAreaN** (section [2.5.97.22](#)), or **PtgSxName** (section [2.5.97.76](#)).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

## 2.5.97.2 BErr

**BErr** is a 1-byte unsigned integer that specifies an error. It MUST be a value from the following table.

| Value | Meaning                                      |
|-------|--|
| 0x00  | #NULL!. Null range reference.                |
| 0x07  | #DIV/0!. Divide by zero.                     |
| 0x0F  | #VALUE!. Value (i.e., "hello" + 1).          |
| 0x17  | #REF!. Reference (i.e., R[-1] when row = 1). |
| 0x1D  | #NAME?. Unrecognized name in formula.        |
| 0x24  | #NUM!. Problem with a number.                |
| 0x2A  | #N/A. No value available.                    |
| 0x2B  | #GETTING_DATA. We're waiting for data.       |

## 2.5.97.3 Boolean

A **Boolean** (section [2.5.97.3](#)) is an unsigned integer, of size greater than 1 bit, that specifies a **Boolean** value. It MUST be a value from the following table. All other bits in the field MUST be 0.

| Value | Meaning             |
|-------|---------------------|
| 0x0   | Boolean value FALSE |
| 0x1   | Boolean value TRUE  |

#### 2.5.97.4 CellParsedFormula

**CellParsedFormula** is a structure that specifies a formula (section [2.2.2](#)) stored in a cell.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. This value MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. MUST NOT contain **PtgRefN** (section [2.5.97.72](#)), **PtgAreaN** (section [2.5.97.22](#)), or **PtgSxName** (section [2.5.97.76](#)).

The root node of the parse tree of this field MUST be a VALUE\_TYPE, as described in section [2.5.97.88](#).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

#### 2.5.97.5 Cetab

The **Cetab** structure specifies a function that can be called from a formula (section [2.2.2](#)). The definition of each function specifies the function name and the valid sequence of arguments.

| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cetab |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cetab (2 bytes):** An unsigned integer that specifies the function to be called. It MUST be a value from the following table.

The elements **ref** and **val** are specified in **Rgce** (section [2.5.97.88](#)).

| Value  | Meaning                            |
|--------|------------------------------------|
| 0x0000 | BEEP                               |
|        | beep-params = [val]                |
| 0x0001 | OPEN                               |
|        | open-params = *17(val)             |
| 0x0002 | OPEN.LINKS                         |
|        | open-links-params = *15(val)       |
| 0x0003 | CLOSE.ALL                          |
|        | This function takes no parameters. |
| 0x0004 | SAVE                               |
|        | This function takes no parameters. |
| 0x0005 | SAVE.AS                            |
|        | save-as-params = *7(val)           |
| 0x0006 | FILE.DELETE                        |
|        | file-delete-params = [val]         |
| 0x0007 | PAGE.SETUP                         |
|        | page-setup-params = *30(val)       |
| 0x0008 | PRINT                              |
|        | print-params = *17(val)            |
| 0x0009 | PRINTER.SETUP                      |
|        | printer-setup-params = [val]       |
| 0x000A | QUIT                               |
|        | This function takes no parameters. |
| 0x000B | NEW.WINDOW                         |
|        | This function takes no parameters. |
| 0x000C | ARRANGE.ALL                        |
|        | arrange-All-params = *4(val)       |
| 0x000D | WINDOW.SIZE                        |

| Value  | Meaning                                 |
|--------|---|
|        | window-size-params = *3(val)            |
| 0x000E | WINDOW.MOVE                             |
|        | window-move-params = *3(val)            |
| 0x000F | FULL                                    |
|        | full-params = [val]                     |
| 0x0010 | CLOSE                                   |
|        | close-params = *2(val)                  |
| 0x0011 | RUN                                     |
|        | run-params = [(ref / val), [val]]       |
| 0x0016 | SET.PRINT.AREA                          |
|        | set-print-area-params = [ref / val]     |
| 0x0017 | SET.PRINT.TITLES                        |
|        | set-print-titles-params = *2(ref / val) |
| 0x0018 | SET.PAGE.BREAK                          |
|        | This function takes no parameters.      |
| 0x0019 | REMOVE.PAGE.BREAK                       |
|        | remove-page-break-params = *2(val)      |
| 0x001A | FONT                                    |
|        | font-params = *2(val)                   |
| 0x001B | DISPLAY                                 |
|        | display-params = *9(val)                |
| 0x001C | PROTECT.DOCUMENT                        |
|        | protect-document-params = *7(val)       |
| 0x001D | PRECISION                               |
|        | precision-params = [val]                |
| 0x001E | A1.R1C1                                 |
|        | a1-r1c1-params = [val]                  |
| 0x001F | CALCULATE.NOW                           |
|        | This function takes no parameters.      |
| 0x0020 | CALCULATION                             |



| Value  | Meaning   |
|--------|---|
|        | calculation-params = *11(val)   |
| 0x0022 | DATA.FIND   |
|        | data-find-params = [val]  |
| 0x0023 | EXTRACT   |
|        | extract-params = [val]  |
| 0x0024 | DATA.DELETE   |
|        | This function takes no parameters.  |
| 0x0025 | SET.DATABASE  |
|        | This function takes no parameters.  |
| 0x0026 | SET.CRITERIA  |
|        | This function takes no parameters.  |
| 0x0027 | SORT  |
|        | sort-params = [val, [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), *10(val)]]]]]]]]]]] |
| 0x0028 | DATA.SERIES   |
|        | data-series-params = *6(val)  |
| 0x0029 | TABLE   |
|        | table-params = *2(ref / val)  |
| 0x002A | FORMAT.NUMBER   |
|        | format-number-params = [val]  |
| 0x002B | ALIGNMENT   |
|        | alignment-params = *10(val)   |
| 0x002C | STYLE   |
|        | style-params = *2(val)  |
| 0x002D | BORDER  |
|        | border-params = *27(val)  |
| 0x002E | CELL.PROTECTION   |
|        | cell-protection-params = *2(val)  |
| 0x002F | COLUMN.WIDTH  |
|        | column-width-params = [val, *4(ref / val)]  |

| <b>Value</b> | <b>Meaning</b>   |
|--------------|--|
| 0x0030       | UNDO   |
|              | This function takes no parameters.   |
| 0x0031       | CUT  |
|              | cut-params = *2(ref / val)   |
| 0x0032       | COPY   |
|              | copy-params = *2(ref / val)  |
| 0x0033       | PASTE  |
|              | paste-params = [ref / val]   |
| 0x0034       | CLEAR  |
|              | clear-params = [val]   |
| 0x0035       | PASTE.SPECIAL  |
|              | paste-special-params = *7(val)   |
| 0x0036       | EDIT.DELETE  |
|              | edit-delete-params = [val]   |
| 0x0037       | INSERT   |
|              | insert-params = *2(val)  |
| 0x0038       | FILL.RIGHT   |
|              | This function takes no parameters.   |
| 0x0039       | FILL.DOWN  |
|              | This function takes no parameters.   |
| 0x003D       | DEFINE.NAME  |
|              | define-name-params = [val, [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [val]]]]]]]]] |
| 0x003E       | CREATE.NAMES   |
|              | create-names-params = *4(val)  |
| 0x003F       | FORMULA.GOTO   |
|              | formula-goto-params = [(ref / val), [val]]   |
| 0x0040       | FORMULA.FIND   |
|              | formula-find-params = *12(val)   |
| 0x0041       | SELECT.LAST.CELL   |

| Value  | Meaning                            |
|--------|------------------------------------|
|        | This function takes no parameters. |
| 0x0042 | SHOW.ACTIVE.CELL                   |
|        | This function takes no parameters. |
| 0x0043 | GALLERY.AREA                       |
|        | gallery-area-params = *2(val)      |
| 0x0044 | GALLERY.BAR                        |
|        | gallery-bar-params = *2(val)       |
| 0x0045 | GALLERY.COLUMN                     |
|        | gallery-column-params = *2(val)    |
| 0x0046 | GALLERY.LINE                       |
|        | gallery-line-params = *2(val)      |
| 0x0047 | GALLERY.PIE                        |
|        | gallery-pie-params = *2(val)       |
| 0x0048 | GALLERY.SCATTER                    |
|        | gallery-scatter-params = *2(val)   |
| 0x0049 | COMBINATION                        |
|        | combination-params = [val]         |
| 0x004A | PREFERRED                          |
|        | This function takes no parameters. |
| 0x004B | ADD.OVERLAY                        |
|        | This function takes no parameters. |
| 0x004C | GRIDLINES                          |
|        | gridlines-params = *7(val)         |
| 0x004D | SET.PREFERRED                      |
|        | set-preferred-params = [val]       |
| 0x004E | AXES                               |
|        | axes-params = *6(val)              |
| 0x004F | LEGEND                             |
|        | legend-params = [val]              |
| 0x0050 | ATTACH.TEXT                        |

| Value  | Meaning                            |
|--------|------------------------------------|
|        | attach-text-params = *3(val)       |
| 0x0051 | ADD.ARROW                          |
|        | This function takes no parameters. |
| 0x0052 | SELECT.CHART                       |
|        | This function takes no parameters. |
| 0x0053 | SELECT.PLOT.AREA                   |
|        | This function takes no parameters. |
| 0x0054 | PATTERNS                           |
|        | patterns-params = *13(val)         |
| 0x0055 | MAIN.CHART                         |
|        | main-chart-params = *10(val)       |
| 0x0056 | OVERLAY                            |
|        | overlay-params = *12(val)          |
| 0x0057 | SCALE                              |
|        | scale-params = *10(val)            |
| 0x0058 | FORMAT.LEGEND                      |
|        | format-legend-params = [val]       |
| 0x0059 | FORMAT.TEXT                        |
|        | format-text-params = *11(val)      |
| 0x005A | EDIT.REPEAT                        |
|        | This function takes no parameters. |
| 0x005B | PARSE                              |
|        | parse-params = [val, [ref / val]]  |
| 0x005C | JUSTIFY                            |
|        | This function takes no parameters. |
| 0x005D | HIDE                               |
|        | This function takes no parameters. |
| 0x005E | UNHIDE                             |
|        | unhide-params = [val]              |
| 0x005F | WORKSPACE                          |

| Value  | Meaning                                   |
|--------|---|
|        | workspace-params = *16(val)               |
| 0x0060 | FORMULA                                   |
|        | formula-params = [val, [ref / val]]       |
| 0x0061 | FORMULA.FILL                              |
|        | formula-fill-params = [val, [ref / val]]  |
| 0x0062 | FORMULA.ARRAY                             |
|        | formula-array-params = [val, [ref / val]] |
| 0x0063 | DATA.FIND.NEXT                            |
|        | This function takes no parameters.        |
| 0x0064 | DATA.FIND.PREV                            |
|        | This function takes no parameters.        |
| 0x0065 | FORMULA.FIND.NEXT                         |
|        | This function takes no parameters.        |
| 0x0066 | FORMULA.FIND.PREV                         |
|        | This function takes no parameters.        |
| 0x0067 | ACTIVATE                                  |
|        | activate-params = *2(val)                 |
| 0x0068 | ACTIVATE.NEXT                             |
|        | activate-next-params = [val]              |
| 0x0069 | ACTIVATE.PREV                             |
|        | activate-prev-params = [val]              |
| 0x006A | UNLOCKED.NEXT                             |
|        | This function takes no parameters.        |
| 0x006B | UNLOCKED.PREV                             |
|        | This function takes no parameters.        |
| 0x006C | COPY.PICTURE                              |
|        | copy-picture-params = *3(val)             |
| 0x006D | SELECT                                    |
|        | select-params = *2(ref / val)             |
| 0x006E | DELETE.NAME                               |

| Value  | Meaning                            |
|--------|------------------------------------|
|        | delete-name-params = [val]         |
| 0x006F | DELETE.FORMAT                      |
|        | delete-format-params = [val]       |
| 0x0070 | VLINE                              |
|        | vline-params = [val]               |
| 0x0071 | HLINE                              |
|        | hline-params = [val]               |
| 0x0072 | VPAGE                              |
|        | vpage-params = [val]               |
| 0x0073 | HPAGE                              |
|        | hpage-params = [val]               |
| 0x0074 | VSCROLL                            |
|        | vscroll-params = *2(val)           |
| 0x0075 | HSCROLL                            |
|        | hscroll-params = *2(val)           |
| 0x0076 | ALERT                              |
|        | alert-params = *3(val)             |
| 0x0077 | NEW                                |
|        | new-params = *3(val)               |
| 0x0078 | CANCEL.COPY                        |
|        | cancel-copy-params = [val]         |
| 0x0079 | SHOW.CLIPBOARD                     |
|        | This function takes no parameters. |
| 0x007A | MESSAGE                            |
|        | message-params = *2(val)           |
| 0x007C | PASTE.LINK                         |
|        | This function takes no parameters. |
| 0x007D | APP.ACTIVATE                       |
|        | app-activate-params = *2(val)      |
| 0x007E | DELETE.ARROW                       |

| Value  | Meaning                                   |
|--------|---|
|        | This function takes no parameters.        |
| 0x007F | ROW.HEIGHT                                |
|        | row-height-params = [val, *3(ref / val)]  |
| 0x0080 | FORMAT.MOVE                               |
|        | format-move-params = [val, *2(ref / val)] |
| 0x0081 | FORMAT.SIZE                               |
|        | format-size-params = [val, *2(ref / val)] |
| 0x0082 | FORMULA.REPLACE                           |
|        | formula-replace-params = *11(val)         |
| 0x0083 | SEND.KEYS                                 |
|        | send-keys-params = *2(val)                |
| 0x0084 | SELECT.SPECIAL                            |
|        | select-special-params = *3(val)           |
| 0x0085 | APPLY.NAMES                               |
|        | apply-names-params = *7(val)              |
| 0x0086 | REPLACE.FONT                              |
|        | replace-font-params = *10(val)            |
| 0x0087 | FREEZE.PANES                              |
|        | freeze-panes-params = *3(val)             |
| 0x0088 | SHOW.INFO                                 |
|        | show-info-params = [val]                  |
| 0x0089 | SPLIT                                     |
|        | split-params = *2(val)                    |
| 0x008A | ON.WINDOW                                 |
|        | on-window-params = *2(val)                |
| 0x008B | ON.DATA                                   |
|        | on-data-params = *2(val)                  |
| 0x008C | DISABLE.INPUT                             |
|        | disable-input-params = [val]              |
| 0x008E | OUTLINE                                   |

| Value  | Meaning                            |
|--------|------------------------------------|
|        | outline-params = *4(val)           |
| 0x008F | LIST.NAMES                         |
|        | This function takes no parameters. |
| 0x0090 | FILE.CLOSE                         |
|        | file-close-params = *2(val)        |
| 0x0091 | SAVE.WORKBOOK                      |
|        | save-workbook-params = *6(val)     |
| 0x0092 | DATA.FORM                          |
|        | This function takes no parameters. |
| 0x0093 | COPY.CHART                         |
|        | copy-chart-params = [val]          |
| 0x0094 | ON.TIME                            |
|        | on-time-params = *4(val)           |
| 0x0095 | WAIT                               |
|        | wait-params = [val]                |
| 0x0096 | FORMAT.FONT                        |
|        | format-font-params = *15(val)      |
| 0x0097 | FILL.UP                            |
|        | This function takes no parameters. |
| 0x0098 | FILL.LEFT                          |
|        | This function takes no parameters. |
| 0x0099 | DELETE.OVERLAY                     |
|        | This function takes no parameters. |
| 0x009B | SHORT.MENUS                        |
|        | short-menus-params = [val]         |
| 0x009F | SET.UPDATE.STATUS                  |
|        | set-update-status-params = *3(val) |
| 0x00A1 | COLOR.PALETTE                      |
|        | color-palette-params = [val]       |
| 0x00A2 | DELETE.STYLE                       |



| <b>Value</b> | <b>Meaning</b>                     |
|--------------|------------------------------------|
|              | delete-style-params = [val]        |
| 0x00A3       | WINDOW.RESTORE                     |
|              | window-restore-params = [val]      |
| 0x00A4       | WINDOW.MAXIMIZE                    |
|              | window-maximize-params = [val]     |
| 0x00A6       | CHANGE.LINK                        |
|              | change-link-params = *3(val)       |
| 0x00A7       | CALCULATE.DOCUMENT                 |
|              | This function takes no parameters. |
| 0x00A8       | ON.KEY                             |
|              | on-key-params = *2(val)            |
| 0x00A9       | APP.RESTORE                        |
|              | This function takes no parameters. |
| 0x00AA       | APP.MOVE                           |
|              | app-move-params = *2(val)          |
| 0x00AB       | APP.SIZE                           |
|              | app-size-params = *2(val)          |
| 0x00AC       | APP.MINIMIZE                       |
|              | This function takes no parameters. |
| 0x00AD       | APP.MAXIMIZE                       |
|              | This function takes no parameters. |
| 0x00AE       | BRING.TO.FRONT                     |
|              | This function takes no parameters. |
| 0x00AF       | SEND.TO.BACK                       |
|              | This function takes no parameters. |
| 0x00B9       | MAIN.CHART.TYPE                    |
|              | main-chart-type-params = [val]     |
| 0x00BA       | OVERLAY.CHART.TYPE                 |
|              | overlay-chart-type-params = [val]  |
| 0x00BB       | SELECT.END                         |

| Value  | Meaning   |
|--------|---|
|        | select-end-params = [val]   |
| 0x00BC | OPEN.MAIL   |
|        | open-mail-params = *2(val)  |
| 0x00BD | SEND.MAIL   |
|        | send-mail-params = [(ref / val), *2(val)]   |
| 0x00BE | STANDARD.FONT   |
|        | standard-font-params = *9(val)  |
| 0x00BF | CONSOLIDATE   |
|        | consolidate-params = *5(val)  |
| 0x00C0 | SORT.SPECIAL  |
|        | sort-special-params = [val, [val, [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), [(ref / val), *6(val)]]]]]]]]]]]] |
| 0x00C1 | GALLERY.3D.AREA   |
|        | gallery-3d-area-params = [val]  |
| 0x00C2 | GALLERY.3D.COLUMN   |
|        | gallery-3d-column-params = [val]  |
| 0x00C3 | GALLERY.3D.LINE   |
|        | gallery-3d-line-params = [val]  |
| 0x00C4 | GALLERY.3D.PIE  |
|        | gallery-3d-pie-params = [val]   |
| 0x00C5 | VIEW.3D   |
|        | view-3d-params = *6(val)  |
| 0x00C6 | GOAL.SEEK   |
|        | goal-seek-params = *3(ref / val)  |
| 0x00C7 | WORKGROUP   |
|        | workgroup-params = [val]  |
| 0x00C8 | FILL.GROUP  |
|        | fill-group-params = [val]   |
| 0x00C9 | UPDATE.LINK   |
|        | update-link-params = *2(val)  |

| <b>Value</b> | <b>Meaning</b>                        |
|--------------|---------------------------------------|
| 0x00CA       | PROMOTE                               |
|              | promote-params = [val]                |
| 0x00CB       | DEMOTE                                |
|              | demote-params = [val]                 |
| 0x00CC       | SHOW.DETAIL                           |
|              | show-detail-params = *4(val)          |
| 0x00CE       | UNGROUP                               |
|              | This function takes no parameters.    |
| 0x00CF       | OBJECT.PROPERTIES                     |
|              | object-properties-params = *2(val)    |
| 0x00D0       | SAVE.NEW.OBJECT                       |
|              | save-new-object-params = [val]        |
| 0x00D1       | SHARE                                 |
|              | This function takes no parameters.    |
| 0x00D2       | SHARE.NAME                            |
|              | share-name-params = [val]             |
| 0x00D3       | DUPLICATE                             |
|              | This function takes no parameters.    |
| 0x00D4       | APPLY.STYLE                           |
|              | apply-style-params = [val]            |
| 0x00D5       | ASSIGN.TO.OBJECT                      |
|              | assign-to-object-params = [ref / val] |
| 0x00D6       | OBJECT.PROTECTION                     |
|              | object-protection-params = *2(val)    |
| 0x00D7       | HIDE.OBJECT                           |
|              | hide-object-params = *2(val)          |
| 0x00D8       | SET.EXTRACT                           |
|              | This function takes no parameters.    |
| 0x00D9       | CREATE.PUBLISHER                      |
|              | create-publisher-params = *4(val)     |

| <b>Value</b> | <b>Meaning</b>                            |
|--------------|---|
| 0x00DA       | SUBSCRIBE.TO                              |
|              | subscribe-to-params = *2(val)             |
| 0x00DB       | ATTRIBUTES                                |
|              | attributes-params = *2(val)               |
| 0x00DC       | SHOW.TOOLBAR                              |
|              | show-toolbar-params = *10(val)            |
| 0x00DE       | PRINT.PREVIEW                             |
|              | print-preview-params = [val]              |
| 0x00DF       | EDIT.COLOR                                |
|              | edit-color-params = *4(val)               |
| 0x00E0       | SHOW.LEVELS                               |
|              | show-levels-params = *2(val)              |
| 0x00E1       | FORMAT.MAIN                               |
|              | format-main-params = *14(val)             |
| 0x00E2       | FORMAT.OVERLAY                            |
|              | format-overlay-params = *14(val)          |
| 0x00E3       | ON.RECALC                                 |
|              | on-recalc-params = *2(val)                |
| 0x00E4       | EDIT.SERIES                               |
|              | edit-series-params = [val, *6(ref / val)] |
| 0x00E5       | DEFINE.STYLE                              |
|              | define-style-params = *14(val)            |
| 0x00F0       | LINE.PRINT                                |
|              | line-print-params = *11(val)              |
| 0x00F3       | ENTER.DATA                                |
|              | enter-data-params = [ref / val]           |
| 0x00F9       | GALLERY.RADAR                             |
|              | gallery-radar-params = *2(val)            |
| 0x00FA       | MERGE.STYLES                              |
|              | merge-styles-params = [val]               |

| Value  | Meaning  |
|--------|--|
| 0x00FB | EDITION.OPTIONS  |
|        | edition-options-params = [val, *6(ref / val)]  |
| 0x00FC | PASTE.PICTURE  |
|        | This function takes no parameters.   |
| 0x00FD | PASTE.PICTURE.LINK   |
|        | This function takes no parameters.   |
| 0x00FE | SPELLING   |
|        | spelling-params = *6(val)  |
| 0x0100 | ZOOM   |
|        | zoom-params = [val]  |
| 0x0103 | INSERT.OBJECT  |
|        | insert-object-params = [val, [val, [val, [val, [val, [val, [val, [(ref / val), [val, [val, [(ref / val), *2(val)]]]]]]]]]]]]]] |
| 0x0104 | WINDOW.MINIMIZE  |
|        | window-minimize-params = [val]   |
| 0x0109 | SOUND.NOTE   |
|        | sound-note-params = [(ref / val), *2(val)]   |
| 0x010A | SOUND.PLAY   |
|        | sound-play-params = [(ref / val), *2(val)]   |
| 0x010B | FORMAT.SHAPE   |
|        | format-shape-params = [val, [val, [(ref / val), *2(val)]]]   |
| 0x010C | EXTEND.POLYGON   |
|        | extend-polygon-params = [val]  |
| 0x010D | FORMAT.AUTO  |
|        | format-auto-params = *7(val)   |
| 0x0110 | GALLERY.3D.BAR   |
|        | gallery-3d-bar-params = [val]  |
| 0x0111 | GALLERY.3D.SURFACE   |
|        | gallery-3d-surface-params = [val]  |
| 0x0112 | FILL.AUTO  |

| Value  | Meaning  |
|--------|--|
|        | fill-auto-params = [(ref / val), [val]]              |
| 0x0114 | CUSTOMIZE.TOOLBAR                                    |
|        | customize-toolbar-params = [val]                     |
| 0x0115 | ADD.TOOL   |
|        | add-tool-params = *3(val)                            |
| 0x0116 | EDIT.OBJECT  |
|        | edit-object-params = [val]                           |
| 0x0117 | ON.DOUBLECLICK                                       |
|        | on-doubleclick-params = *2(val)                      |
| 0x0118 | ON.ENTRY   |
|        | on-entry-params = *2(val)                            |
| 0x0119 | WORKBOOK.ADD   |
|        | workbook-add-params = *3(val)                        |
| 0x011A | WORKBOOK.MOVE  |
|        | workbook-move-params = *3(val)                       |
| 0x011B | WORKBOOK.COPY  |
|        | workbook-copy-params = *3(val)                       |
| 0x011C | WORKBOOK.OPTIONS                                     |
|        | workbook-options-params = *3(val)                    |
| 0x011D | SAVE.WORKSPACE                                       |
|        | save-workspace-params = [val]                        |
| 0x0120 | CHART.WIZARD   |
|        | chart-wizard-params = [val, [(ref / val), *12(val)]] |
| 0x0121 | DELETE.TOOL  |
|        | delete-tool-params = *2(val)                         |
| 0x0122 | MOVE.TOOL  |
|        | move-tool-params = *6(val)                           |
| 0x0123 | WORKBOOK.SELECT                                      |
|        | workbook-select-params = *3(val)                     |
| 0x0124 | WORKBOOK.ACTIVATE                                    |

| Value  | Meaning   |
|--------|---|
|        | workbook-activate-params = *2(val)  |
| 0x0125 | ASSIGN.TO.TOOL  |
|        | assign-to-tool-params = [val, [val, [ref / val]]]                         |
| 0x0127 | COPY.TOOL   |
|        | copy-tool-params = *2(val)  |
| 0x0128 | RESET.TOOL  |
|        | reset-tool-params = *2(val)   |
| 0x0129 | CONSTRAIN.NUMERIC   |
|        | constrain-numeric-params = [val]  |
| 0x012A | PASTE.TOOL  |
|        | paste-tool-params = *2(val)   |
| 0x012E | WORKBOOK.NEW  |
|        | workbook-new-params = *3(val)   |
| 0x0131 | SCENARIO.CELLS  |
|        | scenario-cells-params = [ref / val]                                       |
| 0x0132 | SCENARIO.DELETE   |
|        | scenario-delete-params = [val]  |
| 0x0133 | SCENARIO.ADD  |
|        | scenario-add-params = [val, [val, [(ref / val), *3(val)]]]                |
| 0x0134 | SCENARIO.EDIT   |
|        | scenario-edit-params = [val, [val, [val, [(ref / val), *3(val)]]]]        |
| 0x0135 | SCENARIO.SHOW   |
|        | scenario-show-params = [val]  |
| 0x0136 | SCENARIO.SHOW.NEXT  |
|        | This function takes no parameters.  |
| 0x0137 | SCENARIO.SUMMARY  |
|        | scenario-summary-params = [(ref / val), [val]]                            |
| 0x0138 | PIVOT.TABLE.WIZARD  |
|        | pivot-table-wizard-params = [val, [(ref / val), [(ref / val), *13(val)]]] |
| 0x0139 | PIVOT.FIELD.PROPERTIES  |

| Value  | Meaning                                      |
|--------|--|
|        | pivot-field-properties-params = *7(val)      |
| 0x013A | PIVOT.FIELD                                  |
|        | pivot-field-params = *4(val)                 |
| 0x013B | PIVOT.ITEM                                   |
|        | pivot-item-params = *4(val)                  |
| 0x013C | PIVOT.ADD.FIELDS                             |
|        | pivot-add-fields-params = *5(val)            |
| 0x013E | OPTIONS.CALCULATION                          |
|        | options-calculation-params = *10(val)        |
| 0x013F | OPTIONS.EDIT                                 |
|        | options-edit-params = *11(val)               |
| 0x0140 | OPTIONS.VIEW                                 |
|        | options-view-params = *18(val)               |
| 0x0141 | ADDIN.MANAGER                                |
|        | addin-manager-params = *3(val)               |
| 0x0142 | MENU.EDITOR                                  |
|        | This function takes no parameters.           |
| 0x0143 | ATTACH.TOOLBARS                              |
|        | This function takes no parameters.           |
| 0x0144 | VBAActivate                                  |
|        | vbaactivate-params = *2(val)                 |
| 0x0145 | OPTIONS.CHART                                |
|        | options-chart-params = *3(val)               |
| 0x0148 | VBA.INSERT.FILE                              |
|        | vba-insert-file-params = [val]               |
| 0x014A | VBA.PROCEDURE.DEFINITION                     |
|        | This function takes no parameters.           |
| 0x0150 | ROUTING.SLIP                                 |
|        | routing-slip-params = [(ref / val), *5(val)] |
| 0x0152 | ROUTE.DOCUMENT                               |



| Value  | Meaning  |
|--------|--|
|        | This function takes no parameters.   |
| 0x0153 | MAIL.LOGON   |
|        | mail-logon-params = [(ref / val), [(ref / val), [val]]]                            |
| 0x0156 | INSERT.PICTURE   |
|        | insert-picture-params = *2(val)  |
| 0x0157 | EDIT.TOOL  |
|        | edit-tool-params = *2(val)   |
| 0x0158 | GALLERY.DOUGHNUT   |
|        | gallery-doughnut-params = *2(val)  |
| 0x015E | CHART.TREND  |
|        | chart-trend-params = *8(val)   |
| 0x0160 | PIVOT.ITEM.PROPERTIES  |
|        | pivot-item-properties-params = *7(val)   |
| 0x0162 | WORKBOOK.INSERT  |
|        | workbook-insert-params = [val]   |
| 0x0163 | OPTIONS.TRANSITION   |
|        | options-transition-params = *5(val)  |
| 0x0164 | OPTIONS.GENERAL  |
|        | options-general-params = *14(val)  |
| 0x0172 | FILTER.ADVANCED  |
|        | filter-advanced-params = [val, [(ref / val), [(ref / val), [(ref / val), [val]]]]] |
| 0x0175 | MAIL.ADD.MAILER  |
|        | This function takes no parameters.   |
| 0x0176 | MAIL.DELETE.MAILER   |
|        | This function takes no parameters.   |
| 0x0177 | MAIL.REPLY   |
|        | This function takes no parameters.   |
| 0x0178 | MAIL.REPLY.ALL   |
|        | This function takes no parameters.   |
| 0x0179 | MAIL.FORWARD   |

| Value  | Meaning   |
|--------|---|
|        | This function takes no parameters.                    |
| 0x017A | MAIL.NEXT.LETTER                                      |
|        | This function takes no parameters.                    |
| 0x017B | DATA.LABEL  |
|        | data-label-params = *10(val)                          |
| 0x017C | INSERT.TITLE  |
|        | insert-title-params = *5(val)                         |
| 0x017D | FONT.PROPERTIES                                       |
|        | font-properties-params = *14(val)                     |
| 0x017E | MACRO.OPTIONS   |
|        | macro-options-params = *10(val)                       |
| 0x017F | WORKBOOK.HIDE   |
|        | workbook-hide-params = *2(val)                        |
| 0x0180 | WORKBOOK.UNHIDE                                       |
|        | workbook-unhide-params = [val]                        |
| 0x0181 | WORKBOOK.DELETE                                       |
|        | workbook-delete-params = [val]                        |
| 0x0182 | WORKBOOK.NAME   |
|        | workbook-name-params = *2(val)                        |
| 0x0184 | GALLERY.CUSTOM  |
|        | gallery-custom-params = [val]                         |
| 0x0186 | ADD.CHART.AUTOFORMAT                                  |
|        | add-chart-autoformat-params = *2(val)                 |
| 0x0187 | DELETE.CHART.AUTOFORMAT                               |
|        | delete-chart-autoformat-params = [val]                |
| 0x0188 | CHART.ADD.DATA  |
|        | chart-add-data-params = [val, [(ref / val), *4(val)]] |
| 0x0189 | AUTO.OUTLINE  |
|        | This function takes no parameters.                    |
| 0x018A | TAB.ORDER   |

| Value  | Meaning                               |
|--------|---------------------------------------|
|        | This function takes no parameters.    |
| 0x018B | SHOW.DIALOG                           |
|        | show-dialog-params = [val]            |
| 0x018C | SELECT.ALL                            |
|        | This function takes no parameters.    |
| 0x018D | UNGROUP.SHEETS                        |
|        | This function takes no parameters.    |
| 0x018E | SUBTOTAL.CREATE                       |
|        | subtotal-create-params = *6(val)      |
| 0x018F | SUBTOTAL.REMOVE                       |
|        | This function takes no parameters.    |
| 0x0190 | RENAME.OBJECT                         |
|        | rename-object-params = [val]          |
| 0x019C | WORKBOOK.SCROLL                       |
|        | workbook-scroll-params = *2(val)      |
| 0x019D | WORKBOOK.NEXT                         |
|        | This function takes no parameters.    |
| 0x019E | WORKBOOK.PREV                         |
|        | This function takes no parameters.    |
| 0x019F | WORKBOOK.TAB.SPLIT                    |
|        | workbook-tab-split-params = [val]     |
| 0x01A0 | FULL.SCREEN                           |
|        | full-screen-params = [val]            |
| 0x01A1 | WORKBOOK.PROTECT                      |
|        | workbook-protect-params = *3(val)     |
| 0x01A4 | SCROLLBAR.PROPERTIES                  |
|        | scrollbar-properties-params = *7(val) |
| 0x01A5 | PIVOT.SHOW.PAGES                      |
|        | pivot-show-pages-params = *2(val)     |
| 0x01A6 | TEXT.TO.COLUMNS                       |

| Value  | Meaning   |
|--------|---|
|        | text-to-columns-params = [val, [(ref / val), *12(val)]] |
| 0x01A7 | FORMAT.CHARTTYPE  |
|        | format-charttype-params = *4(val)                       |
| 0x01A8 | LINK.FORMAT   |
|        | This function takes no parameters.                      |
| 0x01A9 | TRACER.DISPLAY  |
|        | tracer-display-params = *2(val)                         |
| 0x01AE | TRACER.NAVIGATE   |
|        | tracer-navigate-params = *3(val)                        |
| 0x01AF | TRACER.CLEAR  |
|        | This function takes no parameters.                      |
| 0x01B0 | TRACER.ERROR  |
|        | This function takes no parameters.                      |
| 0x01B1 | PIVOT.FIELD.GROUP                                       |
|        | pivot-field-group-params = *4(val)                      |
| 0x01B2 | PIVOT.FIELD.UNGROUP                                     |
|        | This function takes no parameters.                      |
| 0x01B3 | CHECKBOX.PROPERTIES                                     |
|        | checkbox-properties-params = *5(val)                    |
| 0x01B4 | LABEL.PROPERTIES  |
|        | label-properties-params = *3(val)                       |
| 0x01B5 | LISTBOX.PROPERTIES                                      |
|        | listbox-properties-params = *5(val)                     |
| 0x01B6 | EDITBOX.PROPERTIES                                      |
|        | editbox-properties-params = *4(val)                     |
| 0x01B7 | PIVOT.REFRESH   |
|        | pivot-refresh-params = [val]                            |
| 0x01B8 | LINK.COMBO  |
|        | link-combo-params = [val]                               |
| 0x01B9 | OPEN.TEXT   |

| Value  | Meaning                                |
|--------|--|
|        | open-text-params = *17(val)            |
| 0x01BA | HIDE.DIALOG                            |
|        | hide-dialog-params = [val]             |
| 0x01BB | SET.DIALOG.FOCUS                       |
|        | set-dialog-focus-params = [val]        |
| 0x01BC | ENABLE.OBJECT                          |
|        | enable-object-params = *2(val)         |
| 0x01BD | PUSHBUTTON.PROPERTIES                  |
|        | pushbutton-properties-params = *6(val) |
| 0x01BE | SET.DIALOG.DEFAULT                     |
|        | set-dialog-default-params = [val]      |
| 0x01BF | FILTER                                 |
|        | filter-params = *6(val)                |
| 0x01C0 | FILTER.SHOW.ALL                        |
|        | This function takes no parameters.     |
| 0x01C1 | CLEAR.OUTLINE                          |
|        | This function takes no parameters.     |
| 0x01C2 | FUNCTION.WIZARD                        |
|        | function-wizard-params = [val]         |
| 0x01C3 | ADD.LIST.ITEM                          |
|        | add-list-item-params = *2(val)         |
| 0x01C4 | SET.LIST.ITEM                          |
|        | set-list-item-params = *2(val)         |
| 0x01C5 | REMOVE.LIST.ITEM                       |
|        | remove-list-item-params = *2(val)      |
| 0x01C6 | SELECT.LIST.ITEM                       |
|        | select-list-item-params = *2(val)      |
| 0x01C7 | SET.CONTROL.VALUE                      |
|        | set-control-value-params = [val]       |
| 0x01C8 | SAVE.COPY.AS                           |

| Value  | Meaning  |
|--------|--|
|        | save-copy-as-params = [val]  |
| 0x01CA | OPTIONS.LISTS.ADD  |
|        | options-lists-add-params = [val, [ref / val]]  |
| 0x01CB | OPTIONS.LISTS.DELETE   |
|        | options-lists-delete-params = [val]  |
| 0x01CC | SERIES.AXES  |
|        | series-axes-params = [val]   |
| 0x01CD | SERIES.X   |
|        | series-x-params = [ref / val]  |
| 0x01CE | SERIES.Y   |
|        | series-y-params = *2(ref / val)  |
| 0x01CF | ERRORBAR.X   |
|        | errorbar-x-params = [val, [val, [val, [ref / val]]]]   |
| 0x01D0 | ERRORBAR.Y   |
|        | errorbar-y-params = [val, [val, [val, [ref / val]]]]   |
| 0x01D1 | FORMAT.CHART   |
|        | format-chart-params = [(ref / val), *17(val)]  |
| 0x01D2 | SERIES.ORDER   |
|        | series-order-params = *3(val)  |
| 0x01D3 | MAIL.LOGOFF  |
|        | This function takes no parameters.   |
| 0x01D4 | CLEAR.ROUTING.SLIP   |
|        | clear-routing-slip-params = [val]  |
| 0x01D5 | APP.ACTIVATE.MICROSOFT   |
|        | app-activate-microsoft-params = [val]  |
| 0x01D6 | MAIL.EDIT.MAILER   |
|        | mail-edit-mailer-params = [val, [(ref / val), [(ref / val), [(ref / val), [val, [ref / val]]]]]] |
| 0x01D7 | ON.SHEET   |
|        | on-sheet-params = *3(val)  |
| 0x01D8 | STANDARD.WIDTH   |

| Value  | Meaning                            |
|--------|------------------------------------|
|        | standard-width-params = [val]      |
| 0x01D9 | SCENARIO.MERGE                     |
|        | scenario-merge-params = [val]      |
| 0x01DA | SUMMARY.INFO                       |
|        | summary-info-params = *5(val)      |
| 0x01DB | FIND.FILE                          |
|        | This function takes no parameters. |
| 0x01DC | ACTIVE.CELL.FONT                   |
|        | active-cell-font-params = *14(val) |
| 0x01DD | ENABLE.TIPWIZARD                   |
|        | enable-tipwizard-params = [val]    |
| 0x01DE | VBA.MAKE.ADDIN                     |
|        | vba-make-addin-params = [val]      |
| 0x01E0 | INSERTDATATABLE                    |
|        | insertdatatable-params = [val]     |
| 0x01E1 | WORKGROUP.OPTIONS                  |
|        | This function takes no parameters. |
| 0x01E2 | MAIL.SEND.MAILER                   |
|        | mail-send-mailer-params = *2(val)  |
| 0x01E5 | AUTOCORRECT                        |
|        | autocorrect-params = *2(val)       |
| 0x01E9 | POST.DOCUMENT                      |
|        | post-document-params = [val]       |
| 0x01EB | PICKLIST                           |
|        | This function takes no parameters. |
| 0x01ED | VIEW.SHOW                          |
|        | view-show-params = [val]           |
| 0x01EE | VIEW.DEFINE                        |
|        | view-define-params = *3(val)       |
| 0x01EF | VIEW.DELETE                        |

| Value  | Meaning                                      |
|--------|--|
|        | view-delete-params = [val]                   |
| 0x01FD | SHEET.BACKGROUND                             |
|        | sheet-background-params = *2(val)            |
| 0x01FE | INSERT.MAP.OBJECT                            |
|        | This function takes no parameters.           |
| 0x01FF | OPTIONS.MENONO                               |
|        | options-menono-params = *5(val)              |
| 0x0205 | MSOCHECKS                                    |
|        | This function takes no parameters.           |
| 0x0206 | NORMAL                                       |
|        | This function takes no parameters.           |
| 0x0207 | LAYOUT                                       |
|        | This function takes no parameters.           |
| 0x0208 | RM.PRINT.AREA                                |
|        | rm-print-area-params = [ref / val]           |
| 0x0209 | CLEAR.PRINT.AREA                             |
|        | This function takes no parameters.           |
| 0x020A | ADD.PRINT.AREA                               |
|        | This function takes no parameters.           |
| 0x020B | MOVE.BRK                                     |
|        | move-brk-params = *4(val)                    |
| 0x0221 | HIDECURR.NOTE                                |
|        | hidecurr-note-params = [(ref / val), [val]]  |
| 0x0222 | HIDEALL.NOTES                                |
|        | hideall-notes-params = [val]                 |
| 0x0223 | DELETE.NOTE                                  |
|        | delete-note-params = [ref / val]             |
| 0x0224 | TRAVERSE.NOTES                               |
|        | traverse-notes-params = [(ref / val), [val]] |
| 0x0225 | ACTIVATE.NOTES                               |



| Value  | Meaning  |
|--------|--|
|        | activate-notes-params = [(ref / val), [val]]                             |
| 0x026C | PROTECT.REVISIONS  |
|        | This function takes no parameters.                                       |
| 0x026D | UNPROTECT.REVISIONS  |
|        | This function takes no parameters.                                       |
| 0x0287 | OPTIONS.ME   |
|        | options-me-params = [(ref / val), *8(val)]                               |
| 0x028D | WEB.PUBLISH  |
|        | web-publish-params = *9(val)   |
| 0x029B | NEWWEBQUERY  |
|        | newwebquery-params = [val]   |
| 0x02A1 | PIVOT.TABLE.CHART  |
|        | pivot-table-chart-params = [val, [(ref / val), [(ref / val), *13(val)]]] |
| 0x02F1 | OPTIONS.SAVE   |
|        | options-save-params = *4(val)  |
| 0x02F3 | OPTIONS.SPELL  |
|        | options-spell-params = *12(val)  |
| 0x0328 | HIDEALL.INKANNOTS  |
|        | hideall-inkannots-params = [val]   |

The following grammar is used in the **Rgce** structure definition:

params-cetab = beep-params / open-params / open-links-params / save-as-params /  
file-delete-params / page-setup-params / print-params /  
printer-setup-params /  
arrange-all-params / window-size-params / window-move-params /  
full-params / close-params / run-params /  
set-print-area-params / set-print-titles-params /  
remove-page-break-params / font-params / display-params /  
protect-document-params / precision-params / a1-r1c1-params / calculation-params / data-  
find-params /  
extract-params / sort-params / data-series-params /

table-params / format-number-params / alignment-params /  
style-params / border-params / cell-protection-params /  
column-width-params / cut-params /  
copy-params / paste-params / clear-params /  
paste-special-params / edit-delete-params / insert-params / define-name-params /  
create-names-params / formula-goto-params / formula-find-params / gallery-area-params /  
gallery-bar-params / gallery-column-params / gallery-line-params /  
gallery-pie-params / gallery-scatter-params / combination-params / gridlines-params /  
set-preferred-params / axes-params / legend-params /  
attach-text-params / patterns-params / main-chart-params /  
overlay-params / scale-params / format-legend-params /  
format-text-params / parse-params / unhide-params /  
workspace-params / formula-params / formula-fill-params /  
formula-array-params / activate-params /  
activate-next-params / activate-prev-params / copy-picture-params / select-params /  
delete-name-params / delete-format-params / vline-params /  
hline-params / vpage-params / hpage-params /  
vscroll-params / hscroll-params / alert-params /  
new-params / cancel-copy-params /  
message-params / app-activate-params / row-height-params / format-move-params /  
format-size-params / formula-replace-params / send-keys-params /  
select-special-params / apply-names-params / replace-font-params /  
freeze-panes-params / show-info-params / split-params /  
on-window-params / on-data-params / disable-input-params /  
outline-params / file-close-params /  
save-workbook-params / copy-chart-params /  
on-time-params / wait-params / format-font-params /  
short-menus-params / set-update-status-params / color-palette-params /  
delete-style-params / window-restore-params / window-maximize-params /  
change-link-params / on-key-params / app-move-params / app-size-params / main-chart-  
type-params / overlay-chart-type-params /

select-end-params / open-mail-params / send-mail-params /  
standard-font-params / consolidate-params / sort-special-params /  
gallery-3d-area-params / gallery-3d-column-params / gallery-3d-line-params /  
gallery-3d-pie-params / view-3d-params / goal-seek-params /  
workgroup-params / fill-group-params / update-link-params /  
promote-params / demote-params / show-detail-params / object-properties-params / save-  
new-object-params / share-name-params /  
apply-style-params / assign-to-object-params / object-protection-params /  
hide-object-params / create-publisher-params /  
subscribe-to-params / attributes-params / show-toolbar-params /  
print-preview-params / edit-color-params / show-levels-params /  
format-main-params / format-overlay-params / on-recalc-params /  
edit-series-params / define-style-params / line-print-params /  
enter-data-params / gallery-radar-params / merge-styles-params /  
edition-options-params /  
spelling-params / zoom-params / insert-object-params /  
window-minimize-params / sound-note-params / sound-play-params /  
format-shape-params / extend-polygon-params / format-auto-params /  
gallery-3d-bar-params / gallery-3d-surface-params / fill-auto-params /  
customize-toolbar-params / add-tool-params / edit-object-params /  
on-doubleclick-params / on-entry-params / workbook-add-params /  
workbook-move-params / workbook-copy-params / workbook-options-params /  
save-workspace-params / chart-wizard-params / delete-tool-params /  
move-tool-params / workbook-select-params / workbook-activate-params /  
assign-to-tool-params / copy-tool-params / reset-tool-params /  
constrain-numeric-params / paste-tool-params / workbook-new-params /  
scenario-cells-params / scenario-delete-params / scenario-add-params /  
scenario-edit-params / scenario-show-params /  
scenario-summary-params / pivot-table-wizard-params / pivot-field-properties-params /  
pivot-field-params / pivot-item-params / pivot-add-fields-params /  
options-calculation-params / options-edit-params / options-view-params /

addin-manager-params /  
vbaactivate-params / options-chart-params / vba-insert-file-params / routing-slip-params /  
mail-logon-params / insert-picture-params / edit-tool-params /  
gallery-doughnut-params / chart-trend-params / pivot-item-properties-params /  
workbook-insert-params / options-transition-params / options-general-params /  
filter-advanced-params / data-label-params / insert-title-params /  
font-properties-params / macro-options-params / workbook-hide-params /  
workbook-unhide-params / workbook-delete-params / workbook-name-params /  
gallery-custom-params / add-chart-autoformat-params / delete-chart-autoformat-params /  
chart-add-data-params /  
show-dialog-params /  
subtotal-create-params / rename-object-params /  
workbook-scroll-params /  
workbook-tab-split-params / full-screen-params / workbook-protect-params /  
scrollbar-properties-params / pivot-show-pages-params / text-to-columns-params /  
format-charttype-params / tracer-display-params /  
tracer-navigate-params /  
pivot-field-group-params / checkbox-properties-params /  
label-properties-params / listbox-properties-params / editbox-properties-params /  
pivot-refresh-params / link-combo-params / open-text-params /  
hide-dialog-params / set-dialog-focus-params / enable-object-params /  
pushbutton-properties-params / set-dialog-default-params / filter-params / function-wizard-params /  
add-list-item-params / set-list-item-params / remove-list-item-params /  
select-list-item-params / set-control-value-params / save-copy-as-params /  
options-lists-add-params / options-lists-delete-params / series-axes-params /  
series-x-params / series-y-params / errorbar-x-params /  
errorbar-y-params / format-chart-params / series-order-params / clear-routing-slip-params /  
app-activate-microsoft-params /  
mail-edit-mailer-params / on-sheet-params / standard-width-params /  
scenario-merge-params / summary-info-params /

active-cell-font-params / enable-tipwizard-params / vba-make-addin-params /  
 insertdatatable-params / mail-send-mailer-params /  
 autocorrect-params / post-document-params /  
 view-show-params / view-define-params / view-delete-params /  
 sheet-background-params / options-menono-params /  
 rm-print-area-params /  
 move-brk-params / hidecurr-note-params / hideall-notes-params /  
 delete-note-params / traverse-notes-params / activate-notes-params / options-me-params /  
 web-publish-params / newwebquery-params / pivot-table-chart-params /  
 options-save-params / options-spell-params / hideall-inkannots-params

### 2.5.97.6 CFParsedFormula

The **CFParsedFormula** structure specifies a formula (section [2.2.2](#)) used in a conditional formatting rule.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. This value MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgList** (section [2.5.97.52](#)), **PtgSxName** (section [2.5.97.76](#)), **PtgIsect** (section [2.5.97.50](#)), **PtgUnion** (section [2.5.97.78](#)), **PtgArray** (section [2.5.97.23](#)), **PtgRef3d** (section [2.5.97.69](#)), **PtgArea3d** (section [2.5.97.19](#)), **PtgRefErr3d** (section [2.5.97.71](#)), **PtgAreaErr3d** (section [2.5.97.21](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgMemArea** (section [2.5.97.54](#)), or **PtgMemNoMem** (section [2.5.97.57](#)). A **PtgArea** (section [2.5.97.18](#)) or a **PtgAreaN** (section [2.5.97.22](#)) MUST NOT be the only **Ptg** structure in the sequence.

The root node of the parse tree of this field MUST be a VALUE\_TYPE, as described in section [2.5.97.88](#).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

### 2.5.97.7 CFVOParsedFormula

This structure specifies a formula (section [2.2.2](#)) without relative references that is used in a conditional formatting rule.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgList** (section [2.5.97.52](#)), **PtgSxName** (section [2.5.97.76](#)), **PtgIsect** (section [2.5.97.50](#)), **PtgUnion** (section [2.5.97.78](#)), **PtgArray** (section [2.5.97.23](#)), **PtgRef3d** (section [2.5.97.69](#)), **PtgArea3d** (section [2.5.97.19](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgMemArea** (section [2.5.97.54](#)), **PtgMemNoMem** (section [2.5.97.57](#)), **PtgRefErr3d** (section [2.5.97.71](#)) or **PtgAreaErr3d** (section [2.5.97.21](#)). A **PtgArea** (section [2.5.97.18](#)) or a **PtgAreaN** (section [2.5.97.22](#)) MUST NOT be the only **Ptg** in the sequence.

If this field contains a **PtgRef** (section [2.5.97.68](#)), the **loc.column.fColRel** and **loc.column.fRwRel** fields in the **PtgRef** MUST be 0.

If this field contains a **PtgRefN** (section [2.5.97.72](#)), the **loc.column.fColRel** and **loc.column.fRwRel** fields in the **PtgRefN** MUST be 0.

If this field contains a **PtgArea** (section [2.5.97.18](#)), the **area.columnFirst.fColRel**, **area.columnFirst.fRwRel**, **area.columnLast.fColRel**, and **area.columnLast.fRwRel** fields in the **PtgArea** MUST be 0.

If this field contains a **PtgAreaN** (section [2.5.97.22](#)), the **area.columnFirst.fColRel**, **area.columnFirst.fRwRel**, **area.columnLast.fColRel**, and **area.columnLast.fRwRel** fields in the **PtgAreaN** MUST be 0.

The root node of the parse tree of this field MUST be a VALUE\_TYPE, as described in **Rgce** (section [2.5.97.88](#)).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

## 2.5.97.8 DVParsedFormula

This structure specifies a formula (section [2.2.2](#)) used in a data validation rule.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. MUST be less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) for the formula. MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgList** (section [2.5.97.52](#)), **PtgSxName** (section [2.5.97.76](#)), **PtgIsect** (section [2.5.97.50](#)), **PtgUnion** (section [2.5.97.78](#)), **PtgArray** (section [2.5.97.23](#)), **PtgRef3d** (section [2.5.97.69](#)), **PtgRefErr3d** (section [2.5.97.71](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgMemArea** (section [2.5.97.54](#)), or **PtgMemNoMem** (section [2.5.97.57](#)).

If the **BrtdVal** (section [2.4.339](#)) record that contains this **DVParsedFormula** in its **BrtdVal.formula1** field has a **BrtdVal.valType** not equal to 3, then the following MUST be true:

- **rgce** MUST NOT contain a **PtgArea3d** (section [2.5.97.19](#)) or a **PtgAreaErr3d** (section [2.5.97.21](#)).
- A **PtgArea** (section [2.5.97.18](#)), a **PtgAreaErr** (section [2.5.97.20](#)), or a **PtgAreaN** (section [2.5.97.22](#)), MUST NOT be the only **Ptg** in **rgce**.
- The root node of the parse tree of this field MUST be a VALUE\_TYPE, as described in **Rgce** (section [2.5.97.88](#)).

If the **BrtdVal** (section [2.4.339](#)) record that contains this **DVParsedFormula** in its **BrtdVal.formula1** field has a **BrtdVal.valType** equal to 3, then the following MUST be true:

- If **rgce** contains a **PtgArea3d** or a **PtgAreaErr3d** (section [2.5.97.21](#)), then the **PtgArea3d** or **PtgAreaErr3d** MUST be the only **Ptg** in **rgce**.
- The root node of the parse tree of this field MUST NOT be a VALUE\_TYPE, as described in **Rgce** (section [2.5.97.88](#)).

If this **DVParsedFormula** is a **BrtDVal.formula2** field, the following MUST be true:

- **rgce** MUST NOT contain a **PtgArea3d** or a **PtgAreaErr3d** (section [2.5.97.21](#)).
- A **PtgArea** (section [2.5.97.18](#)), a **PtgAreaErr** (section [2.5.97.20](#)), or a **PtgAreaN** (section [2.5.97.22](#)) MUST NOT be the only **Ptg** in **rgce**.
- The root node of the parse tree of this field MUST be a VALUE\_TYPE, as described in **Rgce** (section [2.5.97.88](#)).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

### 2.5.97.9 FRTParsedFormula

The **FRTParsedFormula** structure specifies a formula (section [2.2.2](#)) used by a future record (section [2.1.6](#)).

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. This value MUST be less than 16385.

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

### 2.5.97.10 Ftab

The **Ftab** structure specifies a function that can be called from a formula (section [2.2.2](#)). The definition of each function specifies the function name and the valid sequence of parameters.



|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ifstab |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ifstab (2 bytes):** An unsigned integer that specifies the function to be called. It MUST be a value from the following table.

The elements **ref** and **val** (section [2.5.97.88](#)) are specified in section [2.5.97.88](#).

| Value  | Meaning                                      |
|--------|--|
| 0x0000 | COUNT  |
|        | count-params = (ref / val) *254(ref / val)   |
| 0x0001 | IF   |
|        | if-params = val *2(ref / val)                |
| 0x0002 | ISNA   |
|        | isna-params = val                            |
| 0x0003 | ISERROR                                      |
|        | iserror-params = val                         |
| 0x0004 | SUM  |
|        | sum-params = (ref / val) *254(ref / val)     |
| 0x0005 | AVERAGE                                      |
|        | average-params = (ref / val) *254(ref / val) |
| 0x0006 | MIN  |
|        | min-params = (ref / val) *254(ref / val)     |
| 0x0007 | MAX  |
|        | max-params = (ref / val) *254(ref / val)     |
| 0x0008 | ROW  |
|        | row-params = [ref]                           |
| 0x0009 | COLUMN                                       |
|        | column-params = [ref]                        |
| 0x000A | NA   |
|        | This function takes no parameters.           |
| 0x000B | NPV  |
|        | npv-params = val (ref / val) *253(ref / val) |

| Value  | Meaning                                    |
|--------|--|
| 0x000C | STDEV                                      |
|        | stdev-params = (ref / val) *254(ref / val) |
| 0x000D | DOLLAR                                     |
|        | dollar-params = val [val]                  |
| 0x000E | FIXED                                      |
|        | fixed-params = val [val [val]]             |
| 0x000F | SIN  |
|        | sin-params = val                           |
| 0x0010 | COS  |
|        | cos-params = val                           |
| 0x0011 | TAN  |
|        | tan-params = val                           |
| 0x0012 | ATAN                                       |
|        | atan-params = val                          |
| 0x0013 | PI   |
|        | This function takes no parameters.         |
| 0x0014 | SQRT                                       |
|        | sqrt-params = val                          |
| 0x0015 | EXP  |
|        | exp-params = val                           |
| 0x0016 | LN   |
|        | ln-params = val                            |
| 0x0017 | LOG10                                      |
|        | log10-params = val                         |
| 0x0018 | ABS  |
|        | abs-params = val                           |
| 0x0019 | INT  |
|        | int-params = val                           |
| 0x001A | SIGN                                       |
|        | sign-params = val                          |

| Value  | Meaning                                     |
|--------|---|
| 0x001B | ROUND                                       |
|        | round-params = val val                      |
| 0x001C | LOOKUP                                      |
|        | lookup-params = val (ref / val) [ref / val] |
| 0x001D | INDEX                                       |
|        | index-params = (ref / val) val *2(val)      |
| 0x001E | REPT  |
|        | rept-params = val val                       |
| 0x001F | MID   |
|        | mid-params = val val val                    |
| 0x0020 | LEN   |
|        | len-params = val                            |
| 0x0021 | VALUE                                       |
|        | value-params = val                          |
| 0x0022 | TRUE  |
|        | This function takes no parameters.          |
| 0x0023 | FALSE                                       |
|        | This function takes no parameters.          |
| 0x0024 | AND   |
|        | and-params = (ref / val) *254(ref / val)    |
| 0x0025 | OR  |
|        | or-params = (ref / val) *254(ref / val)     |
| 0x0026 | NOT   |
|        | not-params = val                            |
| 0x0027 | MOD   |
|        | mod-params = val val                        |
| 0x0028 | DCOUNT                                      |
|        | dcount-params = ref (ref / val) (ref / val) |
| 0x0029 | DSUM  |
|        | dsum-params = ref (ref / val) (ref / val)   |

| Value  | Meaning   |
|--------|---|
| 0x002A | DAVERAGE  |
|        | daverage-params = ref (ref / val) (ref / val)                       |
| 0x002B | DMIN  |
|        | dmin-params = ref (ref / val) (ref / val)                           |
| 0x002C | DMAX  |
|        | dmax-params = ref (ref / val) (ref / val)                           |
| 0x002D | DSTDEV  |
|        | dstdev-params = ref (ref / val) (ref / val)                         |
| 0x002E | VAR   |
|        | var-params = (ref / val) *254(ref / val)                            |
| 0x002F | DVAR  |
|        | dvar-params = ref (ref / val) (ref / val)                           |
| 0x0030 | TEXT  |
|        | text-params = val val   |
| 0x0031 | LINEST  |
|        | linest-params = (ref / val) [(ref / val) *2(ref / val)]             |
| 0x0032 | TREND   |
|        | trend-params = (ref / val) [(ref / val) [(ref / val) [ref / val]]]  |
| 0x0033 | LOGEST  |
|        | logest-params = (ref / val) [(ref / val) *2(ref / val)]             |
| 0x0034 | GROWTH  |
|        | growth-params = (ref / val) [(ref / val) [(ref / val) [ref / val]]] |
| 0x0035 | GOTO  |
|        | goto-params = ref   |
| 0x0036 | HALT  |
|        | halt-params = [val]   |
| 0x0037 | RETURN  |
|        | return-params = [ref / val]   |
| 0x0038 | PV  |
|        | pv-params = val val val *2(val)                                     |

| Value  | Meaning                                    |
|--------|--|
| 0x0039 | FV   |
|        | fv-params = val val val *2(val)            |
| 0x003A | NPER                                       |
|        | nper-params = val val val *2(val)          |
| 0x003B | PMT  |
|        | pmt-params = val val val *2(val)           |
| 0x003C | RATE                                       |
|        | rate-params = val val val *3(val)          |
| 0x003D | MIRR                                       |
|        | mirr-params = (ref / val) val val          |
| 0x003E | IRR  |
|        | irr-params = (ref / val) [val]             |
| 0x003F | RAND                                       |
|        | This function takes no parameters.         |
| 0x0040 | MATCH                                      |
|        | match-params = val (ref / val) [ref / val] |
| 0x0041 | DATE                                       |
|        | date-params = val val val                  |
| 0x0042 | TIME                                       |
|        | time-params = val val val                  |
| 0x0043 | DAY  |
|        | day-params = val                           |
| 0x0044 | MONTH                                      |
|        | month-params = val                         |
| 0x0045 | YEAR                                       |
|        | year-params = val                          |
| 0x0046 | WEEKDAY                                    |
|        | weekday-params = val [val]                 |
| 0x0047 | HOUR                                       |
|        | hour-params = val                          |

| <b>Value</b> | <b>Meaning</b>                              |
|--------------|---|
| 0x0048       | MINUTE                                      |
|              | minute-params = val                         |
| 0x0049       | SECOND                                      |
|              | second-params = val                         |
| 0x004A       | NOW   |
|              | This function takes no parameters.          |
| 0x004B       | AREAS                                       |
|              | areas-params = ref                          |
| 0x004C       | ROWS  |
|              | rows-params = (ref / val)                   |
| 0x004D       | COLUMNS                                     |
|              | columns-params = (ref / val)                |
| 0x004E       | OFFSET                                      |
|              | offset-params = ref val val *2(val)         |
| 0x004F       | ABSREF                                      |
|              | absref-params = val ref                     |
| 0x0050       | RELREF                                      |
|              | relref-params = ref ref                     |
| 0x0051       | ARGUMENT                                    |
|              | argument-params = [val [(ref / val) [ref]]] |
| 0x0052       | SEARCH                                      |
|              | search-params = val val [val]               |
| 0x0053       | TRANSPOSE                                   |
|              | transpose-params = val                      |
| 0x0054       | ERROR                                       |
|              | error-params = [val [ref / val]]            |
| 0x0055       | STEP  |
|              | This function takes no parameters.          |
| 0x0056       | TYPE  |
|              | type-params = val                           |

| Value  | Meaning  |
|--------|--|
| 0x0057 | ECHO   |
|        | echo-params = [val]                                |
| 0x0058 | SET.NAME   |
|        | set-name-params = val [ref / val]                  |
| 0x0059 | CALLER   |
|        | This function takes no parameters.                 |
| 0x005A | DEREF  |
|        | deref-params = ref                                 |
| 0x005B | WINDOWS  |
|        | windows-params = [val [val]]                       |
| 0x005D | DOCUMENTS  |
|        | documents-params = [val [val]]                     |
| 0x005E | ACTIVE.CELL  |
|        | This function takes no parameters.                 |
| 0x005F | SELECTION  |
|        | This function takes no parameters.                 |
| 0x0060 | RESULT   |
|        | result-params = [val]                              |
| 0x0061 | ATAN2  |
|        | atan2-params = val val                             |
| 0x0062 | ASIN   |
|        | asin-params = val                                  |
| 0x0063 | ACOS   |
|        | acos-params = val                                  |
| 0x0064 | CHOOSE   |
|        | choose-params = val (ref / val) *253(ref / val)    |
| 0x0065 | HLOOKUP  |
|        | hlookup-params = val (ref / val) (ref / val) [val] |
| 0x0066 | VLOOKUP  |
|        | vlookup-params = val (ref / val) (ref / val) [val] |

| <b>Value</b> | <b>Meaning</b>   |
|--------------|--|
| 0x0067       | LINKS  |
|              | links-params = [val [val]]                             |
| 0x0068       | INPUT  |
|              | input-params = val [val [val [val [val [val [val]]]]]] |
| 0x0069       | ISREF  |
|              | isref-params = (ref / val)                             |
| 0x006A       | GET.FORMULA  |
|              | get-formula-params = (ref / val)                       |
| 0x006B       | GET.NAME   |
|              | get-name-params = val [val]                            |
| 0x006C       | SET.VALUE  |
|              | set-value-params = ref val                             |
| 0x006D       | LOG  |
|              | log-params = val [val]                                 |
| 0x006E       | EXEC   |
|              | exec-params = val [val *2(val)]                        |
| 0x006F       | CHAR   |
|              | char-params = val                                      |
| 0x0070       | LOWER  |
|              | lower-params = val                                     |
| 0x0071       | UPPER  |
|              | upper-params = val                                     |
| 0x0072       | PROPER   |
|              | proper-params = val                                    |
| 0x0073       | LEFT   |
|              | left-params = val [val]                                |
| 0x0074       | RIGHT  |
|              | right-params = val [val]                               |
| 0x0075       | EXACT  |
|              | exact-params = val val                                 |



| <b>Value</b> | <b>Meaning</b>                        |
|--------------|---------------------------------------|
| 0x0076       | TRIM                                  |
|              | trim-params = val                     |
| 0x0077       | REPLACE                               |
|              | replace-params = val val val val      |
| 0x0078       | SUBSTITUTE                            |
|              | substitute-params = val val val [val] |
| 0x0079       | CODE                                  |
|              | code-params = val                     |
| 0x007A       | NAMES                                 |
|              | names-params = [val [val [val]]]      |
| 0x007B       | DIRECTORY                             |
|              | directory-params = [val]              |
| 0x007C       | FIND                                  |
|              | find-params = val val [val]           |
| 0x007D       | CELL                                  |
|              | cell-params = val [ref]               |
| 0x007E       | ISERR                                 |
|              | iserr-params = val                    |
| 0x007F       | ISTEXT                                |
|              | istext-params = val                   |
| 0x0080       | ISNUMBER                              |
|              | isnumber-params = val                 |
| 0x0081       | ISBLANK                               |
|              | isblank-params = val                  |
| 0x0082       | T                                     |
|              | t-params = (ref / val)                |
| 0x0083       | N                                     |
|              | n-params = (ref / val)                |
| 0x0084       | FOPEN                                 |
|              | fopen-params = val [val]              |

| <b>Value</b> | <b>Meaning</b>                     |
|--------------|------------------------------------|
| 0x0085       | FCLOSE                             |
|              | fclose-params = val                |
| 0x0086       | FSIZE                              |
|              | fsize-params = val                 |
| 0x0087       | FREADLN                            |
|              | freadln-params = val               |
| 0x0088       | FREAD                              |
|              | fread-params = val val             |
| 0x0089       | FWRITELN                           |
|              | fwriteln-params = val val          |
| 0x008A       | FWRITE                             |
|              | fwrite-params = val val            |
| 0x008B       | FPOS                               |
|              | fpos-params = val [val]            |
| 0x008C       | DATEVALUE                          |
|              | datevalue-params = val             |
| 0x008D       | TIMEVALUE                          |
|              | timevalue-params = val             |
| 0x008E       | SLN                                |
|              | sln-params = val val val           |
| 0x008F       | SYD                                |
|              | syd-params = val val val val       |
| 0x0090       | DDB                                |
|              | ddb-params = val val val val [val] |
| 0x0091       | GET.DEF                            |
|              | get-def-params = val [val [val]]   |
| 0x0092       | REFTEXT                            |
|              | reftext-params = ref [val]         |
| 0x0093       | TEXTREF                            |
|              | textref-params = val [val]         |

| <b>Value</b> | <b>Meaning</b>  |
|--------------|---|
| 0x0094       | INDIRECT  |
|              | indirect-params = val [val]   |
| 0x0095       | REGISTER  |
|              | register-params = val [val [val [val [val [val [val [val [val [val [val *245(val)]]]]]]]]]]]] |
| 0x0096       | CALL  |
|              | call-params = val [(ref / val) *253(ref / val)]   |
| 0x0097       | ADD.BAR   |
|              | add-bar-params = [val]  |
| 0x0098       | ADD.MENU  |
|              | add-menu-params = val (ref / val) [(ref / val) [val]]   |
| 0x0099       | ADD.COMMAND   |
|              | add-command-params = val (ref / val) (ref / val) [(ref / val) [val]]                          |
| 0x009A       | ENABLE.COMMAND  |
|              | enable-command-params = val val val val [val]   |
| 0x009B       | CHECK.COMMAND   |
|              | check-command-params = val val val val [val]  |
| 0x009C       | RENAME.COMMAND  |
|              | rename-command-params = val val val val [val]   |
| 0x009D       | SHOW.BAR  |
|              | show-bar-params = [val]   |
| 0x009E       | DELETE.MENU   |
|              | delete-menu-params = val val [val]  |
| 0x009F       | DELETE.COMMAND  |
|              | delete-command-params = val val val [val]   |
| 0x00A0       | GET.CHART.ITEM  |
|              | get-chart-item-params = val [val [val]]   |
| 0x00A1       | DIALOG.BOX  |
|              | dialog-box-params = (ref / val)   |
| 0x00A2       | CLEAN   |
|              | clean-params = val  |

| Value  | Meaning                                     |
|--------|---|
| 0x00A3 | MDETERM                                     |
|        | mdeterm-params = val                        |
| 0x00A4 | MINVERSE                                    |
|        | minverse-params = val                       |
| 0x00A5 | MMULT                                       |
|        | mmult-params = val val                      |
| 0x00A6 | FILES                                       |
|        | files-params = *2(val)                      |
| 0x00A7 | IPMT  |
|        | ipmt-params = val val val val *2(val)       |
| 0x00A8 | PPMT  |
|        | ppmt-params = val val val val *2(val)       |
| 0x00A9 | COUNTA                                      |
|        | counta-params = (ref / val) *254(ref / val) |
| 0x00AA | CANCEL.KEY                                  |
|        | cancel-key-params = [val [ref]]             |
| 0x00AB | FOR   |
|        | for-params = val val val [val]              |
| 0x00AC | WHILE                                       |
|        | while-params = val                          |
| 0x00AD | BREAK                                       |
|        | This function takes no parameters.          |
| 0x00AE | NEXT  |
|        | This function takes no parameters.          |
| 0x00AF | INITIATE                                    |
|        | initiate-params = val val                   |
| 0x00B0 | REQUEST                                     |
|        | request-params = val val                    |
| 0x00B1 | POKE  |
|        | poke-params = val (ref / val) (ref / val)   |

| Value  | Meaning   |
|--------|---|
| 0x00B2 | EXECUTE   |
|        | execute-params = val val                        |
| 0x00B3 | TERMINATE                                       |
|        | terminate-params = val                          |
| 0x00B4 | RESTART   |
|        | restart-params = [val]                          |
| 0x00B5 | HELP  |
|        | help-params = [val]                             |
| 0x00B6 | GET.BAR   |
|        | get-bar-params = *4(val)                        |
| 0x00B7 | PRODUCT   |
|        | product-params = (ref / val) *254(ref / val)    |
| 0x00B8 | FACT  |
|        | fact-params = val                               |
| 0x00B9 | GET.CELL  |
|        | get-cell-params = val [ref]                     |
| 0x00BA | GET.WORKSPACE                                   |
|        | get-workspace-params = val                      |
| 0x00BB | GET.WINDOW                                      |
|        | get-window-params = val [val]                   |
| 0x00BC | GET.DOCUMENT                                    |
|        | get-document-params = val [val]                 |
| 0x00BD | DPRODUCT  |
|        | dproduct-params = ref (ref / val) (ref / val)   |
| 0x00BE | ISNONTEXT                                       |
|        | isnontext-params = val                          |
| 0x00BF | GET.NOTE  |
|        | get-note-params = [(ref / val) *2(val)]         |
| 0x00C0 | NOTE  |
|        | note-params = [val [(ref / val) *2(ref / val)]] |

| Value  | Meaning                                      |
|--------|--|
| 0x00C1 | STDEVP                                       |
|        | stdevp-params = (ref / val) *254(ref / val)  |
| 0x00C2 | VARP   |
|        | varp-params = (ref / val) *254(ref / val)    |
| 0x00C3 | DSTDEVP                                      |
|        | dstdevp-params = ref (ref / val) (ref / val) |
| 0x00C4 | DVARP  |
|        | dvarp-params = ref (ref / val) (ref / val)   |
| 0x00C5 | TRUNC  |
|        | trunc-params = val [val]                     |
| 0x00C6 | ISLOGICAL                                    |
|        | islogical-params = val                       |
| 0x00C7 | DCOUNTA                                      |
|        | dcounta-params = ref (ref / val) (ref / val) |
| 0x00C8 | DELETE.BAR                                   |
|        | delete-bar-params = val                      |
| 0x00C9 | UNREGISTER                                   |
|        | unregister-params = val                      |
| 0x00CC | USDOLLAR                                     |
|        | usdollar-params = val [val]                  |
| 0x00CD | FINDB  |
|        | findb-params = val val [val]                 |
| 0x00CE | SEARCHB                                      |
|        | searchb-params = val val [val]               |
| 0x00CF | REPLACEB                                     |
|        | replaceb-params = val val val val            |
| 0x00D0 | LEFTB  |
|        | leftb-params = val [val]                     |
| 0x00D1 | RIGHTB                                       |
|        | rightb-params = val [val]                    |

| <b>Value</b> | <b>Meaning</b>                                  |
|--------------|---|
| 0x00D2       | MIDB  |
|              | midb-params = val val val                       |
| 0x00D3       | LENB  |
|              | lenb-params = val                               |
| 0x00D4       | ROUNDUP   |
|              | roundup-params = val val                        |
| 0x00D5       | ROUNDDOWN                                       |
|              | rounddown-params = val val                      |
| 0x00D6       | ASC   |
|              | asc-params = val                                |
| 0x00D7       | DBCS  |
|              | dbcs-params = val                               |
| 0x00D8       | RANK  |
|              | rank-params = val ref [val]                     |
| 0x00DB       | ADDRESS   |
|              | address-params = val val [val [val [val]]]      |
| 0x00DC       | DAYS360   |
|              | days360-params = val val [val]                  |
| 0x00DD       | TODAY   |
|              | This function takes no parameters.              |
| 0x00DE       | VDB   |
|              | vdb-params = val val val val val [val [val]]    |
| 0x00DF       | ELSE  |
|              | This function takes no parameters.              |
| 0x00E0       | ELSE.IF   |
|              | else-if-params = val                            |
| 0x00E1       | END.IF  |
|              | This function takes no parameters.              |
| 0x00E2       | FOR.CELL  |
|              | for-cell-params = val [(ref / val) [ref / val]] |

| Value  | Meaning   |
|--------|---|
| 0x00E3 | MEDIAN  |
|        | median-params = (ref / val) *254(ref / val)   |
| 0x00E4 | SUMPRODUCT  |
|        | sumproduct-params = val *254(val)   |
| 0x00E5 | SINH  |
|        | sinh-params = val   |
| 0x00E6 | COSH  |
|        | cosh-params = val   |
| 0x00E7 | TANH  |
|        | tanh-params = val   |
| 0x00E8 | ASINH   |
|        | asinh-params = val  |
| 0x00E9 | ACOSH   |
|        | acosh-params = val  |
| 0x00EA | ATANH   |
|        | atanh-params = val  |
| 0x00EB | DGET  |
|        | dget-params = ref (ref / val) (ref / val)   |
| 0x00EC | CREATE.OBJECT   |
|        | create-object-params = val (ref / val) [(ref / val) [(ref / val) [(ref / val) [(ref / val) [(ref / val) [(ref / val) [(ref / val) [(ref / val) [(ref / val) [(ref / val) [ref / val]]]]]]]]]]]]]] |
| 0x00ED | VOLATILE  |
|        | volatile-params = [val]   |
| 0x00EE | LAST.ERROR  |
|        | This function takes no parameters.  |
| 0x00EF | CUSTOM.UNDO   |
|        | custom-undo-params = *2(val)  |
| 0x00F0 | CUSTOM.REPEAT   |
|        | custom-repeat-params = *3(val)  |
| 0x00F1 | FORMULA.CONVERT   |



| Value  | Meaning   |
|--------|---|
|        | formula-convert-params = val (ref / val) *3(ref / val)  |
| 0x00F2 | GET.LINK.INFO   |
|        | get-link-info-params = val val [val [val]]  |
| 0x00F3 | TEXT.BOX  |
|        | text-box-params = val [val *2(val)]   |
| 0x00F4 | INFO  |
|        | info-params = val   |
| 0x00F5 | GROUP   |
|        | This function takes no parameters.  |
| 0x00F6 | GET.OBJECT  |
|        | get-object-params = val [val *3(val)]   |
| 0x00F7 | DB  |
|        | db-params = val val val val [val]   |
| 0x00F8 | PAUSE   |
|        | pause-params = [val]  |
| 0x00FB | RESUME  |
|        | resume-params = [val]   |
| 0x00FC | FREQUENCY   |
|        | frequency-params = (ref / val) (ref / val)  |
| 0x00FD | ADD.TOOLBAR   |
|        | add-toolbar-params = [val [val]]  |
| 0x00FE | DELETE.TOOLBAR  |
|        | delete-toolbar-params = val   |
| 0x00FF | user-defined function (UDF) or future function  |
|        | <p>user-defined-or-future-function = cell-params / user-defined-params / user-defined-x-params / future-function</p> <p>cell-params = (<b>PtgRef</b> / <b>PtgRefN</b> / <b>PtgRef3d</b> / <b>PtgRefErr</b> / <b>PtgRefErr3d</b>) *254(ref / val)</p> <p>user-defined-params = <b>PtgName</b> *254(ref / val)</p> <p>The <b>PtgName</b> (section <a href="#">2.5.97.60</a>) of the user-defined-params rule MUST NOT be a VALUE_TYPE, as described in section <a href="#">2.5.97.88</a>.</p> <p>If the formula (section <a href="#">2.2.2</a>) containing this structure is part of a revision as specified in the Formulas overview (section <a href="#">2.2.2</a>), then this structure MUST be contained by a <b>CellParsedFormula</b> (section <a href="#">2.5.97.4</a>) or <b>NameParsedFormula</b> (section <a href="#">2.5.97.12</a>)</p> |

| Value | Meaning  |
|-------|--|
|       | <p>structure. The <b>rgcb</b> field of the <b>CellParsedFormula</b> or <b>NameParsedFormula</b> MUST have a <b>RevNameTabid</b> (section <a href="#">2.5.97.85</a>) that corresponds to the <b>PtgName</b> in the user-defined-params rule. The correspondence between <b>RevNameTabid</b> and <b>PtgName</b> is specified by <b>RgbExtra</b> (section <a href="#">2.5.97.87</a>). The <b>RevNameTabid</b> MUST NOT have a <b>name.st</b> equal to one of the values in the following table.</p> <p>If the formula containing this structure is not part of a revision as specified in the Formulas overview (section <a href="#">2.2.2</a>), the <b>fFutureFunction</b> field of the <b>BrtName</b> (section <a href="#">2.4.680</a>) record MUST be 0. The <b>BrtName</b> record is specified by the <b>nameindex</b> field of the <b>PtgName</b> of the user-defined-params rule.</p> $\text{user-defined-x-params} = \text{PtgNameX} * 254(\text{ref} / \text{val})$ <p>The <b>PtgNameX</b> (section <a href="#">2.5.97.61</a>) of the user-defined-x-params rule MUST NOT be a VALUE_TYPE, as described in section <a href="#">2.5.97.88</a>.</p> <p>Some of the formulas containing this structure are part of a revision as specified in the Formulas overview (section <a href="#">2.2.2</a>). If so, the <b>RevName</b> (section <a href="#">2.5.97.83</a>) corresponding to the <b>PtgNameX</b> (as specified by <b>RgbExtra</b>) in the <b>rgcb</b> field of the <b>CellParsedFormula</b> or <b>NameParsedFormula</b> containing this structure MUST NOT have a <b>name.name.st</b> or <b>externName.name.st</b> equal to one of the values in the following table.</p> <p>If the formula containing this structure is not part of a revision as specified in the Formulas overview (section <a href="#">2.2.2</a>), the <b>fFutureFunction</b> field of the <b>BrtName</b> record MUST be 0. The <b>BrtName</b> record is specified by the <b>nameindex</b> field of the <b>PtgNameX</b> of the user-defined-x-params rule.</p> $\text{future-function} = \text{PtgName future-function-params}$ <p>The <b>PtgName</b> of the future-function rule MUST NOT be a VALUE_TYPE, as described in section <a href="#">2.5.97.88</a>.</p> <p>If the formula containing this structure is part of a revision as specified in the Formulas overview (section <a href="#">2.2.2</a>), then this structure MUST be contained by a <b>CellParsedFormula</b> or <b>NameParsedFormula</b> structure. The <b>rgcb</b> field of the <b>CellParsedFormula</b> or <b>NameParsedFormula</b> MUST have a <b>RevNameTabid</b> that corresponds to the <b>PtgName</b> in the future-function rule. The correspondence between <b>RevNameTabid</b> and <b>PtgName</b> is specified by <b>RgbExtra</b>. The <b>RevNameTabid</b> MUST have a <b>tabid</b> of 0xFFFF, a <b>name.iBuiltin</b> of 0, and a <b>name.st</b> equal to one of the values in the following table.</p> <p>If the formula containing this structure is not part of a revision as specified in the Formulas overview (section <a href="#">2.2.2</a>), the <b>fFutureFunction</b> field of the <b>BrtName</b> record MUST be 1. The <b>BrtName</b> record is specified by the <b>nameindex</b> field of the <b>PtgName</b> of the future-function rule.</p> $\text{future-function-params} = \text{acot-params} / \text{acoth-params} / \text{aggregate-params} / \text{arabic-params} / \text{base-params} / \text{betadist-params} / \text{beta-inv-params} / \text{binom-dist-params} / \text{binom-dist-range-params} / \text{binom-inv-params} / \text{bitand-params} / \text{bitlshift-params} / \text{bitor-params} / \text{bitrshift-params} / \text{bitxor-params} / \text{ceiling-math-params} / \text{ceiling-precise-params} / \text{chisq-dist-params} / \text{chisq-dist-rt-params} / \text{chisq-inv-params} / \text{chisq-inv-rt-params} / \text{chisq-test-params} / \text{combina-params} / \text{confidence-norm-params} / \text{confidence-t-params} / \text{cot-params} / \text{coth-params} / \text{covariance-p-params} / \text{covariance-s-params} / \text{csc-params} / \text{csch-params} / \text{days-params} / \text{decimal-params} / \text{ecma-ceiling-params} / \text{erf-precise-params} / \text{erfc-precise-params} / \text{expon-dist-params} / \text{f-dist-params} / \text{f-dist-rt-params} / \text{f-inv-params} / \text{f-inv-rt-params} / \text{filterxml-params} / \text{floor-math-params} / \text{floor-precise-params} / \text{formulatext-params} / \text{gamma-params} / \text{gamma-dist-params} / \text{gamma-inv-params} / \text{gammaln-precise-params} / \text{gauss-params} / \text{hypgeom-dist-params} / \text{ifna-params} / \text{imcosh-params} / \text{imcot-params} / \text{imcsc-params} / \text{imcsch-params} / \text{imsec-params} / \text{imsech-params} / \text{imsinh-params} / \text{imtan-params} / \text{isformula-params} / \text{iso-ceiling-params} / \text{isoweeknum-params} / \text{lognorm-dist-params} / \text{lognorm-inv-params} / \text{mode-mult-params} / \text{mode-sngl-params} / \text{munit-params} / \text{negbinom-dist-params} / \text{networkdays-intl-params} / \text{norm-dist-params} / \text{norm-inv-params} / \text{norm-s-dist-params} / \text{norm-s-inv-params} / \text{numbervalue-params} / \text{pduration-params} / \text{percentile-exc-params} / \text{percentile-inc-params} / \text{percentrank-}$ |

| Value  | Meaning   |
|--------|---|
|        | exc-params / percentrank-inc-params / permutationa-params / phi-params / poisson-dist-params / quartile-exc-params / quartile-inc-params / querystring-params / rank-avg-params / rank-eq-params / rri-params / sec-params / sech-params / sheet-params / sheets-params / skew-p-params / stdev-p-params / stdev-s-params / t-dist-params / t-dist-twotails-params / t-dist-rt-params / t-inv-params / t-inv-twotails-params / t-test-params / unichar-params / unicode-params / var-s-params / var-p-params / webservice-params / weibull-dist-params / workday-intl-params / xor-params / z-test-params |
| 0x0100 | RESET.TOOLBAR   |
|        | reset-toolbar-params = val  |
| 0x0101 | EVALUATE  |
|        | evaluate-params = val   |
| 0x0102 | GET.TOOLBAR   |
|        | get-toolbar-params = val [val]  |
| 0x0103 | GET.TOOL  |
|        | get-tool-params = val [val [val]]   |
| 0x0104 | SPELLING.CHECK  |
|        | spelling-check-params = val [val [val]]   |
| 0x0105 | ERROR.TYPE  |
|        | error-type-params = val   |
| 0x0106 | APP.TITLE   |
|        | app-title-params = [val]  |
| 0x0107 | WINDOW.TITLE  |
|        | window-title-params = [val]   |
| 0x0108 | SAVE.TOOLBAR  |
|        | save-toolbar-params = [val [val]]   |
| 0x0109 | ENABLE.TOOL   |
|        | enable-tool-params = val val val  |
| 0x010A | PRESS.TOOL  |
|        | press-tool-params = val val val   |
| 0x010B | REGISTER.ID   |
|        | register-id-params = val val [val]  |
| 0x010C | GET.WORKBOOK  |
|        | get-workbook-params = val [val]   |

| Value  | Meaning                                     |
|--------|---|
| 0x010D | AVEDEV                                      |
|        | avedev-params = (ref / val) *254(ref / val) |
| 0x010E | BETADIST                                    |
|        | betadist-params = val val val *2(val)       |
| 0x010F | GAMMALN                                     |
|        | gammaln-params = val                        |
| 0x0110 | BETAINV                                     |
|        | betainv-params = val val val *2(val)        |
| 0x0111 | BINOMDIST                                   |
|        | binomdist-params = val val val val          |
| 0x0112 | CHIDIST                                     |
|        | chidist-params = val val                    |
| 0x0113 | CHIINV                                      |
|        | chiinv-params = val val                     |
| 0x0114 | COMBIN                                      |
|        | combin-params = val val                     |
| 0x0115 | CONFIDENCE                                  |
|        | confidence-params = val val val             |
| 0x0116 | CRITBINOM                                   |
|        | critbinom-params = val val val              |
| 0x0117 | EVEN  |
|        | even-params = val                           |
| 0x0118 | EXPONDIST                                   |
|        | expondist-params = val val val              |
| 0x0119 | FDIST                                       |
|        | fdist-params = val val val                  |
| 0x011A | FINV  |
|        | finv-params = val val val                   |
| 0x011B | FISHER                                      |
|        | fisher-params = val                         |

| <b>Value</b> | <b>Meaning</b>                       |
|--------------|--------------------------------------|
| 0x011C       | FISHERINV                            |
|              | fisherinv-params = val               |
| 0x011D       | FLOOR                                |
|              | floor-params = val val               |
| 0x011E       | GAMMADIST                            |
|              | gammadist-params = val val val val   |
| 0x011F       | GAMMAINV                             |
|              | gammainv-params = val val val        |
| 0x0120       | CEILING                              |
|              | ceiling-params = val val             |
| 0x0121       | HYPGEOMDIST                          |
|              | hypgeomdist-params = val val val val |
| 0x0122       | LOGNORMDIST                          |
|              | lognormdist-params = val val val     |
| 0x0123       | LOGINV                               |
|              | loginv-params = val val val          |
| 0x0124       | NEGBINOMDIST                         |
|              | negbinomdist-params = val val val    |
| 0x0125       | NORMDIST                             |
|              | normdist-params = val val val val    |
| 0x0126       | NORMSDIST                            |
|              | normsdist-params = val               |
| 0x0127       | NORMINV                              |
|              | norminv-params = val val val         |
| 0x0128       | NORMSINV                             |
|              | normsinv-params = val                |
| 0x0129       | STANDARDIZE                          |
|              | standardize-params = val val val     |
| 0x012A       | ODD                                  |
|              | odd-params = val                     |

| <b>Value</b> | <b>Meaning</b>                   |
|--------------|----------------------------------|
| 0x012B       | PERMUT                           |
|              | permut-params = val val          |
| 0x012C       | POISSON                          |
|              | poisson-params = val val val     |
| 0x012D       | TDIST                            |
|              | tdist-params = val val val       |
| 0x012E       | WEIBULL                          |
|              | weibull-params = val val val val |
| 0x012F       | SUMXMY2                          |
|              | sumxmy2-params = val val         |
| 0x0130       | SUMX2MY2                         |
|              | sumx2my2-params = val val        |
| 0x0131       | SUMX2PY2                         |
|              | sumx2py2-params = val val        |
| 0x0132       | CHITEST                          |
|              | chitest-params = val val         |
| 0x0133       | CORREL                           |
|              | correl-params = val val          |
| 0x0134       | COVAR                            |
|              | covar-params = val val           |
| 0x0135       | FORECAST                         |
|              | forecast-params = val val val    |
| 0x0136       | FTEST                            |
|              | ftest-params = val val           |
| 0x0137       | INTERCEPT                        |
|              | intercept-params = val val       |
| 0x0138       | PEARSON                          |
|              | pearson-params = val val         |
| 0x0139       | RSQ                              |
|              | rsq-params = val val             |

| Value  | Meaning                                      |
|--------|--|
| 0x013A | STEYX  |
|        | steyx-params = val val                       |
| 0x013B | SLOPE  |
|        | slope-params = val val                       |
| 0x013C | TTEST  |
|        | ttest-params = val val val val               |
| 0x013D | PROB   |
|        | prob-params = val val val [val]              |
| 0x013E | DEVSQ  |
|        | devsq-params = (ref / val) *254(ref / val)   |
| 0x013F | GEOMEAN                                      |
|        | geomean-params = (ref / val) *254(ref / val) |
| 0x0140 | HARMEAN                                      |
|        | harmean-params = (ref / val) *254(ref / val) |
| 0x0141 | SUMSQ  |
|        | sumsq-params = (ref / val) *254(ref / val)   |
| 0x0142 | KURT   |
|        | kurt-params = (ref / val) *254(ref / val)    |
| 0x0143 | SKEW   |
|        | skew-params = (ref / val) *254(ref / val)    |
| 0x0144 | ZTEST  |
|        | ztest-params = (ref / val) val [val]         |
| 0x0145 | LARGE  |
|        | large-params = (ref / val) val               |
| 0x0146 | SMALL  |
|        | small-params = (ref / val) val               |
| 0x0147 | QUARTILE                                     |
|        | quartile-params = (ref / val) val            |
| 0x0148 | PERCENTILE                                   |
|        | percentile-params = (ref / val) val          |

| Value  | Meaning   |
|--------|---|
| 0x0149 | PERCENTRANK   |
|        | percentrank-params = (ref / val) val [val]                      |
| 0x014A | MODE  |
|        | mode-params = val *254(val)                                     |
| 0x014B | TRIMMEAN  |
|        | trimmean-params = (ref / val) val                               |
| 0x014C | TINV  |
|        | tinvs-params = val val  |
| 0x014E | MOVIE.COMMAND   |
|        | movie-command-params = val val val [val]                        |
| 0x014F | GET.MOVIE   |
|        | get-movie-params = val val [val]                                |
| 0x0150 | CONCATENATE   |
|        | concatenate-params = val *254(val)                              |
| 0x0151 | POWER   |
|        | power-params = val val  |
| 0x0152 | PIVOT.ADD.DATA  |
|        | pivot-add-data-params = val val [val [val [val [val *3(val)]]]] |
| 0x0153 | GET.PIVOT.TABLE   |
|        | get-pivot-table-params = val [val]                              |
| 0x0154 | GET.PIVOT.FIELD   |
|        | get-pivot-field-params = val [val [val]]                        |
| 0x0155 | GET.PIVOT.ITEM  |
|        | get-pivot-item-params = val [val [val [val]]]                   |
| 0x0156 | RADIANS   |
|        | radians-params = val  |
| 0x0157 | DEGREES   |
|        | degrees-params = val  |
| 0x0158 | SUBTOTAL  |
|        | subtotal-params = val ref *253(ref)                             |



| Value  | Meaning   |
|--------|---|
| 0x0159 | SUMIF   |
|        | sumif-params = ref val [ref]  |
| 0x015A | COUNTIF   |
|        | countif-params = ref val  |
| 0x015B | COUNTBLANK  |
|        | countblank-params = ref   |
| 0x015C | SCENARIO.GET  |
|        | scenario-get-params = val [val]   |
| 0x015D | OPTIONS.LISTS.GET   |
|        | options-lists-get-params = val  |
| 0x015E | ISPMT   |
|        | ispmt-params = val val val val  |
| 0x015F | DATEDIF   |
|        | datedif-params = val val val  |
| 0x0160 | DATESTRING  |
|        | datestring-params = val   |
| 0x0161 | NUMBERSTRING  |
|        | numberstring-params = val val   |
| 0x0162 | ROMAN   |
|        | roman-params = val [val]  |
| 0x0163 | OPEN.DIALOG   |
|        | open-dialog-params = [val [val [val [val]]]]                            |
| 0x0164 | SAVE.DIALOG   |
|        | save-dialog-params = [val [val [val [val [val]]]]]                      |
| 0x0165 | VIEW.GET  |
|        | view-get-params = val [val]   |
| 0x0166 | GETPIVOTDATA  |
|        | getpivotdata-params = (ref / val) (ref / val) [val [val *125(val val)]] |
| 0x0167 | HYPERLINK   |
|        | hyperlink-params = val [val]  |

| <b>Value</b> | <b>Meaning</b>                                |
|--------------|---|
| 0x0168       | PHONETIC                                      |
|              | phonetic-params = ref                         |
| 0x0169       | AVERAGEA                                      |
|              | averagea-params = (ref / val) *254(ref / val) |
| 0x016A       | MAXA  |
|              | maxa-params = (ref / val) *254(ref / val)     |
| 0x016B       | MINA  |
|              | mina-params = (ref / val) *254(ref / val)     |
| 0x016C       | STDEVPA                                       |
|              | stdevpa-params = (ref / val) *254(ref / val)  |
| 0x016D       | VARPA   |
|              | varpa-params = (ref / val) *254(ref / val)    |
| 0x016E       | STDEVA  |
|              | stdeva-params = (ref / val) *254(ref / val)   |
| 0x016F       | VARA  |
|              | vara-params = (ref / val) *254(ref / val)     |
| 0x0170       | BAHTTEXT                                      |
|              | bahttext-params = val                         |
| 0x0171       | THAIDAYOFWEEK                                 |
|              | thaidayofweek-params = val                    |
| 0x0172       | THAIDIGIT                                     |
|              | thaidigit-params = val                        |
| 0x0173       | THAIMONTHOFYEAR                               |
|              | thaimonthofyear-params = val                  |
| 0x0174       | THAINUMSOUND                                  |
|              | thainumsound-params = val                     |
| 0x0175       | THAINUMSTRING                                 |
|              | thainumstring-params = val                    |
| 0x0176       | THAISTRINGLENGTH                              |
|              | thastringlength-params = val                  |

| Value  | Meaning  |
|--------|--|
| 0x0177 | ISTHAIDIGIT  |
|        | isthaidigit-params = val                             |
| 0x0178 | ROUNDBAHTDOWN  |
|        | roundbahtdown-params = val                           |
| 0x0179 | ROUNDBAHTUP  |
|        | roundbahtup-params = val                             |
| 0x017A | THAIYEAR   |
|        | thaiyear-params = val                                |
| 0x017B | RTD  |
|        | rtd-params = val val val *252(val)                   |
| 0x017C | CUBEVALUE  |
|        | cubevalue-params = val [(ref / val) *253(ref / val)] |
| 0x017D | CUBEMEMBER   |
|        | cubemember-params = val (ref / val) [val]            |
| 0x017E | CUBEMEMBERPROPERTY                                   |
|        | cubememberproperty-params = val val val              |
| 0x017F | CUBERANKEDMEMBER                                     |
|        | cuberankedmember-params = val val val [val]          |
| 0x0180 | HEX2BIN  |
|        | hex2bin-params = (ref / val) [ref / val]             |
| 0x0181 | HEX2DEC  |
|        | hex2dec-params = (ref / val)                         |
| 0x0182 | HEX2OCT  |
|        | hex2oct-params = (ref / val) [ref / val]             |
| 0x0183 | DEC2BIN  |
|        | dec2bin-params = (ref / val) [ref / val]             |
| 0x0184 | DEC2HEX  |
|        | dec2hex-params = (ref / val) [ref / val]             |
| 0x0185 | DEC2OCT  |
|        | dec2oct-params = (ref / val) [ref / val]             |

| <b>Value</b> | <b>Meaning</b>                           |
|--------------|--|
| 0x0186       | OCT2BIN                                  |
|              | oct2bin-params = (ref / val) [ref / val] |
| 0x0187       | OCT2HEX                                  |
|              | oct2hex-params = (ref / val) [ref / val] |
| 0x0188       | OCT2DEC                                  |
|              | oct2dec-params = (ref / val)             |
| 0x0189       | BIN2DEC                                  |
|              | bin2dec-params = (ref / val)             |
| 0x018A       | BIN2OCT                                  |
|              | bin2oct-params = (ref / val) [ref / val] |
| 0x018B       | BIN2HEX                                  |
|              | bin2hex-params = (ref / val) [ref / val] |
| 0x018C       | IMSUB                                    |
|              | imsub-params = (ref / val) (ref / val)   |
| 0x018D       | IMDIV                                    |
|              | imdiv-params = (ref / val) (ref / val)   |
| 0x018E       | IMPOWER                                  |
|              | impower-params = (ref / val) (ref / val) |
| 0x018F       | IMABS                                    |
|              | imabs-params = (ref / val)               |
| 0x0190       | IMSQRT                                   |
|              | imsqrt-params = (ref / val)              |
| 0x0191       | IMLN                                     |
|              | imln-params = (ref / val)                |
| 0x0192       | IMLOG2                                   |
|              | imlog2-params = (ref / val)              |
| 0x0193       | IMLOG10                                  |
|              | imlog10-params = (ref / val)             |
| 0x0194       | IMSIN                                    |
|              | imsin-params = (ref / val)               |

| Value  | Meaning  |
|--------|--|
| 0x0195 | IMCOS  |
|        | imcos-params = (ref / val)   |
| 0x0196 | IMEXP  |
|        | imexp-params = (ref / val)   |
| 0x0197 | IMARGUMENT   |
|        | imargument-params = (ref / val)                                    |
| 0x0198 | IMCONJUGATE  |
|        | imconjugate-params = (ref / val)                                   |
| 0x0199 | IMAGINARY  |
|        | imaginary-params = (ref / val)                                     |
| 0x019A | IMREAL   |
|        | imreal-params = (ref / val)  |
| 0x019B | COMPLEX  |
|        | complex-params = (ref / val) (ref / val) [ref / val]               |
| 0x019C | IMSUM  |
|        | imsum-params = (ref / val) *254(ref / val)                         |
| 0x019D | IMPRODUCT  |
|        | improduct-params = (ref / val) *254(ref / val)                     |
| 0x019E | SERIESSUM  |
|        | seriessum-params = (ref / val) (ref / val) (ref / val) (ref / val) |
| 0x019F | FACTDOUBLE   |
|        | factdouble-params = (ref / val)                                    |
| 0x01A0 | SQRTPI   |
|        | sqrtpi-params = (ref / val)  |
| 0x01A1 | QUOTIENT   |
|        | quotient-params = (ref / val) (ref / val)                          |
| 0x01A2 | DELTA  |
|        | delta-params = (ref / val) [ref / val]                             |
| 0x01A3 | GESTEP   |
|        | gestep-params = (ref / val) [ref / val]                            |

| <b>Value</b> | <b>Meaning</b>  |
|--------------|---|
| 0x01A4       | ISEVEN  |
|              | iseven-params = (ref / val)   |
| 0x01A5       | ISODD   |
|              | isodd-params = (ref / val)  |
| 0x01A6       | MROUND  |
|              | mround-params = (ref / val) (ref / val)   |
| 0x01A7       | ERF   |
|              | erf-params = (ref / val) [ref / val]  |
| 0x01A8       | ERFC  |
|              | erfc-params = (ref / val)   |
| 0x01A9       | BESSELJ   |
|              | besselj-params = (ref / val) (ref / val)  |
| 0x01AA       | BESSELK   |
|              | besselk-params = (ref / val) (ref / val)  |
| 0x01AB       | BESSELY   |
|              | bessely-params = (ref / val) (ref / val)  |
| 0x01AC       | BESSELI   |
|              | besseli-params = (ref / val) (ref / val)  |
| 0x01AD       | XIRR  |
|              | xirr-params = (ref / val) (ref / val) [ref / val]   |
| 0x01AE       | XNPV  |
|              | xnpv-params = (ref / val) (ref / val) (ref / val)   |
| 0x01AF       | PRICEMAT  |
|              | pricemat-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val] |
| 0x01B0       | YIELDMAT  |
|              | yieldmat-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val] |
| 0x01B1       | INTRATE   |
|              | intrate-params = (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]              |
| 0x01B2       | RECEIVED  |
|              | received-params = (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]             |

| <b>Value</b> | <b>Meaning</b>   |
|--------------|--|
| 0x01B3       | DISC   |
|              | disc-params = (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]                          |
| 0x01B4       | PRICEDISC  |
|              | pricedisc-params = (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]                     |
| 0x01B5       | YIELDDISC  |
|              | yielddisc-params = (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]                     |
| 0x01B6       | TBILLEQ  |
|              | tbilleq-params = (ref / val) (ref / val) (ref / val)   |
| 0x01B7       | TBILLPRICE   |
|              | tbillprice-params = (ref / val) (ref / val) (ref / val)  |
| 0x01B8       | TBILLYIELD   |
|              | tbillyield-params = (ref / val) (ref / val) (ref / val)  |
| 0x01B9       | PRICE  |
|              | price-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val] |
| 0x01BA       | YIELD  |
|              | yield-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val] |
| 0x01BB       | DOLLARDE   |
|              | dollarde-params = (ref / val) (ref / val)  |
| 0x01BC       | DOLLARFR   |
|              | dollarfr-params = (ref / val) (ref / val)  |
| 0x01BD       | NOMINAL  |
|              | nominal-params = (ref / val) (ref / val)   |
| 0x01BE       | EFFECT   |
|              | effect-params = (ref / val) (ref / val)  |
| 0x01BF       | CUMPRINC   |
|              | cumprinc-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val)          |
| 0x01C0       | CUMIPMT  |
|              | cumipmt-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val)           |
| 0x01C1       | EDATE  |
|              | edate-params = (ref / val) (ref / val)   |

| <b>Value</b> | <b>Meaning</b>   |
|--------------|--|
| 0x01C2       | EOMONTH  |
|              | eomonth-params = (ref / val) (ref / val)   |
| 0x01C3       | YEARFRAC   |
|              | yearfrac-params = (ref / val) (ref / val) [ref / val]  |
| 0x01C4       | COUPDAYBS  |
|              | coupdaybs-params = (ref / val) (ref / val) (ref / val) [ref / val]   |
| 0x01C5       | COUPDAYS   |
|              | coupdays-params = (ref / val) (ref / val) (ref / val) [ref / val]  |
| 0x01C6       | COUPDAYSNC   |
|              | coupdaysnc-params = (ref / val) (ref / val) (ref / val) [ref / val]  |
| 0x01C7       | COUPNCD  |
|              | coupncd-params = (ref / val) (ref / val) (ref / val) [ref / val]   |
| 0x01C8       | COUPNUM  |
|              | coupnum-params = (ref / val) (ref / val) (ref / val) [ref / val]   |
| 0x01C9       | COUPPCD  |
|              | couppcd-params = (ref / val) (ref / val) (ref / val) [ref / val]   |
| 0x01CA       | DURATION   |
|              | duration-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]                                      |
| 0x01CB       | MDURATION  |
|              | mduration-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]                                     |
| 0x01CC       | ODDLPRICE  |
|              | oddprice-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]              |
| 0x01CD       | ODDLYIELD  |
|              | oddyield-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]              |
| 0x01CE       | ODDFPRICE  |
|              | oddfprice-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val] |
| 0x01CF       | ODDFYIELD  |
|              | oddfyield-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val] |



| Value  | Meaning  |
|--------|--|
| 0x01D0 | RANDBETWEEN  |
|        | randbetween-params = (ref / val) (ref / val)   |
| 0x01D1 | WEEKNUM  |
|        | weeknum-params = (ref / val) [ref / val]   |
| 0x01D2 | AMORDEGRC  |
|        | amordegrc-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val] |
| 0x01D3 | AMORLINC   |
|        | amorlinc-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]  |
| 0x01D4 | CONVERT  |
|        | convert-params = (ref / val) (ref / val) (ref / val)   |
| 0x01D5 | ACCRINT  |
|        | accrint-params = (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) (ref / val) *2(ref / val) |
| 0x01D6 | ACCRINTM   |
|        | accrintm-params = (ref / val) (ref / val) (ref / val) (ref / val) [ref / val]                          |
| 0x01D7 | WORKDAY  |
|        | workday-params = (ref / val) (ref / val) [ref / val]   |
| 0x01D8 | NETWORKDAYS  |
|        | networkdays-params = (ref / val) (ref / val) [ref / val]   |
| 0x01D9 | GCD  |
|        | gcd-params = (ref / val) *254(ref / val)   |
| 0x01DA | MULTINOMIAL  |
|        | multinomial-params = (ref / val) *254(ref / val)   |
| 0x01DB | LCM  |
|        | lcm-params = (ref / val) *254(ref / val)   |
| 0x01DC | FVSCHEDULE   |
|        | fvschedule-params = (ref / val) (ref / val)  |
| 0x01DD | CUBEKPIMEMBER  |
|        | cubekpimember-params = val val val [val]   |

| Value  | Meaning   |
|--------|---|
| 0x01DE | CUBESET   |
|        | cubese-params = val (ref / val) [val [val [val]]] |
| 0x01DF | CUBESETCOUNT                                      |
|        | cubese-count-params = val                         |
| 0x01E0 | IFERROR   |
|        | iferror-params = val (ref / val)                  |
| 0x01E1 | COUNTIFS  |
|        | countifs-params = ref val *126(ref val)           |
| 0x01E2 | SUMIFS  |
|        | sumifs-params = ref ref val *126(ref val)         |
| 0x01E3 | AVERAGEIF   |
|        | averageif-params = ref val [ref]                  |
| 0x01E4 | AVERAGEIFS  |
|        | averageifs-params = ref ref val *126(ref val)     |

The following table specifies the names of future functions.

| Future Function Value | Meaning  |
|-----------------------|--|
| _xln.ACOT             | ACOT   |
|                       | acot-params = val                                  |
| _xln.ACOTH            | ACOTH  |
|                       | acoth-params = val                                 |
| _xln.AGGREGATE        | AGGREGATE  |
|                       | aggregate-params = 2(val) 1*2(ref / val) *250(ref) |
| _xln.ARABIC           | ARABIC   |
|                       | arabic-params = val                                |
| _xln.BASE             | BASE   |
|                       | base-params = val val [val]                        |
| _xln.BETA.DIST        | BETA.DIST  |
|                       | betadist-params = val val val val *2(val)          |
| _xln.BETA.INV         | BETA.INV   |

| <b>Future Function Value</b> | <b>Meaning</b>                              |
|------------------------------|---|
|                              | beta-inv-params = val val val *2(val)       |
| _xlfn.BINOM.DIST             | BINOM.DIST                                  |
|                              | binom-dist-params = val val val val         |
| _xlfn.BINOM.DIST.RANGE       | BINOM.DIST.RANGE                            |
|                              | binom-dist-range-params = val val val [val] |
| _xlfn.BINOM.INV              | BINOM.INV                                   |
|                              | binom-inv-params = val val val              |
| _xlfn.BITAND                 | BITAND                                      |
|                              | bitand-params = val val                     |
| _xlfn.BITLSHIFT              | BITLSHIFT                                   |
|                              | bitlshift-params = val val                  |
| _xlfn.BITOR                  | BITOR                                       |
|                              | bitor-params = val val                      |
| _xlfn.BITRSHIFT              | BITRSHIFT                                   |
|                              | bitrshift-params = val val                  |
| _xlfn.BITXOR                 | BITXOR                                      |
|                              | bitxor-params = val val                     |
| _xlfn.CEILING.MATH           | CEILING.MATH                                |
|                              | ceiling-math-params = val [val [val]]       |
| _xlfn.CEILING.PRECISE        | CEILING.PRECISE                             |
|                              | ceiling-precise-params = val val            |
| _xlfn.CHISQ.DIST             | CHISQ.DIST                                  |
|                              | chisq-dist-params = val val val             |
| _xlfn.CHISQ.DIST.RT          | CHISQ.DIST.RT                               |
|                              | chisq-dist-rt-params = val val              |
| _xlfn.CHISQ.INV              | CHISQ.INV                                   |
|                              | chisq-inv-params = val val                  |
| _xlfn.CHISQ.INV.RT           | CHISQ.INV.RT                                |
|                              | chisq-inv-rt-params = val val               |
| _xlfn.CHISQ.TEST             | CHISQ.TEST                                  |

| <b>Future Function Value</b> | <b>Meaning</b>                       |
|------------------------------|--------------------------------------|
|                              | chisq-test-params = val val          |
| _xlnb.COMBINA                | COMBINA                              |
|                              | combina-params = val val             |
| _xlnb.CONFIDENCE.NORM        | CONFIDENCE.NORM                      |
|                              | confidence-norm-params = val val val |
| _xlnb.CONFIDENCE.T           | CONFIDENCE.T                         |
|                              | confidence-t-params = val val val    |
| _xlnb.COT                    | COT                                  |
|                              | cot-params = val                     |
| _xlnb.COTH                   | COTH                                 |
|                              | coth-params = val                    |
| _xlnb.COVARANCE.P            | COVARANCE.P                          |
|                              | covariance-p-params = val val        |
| _xlnb.COVARANCE.S            | COVARANCE.S                          |
|                              | covariance-s-params = val val        |
| _xlnb.CSC                    | CSC                                  |
|                              | csc-params = val                     |
| _xlnb.CSCH                   | CSCH                                 |
|                              | csch-params = val                    |
| _xlnb.DAYS                   | DAYS                                 |
|                              | days-params = val val                |
| _xlnb.DECIMAL                | DECIMAL                              |
|                              | decimal-params = val val             |
| _xlnb.ECMA.CEILING           | ECMA.CEILING                         |
|                              | ecma-ceiling-params = val val        |
| _xlnb.ERF.PRECISE            | ERF.PRECISE                          |
|                              | erf-precise-params = (ref / val)     |
| _xlnb.ERFC.PRECISE           | ERFC.PRECISE                         |
|                              | erfc-precise-params = (ref / val)    |
| _xlnb.EXPON.DIST             | EXPON.DIST                           |

| Future Function Value | Meaning                                   |
|-----------------------|---|
|                       | expon-dist-params = val val val           |
| _xlfn.F.DIST          | F.DIST                                    |
|                       | f-dist-params = val val val val           |
| _xlfn.F.DIST.RT       | F.DIST.RT                                 |
|                       | f-dist-rt-params = val val val            |
| _xlfn.F.INV           | F.INV                                     |
|                       | f-inv-params = val val val                |
| _xlfn.F.INV.RT        | F.INV.RT                                  |
|                       | f-inv-rt-params = val val val             |
| _xlfn.FILTERXML       | FILTERXML                                 |
|                       | filterxml-params = val val                |
| _xlfn.FLOOR.MATH      | FLOOR.MATH                                |
|                       | floor-math-params = val [val [val]]       |
| _xlfn.FLOOR.PRECISE   | FLOOR.PRECISE                             |
|                       | floor-precise-params = val val            |
| _xlfn.FORMULATEXT     | FORMULATEXT                               |
|                       | formulatext-params = ref                  |
| _xlfn.GAMMA           | GAMMA                                     |
|                       | gamma-params = val                        |
| _xlfn.GAMMA.DIST      | GAMMA.DIST                                |
|                       | gamma-dist-params = val val val val       |
| _xlfn.GAMMA.INV       | GAMMA.INV                                 |
|                       | gamma-inv-params = val val val            |
| _xlfn.GAMMALN.PRECISE | GAMMALN.PRECISE                           |
|                       | gammaln-precise-params = val              |
| _xlfn.GAUSS           | GAUSS                                     |
|                       | gauss-params = val                        |
| _xlfn.HYPGEOM.DIST    | HYPGEOM.DIST                              |
|                       | hypgeom-dist-params = val val val val val |
| _xlfn.IFNA            | IFNA                                      |

| <b>Future Function Value</b> | <b>Meaning</b>                        |
|------------------------------|---------------------------------------|
|                              | ifna-params = val (ref / val)         |
| _xlnv.IMCOSH                 | IMCOSH                                |
|                              | imcosh-params = val                   |
| _xlnv.IMCOT                  | IMCOT                                 |
|                              | imcot-params = val                    |
| _xlnv.IMCSC                  | IMCSC                                 |
|                              | imcsc-params = val                    |
| _xlnv.IMCSCH                 | IMCSCH                                |
|                              | imcsch-params = val                   |
| _xlnv.IMSEC                  | IMSEC                                 |
|                              | imsec-params = val                    |
| _xlnv.IMSECH                 | IMSECH                                |
|                              | imsech-params = val                   |
| _xlnv.IMSINH                 | IMSINH                                |
|                              | imsinh-params = val                   |
| _xlnv.IMTAN                  | IMTAN                                 |
|                              | imtan-params = val                    |
| _xlnv.ISFORMULA              | ISFORMULA                             |
|                              | isformula-params = ref                |
| _xlnv.ISO.CEILING            | ISO.CEILING                           |
|                              | iso-ceiling-params = val val          |
| _xlnv.ISOWEEKNUM             | ISOWEEKNUM                            |
|                              | isoweeknum-params = val               |
| _xlnv.LOGNORM.DIST           | LOGNORM.DIST                          |
|                              | lognorm-dist-params = val val val val |
| _xlnv.LOGNORM.INV            | LOGNORM.INV                           |
|                              | lognorm-inv-params = val val val      |
| _xlnv.MODE.MULT              | MODE.MULT                             |
|                              | mode-mult-params = 1*254(val)         |
| _xlnv.MODE.SNGL              | MODE.SNGL                             |

| <b>Future Function Value</b> | <b>Meaning</b>   |
|------------------------------|--|
|                              | mode-sngl-params = 1*254(val)                            |
| _xln.MUNIT                   | MUNIT  |
|                              | munit-params = val                                       |
| _xln.NEGBINOM.DIST           | NEGBINOM.DIST  |
|                              | negbinom-dist-params = val val val val                   |
| _xln.NETWORKDAYS.INTL        | NETWORKDAYS.INTL   |
|                              | networkdays-intl-params = 2(ref / val) [val [ref / val]] |
| _xln.NORM.DIST               | NORM.DIST  |
|                              | norm-dist-params = val val val val                       |
| _xln.NORM.INV                | NORM.INV   |
|                              | norm-inv-params = val val val                            |
| _xln.NORM.S.DIST             | NORM.S.DIST  |
|                              | norm-s-dist-params = val val                             |
| _xln.NORM.S.INV              | NORM.S.INV   |
|                              | norm-s-inv-params = val                                  |
| _xln.NUMBERVALUE             | NUMBERVALUE  |
|                              | numbervalue-params = val [val [val]]                     |
| _xln.PDURATION               | PDURATION  |
|                              | pduration-params = val val val                           |
| _xln.PERCENTILE.EXC          | PERCENTILE.EXC   |
|                              | percentile-exc-params = (ref / val) val                  |
| _xln.PERCENTILE.INC          | PERCENTILE.INC   |
|                              | percentile-inc-params = (ref / val) val                  |
| _xln.PERCENTRANK.EXC         | PERCENTRANK.EXC  |
|                              | percentrank-exc-params = (ref / val) val [val]           |
| _xln.PERCENTRANK.INC         | PERCENTRANK.INC  |
|                              | percentrank-inc-params = (ref / val) val [val]           |
| _xln.PERMUTATIONA            | PERMUTATIONA   |
|                              | permutationa-params = val val                            |
| _xln.PHI                     | PHI  |

| <b>Future Function Value</b> | <b>Meaning</b>                              |
|------------------------------|---|
|                              | phi-params = val                            |
| _xlnv.POISSON.DIST           | POISSON.DIST                                |
|                              | poisson-dist-params = val val val           |
| _xlnv.QUARTILE.EXC           | QUARTILE.EXC                                |
|                              | quartile-exc-params = (ref / val) val       |
| _xlnv.QUARTILE.INC           | QUARTILE.INC                                |
|                              | quartile-inc-params = (ref / val) val       |
| _xlnv.QUERYSTRING            | QUERYSTRING                                 |
|                              | querystring-params = val val *126(val val)  |
| _xlnv.RANK.AVG               | RANK.AVG                                    |
|                              | rank-avg-params = val ref [val]             |
| _xlnv.RANK.EQ                | RANK.EQ                                     |
|                              | rank-eq-params = val ref [val]              |
| _xlnv.RRI                    | RRI   |
|                              | rri-params = val val val                    |
| _xlnv.SEC                    | SEC   |
|                              | sec-params = val                            |
| _xlnv.SECH                   | SECH  |
|                              | sech-params = val                           |
| _xlnv.SHEET                  | SHEET                                       |
|                              | sheet-params = [(ref / val)]                |
| _xlnv.SHEETS                 | SHEETS                                      |
|                              | sheets-params = [(ref / val)]               |
| _xlnv.SKEW.P                 | SKEW.P                                      |
|                              | skew-p-params = (ref / val) *253(ref / val) |
| _xlnv.STDEV.P                | STDEV.P                                     |
|                              | stdev-p-params = 1*254(ref / val)           |
| _xlnv.STDEV.S                | STDEV.S                                     |
|                              | stdev-s-params = 1*254(ref / val)           |
| _xlnv.T.DIST                 | T.DIST                                      |



| Future Function Value | Meaning  |
|-----------------------|--|
|                       | t-dist-params = val val val                          |
| _xlnv.T.DIST.2T       | T.DIST.2T  |
|                       | t-dist-twotails-params = val val                     |
| _xlnv.T.DIST.RT       | T.DIST.RT  |
|                       | t-dist-rt-params = val val                           |
| _xlnv.T.INV           | T.INV  |
|                       | t-inv-params = val val                               |
| _xlnv.T.INV.2T        | T.INV.2T   |
|                       | t-inv-twotails-params = val val                      |
| _xlnv.T.TEST          | T.TEST   |
|                       | t-test-params = val val val val                      |
| _xlnv.UNICHAR         | UNICHAR  |
|                       | unichar-params = val                                 |
| _xlnv.UNICODE         | UNICODE  |
|                       | unicode-params = val                                 |
| _xlnv.VAR.P           | VAR.P  |
|                       | var-s-params = 1*254(ref / val)                      |
| _xlnv.VAR.S           | VAR.S  |
|                       | var-p-params = 1*254(ref / val)                      |
| _xlnv.WEBSERVICE      | WEBSERVICE   |
|                       | webservice-params = val [val]                        |
| _xlnv.WEIBULL.DIST    | WEIBULL.DIST   |
|                       | weibull-dist-params = val val val val                |
| _xlnv.WORKDAY.INTL    | WORKDAY.INTL   |
|                       | workday-intl-params = 2(ref / val) [val [ref / val]] |
| _xlnv.XOR             | XOR  |
|                       | xor-params = (ref / val) *253(ref / val)             |
| _xlnv.Z.TEST          | Z.TEST   |
|                       | z-test-params = (ref / val) val [val]                |

The following grammar is used in the **Rgce** (section [2.5.97.88](#)) structure definition.

params-fixed = isna-params / iserror-params /  
sin-params / cos-params / tan-params /  
atan-params / sqrt-params /  
exp-params / ln-params / log10-params /  
abs-params / int-params / sign-params /  
round-params / rept-params / mid-params /  
len-params / value-params / not-params / mod-params /  
dcount-params / dsum-params / daverage-params /  
dmin-params / dmax-params / dstdev-params /  
dvar-params / text-params / goto-params /  
mirr-params / date-params /  
time-params / day-params / month-params /  
year-params / hour-params / minute-params /  
second-params / areas-params /  
rows-params / columns-params / absref-params /  
relref-params / transpose-params /  
type-params / deref-params / atan2-params /  
asin-params / acos-params / isref-params /  
get-formula-params / set-value-params / char-params /  
lower-params / upper-params / proper-params /  
exact-params / trim-params / replace-params /  
code-params / iserr-params / istext-params /  
isnumber-params / isblank-params / t-params /  
n-params / fclose-params / fsize-params /  
freadln-params / fread-params / fwriteln-params /  
fwrite-params / datevalue-params / timevalue-params /  
sln-params / syd-params / dialog-box-params /  
clean-params / mdeterm-params / minverse-params /  
mmult-params / while-params / initiate-params / request-params /  
poke-params / execute-params / terminate-params /

fact-params / get-workspace-params / dproduct-params /  
isnontext-params / dstdevp-params / dvarp-params /  
islogical-params / dcounta-params / delete-bar-params /  
unregister-params / replaceb-params / midb-params /  
lenb-params / roundup-params / rounddown-params /  
asc-params / dbcs-params / else-if-params /  
sinh-params / cosh-params / tanh-params /  
asinh-params / acosh-params / atanh-params /  
dget-params / info-params / frequency-params / delete-toolbar-params /  
reset-toolbar-params / evaluate-params / error-type-params /  
enable-tool-params / press-tool-params / gammaln-params /  
binomdist-params / chidist-params / chiinv-params /  
combin-params / confidence-params / critbinom-params /  
even-params / expndist-params / fdist-params /  
finv-params / fisher-params / fisherinv-params /  
floor-params / gammadist-params / gammainv-params /  
ceiling-params / hypgeomdist-params / lognormdist-params /  
loginv-params / negbinomdist-params / normdist-params /  
normsdist-params / norminv-params / normsinv-params /  
standardize-params / odd-params / permut-params /  
poisson-params / tdist-params / weibull-params /  
sumxmy2-params / sumx2my2-params / sumx2py2-params /  
chitest-params / correl-params / covar-params /  
forecast-params / ftest-params / intercept-params /  
pearson-params / rsq-params / steyx-params /  
slope-params / ttest-params / large-params /  
small-params / quartile-params / percentile-params /  
trimmean-params / tinv-params / power-params /  
radians-params / degrees-params / countif-params /  
countblank-params / options-lists-get-params / ispmt-params /

datedif-params / datestring-params / numberstring-params /  
phonetic-params / bahttext-params / thaidayofweek-params /  
thaidigit-params / thaimonthofyear-params / thainumsound-params /  
thainumstring-params / thaistringlength-params / isthaidigit-params /  
roundbahtdown-params / roundbahtup-params / thaiyear-params /  
cubememberproperty-params / hex2dec-params / oct2dec-params /  
bin2dec-params / imsub-params / imdiv-params /  
impower-params / imabs-params / imsqr-params /  
imln-params / imlog2-params / imlog10-params /  
imsin-params / imcos-params / imexp-params /  
imargument-params / imconjugate-params / imaginary-params /  
imreal-params / seriessum-params / factdouble-params /  
sqrtpi-params / quotient-params / iseven-params /  
isodd-params / mround-params / erfc-params /  
besselj-params / besseli-params / bessely-params /  
besseli-params / xnpv-params / tbilleq-params /  
tbillprice-params / tbillyield-params / dollarde-params /  
dollarfr-params / nominal-params / effect-params /  
cumprinc-params / cumipmt-params / edate-params /  
eomonth-params / randbetween-params / convert-params /  
fvschedule-params / cubesetcount-params / iferror-params  
params-variable = count-params / if-params / sum-params /  
average-params / min-params / max-params /  
row-params / column-params / npv-params /  
stdev-params / dollar-params / fixed-params /  
lookup-params / index-params / and-params /  
or-params / var-params / linest-params /  
trend-params / logest-params / growth-params /  
halt-params / return-params / pv-params /  
fv-params / nper-params / pmt-params /

rate-params / irr-params / match-params /  
weekday-params / offset-params / argument-params /  
search-params / error-params / echo-params /  
set-name-params / windows-params /  
documents-params / result-params / choose-params /  
hlookup-params / vlookup-params / links-params /  
input-params / get-name-params / log-params /  
exec-params / left-params / right-params /  
substitute-params / names-params / directory-params /  
find-params / cell-params / fopen-params /  
fpos-params / ddb-params / get-def-params /  
reftext-params / textref-params / indirect-params /  
register-params / call-params / add-bar-params /  
add-menu-params / add-command-params / enable-command-params /  
check-command-params / rename-command-params / show-bar-params /  
delete-menu-params / delete-command-params / get-chart-item-params /  
files-params / ipmt-params / ppmt-params /  
counta-params / cancel-key-params / for-params /  
restart-params / help-params / get-bar-params /  
product-params / get-cell-params / get-window-params /  
get-document-params / get-note-params / note-params /  
stdevp-params / varp-params / trunc-params /  
usdollar-params / findb-params / searchb-params /  
leftb-params / rightb-params / rank-params /  
address-params / days360-params / vdb-params /  
for-cell-params / median-params / sumproduct-params /  
create-object-params / volatile-params / custom-undo-params /  
custom-repeat-params / formula-convert-params / get-link-info-params /  
text-box-params / get-object-params / db-params /  
pause-params / resume-params / add-toolbar-params /

user-defined-or-future-function / get-toolbar-params / get-tool-params /  
spelling-check-params / app-title-params / window-title-params /  
save-toolbar-params / register-id-params / get-workbook-params /  
avedev-params / betadist-params / betainv-params /  
prob-params / devsq-params / geomean-params /  
harmean-params / sumsq-params / kurt-params /  
skew-params / ztest-params / percentrank-params /  
mode-params / movie-command-params / get-movie-params /  
concatenate-params / pivot-add-data-params / get-pivot-table-params /  
get-pivot-field-params / get-pivot-item-params / subtotal-params /  
sumif-params / scenario-get-params / roman-params /  
open-dialog-params / save-dialog-params / view-get-params /  
getpivotdata-params / hyperlink-params / averagea-params /  
maxa-params / mina-params / stdevpa-params /  
varpa-params / stdeva-params / vara-params /  
rtd-params / cubevalue-params / cubemember-params /  
cuberankedmember-params / hex2bin-params / hex2oct-params /  
dec2bin-params / dec2hex-params / dec2oct-params /  
oct2bin-params / oct2hex-params / bin2oct-params /  
bin2hex-params / complex-params / imsum-params /  
improduct-params / delta-params / gestep-params /  
erf-params / xirr-params / pricemat-params /  
yieldmat-params / intrate-params / received-params /  
disc-params / pricedisc-params / yielddisc-params /  
price-params / yield-params / yearfrac-params /  
coupdaybs-params / coupdays-params / coupdaysnc-params /  
counpcd-params / couponum-params / couppcd-params /  
duration-params / mduration-params / oddlprice-params /  
oddyield-params / oddfprice-params / oddfyield-params /  
weeknum-params / amordegrc-params / amorlinc-params /

accrint-params / accrintm-params / workday-params /  
networkdays-params / gcd-params / multinomial-params /  
lcm-params / cubekpimember-params / cubeset-params /  
countifs-params / sumifs-params / averageif-params /  
averageifs-params

### 2.5.97.11 ListParsedFormula

The **ListParsedFormula** structure specifies a formula (section [2.2.2](#)) used in a table.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. Its value MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. It MUST NOT contain **PtgExp** (section [2.5.97.40](#)) or **PtgSxName** (section [2.5.97.76](#)).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

### 2.5.97.12 NameParsedFormula

The **NameParsedFormula** structure specifies a formula (section [2.2.2](#)) used in a defined name.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                 |
|-----------------|
| ...             |
| cb              |
| rgcb (variable) |
| ...             |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. Its value MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. It MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgSxName** (section [2.5.97.76](#)), **PtgRef** (section [2.5.97.68](#)), **PtgRefN** (section [2.5.97.72](#)), **PtgRefErr** (section [2.5.97.70](#)), **PtgArea** (section [2.5.97.18](#)), **PtgAreaN** (section [2.5.97.22](#)), or **PtgAreaErr** (section [2.5.97.20](#)).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

### 2.5.97.13 ObjectParsedFormula

The **ObjectParsedFormula** structure specifies a formula (section [2.2.2](#)) used by an embedded object.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. Its value MUST be equal to 7.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. It MUST contain only one **Ptg**, and this **Ptg** MUST be **PtgNameX** (section [2.5.97.61](#)).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.



**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

### 2.5.97.14 ParameterParsedFormula

The **ParameterParsedFormula** structure specifies the formula (section [2.2.2](#)) for a query parameter.

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. Its value MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. It MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgArray** (section [2.5.97.23](#))<66>, **PtgMemArea** (section [2.5.97.54](#)), or **PtgSxName** (section [2.5.97.76](#)).

The root node of the parse tree of this field MUST NOT be a VALUE\_TYPE, as described in section [2.5.97.88](#).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

### 2.5.97.15 PivotParsedFormula

The **PivotParsedFormula** structure specifies a formula (section [2.2.2](#)) used in a **PivotTable** (section [2.1.7.40](#)).

| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

|                 |
|-----------------|
| cb              |
| rgcb (variable) |
| ...             |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. Its value MUST be less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) structure that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgUnion** (section [2.5.97.78](#)), **PtgIsect** (section [2.5.97.50](#)), **PtgRange** (section [2.5.97.67](#)), **PtgList** (section [2.5.97.52](#)), **PtgArray** (section [2.5.97.23](#)), **PtgAttrSpaceSemi** (section [2.5.97.31](#)), **PtgAttrSemi** (section [2.5.97.29](#)), **PtgRef** (section [2.5.97.68](#)), **PtgRefErr** (section [2.5.97.70](#)), **PtgRefN** (section [2.5.97.72](#)), **PtgArea** (section [2.5.97.18](#)), **PtgAreaErr** (section [2.5.97.20](#)), **PtgAreaN** (section [2.5.97.22](#)), **PtgRef3d** (section [2.5.97.69](#)), **PtgArea3d** (section [2.5.97.19](#)), **PtgRefErr3d** (section [2.5.97.71](#)), **PtgAreaErr3d** (section [2.5.97.21](#)), **PtgName** (section [2.5.97.60](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgMemArea** (section [2.5.97.54](#)), **PtgMemErr** (section [2.5.97.55](#)), **PtgMemNoMem** (section [2.5.97.57](#)), or **PtgMemFunc** (section [2.5.97.56](#)).

If this field contains a **PtgFunc** (section [2.5.97.45](#)), then the **iftab** field of **PtgFunc** MUST be less than 0x0028 or greater than 0x002D and MUST NOT be equal to 0x002F, 0x00BD, 0x00C3, 0x00C4, or 0x00C7.

If this field contains a **PtgFuncVar** (section [2.5.97.46](#)), then the value of the **fCeFunc** field of **PtgFuncVar** MUST be 0 and the **tab** field of **PtgFuncVar** MUST NOT be equal to 0x00FF or 0x0166.

The root node of the parse tree of this field MUST be a VALUE\_TYPE, as described in section [2.5.97.88](#).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

## 2.5.97.16 Ptg

The **Ptg** structure specifies a single element of a formula (section [2.2.2](#)). The value of the first byte determines which structure it represents and MUST be one of the values specified in the first column of the following table. If the value of the first byte is 0x18 or 0x19, then the second byte determines which structure it represents and MUST be one of the values specified in the second column of the following table.

| First byte | Second byte | Ptg             |
|------------|-------------|-----------------|
| 0x01       |             | ▪ <b>PtgExp</b> |
| 0x03       |             | ▪ <b>PtgAdd</b> |
| 0x04       |             | ▪ <b>PtgSub</b> |

| <b>First byte</b> | <b>Second byte</b> | <b>Ptg</b>          |
|-------------------|--------------------|---------------------|
| 0x05              |                    | ▪ <b>PtgMul</b>     |
| 0x06              |                    | ▪ <b>PtgDiv</b>     |
| 0x07              |                    | ▪ <b>PtgPower</b>   |
| 0x08              |                    | ▪ <b>PtgConcat</b>  |
| 0x09              |                    | ▪ <b>PtgLt</b>      |
| 0x0A              |                    | ▪ <b>PtgLe</b>      |
| 0x0B              |                    | ▪ <b>PtgEq</b>      |
| 0x0C              |                    | ▪ <b>PtgGe</b>      |
| 0x0D              |                    | ▪ <b>PtgGt</b>      |
| 0x0E              |                    | ▪ <b>PtgNe</b>      |
| 0x0F              |                    | ▪ <b>PtgIsect</b>   |
| 0x10              |                    | ▪ <b>PtgUnion</b>   |
| 0x11              |                    | ▪ <b>PtgRange</b>   |
| 0x12              |                    | ▪ <b>PtgUPlus</b>   |
| 0x13              |                    | ▪ <b>PtgUMinus</b>  |
| 0x14              |                    | ▪ <b>PtgPercent</b> |
| 0x15              |                    | ▪ <b>PtgParen</b>   |
| 0x16              |                    | ▪ <b>PtgMissArg</b> |

| First byte | Second byte | Ptg                       |
|------------|-------------|---------------------------|
| 0x17       |             | ▪ <b>PtgStr</b>           |
| 0x18       | 0x19        | ▪ <b>PtgList</b>          |
| 0x18       | 0x1D        | ▪ <b>PtgSxName</b>        |
| 0x19       | 0x01        | ▪ <b>PtgAttrSemi</b>      |
| 0x19       | 0x02        | ▪ <b>PtgAttrIf</b>        |
| 0x19       | 0x04        | ▪ <b>PtgAttrChoose</b>    |
| 0x19       | 0x08        | ▪ <b>PtgAttrGoTo</b>      |
| 0x19       | 0x10        | ▪ <b>PtgAttrSum</b>       |
| 0x19       | 0x20        | ▪ <b>PtgAttrBaxcel</b>    |
| 0x19       | 0x21        | ▪ <b>PtgAttrBaxcel</b>    |
| 0x19       | 0x40        | ▪ <b>PtgAttrSpace</b>     |
| 0x19       | 0x41        | ▪ <b>PtgAttrSpaceSemi</b> |
| 0x19       | 0x80        | ▪ <b>PtgAttrIfError</b>   |
| 0x1C       |             | ▪ <b>PtgErr</b>           |
| 0x1D       |             | ▪ <b>PtgBool</b>          |
| 0x1E       |             | ▪ <b>PtgInt</b>           |
| 0x1F       |             | ▪ <b>PtgNum</b>           |
| 0x20       |             | ▪ <b>PtgArray</b>         |

| First byte | Second byte | Ptg                   |
|------------|-------------|-----------------------|
| 0x21       |             | ▪ <b>PtgFunc</b>      |
| 0x22       |             | ▪ <b>PtgFuncVar</b>   |
| 0x23       |             | ▪ <b>PtgName</b>      |
| 0x24       |             | ▪ <b>PtgRef</b>       |
| 0x25       |             | ▪ <b>PtgArea</b>      |
| 0x26       |             | ▪ <b>PtgMemArea</b>   |
| 0x27       |             | ▪ <b>PtgMemErr</b>    |
| 0x28       |             | ▪ <b>PtgMemNoMem</b>  |
| 0x29       |             | ▪ <b>PtgMemFunc</b>   |
| 0x2A       |             | ▪ <b>PtgRefErr</b>    |
| 0x2B       |             | ▪ <b>PtgAreaErr</b>   |
| 0x2C       |             | ▪ <b>PtgRefN</b>      |
| 0x2D       |             | ▪ <b>PtgAreaN</b>     |
| 0x39       |             | ▪ <b>PtgNameX</b>     |
| 0x3A       |             | ▪ <b>PtgRef3d</b>     |
| 0x3B       |             | ▪ <b>PtgArea3d</b>    |
| 0x3C       |             | ▪ <b>PtgRefErr3d</b>  |
| 0x3D       |             | ▪ <b>PtgAreaErr3d</b> |

| <b>First byte</b> | <b>Second byte</b> | <b>Ptg</b>           |
|-------------------|--------------------|----------------------|
| 0x40              |                    | ▪ <b>PtgArray</b>    |
| 0x41              |                    | ▪ <b>PtgFunc</b>     |
| 0x42              |                    | ▪ <b>PtgFuncVar</b>  |
| 0x43              |                    | ▪ <b>PtgName</b>     |
| 0x44              |                    | ▪ <b>PtgRef</b>      |
| 0x45              |                    | ▪ <b>PtgArea</b>     |
| 0x46              |                    | ▪ <b>PtgMemArea</b>  |
| 0x47              |                    | ▪ <b>PtgMemErr</b>   |
| 0x48              |                    | ▪ <b>PtgMemNoMem</b> |
| 0x49              |                    | ▪ <b>PtgMemFunc</b>  |
| 0x4A              |                    | ▪ <b>PtgRefErr</b>   |
| 0x4B              |                    | ▪ <b>PtgAreaErr</b>  |
| 0x4C              |                    | ▪ <b>PtgRefN</b>     |
| 0x4D              |                    | ▪ <b>PtgAreaN</b>    |
| 0x59              |                    | ▪ <b>PtgNameX</b>    |
| 0x5A              |                    | ▪ <b>PtgRef3d</b>    |
| 0x5B              |                    | ▪ <b>PtgArea3d</b>   |
| 0x5C              |                    | ▪ <b>PtgRefErr3d</b> |

| First byte | Second byte | Ptg                   |
|------------|-------------|-----------------------|
| 0x5D       |             | ▪ <b>PtgAreaErr3d</b> |
| 0x60       |             | ▪ <b>PtgArray</b>     |
| 0x61       |             | ▪ <b>PtgFunc</b>      |
| 0x62       |             | ▪ <b>PtgFuncVar</b>   |
| 0x63       |             | ▪ <b>PtgName</b>      |
| 0x64       |             | ▪ <b>PtgRef</b>       |
| 0x65       |             | ▪ <b>PtgArea</b>      |
| 0x66       |             | ▪ <b>PtgMemArea</b>   |
| 0x67       |             | ▪ <b>PtgMemErr</b>    |
| 0x68       |             | ▪ <b>PtgMemNoMem</b>  |
| 0x69       |             | ▪ <b>PtgMemFunc</b>   |
| 0x6A       |             | ▪ <b>PtgRefErr</b>    |
| 0x6B       |             | ▪ <b>PtgAreaErr</b>   |
| 0x6C       |             | ▪ <b>PtgRefN</b>      |
| 0x6D       |             | ▪ <b>PtgAreaN</b>     |
| 0x79       |             | ▪ <b>PtgNameX</b>     |
| 0x7A       |             | ▪ <b>PtgRef3d</b>     |
| 0x7B       |             | ▪ <b>PtgArea3d</b>    |

| First byte | Second byte | Ptg                   |
|------------|-------------|-----------------------|
| 0x7C       |             | ▪ <b>PtgRefErr3d</b>  |
| 0x7D       |             | ▪ <b>PtgAreaErr3d</b> |

### 2.5.97.17 PtgAdd

The **PtgAdd** structure specifies a binary-value-operator (section [2.5.97.88](#)) that adds the second expression in a binary-value-expression (section [2.5.97.88](#)) to the first.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x03.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.18 PtgArea

The **PtgArea** operand (section [2.5.97.88](#)) specifies a reference to a rectangular range of cells.

|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7    | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | area |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x05.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0 and MUST be ignored.

**area (12 bytes):** A **RgceArea** (section [2.5.97.89](#)) structure that specifies the referenced range of cells.

### 2.5.97.19 PtgArea3d

The **PtgArea3d** operand (section [2.5.97.88](#)) specifies a reference to the same rectangular range of cells on one or more sheets.



If the [formula](#) containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), then there MUST be a **RevExtern** (section [2.5.97.80](#)) in the **RgbExtra** (section [2.5.97.87](#)) corresponding to this **PtgArea3d**, which specifies those sheets.

|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|------|---|---|----|----|----|----|----|----|----|----|----|------|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7    | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19   | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | ixti |   |   |    |    |    |    |    |    |    |    |    | area |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x1B.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**ixti (2 bytes):** If the formula containing this structure is not part of a revision as specified in the Formulas overview (section [2.2.2](#)), then this value is an **XtiIndex** (section [2.5.97.103](#)) that specifies the **Xti** (section [2.5.172](#)) that specifies those sheets. Otherwise, it is undefined and MUST be ignored.

**area (12 bytes):** A value that specifies coordinates of the referenced range of a cell. If this **PtgArea3d** is part of a **NameParsedFormula** (section [2.5.97.12](#)), then this is a **RgceAreaRel** (section [2.5.97.90](#)) value. Otherwise, it is a **RgceArea** (section [2.5.97.89](#)) value.

### 2.5.97.20 PtgAreaErr

This operand (section [2.5.97.88](#)) specifies an invalid reference to a cell range.

|     |   |   |   |   |   |   |         |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7       | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | unused1 |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   | unused2 |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   | unused3 |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |         |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x0B.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**unused1 (4 bytes):** Undefined. This value MUST be ignored.

**unused2 (4 bytes):** Undefined. This value MUST be ignored.

**unused3 (4 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.21 PtgAreaErr3d

The **PtgAreaErr3d** operand (section [2.5.97.88](#)) specifies an invalid reference to the same rectangular range of cells on multiple sheets.

If the [formula](#) containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), then there MUST be a **RevExtern** (section [2.5.97.80](#)) in the **RgbExtra** (section [2.5.97.87](#)) corresponding to this **PtgAreaErr3d**, which specifies those sheets.

|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    |     |    |    |    |         |    |    |         |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|------|---|---|----|----|----|----|----|-----|----|----|----|---------|----|----|---------|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7    | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15  | 16 | 17 | 18 | 19      | 20 | 21 | 22      | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   | A |   | B | ixti |   |   |    |    |    |    |    |     |    |    |    |         |    |    | unused1 |    |    |    |    |    |    |    |    |    |
|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    | ... |    |    |    | unused2 |    |    |         |    |    |    |    |    |    |    |    |    |
|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    | ... |    |    |    | unused3 |    |    |         |    |    |    |    |    |    |    |    |    |
|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    | ... |    |    |    |         |    |    |         |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x1D.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**ixti (2 bytes):** If the formula containing this structure is not part of a revision as specified in the Formulas overview (section [2.2.2](#)), then this value is an **XtiIndex** (section [2.5.97.103](#)) that specifies the **Xti** (section [2.5.172](#)) that specifies those sheets. Otherwise, it is undefined and MUST be ignored.

**unused1 (4 bytes):** Undefined. This value MUST be ignored.

**unused2 (4 bytes):** Undefined. This value MUST be ignored.

**unused3 (4 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.22 PtgAreaN

The **PtgAreaN** operand (section [2.5.97.88](#)) specifies a reference to a rectangular range of cells as an **RgceAreaRel** (section [2.5.97.90](#)).

|     |   |   |   |   |   |   |   |      |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   | A |   | B | area |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ... |   |   |   |   |   |   |   |      |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ... |   |   |   |   |   |   |   |      |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ... |   |   |   |   |   |   |   |      |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (5 bits):** Reserved. This value MUST be 0x0D.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**area (12 bytes):** An **RgceAreaRel** (section [2.5.97.90](#)) structure that specifies the referenced range.

### 2.5.97.23 PtgArray

The **PtgArray** operand (section [2.5.97.88](#)) specifies an array of values. There MUST be a **PtgExtraArray** (section [2.5.97.41](#)) in the **RgbExtra** (section [2.5.97.87](#)) corresponding to this **PtgArray**. The correspondence between **PtgArray** and **PtgExtraArray** structures is specified in **RgbExtra**.

|     |   |   |   |   |   |   |         |         |   |    |    |         |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---------|---------|---|----|----|---------|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7       | 8       | 9 | 10 | 11 | 12      | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22      | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   | A |   | B       | unused1 |   |    |    |         |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ... |   |   |   |   |   |   | unused2 |         |   |    |    |         |    |    |    |    |    |    |    |    |    | unused3 |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ... |   |   |   |   |   |   |         |         |   |    |    | unused4 |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
| ... |   |   |   |   |   |   |         |         |   |    |    |         |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (5 bits):** Reserved. This value MUST be 0x00.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the array. This value MUST be 2 or 3.

**B - reserved (1 bit):** This value MUST be 0 and MUST be ignored.

**unused1 (4 bytes):** Undefined. This value MUST be ignored.

**unused2 (2 bytes):** Undefined. This value MUST be ignored.

**unused3 (4 bytes):** Undefined. This value MUST be ignored.

**unused4 (4 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.24 PtgAttrBaxcel

The **PtgAttrBaxcel** structure specifies that the result of the **Rgce** (section [2.5.97.88](#)) is to be assigned to a local variable used in a macro sheet.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15     | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | B | C |    |    |    | D  | E  | unused |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - bitSemi (1 bit):** A bit that specifies whether or not this **Rgce** is **volatile**.

**C - reserved2 (4 bits):** This value MUST be 0, and MUST be ignored.

**D - bitBaxcel (1 bit):** Reserved. This value MUST be 1.

**E - reserved3 (2 bits):** This value MUST be 0, and MUST be ignored.

**unused (2 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.25 PtgAttrChoose

The **PtgAttrChoose** structure specifies a control token (section [2.2.2.3](#)).

|                     |   |   |   |   |   |   |   |   |   |           |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|-----------|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10        | 11 | 12 | 13 | 14 | 15      | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg                 |   |   |   |   |   |   | A | B | C | reserved3 |    |    |    |    | cOffset |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgOffset (variable) |   |   |   |   |   |   |   |   |   |           |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |           |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - reserved2 (2 bits):** This value MUST be 0, and MUST be ignored.

**C - bitChoose (1 bit):** Reserved. This value MUST be 1.

**reserved3 (5 bits):** This value MUST be 0, and MUST be ignored.

**cOffset (2 bytes):** An unsigned integer that specifies a value that is 1 less than the number of elements in **rgOffset**.

**rgOffset (variable):** An array of unsigned integers that specifies the byte offsets.

### 2.5.97.26 PtgAttrGoTo

The **PtgAttrGoTo** structure specifies a control token (section [2.2.2.3](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | B |   |    | C  | D  |    |    |    | offset |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - reserved2 (3 bits):** This value MUST be 0, and MUST be ignored.

**C - bitGoto (1 bit):** Reserved. This value MUST be 1.

**D - reserved3 (4 bits):** This value MUST be 0, and MUST be ignored.

**offset (2 bytes):** An unsigned integer that specifies a value 1 less than the byte offset.

### 2.5.97.27 PtgAttrIf

The **PtgAttrIf** structure specifies a control token (section [2.2.2.3](#)).

|     |   |   |   |   |   |   |   |   |   |           |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|-----------|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10        | 11 | 12 | 13 | 14 | 15 | 16     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | B | C | reserved3 |    |    |    |    |    | offset |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - reserved2 (1 bit):** This value MUST be 0, and MUST be ignored.

**C - bitIf (1 bit):** Reserved. This value MUST be 1.

**reserved3 (6 bits):** This value MUST be 0, and MUST be ignored.

**offset (2 bytes):** An unsigned integer that specifies the byte offset.

### 2.5.97.28 PtgAttrIfError

The **PtgAttrIfError** structure specifies a control token (section [2.2.2.3](#)).

|     |   |   |   |   |   |   |   |           |   |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|-----------|---|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8         | 9 | 10 | 11 | 12 | 13 | 14 | 15     | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | reserved2 |   |    |    |    |    | B  | offset |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**reserved2 (7 bits):** This value MUST be 0, and MUST be ignored.

**B - bitIfError (1 bit):** Reserved. This value MUST be 1.

**offset (2 bytes):** An unsigned integer that specifies the byte offset.

### 2.5.97.29 PtgAttrSemi

The **PtgAttrSemi** structure specifies that this **Rgce** (section [2.5.97.88](#)) is volatile.

|     |   |   |   |   |   |   |   |   |           |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|-----------|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9         | 10 | 11 | 12 | 13 | 14 | 15 | 16     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | B | reserved2 |    |    |    |    |    |    | unused |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - bitSemi (1 bit):** Reserved. This value MUST be 1.

**reserved2 (7 bits):** This value MUST be 0, and MUST be ignored.

**unused (2 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.30 PtgAttrSpace

The **PtgAttrSpace** display token (section [2.2.2.4](#)) specifies the number of space or carriage return characters that are displayed around the expression in a display-precedence-expression (section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |           |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|-----------|---|----|----|----|----|----|----|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8         | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16   | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | reserved2 |   |    |    |    |    | B  | C  | type |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**reserved2 (6 bits):** This value MUST be 0, and MUST be ignored.

**B - bitSpace (1 bit):** Reserved. This value MUST be 1.

**C - reserved3 (1 bit):** This value MUST be 0, and MUST be ignored.

**type (2 bytes):** A **PtgAttrSpaceType** (section [2.5.97.32](#)) structure that specifies the number of space or carriage return characters and the position of those characters.

### 2.5.97.31 PtgAttrSpaceSemi

The **PtgAttrSpaceSemi** structure specifies the number of space or carriage return characters that are displayed around the expression in a display-precedence-expression (section [2.5.97.88](#)). It also specifies that the **Rgce** (section [2.5.97.88](#)) is volatile.

|     |   |   |   |   |   |   |   |           |   |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|-----------|---|----|----|----|----|----|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8         | 9 | 10 | 11 | 12 | 13 | 14 | 15   | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | reserved2 |   |    |    |    |    |    | type |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**reserved2 (1 byte):** Reserved. This value MUST be 0x41.

**type (2 bytes):** A **PtgAttrSpaceType** (section [2.5.97.32](#)) structure that specifies the number of space or carriage return characters and position of those characters.

### 2.5.97.32 PtgAttrSpaceType

The **PtgAttrSpaceType** structure specifies the number of space or carriage return characters and the position of those characters.

|      |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10  | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| type |   |   |   |   |   |   |   |   |   | cch |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**type (1 byte):** An unsigned integer that specifies the character and the position of the character. This value MUST correspond to the following table.

| Value | Meaning  |
|-------|--|
| 0x00  | Specifies space characters before a base-expression (section <a href="#">2.5.97.88</a> ).  |
| 0x01  | Specifies carriage return characters before a base-expression.   |
| 0x02  | Specifies space characters before the open parenthesis specified by <b>PtgParen</b> (section <a href="#">2.5.97.64</a> ) in a display-precedence-specifier (section <a href="#">2.5.97.88</a> ). |
| 0x03  | Specifies carriage return characters before the open parenthesis specified by <b>PtgParen</b> in a display-precedence-specifier.   |
| 0x04  | Specifies space characters before the close parenthesis specified by <b>PtgParen</b> in a display-precedence-specifier.  |
| 0x05  | Specifies carriage return characters before the close parenthesis specified by <b>PtgParen</b> in a display-precedence-specifier.  |
| 0x06  | Specifies space characters before an expression.   |

**cch (1 byte):** An unsigned integer that specifies the number of characters.

### 2.5.97.33 PtgAttrSum

The **PtgAttrSum** structure specifies the sum of an expression as defined in function-call (section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14     | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | B |   |    |    | C  | D  | unused |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x19.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**B - reserved2 (4 bits):** This value MUST be 0, and MUST be ignored.

**C - bitSum (1 bit):** Reserved. This value MUST be 1.

**D - reserved3 (3 bits):** This value MUST be 0, and MUST be ignored.

**unused (2 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.34 PtgBool

The **PtgBool** operand (section [2.5.97.88](#)) specifies a **Boolean** (section [2.5.97.3](#)) value.

|     |   |   |   |   |   |   |   |         |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8       | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | boolean |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x1D.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

**boolean (1 byte):** A **Boolean** that specifies the value.

### 2.5.97.35 PtgConcat

The **PtgConcat** structure specifies a binary-value-operator (section [2.5.97.88](#)) that appends the second expression in binary-value-expression (section [2.5.97.88](#)) to the first.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x08.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.36 PtgDataType

The **PtgDataType** enumeration specifies the data type of a **Ptg** (section [2.5.97.16](#)). It MUST be a value from the following table.



| Name             | Value | Meaning  |
|------------------|-------|--|
| <b>REFERENCE</b> | 0x1   | Specifies a reference to a range.  |
| <b>VALUE</b>     | 0x2   | Specifies a single value of a simple type. The type can be a <b>Boolean</b> (section <a href="#">2.5.97.3</a> ), a number, a string, or an error code. |
| <b>ARRAY</b>     | 0x3   | Specifies an array of values.  |

### 2.5.97.37 PtgDiv

The **PtgDiv** structure specifies a binary-value-operator (section [2.5.97.88](#)) that divides the first expression in a binary-value-expression (section [2.5.97.88](#)) by the second.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x06.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.38 PtgEq

The **PtgEq** structure specifies a binary-value-operator (section [2.5.97.88](#)) that decides whether the second expression in a binary-value-expression (section [2.5.97.88](#)) is equal to the first.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x0B.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.39 PtgErr

The **PtgErr** operand (section [2.5.97.88](#)) specifies an error code.

|     |   |   |   |   |   |   |   |     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|-----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8   | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | err |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x1C.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

**err (1 byte):** A **BErr** structure (section [2.5.97.2](#)) that specifies the error code.

## 2.5.97.40 PtgExp

The **PtgExp** structure specifies that the containing **Rgce** (section [2.5.97.88](#)) is part of an array formula (section [2.2.2](#)) or shared formula and specifies the row (2) of the cell in which that formula exists. The column (2) of the cell in which that formula exists is specified by the **col** field of the corresponding **PtgExtraCol** (section [2.5.97.42](#)) in the **RgbExtra** (section [2.5.97.87](#)) of the containing **Rgce**.

There MUST be a **PtgExtraCol** in the **RgbExtra** corresponding to this **PtgExp**.

There MUST be a **BrtFmlaString** (section [2.4.650](#)), **BrtFmlaNum** (section [2.4.649](#)), **BrtFmlaBool** (section [2.4.647](#)), or **BrtFmlaError** (section [2.4.648](#)) record specifying the array formula or shared formula. That record MUST have a **cell.col** field equal to the **col** field of the **PtgExtraCol**, and MUST be between a **BrtRowHdr** (section [2.4.718](#)) record with a **rw** field equal to the **row** field and the next **BrtRowHdr** or **BrtEndSheetData** (section [2.4.524](#)) record, as defined in the **Worksheet** part ABNF (section [2.1.7.61](#)) and **Macro Sheet** (section [2.1.7.32](#)) part ABNF.

The array formula or shared formula that the containing **Rgce** is a part of MUST be followed by either a **BrtShrFmla** (section [2.4.742](#)) record or a **BrtArrFmla** (section [2.4.6](#)) record.

If the record specifying the array formula or shared formula is followed by a **BrtShrFmla**, the **row** of this **PtgExp** MUST be greater than or equal to the value of the **rfx.rwFirst** field and less than or equal to the value of the **rfx.rwLast** field of the **BrtShrFmla**, and the **col** field of the **PtgExtraCol** MUST be greater than or equal to the value of the **rfx.colFirst** field and less than or equal to the value of the **rfx.colLast** field of the **BrtShrFmla**.

If the record specifying the array formula or shared formula is followed by a **BrtArrFmla**, the **row** of this **PtgExp** MUST be equal to the value of the **rfx.rwFirst** field of the **BrtArrFmla**, and the **col** field of the **PtgExtraCol** MUST be equal to the value of the **rfx.colFirst** field of the **BrtArrFmla**.

|     |   |   |   |   |   |   |   |     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|---|---|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8   | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| ptg |   |   |   |   |   |   | A | row |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |   |     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**ptg (7 bits):** Reserved. This value MUST be 0x01.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

**row (4 bytes):** An **Rw** (section [2.5.125](#)) structure that specifies a zero-based index of the row (2) of the cell on the current sheet that contains the array formula or shared formula that the containing **Rgce** is a part of. Its value MUST be less than or equal to 1048575.

## 2.5.97.41 PtgExtraArray

The **PtgExtraArray** structure specifies the values for the corresponding **PtgArray** (section [2.5.97.23](#)) as specified in **RgbExtra** (section [2.5.97.87](#)).

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rows             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cols             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| array (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rows (4 bytes):** A **DRw** (section [2.5.34](#)) structure that specifies the number of rows (2) in the array. This value MUST be greater than 0.

**cols (4 bytes):** A **DCol** (section [2.5.31](#)) structure that specifies the number of columns (2) in the array. This value MUST be greater than 0.

**array (variable):** An array of **SerAr** (section [2.5.97.93](#)) that specifies the values in row (2) major order. The number of elements MUST be equal to the product of rows (2) and **cols**.

### 2.5.97.42 PtgExtraCol

The **PtgExtraCol** structure specifies the column (2) for the corresponding **PtgExp** (section [2.5.97.40](#)) as specified in **RgbExtra** (section [2.5.97.87](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| col |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**col (4 bytes):** A **Col** (section [2.5.22](#)) structure that specifies the column (2).

### 2.5.97.43 PtgExtraList

The **PtgExtraList** structure specifies a range in a table that corresponds to a **PtgList** (section [2.5.97.52](#)) as specified in **RgbExtra** (section [2.5.97.87](#)).

|                    |   |   |   |   |   |   |   |                  |   |    |    |          |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |    |    |
|--------------------|---|---|---|---|---|---|---|------------------|---|----|----|----------|----|----|----|----|----|----|----|-----|----|----|----|----|----|----|----|----|----|----|----|
| 0                  | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8                | 9 | 10 | 11 | 12       | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20  | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| hasColumns         |   |   |   |   |   |   |   | rowType          |   |    |    | reserved |    |    |    |    |    |    |    | cch |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   | table (variable) |   |    |    |          |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |                  |   |    |    |          |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |    |    |
| columns (variable) |   |   |   |   |   |   |   |                  |   |    |    |          |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |    |    |
| ...                |   |   |   |   |   |   |   |                  |   |    |    |          |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |    |    |

**hasColumns (1 byte):** A **Boolean** (section [2.5.97.3](#)) that specifies the set of columns (2) of the range. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | The columns (2) of the range consist of all the columns (2) in the table.                     |
| 0x01  | The columns (2) of the range consist of one or more columns (2) specified by <b>columns</b> . |

**rowType (5 bits):** A **PtgRowType** (section [2.5.97.73](#)) structure that specifies the rows (2) in the range.

**reserved (11 bits):** This value MUST be 0, and MUST be ignored.

**cch (2 bytes):** An unsigned integer that specifies the number of 16-bit Unicode characters in **table**. This value MUST be less than 256.

**table (variable):** An array of 16-bit Unicode characters that specifies the string with the table name. The string MUST adhere to the grammar specified for **XLNameWideString** (section [2.5.165](#)).

**columns (variable):** An **SxSu** (section [2.5.97.100](#)) structure that specifies the columns (2). It MUST exist if and only if the value of **hasColumns** is not zero.

#### 2.5.97.44 PtgExtraMem

The **PtgExtraMem** structure specifies a range that corresponds to a **PtgMemArea** (section [2.5.97.54](#)) as specified in **RgbExtra** (section [2.5.97.87](#)).

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| count            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| array (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**count (4 bytes):** An unsigned integer that specifies the number of areas within the range.

**array (variable):** An array of **UncheckedRfx** (section [2.5.153](#)) that specifies the range. The number of elements MUST be equal to **count**.

#### 2.5.97.45 PtgFunc

The **PtgFunc** structure specifies a call to a function with a fixed number of parameters, as defined in section [2.5.97.88](#).

|     |   |   |   |   |   |   |       |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|-------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7     | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   | A |   | B | iftab |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x01.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**iftab (2 bytes):** A **Ftab** (section [2.5.97.10](#)) structure that specifies the function to be called. It MUST specify a function with a fixed number of parameters.

### 2.5.97.46 PtgFuncVar

The **PtgFuncVar** structure specifies a call to a function with a variable number of parameters, as defined in section [2.5.97.88](#).

|     |   |   |   |   |   |   |         |   |   |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---------|---|---|----|----|----|----|----|----|----|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7       | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17  | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | cparams |   |   |    |    |    |    |    |    |    | tab |    |    |    |    |    |    |    |    |    | C  |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x02

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**cparams (1 byte):** An unsigned integer that specifies the number of parameters. This value MUST be within the range defined for the function specified by **tab**.

**tab (15 bits):** A structure that specifies the function to be called. If the value of **fCeFunc** is 1, then this field specifies a **Cetab** (section [2.5.97.5](#)) value. If **fCeFunc** is 0, then this field specifies an **Ftab** value.

**C - fCeFunc (1 bit):** A bit that specifies whether **tab** specifies a **Cetab** value or a **Ftab** value.

### 2.5.97.47 PtgGe

The **PtgGe** structure specifies a binary-value-operator (section [2.5.97.88](#)) that specifies whether or not the first expression in a binary-value-expression (section [2.5.97.88](#)) is greater than or equal to the second.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x0C.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.48 PtgGt

The **PtgGt** structure specifies a binary-value-operator (section [2.5.97.88](#)) that specifies whether or not the first expression in a binary-value-expression (section [2.5.97.88](#)) is greater than the second.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x0D.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.49 PtgInt

The **PtgInt** operand (section [2.5.97.88](#)) specifies an unsigned integer value.

|     |   |   |   |   |   |   |   |         |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8       | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | integer |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x1E.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

**integer (2 bytes):** An unsigned integer that specifies the integer value.

### 2.5.97.50 PtgIsect

The **PtgIsect** structure specifies a binary-reference-operator (section [2.5.97.88](#)) that intersects the first expression in a binary-reference-expression (section [2.5.97.88](#)) with the second.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x0F.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.51 PtgLe

The **PtgLe** structure specifies a binary-value-operator (section [2.5.97.88](#)) that specifies whether or not the first expression in a binary-value-expression (section [2.5.97.88](#)) is less than or equal to the second.

|     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| ptg |   |   |   |   |   |   |   |   |   | A |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**ptg (7 bits):** Reserved. This value MUST be 0x0A.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.52 PtgList

The **PtgList** structure specifies a rectangular area of cells in a table.

|         |   |         |   |   |   |   |   |   |   |   |          |   |           |   |   |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---------|---|---------|---|---|---|---|---|---|---|---|----------|---|-----------|---|---|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0       | 1 | 2       | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1        | 2 | 3         | 4 | 5 | 6    | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| ptg     |   |         |   |   |   |   |   |   |   | A | eptg     |   |           |   |   | ixti |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| B       |   | rowType |   |   |   | C | D | E | F | G | H        | I | listIndex |   |   |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...     |   |         |   |   |   |   |   |   |   |   | colFirst |   |           |   |   |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| colLast |   |         |   |   |   |   |   |   |   |   |          |   |           |   |   |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**ptg (7 bits):** Reserved. This value MUST be 0x18.

**A - reserved1 (1 bit):** This value MUST be 0, and MUST be ignored.

**eptg (1 byte):** Reserved. This value MUST be 0x19.

**ixti (2 bytes):** An **XtiIndex** (section [2.5.97.103](#)) structure that specifies the location of the table.

**B - columns (2 bits):** An unsigned integer that specifies the columns (2) in the referenced area. If **invalid** is 1 or **nonresident** is 1, **columns** is unused and MUST be ignored. Otherwise, it MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x00  | The columns (2) of the rectangular area consist of all the columns (2) of the table.   |
| 0x01  | The rectangular area is one column (2) wide; that column (2) is specified by <b>colFirst</b> .   |
| 0x02  | The columns (2) of the rectangular area consist of the columns (2) between the column (2) specified by <b>colFirst</b> and the column (2) specified by <b>colLast</b> , inclusive. |

**rowType (5 bits):** A **PtgRowType** (section [2.5.97.73](#)) structure that specifies the rows (2) of the referenced area. If **invalid** is 1 or **nonresident** is 1, **rowType** is unused and MUST be ignored.

**C - squareBracketSpace (1 bit):** A bit that specifies whether to display spacing around the intra-table portion of the string representation of this formula (section [2.2.2](#)) element.

**D - commaSpace (1 bit):** A bit that specifies whether to display spacing between column (2) references in the string representation of this formula element.

**E - unused (1 bit):** Undefined. This value MUST be ignored.

**F - type (2 bits):** An unsigned integer that specifies the data type of this record. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0x00  | This structure contains a reference, as specified in <b>PtgDataType</b> (section <a href="#">2.5.97.36</a> ). |
| 0x01  | This structure contains a value, as specified in <b>PtgDataType</b> .   |
| 0x02  | This structure contains an array, as specified in <b>PtgDataType</b> .  |

**G - invalid (1 bit):** A bit that specifies whether or not this structure specifies an invalid area.

**H - nonresident (1 bit):** A bit that specifies whether or not the table is on a different workbook than the **Rgce** (section [2.5.97.88](#)). It MUST be 1 if **ixti** specifies a different workbook than the workbook containing the **Rgce** and **invalid** is 0.

If the value of **invalid** is 1, **nonresident** is unused and MUST be ignored.

If the value of **nonresident** is 1, there MUST be a **PtgExtraList** (section [2.5.97.43](#)) associated with this **PtgList** (section [2.5.97.52](#)) in the **RgbExtra** (section [2.5.97.87](#)). This associated **PtgExtraList** specifies the rectangular area.

**I - reserved2 (2 bits):** This value MUST be 0, and MUST be ignored.

**listIndex (4 bytes):** An unsigned integer that specifies the numeric identifier of the referenced table. It MUST equal the **idList** of one of the **BrtBeginList** (section [2.4.96](#)) records in this file.

If **invalid** is 1 or **nonresident** is 1, **listIndex** is unused and MUST be ignored.

**colFirst (2 bytes):** A **ColShort** (section [2.5.26](#)) structure that specifies the first column (2) of the referenced area of the table, relative to the position of the referenced table. Its value MUST be less than the number of columns (2) in the referenced table.

If **invalid** is 1, or **nonresident** is 1, or **columns** is 0, then **colFirst** is unused and MUST be ignored.

**colLast (2 bytes):** A **ColShort** structure that specifies the index of the last column (2) of the referenced area of the table, relative to the position of the referenced table. Its value MUST be greater than or equal to the value of **colFirst**, and less than the number of columns (2) in the table.

If **invalid** is 1, or **nonresident** is 1, or **columns** is 0, then **colLast** is unused and MUST be ignored.

### 2.5.97.53 PtgLt

The **PtgLt** structure specifies a binary-value-operator (section [2.5.97.88](#)) that specifies whether or not the first expression in a binary-value-expression (section [2.5.97.88](#)) is less than the second.



|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x09.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.54 PtgMemArea

The **PtgMemArea** mem token (section [2.2.2.5](#)) specifies that the result of a binary-reference-expression (section [2.5.97.88](#)) in a mem-area-expression (section [2.5.97.88](#)) is a range of cells. The **RgbExtra** (section [2.5.97.87](#)) corresponding to this structure MUST contain a **PtgExtraMem** (section [2.5.97.44](#)) that specifies the range of cells.

|     |   |   |   |   |   |   |     |        |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|-----|--------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7   | 8      | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A |   | B   | unused |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   | cce |        |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x06.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**unused (4 bytes):** Undefined. This value MUST be ignored.

**cce (2 bytes):** An unsigned integer that specifies the count of bytes in the binary-reference-expression following this structure.

### 2.5.97.55 PtgMemErr

The **PtgMemErr** mem token (section [2.2.2.5](#)) specifies that the result of a binary-reference-expression (section [2.5.97.88](#)) in a mem-area-expression (section [2.5.97.88](#)) is an error code.

|     |   |   |   |   |   |   |     |     |   |    |    |    |    |         |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|-----|-----|---|----|----|----|----|---------|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7   | 8   | 9 | 10 | 11 | 12 | 13 | 14      | 15 | 16 | 17 | 18 | 19 | 20      | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A |   | B   | err |   |    |    |    |    | unused1 |    |    |    |    |    | unused2 |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   | cce |     |   |    |    |    |    |         |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x07.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**err (1 byte):** A **BErr** structure (section [2.5.97.2](#)) that specifies the error code value.

**unused1 (1 byte):** Undefined. This value MUST be ignored.

**unused2 (2 bytes):** Undefined. This value MUST be ignored.

**cce (2 bytes):** An unsigned integer that specifies the count of bytes in the binary-reference-expression following this structure.

### 2.5.97.56 PtgMemFunc

The **PtgMemFunc** mem token (section [2.2.2.5](#)) specifies that the result of a binary-reference-expression in a mem-area-expression is variable (see section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |     |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|-----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8   | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A |   | B | cce |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x09.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**cce (2 bytes):** An unsigned integer that specifies the count of bytes in the binary-reference-expression (section [2.5.97.88](#)) following this structure .

### 2.5.97.57 PtgMemNoMem

The **PtgMemNoMem** mem token (section [2.2.2.5](#)) specifies that the result of the binary-reference-expression in a mem-area-expression failed to cache (see section [2.5.97.88](#)).

|     |   |   |   |   |   |   |     |        |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|-----|--------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7   | 8      | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A |   | B   | unused |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   | cce |        |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x08.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**unused (4 bytes):** Undefined. This value MUST be ignored.

**cce (2 bytes):** An unsigned integer that specifies the count of bytes in the binary-reference-expression following this structure.

### 2.5.97.58 PtgMissArg

The **PtgMissArg** operand (section [2.5.97.88](#)) specifies a missing value.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x16.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.59 PtgMul

The **PtgMul** structure specifies a binary-value-operator (section [2.5.97.88](#)) that multiplies the first and second expressions in a binary-value-expression (section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x05.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.60 PtgName

The **PtgName** operand (section [2.5.97.88](#)) specifies a reference to a defined name in the same workbook as the containing **Rgce** (section [2.5.97.88](#)).

If the [formula](#) containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), then there MUST be a **RevNameTabId** (section [2.5.97.85](#)) in the **RgbExtra** (section [2.5.97.87](#)) corresponding to this **PtgName**, which specifies those defined names.

|     |   |   |   |   |   |   |           |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|-----------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7         | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | nameindex |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |           |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x03.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**nameindex (4 bytes):** If the formula containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), then this value is undefined and MUST be ignored.

Otherwise, it is an unsigned integer that specifies a one-based index of a **BrtName** record in the collection of **BrtName** records in the **Workbook** (section [2.1.7.60](#)) part. Its value MUST be greater than 0 and less than or equal to the number of **BrtName** records in the workbook.

### 2.5.97.61 PtgNameX

The **PtgNameX** structure specifies a reference to a defined name in an [external workbook](#) (section [2.1.10](#)).

If the formula containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), then there MUST be a **RevName** (section [2.5.97.83](#)) in the **RgbExtra** (section [2.5.97.87](#)) corresponding to this **PtgNameX**, which specifies the defined name.

If the formula containing this structure is not part of a revision as specified in the Formulas overview (section [2.2.2](#)), then the referenced defined name is specified by an **XtiIndex** (section [2.5.97.103](#)).

|     |   |   |   |   |   |   |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|---|------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|-----------|---|---|---|---|---|---|---|---|---|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7    | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2         | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| ptg |   |   |   |   | A | B | ixti |   |   |   |   |   |   |   |   |   |   |   |   |   |   | nameindex |   |   |   |   |   |   |   |   |   |
| ... |   |   |   |   |   |   |      |   |   |   |   |   |   |   |   |   |   |   |   |   |   |           |   |   |   |   |   |   |   |   |   |

**ptg (5 bits):** Reserved. This value MUST be 0x19.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**ixti (2 bytes):** If the formula containing this structure is not part of a revision as specified in the Formulas overview (section [2.2.2](#)), this value is an **XtiIndex** that specifies the referenced defined name. The **XtiIndex** MUST specify an **Xti** (section [2.5.172](#)) that is a reference to a **BrtSupBookSrc** (section [2.4.757](#)) record.

If the formula containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), this value is undefined and MUST be ignored.

**nameindex (4 bytes):** If the formula containing this structure is not part of a revision as specified in the Formulas overview (section [2.2.2](#)), this value is an unsigned integer that specifies the one-based index of a **BrtSupNameStart** (section [2.4.766](#)) record in the collection of **BrtSupNameStart** records in the **External Link** (section [2.1.7.25](#)) part ABNF that is specified by the **BrtSupBookSrc** record referenced by **ixti**. The referenced and its associated records specify the defined name referenced by this record.

If the formula containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), this value is undefined and MUST be ignored.

### 2.5.97.62 PtgNe

The **PtgNe** structure specifies a binary-value-operator (section [2.5.97.88](#)) that specifies whether or not the second expression in a binary-value-expression (section [2.5.97.88](#)) is equal to the first.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x0E.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.63 PtgNum

The **PtgNum** operand (section [2.5.97.88](#)) specifies a floating point value.

|     |   |   |   |   |   |   |   |       |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|-------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8     | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | value |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |       |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |       |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x1F.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

**value (8 bytes):** An **Xnum** (section [2.5.171](#)) structure that specifies the value.

### 2.5.97.64 PtgParen

The **PtgParen** display token (section [2.2.2.4](#)) specifies that parentheses are displayed around the expression in a display-precedence-expression (section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x15.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.65 PtgPercent

The **PtgPercent** structure specifies a unary-operator that divides the expression in a unary-expression by 100 (see section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x14.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.66 PtgPower

The **PtgPower** structure specifies a binary-value-operator (section [2.5.97.88](#)) that raises the first expression in a binary-value-expression (section [2.5.97.88](#)) to the power of the second.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x07.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.67 PtgRange

The **PtgRange** structure specifies a binary-reference-operator (section [2.5.97.88](#)) that returns the minimum bounding range of the first and second expressions in a binary-reference-expression (section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x11.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.68 PtgRef

The **PtgRef** operand (section [2.5.97.88](#)) specifies a reference to a single cell as an **RgceLoc** (section [2.5.97.91](#))

|     |   |   |   |   |   |   |     |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|-----|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7   | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | loc |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |     |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x04.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**loc (6 bytes):** An **RgceLoc** value that specifies the coordinates of the referenced cell.

### 2.5.97.69 PtgRef3d

The **PtgRef3d** operand (section [2.5.97.88](#)) specifies a reference to a single cell on one or more sheets.

If the [formula](#) containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), then there MUST be a **RevExtern** (section [2.5.97.80](#)) in the **RgbExtra** (section [2.5.97.87](#)) corresponding to this **PtgRef3d**, which specifies those sheets.

|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|-----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7    | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22  | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | ixti |   |   |    |    |    |    |    |    |    |    |    |    |    |    | loc |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x1A.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**ixti (2 bytes):** If the formula containing this structure is not part of a revision as specified in the Formulas overview (section [2.2.2](#)), then this value is an **XtiIndex** (section [2.5.97.103](#)) that specifies the **Xti** (section [2.5.172](#)) that specifies those sheets. Otherwise, it is undefined and MUST be ignored.

**loc (6 bytes):** A value that specifies coordinates of the referenced cell. If this **PtgRef3d** is part of a **NameParsedFormula** (section [2.5.97.12](#)), then this is a **RgceLocRel** (section [2.5.97.92](#)) value. Otherwise, it is a **RgceLoc** (section [2.5.97.91](#)) value.

### 2.5.97.70 PtgRefErr

The **PtgRefErr** operand (section [2.5.97.88](#)) specifies an invalid reference to a cell.

|         |   |   |   |   |   |   |         |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------|---|---|---|---|---|---|---------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7       | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg     |   |   |   |   | A | B | unused1 |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...     |   |   |   |   |   |   |         |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| unused2 |   |   |   |   |   |   |         |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x0A.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**unused1 (4 bytes):** Undefined. This value MUST be ignored.

**unused2 (2 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.71 PtgRefErr3d

The **PtgRefErr3d** operand (section [2.5.97.88](#)) specifies an invalid reference to a cell on one or more sheets.

If the [formula](#) containing this structure is part of a revision as specified in the Formulas overview (section [2.2.2](#)), then there MUST be a **RevExtern** (section [2.5.97.80](#)) in the **RgbExtra** (section [2.5.97.87](#)) corresponding to this **PtgRefErr3d**, that specifies those sheets.

|     |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |         |    |         |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|---------|----|---------|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7    | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22      | 23 | 24      | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | ixti |   |   |    |    |    |    |    |    |    |    |    |    |    |    | unused1 |    |         |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |         |    | unused2 |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |      |   |   |    |    |    |    |    |    |    |    |    |    |    |    |         |    |         |    |    |    |    |    |    |    |

**ptg (5 bits):** Reserved. This value MUST be 0x1C.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this .

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**ixti (2 bytes):** If the formula containing this structure is not part of a revision as specified in the Formulas overview (section [2.2.2](#)), then this value is an **XtiIndex** (section [2.5.97.103](#)) that specifies the **Xti** (section [2.5.172](#)) that specifies those sheets. Otherwise, it is undefined and MUST be ignored.

**unused1 (4 bytes):** Undefined. This value MUST be ignored.

**unused2 (2 bytes):** Undefined. This value MUST be ignored.

### 2.5.97.72 PtgRefN

The **PtgRefN** operand (section [2.5.97.88](#)) specifies a reference to a single cell as an **RgceLocRel** (section [2.5.97.92](#)).

|     |   |   |   |   |   |   |     |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|-----|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7   | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   | A | B | loc |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |



...

**ptg (5 bits):** Reserved. This value MUST be 0x0C.

**A - type (2 bits):** A **PtgDataType** (section [2.5.97.36](#)) structure that specifies the data type for the value of this **Ptg** (section [2.5.97.16](#)).

**B - reserved (1 bit):** This value MUST be 0, and MUST be ignored.

**loc (6 bytes):** An **RgceLocRel** structure that specifies the referenced cell.

### 2.5.97.73 PtgRowType

The **PtgRowType** enumeration specifies the type of rows (2) that make up a contiguous range in a table.

| Name               | Value | Meaning  |
|--------------------|-------|--|
| <b>DATA</b>        | 0x00  | The rows (2) consist of the data region of the table.                                |
| <b>ALL</b>         | 0x01  | The rows (2) consist of all of the rows (2) in the table.                            |
| <b>HEADERS</b>     | 0x02  | The rows (2) consist of the table header.  |
| <b>DATA2</b>       | 0x04  | The rows (2) consist of the data region of the table.                                |
| <b>DATAHEADERS</b> | 0x06  | The rows (2) consist of the table header and the data region of the table.           |
| <b>TOTALS</b>      | 0x08  | The rows (2) consist of the total row of the table.                                  |
| <b>DATATOTALS</b>  | 0x0C  | The rows (2) consist of the data region of the table and the total row of the table. |
| <b>CURRENT</b>     | 0x10  | The rows (2) consist of the current row (2).   |

### 2.5.97.74 PtgStr

The **PtgStr** operand (section [2.5.97.88](#)) specifies a Unicode string value.

|     |   |   |   |   |   |   |   |   |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                 |    |    |    |    |    |    |  |  |
|-----|---|---|---|---|---|---|---|---|-----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|-----------------|----|----|----|----|----|----|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9   | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25              | 26 | 27 | 28 | 29 | 30 | 31 |  |  |
| ptg |   |   |   |   |   |   |   | A | cch |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    | rgch (variable) |    |    |    |    |    |    |  |  |
| ... |   |   |   |   |   |   |   |   |     |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |                 |    |    |    |    |    |    |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x17.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

**cch (2 bytes):** An unsigned integer that specifies the number of elements in **rgch**. Its value MUST be less than or equal to 255.

**rgch (variable):** An array of 16-bit Unicode characters.

### 2.5.97.75 PtgSub

The **PtgSub** structure specifies a binary-value-operator (section [2.5.97.88](#)) that subtracts the second expression in a binary-value-expression (section [2.5.97.88](#)) from the first.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x04.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.76 PtgSxName

The **PtgSxName** structure specifies a reference to a calculated field or a calculated item found in a **PivotParsedFormula** (section [2.5.97.15](#)). The **Rgce** (section [2.5.97.88](#)) that contains this **Ptg** MUST be part of the **fldFmla** field of a **BrtBeginPCDField** (section [2.4.130](#)) record or the **fmla** field of a **BrtBeginPCDCalcItem** (section [2.4.118](#)) record.

|     |   |   |   |   |   |   |   |      |   |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|------|---|----|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8    | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17      | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ptg |   |   |   |   |   |   | A | eptg |   |    |    |    |    |    |    |    | sxIndex |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |      |   |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ptg (7 bits):** Reserved. This value MUST be 0x18.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

**eptg (1 byte):** Reserved. This value MUST be 0x1D.

**sxIndex (4 bytes):** An unsigned integer that specifies the zero-based index of a **BrtBeginPName** (section [2.4.168](#)) record in the collection of **BrtBeginPName** records that follows a **BrtBeginPCDField** record or a **BrtBeginPCDCalcItem** record. This value MUST be less than the number of **BrtBeginPName** records that follow **BrtBeginPCDField** or **BrtBeginPCDCalcItem**.

### 2.5.97.77 PtgUMinus

The **PtgUMinus** structure specifies a unary-operator that generates the additive inverse of a unary-expression (see section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x13.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.78 PtgUnion

The **PtgUnion** structure specifies a binary-reference-operator (section [2.5.97.88](#)) that specifies a union between the first expression in a binary-reference expression (section [2.5.97.88](#)) and the second.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x10.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.79 PtgUPlus

The **PtgUPlus** structure specifies a unary-operator that leaves a unary-expression unchanged (see section [2.5.97.88](#)).

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| ptg |   |   |   |   |   |   | A |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**ptg (7 bits):** Reserved. This value MUST be 0x12.

**A - reserved0 (1 bit):** This value MUST be 0, and MUST be ignored.

### 2.5.97.80 RevExtern

The **RevExtern** structure specifies a range of sheets on a workbook that is referenced by a [formula](#) in a revision, as specified in the Formulas overview (section [2.2.2](#)).

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| book (variable)      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| itabFirst (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| itabLast (variable)  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**book (variable):** A structure that specifies the workbook based on the value of the first byte, according to the following table.

| Value                 | Meaning   |
|-----------------------|---|
| 0x01                  | Specifies the current workbook. This field is two bytes in size. The second byte MUST be 0x02.        |
| Any value except 0x01 | This field is a <b>VirtualPath</b> (section <a href="#">2.5.97.101</a> ) that specifies the workbook. |

**itabFirst (variable):** A **RevItab** (section [2.5.97.81](#)) structure that specifies the first sheet in the range.

**itabLast (variable):** A **RevItab** structure that specifies the last sheet in the range.

### 2.5.97.81 RevItab

The **RevItab** structure specifies a sheet of a workbook referenced by a [formula](#) in a revision, as specified in the Formulas overview (section [2.2.2](#))

|      |   |   |   |   |   |   |   |   |   |                  |    |    |    |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |  |  |
|------|---|---|---|---|---|---|---|---|---|------------------|----|----|----|----|----|----|----|----|----|------------------|----|----|----|----|----|----|----|----|----|----|----|--|--|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10               | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20               | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |
| type |   |   |   |   |   |   |   |   |   | tabid (optional) |    |    |    |    |    |    |    |    |    | sheet (variable) |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...  |   |   |   |   |   |   |   |   |   |                  |    |    |    |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |  |  |

**type (1 byte):** An unsigned integer that specifies the sheet. It MUST correspond to a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x00  | Specifies a sheet on the same workbook. The <b>tabid</b> field specifies the sheet.    |
| 0x01  | Specifies a sheet on a different workbook. The <b>sheet</b> field specifies the sheet. |
| 0x02  | Specifies the same sheet specified by the preceding <b>RevItab</b> .                   |
| 0x03  | Specifies a missing sheet.   |

**tabid (2 bytes):** An unsigned integer that specifies a sheet in the current workbook. This field MUST be present only if the value of **type** is 0x00. This MUST equal the value of the **iTabID** field in an existing **BrbBundleSh** (section [2.4.301](#)).

**sheet (variable):** An **XLUnicodeString** structure (section [2.5.97.102](#)) that specifies the sheet name. This field MUST be present only if the value of **type** is 0x01.

### 2.5.97.82 RevLbIName

The **RevLbIName** structure specifies the name of a defined name that is referenced by a [formula](#) in a revision, as specified in the Formulas overview (section [2.2.2](#)).

|          |   |   |   |   |   |   |   |   |   |               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
|----------|---|---|---|---|---|---|---|---|---|---------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|--|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
| iBuiltin |   |   |   |   |   |   |   |   |   | st (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...      |   |   |   |   |   |   |   |   |   |               |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |  |

**iBuiltin (1 byte):** An unsigned integer that specifies whether the defined name is a built-in name, and if so, which built-in name it is. Its value MUST correspond to the following table.

| Value | Meaning                      |
|-------|------------------------------|
| 0x00  | This is not a built-in name. |
| 0x01  | Consolidate_Area             |
| 0x02  | Auto_Open                    |
| 0x03  | Auto_Close                   |
| 0x04  | Extract                      |
| 0x05  | Database                     |
| 0x06  | Criteria                     |
| 0x07  | Print_Area                   |
| 0x08  | Print_Titles                 |
| 0x09  | Recorder                     |
| 0x0A  | Data_Form                    |
| 0x0B  | Auto_Activate                |
| 0x0C  | Auto_Deactivate              |
| 0x0D  | Sheet_Title                  |
| 0x0E  | _FilterDatabase              |

**st (variable):** If the value of the **iBuiltin** field is 0x00, then this field is an **XLNameWideString** (section [2.5.165](#)) that specifies the name of the defined name. Otherwise, this field is an **XLWideString** (section [2.5.168](#)) and the name of the defined name is specified as the concatenation of the built-in name specified by **iBuiltin** and the value of this field. The concatenated string MUST match grammar specified for **XLNameWideString**.

### 2.5.97.83 RevName

The **RevName** structure specifies a defined name referenced by a [formula](#) in a revision, as specified in the Formulas overview (section [2.2.2](#)).

|                       |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------------|---|---|---|---|---|---|---|---|---|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10              | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| book (variable)       |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fExtern               |   |   |   |   |   |   |   |   |   | name (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| externName (variable) |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                   |   |   |   |   |   |   |   |   |   |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**book (variable):** A structure that specifies the workbook based on the value of the first byte, according to the following table.

| Value                 | Meaning   |
|-----------------------|---|
| 0x01                  | Specifies the current workbook. This field is two bytes in size. The second byte MUST be 0x02.        |
| Any value except 0x01 | This field is a <b>VirtualPath</b> (section <a href="#">2.5.97.101</a> ) that specifies the workbook. |

**fExtern (1 byte):** An unsigned integer that specifies whether the defined name is defined in the current workbook. It MUST be 0x00 if the first byte of **book** is 0x01, and 0x01 otherwise.

**name (variable):** A **RevNameTabId** (section [2.5.97.85](#)) structure that specifies the name and the scope of the defined name. This field MUST be present only if **fExtern** is 0x00.

**externName (variable):** A **RevNamePly** (section [2.5.97.84](#)) structure that specifies the name and the scope of the defined name. This field MUST be present only if **fExtern** is 0x01.

## 2.5.97.84 RevNamePly

The **RevNamePly** structure specifies a defined name in an [external workbook](#) (section [2.1.10](#)) that is referenced by a [formula](#) in a revision, as specified in the [Formulas overview](#) (section [2.2.2](#)), and the sheet on which it is defined.

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| sheet (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| name (variable)  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

...

**sheet (variable):** A **RevSheetName** (section [2.5.97.86](#)) structure that specifies the sheet on which the defined name is defined.

**name (variable):** A **RevLblName** (section [2.5.97.82](#)) structure that specifies the defined name.

### 2.5.97.85 RevNameTabId

The **RevNameTabId** structure specifies a non-external defined name that is referenced by a formula in a revision, as specified in the Formulas overview (section [2.2.2](#)).

|       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
|-------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|-----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17              | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |
| tabid |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    | name (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |

**tabid (2 bytes):** An unsigned integer that specifies the scope of the defined name. This value MUST correspond to the following table.

| Value   | Meaning  |
|---|--|
| 0xFFFF  | Specifies that the scope is the entire workbook.   |
| Greater than or equal to 1 and less than 0xFFFF | Specifies that the scope is a sheet from the workbook. This MUST equal the value of the <b>iTabID</b> field in a <b>BrkBundSh</b> in the <b>Workbook</b> (section <a href="#">2.1.7.60</a> ) part. |

**name (variable):** A **RevLblName** structure that specifies the name of the defined name.

### 2.5.97.86 RevSheetName

The **RevSheetName** structure specifies the sheet or workbook on which a defined name is defined, when that defined name is referenced by a [formula](#) in a revision, as specified in the Formulas overview (section [2.2.2](#)).

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |
| sheet (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |

**sheet (variable):** A **XLUnicodeString** (section [2.5.97.102](#)) structure that specifies the name of the sheet. The length of the string MUST be less than or equal to 31 characters. This field specifies the entire workbook if the length of the string is zero.

## 2.5.97.87 RgbExtra

The **RgbExtra** structure specifies a set of structures, laid out sequentially in the file, that correspond to and MUST exist for certain **Ptgs** (section [2.5.97.16](#)) in the **Rgce** (section [2.5.97.88](#)). The order of the structures MUST be the same as the order of the **Ptgs** in the **Rgce** that they correspond to.

The following **Ptgs** MUST have a corresponding structure in an **RgbExtra**.

| <b>Ptg</b>   | <b>Required structure in an RgbExtra</b>                  |
|--|---|
| <b>PtgArray</b> (section <a href="#">2.5.97.23</a> )   | <b>PtgExtraArray</b> (section <a href="#">2.5.97.41</a> ) |
| <b>PtgMemArea</b> (section <a href="#">2.5.97.54</a> ) | <b>PtgExtraMem</b> (section <a href="#">2.5.97.44</a> )   |
| <b>PtgExp</b> (section <a href="#">2.5.97.40</a> )     | <b>PtgExtraCol</b> (section <a href="#">2.5.97.42</a> )   |

A **PtgList** (section [2.5.97.52](#)) requires a corresponding structure in an **RgbExtra** if and only if the **ixti** field of the **PtgList** (section [2.5.97.52](#)) refers to a different workbook and the value of the **invalid** field of the **PtgList** is 0.

| <b>Ptg</b>  | <b>Required structure in an RgbExtra</b>                 |
|---|--|
| <b>PtgList</b> (section <a href="#">2.5.97.52</a> ) | <b>PtgExtraList</b> (section <a href="#">2.5.97.43</a> ) |

The following **Ptg** structures MUST have a corresponding structure in an **RgbExtra** only if the [formula](#) containing that **Ptg** is part of a revision as specified in the Formulas overview (section [2.2.2](#)).

| <b>Ptg</b>   | <b>Required structure in an RgbExtra</b>                 |
|--|--|
| <b>PtgName</b> (section <a href="#">2.5.97.60</a> )      | <b>RevNameTabid</b> (section <a href="#">2.5.97.85</a> ) |
| <b>PtgNameX</b> (section <a href="#">2.5.97.61</a> )     | <b>RevName</b> (section <a href="#">2.5.97.83</a> )      |
| <b>PtgRef3d</b> (section <a href="#">2.5.97.69</a> )     | <b>RevExtern</b> (section <a href="#">2.5.97.80</a> )    |
| <b>PtgRefErr3d</b> (section <a href="#">2.5.97.71</a> )  | <b>RevExtern</b>   |
| <b>PtgArea3d</b> (section <a href="#">2.5.97.19</a> )    | <b>RevExtern</b>   |
| <b>PtgAreaErr3d</b> (section <a href="#">2.5.97.21</a> ) | <b>RevExtern</b>   |

|                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rgb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rgb (variable):** An array that contains the sequence of these structures.



## 2.5.97.88 Rgce

The **Rgce** structure specifies a set of **Ptgs**, laid out sequentially in the file.

The sequence of **Ptg** (section [2.5.97.16](#)) structures MUST adhere to the following grammar.

EXPRESSION\_SIZE is the sum of the sizes of a contiguous set of **Ptgs** in bytes.

**rgce** = **PtgExp** / [**PtgAttrBaxcel** / **PtgAttrSemi** / **PtgAttrSpaceSemi**] expression

expression = \*(**PtgAttrSpace**) base-expression

The value of the **type** field of each **PtgAttrSpace** (section [2.5.97.30](#)) in an expression MUST be 0, 1, or 6.

base-expression = operand / unary-expression / binary-reference-expression / binary-value-expression / display-precedence-specifier / mem-area-expression / function-call

operand = **PtgMissArg** / **PtgStr** / **PtgErr** / **PtgBool** / **PtgInt** / **PtgNum** / **PtgArray** / **PtgName** / **PtgRef** / **PtgArea** / **PtgRefErr** / **PtgAreaErr** / **PtgRefN** / **PtgAreaN** / **PtgNameX** / **PtgRef3d** / **PtgArea3d** / **PtgRefErr3d** / **PtgAreaErr3d** / **PtgList** / **PtgSxName**

Each **Ptg** in this definition is an operand token (section [2.2.2.2](#)).

unary-expression = val unary-operator

unary-operator = **PtgUPlus** / **PtgUMinus** / **PtgPercent**

Each **Ptg** in this definition is a unary operator token.

binary-reference-expression = 2ref binary-reference-operator

binary-reference-operator = **PtgIsect** / **PtgUnion** / **PtgRange**

Each **Ptg** in this definition is a binary operator token.

binary-value-expression = 2val binary-value-operator

binary-value-operator = **PtgAdd** / **PtgSub** / **PtgMul** / **PtgDiv** / **PtgPower** / **PtgConcat** / **PtgLt** / **PtgLe** / **PtgEq** / **PtgGe** / **PtgGt** / **PtgNe**

Each **Ptg** in this definition is a binary operator token.

display-precedence-specifier = expression [**PtgAttrSpace**] **PtgParen**

The value of the **type** field of the **PtgAttrSpace** MUST be between 2 and 5 inclusive.

**PtgAttrSpace** and **PtgParen** (section [2.5.97.64](#)) are display tokens (section [2.2.2.4](#)).

mem-area-expression = mem-ptg binary-reference-expression

The **cce** field in the **Ptg** of the mem-ptg rule MUST be equal to the EXPRESSION\_SIZE of the **Ptgs** that comprise the binary-reference-expression.

If mem-ptg is not equal to **PtgMemFunc** (section [2.5.97.56](#)), then both expression elements in the binary-reference-expression MUST NOT contain any mem-ptg elements, **PtgFunc** (section [2.5.97.45](#)), **PtgFuncVar** (section [2.5.97.46](#)), **PtgName** (section [2.5.97.60](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgList** (section [2.5.97.52](#)), **PtgRef3d** (section [2.5.97.69](#)), **PtgArea3d** (section [2.5.97.19](#)), **PtgRefErr3d** (section [2.5.97.71](#)), or **PtgAreaErr3d** (section [2.5.97.21](#)).

mem-ptg = **PtgMemArea** / **PtgMemErr** / **PtgMemNoMem** / **PtgMemFunc**

Each **Ptg** in this definition is a mem token (section [2.2.2.5](#)).

function-call = if-expression / iferror-expression / choose-expression / [**params-fixed**] **PtgFunc** / **params-variable PtgFuncVar** / **params-cetab PtgFuncVar** / expression **PtgAttrSum**

The **params-fixed** (section [2.5.97.10](#)) element MUST NOT be specified if **PtgFunc** specifies a function that takes no parameters. Otherwise, it MUST conform to the ABNF rule for the function specified by **PtgFunc**.

if-expression = expression **PtgAttrIf** 1\*2(expression **PtgAttrGoTo**) **PtgFuncVar**

The value of the **offset** field in the **PtgAttrIf** (section [2.5.97.27](#)) MUST be equal to the **EXPRESSION\_SIZE** of all **Ptgs** in the if-expression after the **PtgAttrIf** through the first **PtgAttrGoTo** (section [2.5.97.26](#)).

The value of the **offset** field in each **PtgAttrGoTo** MUST be equal to one less than the **EXPRESSION\_SIZE** of all **Ptgs** remaining in the if-expression after that **PtgAttrGoTo**.

The value of the **fCetab** field of the **PtgFuncVar** MUST be 0. The value of the **tab** field of the **PtgFuncVar** MUST be 0x0001, which represents the IF function.

iferror-expression = expression **PtgAttrIfError** expression **PtgAttrGoTo PtgFunc**

The value of the **offset** field in the **PtgAttrIfError** (section [2.5.97.28](#)) MUST be equal to the **EXPRESSION\_SIZE** of all **Ptgs** in the iferror-expression after the **PtgAttrIfError** through the first **PtgAttrGoTo**.

The value of the **offset** field in the **PtgAttrGoTo** MUST be equal to one less than the **EXPRESSION\_SIZE** of the **PtgFunc**.

The value of the **iftab** field of the **PtgFunc** MUST be 0x01E0, which represents the **IFERROR** function.

choose-expression = expression **PtgAttrChoose** 1\*254(expression **PtgAttrGoTo**) **PtgFuncVar**

The value of the **cOffset** field in the **PtgAttrChoose** (section [2.5.97.25](#)) MUST be equal to the number of times the expression in the repeated sequence group appears.

The first offset in the array of offsets in the **rgOffset** field in the **PtgAttrChoose** MUST be equal to four less than the size of the **PtgAttrChoose** in bytes.

For the  $n^{\text{th}}$  occurrence of the repeated sequence group, the  $(n+1)^{\text{th}}$  offset in the array of offsets in the **rgOffset** field in the **PtgAttrChoose** MUST be equal to the **EXPRESSION\_SIZE** of all **Ptgs** in the choose-expression after the **PtgAttrChoose** through the  $n^{\text{th}}$  **PtgAttrGoTo**.

The value of the **offset** field in each **PtgAttrGoTo** MUST equal one less than the **EXPRESSION\_SIZE** of all **Ptgs** remaining in the choose-expression after that **PtgAttrGoTo**.

The value of the **fCetab** field of the **PtgFuncVar** MUST be 0. The value of the **tab** field of the **PtgFuncVar** MUST be 0x0064, which represents the CHOOSE function.

val = expression

Additional restrictions are specified under **VALUE\_TYPE**. The **params-fixed**, **params-variable** (section [2.5.97.10](#)), and **params-cetab** (section [2.5.97.5](#)) rules also use val.

ref = expression

Additional restrictions are specified under VALUE\_TYPE. The **params-fixed**, **params-variable**, and **params-cetab** rules also use ref.

Additional restrictions on the contents of this structure are specified in terms of a parse tree. For this purpose, a parse tree is a means of organizing the components of an **Rgce**. Each node in the parse tree represents a **Ptg** or an ABNF rule described earlier. Non-leaf nodes represent rules and have one child node for each element in the rule. Leaf nodes represent only a **Ptg**.

For a leaf node in the parse tree, NESTING\_DEPTH is the number of function-call nodes in the path from the root node to that leaf.

For a node in the parse tree, OPERAND\_COUNT is as follows:

- The OPERAND\_COUNT of each **Ptg** appearing in the operand rule definition is one.
- The OPERAND\_COUNT of all other **Ptgs** is 0.
- The OPERAND\_COUNT of a node that has n child nodes with nonzero OPERAND\_COUNT is equal to the maximum, across all the n child nodes, of (n-1) plus the OPERAND\_COUNT of the n<sup>th</sup> child that has nonzero OPERAND\_COUNT.

For a node in the parse tree, VALUE\_TYPE is a state indicating that the node represents a single value of a simple type or an array of such values. A node that is not a VALUE\_TYPE represents a reference to a range. Elements in an expression MUST represent either values or references, based on the specific Ptgs used in the expression. The following rules specify how to traverse the parse tree from the bottom up and determine whether each node is a VALUE\_TYPE, which determines whether the sequence of **Ptg** structures comprising the formula (section 2.2.2) correctly satisfies the requirements of each expression in the formula. A node is determined to be a VALUE\_TYPE as follows:

- Leaf nodes:
  - **PtgMissArg** (section 2.5.97.58), **PtgStr** (section 2.5.97.74), **PtgSxName** (section 2.5.97.76), **PtgErr** (section 2.5.97.39), **PtgBool** (section 2.5.97.34), **PtgInt** (section 2.5.97.49), **PtgNum** (section 2.5.97.63), **PtgArray** (section 2.5.97.23), **PtgRefErr** (section 2.5.97.70), **PtgAreaErr** (section 2.5.97.20), **PtgRefErr3d** (section 2.5.97.71), **PtgAreaErr3d** (section 2.5.97.21), **PtgUPlus** (section 2.5.97.79), **PtgUMinus** (section 2.5.97.77), **PtgPercent** (section 2.5.97.65), **PtgAdd** (section 2.5.97.17), **PtgSub** (section 2.5.97.75), **PtgMul** (section 2.5.97.59), **PtgDiv** (section 2.5.97.37), **PtgPower** (section 2.5.97.66), **PtgConcat** (section 2.5.97.35), **PtgLt** (section 2.5.97.53), **PtgLe** (section 2.5.97.51), **PtgEq** (section 2.5.97.38), **PtgGe** (section 2.5.97.47), **PtgGt** (section 2.5.97.48), and **PtgNe** leaf nodes are VALUE\_TYPES.
  - **PtgName** (section 2.5.97.60), **PtgRef** (section 2.5.97.68), **PtgArea** (section 2.5.97.18), **PtgRefN** (section 2.5.97.72), **PtgAreaN** (section 2.5.97.22), **PtgNameX** (section 2.5.97.61), **PtgRef3d** (section 2.5.97.69), **PtgArea3d** (section 2.5.97.19), **PtgFunc** (section 2.5.97.45), **PtgFuncVar** (section 2.5.97.46), **PtgMemArea** (section 2.5.97.54), **PtgMemErr** (section 2.5.97.55), **PtgMemNoMem** (section 2.5.97.57), and **PtgMemFunc** (section 2.5.97.56) leaf nodes are VALUE\_TYPES if and only if the value of the **type** field is value or array.
  - **PtgList** leaf nodes are VALUE\_TYPES if and only if the **type** field equals 1.
  - All other leaf nodes are not VALUE\_TYPES.
- Non-leaf nodes:

- Any non-leaf node with a single child node MUST be a VALUE\_TYPE if and only if the child node is a VALUE\_TYPE.
- Any non-leaf node with a mem-ptg, unary-operator, binary-value-operator, binary-reference-operator, **PtgAttrSum** (section [2.5.97.33](#)), **PtgFunc** or **PtgFuncVar** child node is a VALUE\_TYPE if and only if that child node is a VALUE\_TYPE. Other child nodes are ignored for the purposes of determining whether the non-leaf node is a VALUE\_TYPE.
- Any non-leaf node corresponding to a val rule MUST be a VALUE\_TYPE.
- Any non-leaf node corresponding to a ref rule MUST NOT be a VALUE\_TYPE.
- Otherwise, a non-leaf node with an expression child node is a VALUE\_TYPE if and only if that expression child node is a VALUE\_TYPE.

A parse tree for an Rgce MUST meet the following conditions:

- The NESTING\_DEPTH of each leaf node MUST NOT exceed 65.
- The OPERAND\_COUNT of the root node MUST NOT exceed 1024.

|                     |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|---------------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| sequence (variable) |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| ...                 |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**sequence (variable):** An array of **Ptg** that specifies the sequence of **Ptg** structures. sequence of **Ptg** (section [2.5.97.16](#)) structures

## 2.5.97.89 RgceArea

The **RgceArea** structure specifies a reference to a rectangular range of cells, where relative references are stored as coordinates.

|             |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |            |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
|-------------|---|---|---|---|---|---|---|---|---|----|---|---|---|---|---|------------|---|---|---|----|---|---|---|---|---|---|---|---|---|----|---|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 1 | 2 | 3 | 4 | 5 | 6          | 7 | 8 | 9 | 20 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 30 | 1 |
| rowFirst    |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |            |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| rowLast     |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   |            |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |
| columnFirst |   |   |   |   |   |   |   |   |   |    |   |   |   |   |   | columnLast |   |   |   |    |   |   |   |   |   |   |   |   |   |    |   |

**rowFirst (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) structure that specifies the first row (2) of the cell range. Its value MUST be less than 1048576.

**rowLast (4 bytes):** An **UncheckedRw** structure that specifies the last row (2) of the cell range. Its value MUST be less than 1048576.

**columnFirst (2 bytes):** A **ColRelShort** (section [2.5.25](#)) structure that specifies the first column (2) of the cell range and relative reference information about the first column (2) and first row (2).

**columnLast (2 bytes):** A **ColRelShort** structure that specifies the last column (2) of the cell range and relative reference information about the last column (2) and last row (2).

### 2.5.97.90 RgceAreaRel

The **RgceAreaRel** structure specifies a rectangular range of cells, where the relative portions of relative references are specified as offsets from the cell in which the formula (section [2.2.2](#)) is evaluated.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16         | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rowFirst    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rowLast     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| columnFirst |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | columnLast |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rowFirst (4 bytes):** If **columnFirst.fRwRel** is 0, then **rowFirst** is an **UncheckedRw** (section [2.5.154](#)) that specifies the first row (2) coordinate of the cell reference. If **columnFirst.fRwRel** is 1, then **rowFirst** is a **RwRelNeg** (section [2.5.128](#)) that specifies the first row (2) as an offset from the cell in which the formula is evaluated.


**rowLast (4 bytes):** If **columnLast.fRwRel** is 0, then **rowLast** is an **UncheckedRw** that specifies the last row (2) coordinate of the cell reference. If **columnLast.fRwRel** is 1, then **rowLast** is a **RwRelNeg** that specifies the last row (2) as an offset from the cell in which the formula is evaluated.

**columnFirst (2 bytes):** A **ColRelShort** (section [2.5.25](#)) structure that specifies information about the first row (2) and column (2). If **columnFirst.fColRel** is 0, then **columnFirst.col** specifies the first column (2) coordinate of the cell reference. If **columnFirst.fColRel** is 1, then **columnFirst.col** specifies the first column (2) as an offset from the cell in which the formula is evaluated.

**columnLast (2 bytes):** A **ColRelShort** structure that specifies information about the last row (2) and column (2). If **columnLast.fColRel** is 0, then **columnLast.col** specifies the last column (2) coordinate of the cell reference. If **columnLast.fColRel** is 1, then **columnLast.col** specifies the last column (2) as an offset from the cell in which the formula is evaluated.

### 2.5.97.91 RgceLoc

The **RgceLoc** structure specifies a reference to a single cell, where relative references are stored as coordinates.

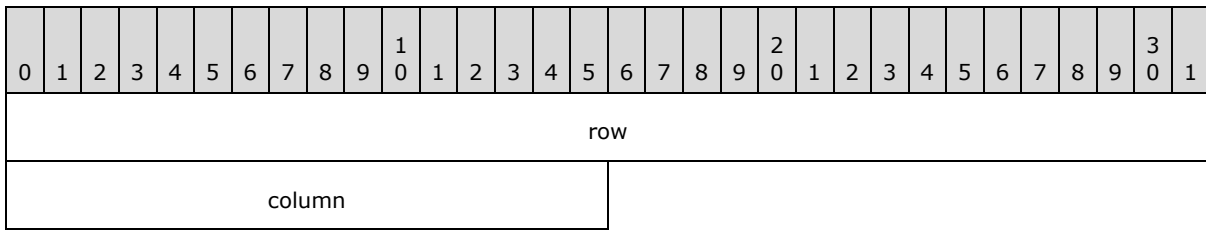


**row (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) structure that specifies the row (2) coordinate of the cell reference. Its value **MUST** be less than 1048576.

**column (2 bytes):** A **ColRelShort** (section [2.5.25](#)) structure that specifies the column (2) coordinate of the cell reference and that specifies relative reference information.

### 2.5.97.92 Rgcelocrel

The **Rgcelocrel** structure specifies a single cell reference where the relative portions of relative references are specified as offsets from the cell in which the formula (section [2.2.2](#)) is evaluated.

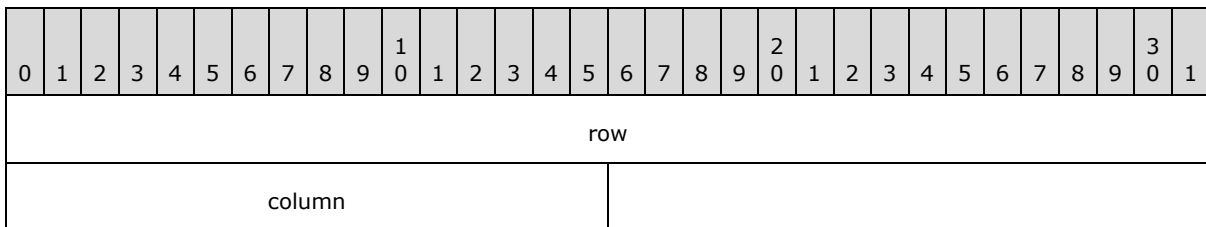


**row (4 bytes):** If **column.fRwRel** is 0, then **row** is an **UncheckedRw** (section [2.5.154](#)) that specifies the row (2) coordinate of the cell reference. If **column.fRwRel** is 1, then **row** is a **RwRelNeg** (section [2.5.128](#)) that specifies the row (2) as an offset from the cell in which the formula is evaluated. If the signed result of the offset is a row (2) index less than 0x00000000, the value is incremented by 0x00100000 so that it results in a valid row (2) index. If the signed result of the offset is a row (2) index greater than 0x000FFFFF, the value is decremented by 0x00100000.

**column (2 bytes):** A **ColRelShort** (section [2.5.25](#)) structure that specifies information about the row (2) and column (2). If **column.fColRel** is 0, then **column.col** specifies the column (2) coordinate of the cell reference. If **column.fColRel** is 1, then **column.col** specifies the column (2) as an offset from the cell in which the formula is evaluated. If the signed result of the offset is a column (2) index less than 0x0000, the value is incremented by 0x4000 so that it results in a valid column (2) index. If the signed result of the offset is a column (2) index greater than 0x3FFF, the value is adjusted by 0x4000 so that it results in a valid column (2) index.

### 2.5.97.93 SerAr

The **SerAr** structure specifies a value in **PtgExtraArray** (section [2.5.97.41](#)).

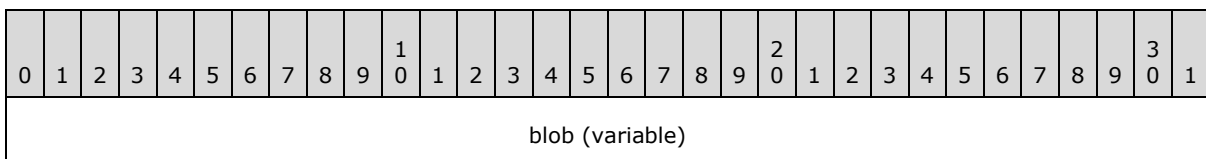

...

**blob (variable):** A structure that specifies a value in **PtgExtraArray**. MUST be one of the following structures: **SerNum** (section [2.5.97.96](#)), **SerStr** (section [2.5.97.97](#)), **SerBool** (section [2.5.97.94](#)), or **SerErr** (section [2.5.97.95](#)). The structure is specified by the first byte, which is the reserved byte in each of those structures.

### 2.5.97.94 SerBool

The **SerBool** structure specifies a **Boolean** (section [2.5.97.3](#)) value in an array of values.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| reserved |   |   |   |   |   |   |   |   |   | f  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**reserved (1 byte):** Reserved. This value MUST be 0x02.

**f (1 byte):** A **Boolean** that specifies the value.

### 2.5.97.95 SerErr

The **SerErr** structure specifies an error value in an array of values.

|           |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |    |    |    |    |           |    |    |    |    |           |    |    |    |    |    |    |
|-----------|---|---|---|---|---|---|---|---|---|-----|----|----|----|----|----|----|----|----|----|-----------|----|----|----|----|-----------|----|----|----|----|----|----|
| 0         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10  | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20        | 21 | 22 | 23 | 24 | 25        | 26 | 27 | 28 | 29 | 30 | 31 |
| reserved1 |   |   |   |   |   |   |   |   |   | err |    |    |    |    |    |    |    |    |    | reserved2 |    |    |    |    | reserved3 |    |    |    |    |    |    |
| ...       |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |    |    |    |    |           |    |    |    |    |           |    |    |    |    |    |    |

**reserved1 (1 byte):** Reserved. This value MUST be 0x04.

**err (1 byte):** A **BErr** (section [2.5.97.2](#)) structure that specifies the error code value.

**reserved2 (1 byte):** This value MUST be 0, and MUST be ignored.

**reserved3 (2 bytes):** This value MUST be 0, and MUST be ignored.

### 2.5.97.96 SerNum

The **SerNum** structure specifies a numeric value in an array of values.

|          |   |   |   |   |   |   |   |   |   |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
|----------|---|---|---|---|---|---|---|---|---|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|--|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10   | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |  |
| reserved |   |   |   |   |   |   |   |   |   | xnum |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |
| ...      |   |   |   |   |   |   |   |   |   |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |  |

|     |
|-----|
| ... |
|-----|

**reserved (1 byte):** Reserved. This value MUST be 0x00.

**xnum (8 bytes):** An **Xnum** (section [2.5.171](#)) structure that specifies the value.

### 2.5.97.97 SerStr

The **SerStr** structure specifies a text string in an array of values.

|          |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|-----|----|----|----|----|----|----|----|----|----|-----------------|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10  | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20              | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| reserved |   |   |   |   |   |   |   |   |   | cch |    |    |    |    |    |    |    |    |    | rgch (variable) |    |    |    |    |    |    |    |    |    |    |    |
| ...      |   |   |   |   |   |   |   |   |   |     |    |    |    |    |    |    |    |    |    |                 |    |    |    |    |    |    |    |    |    |    |    |

**reserved (1 byte):** Reserved. This value MUST be 0x01.

**cch (2 bytes):** An unsigned integer that specifies the number of characters in **rgch**. Its value MUST be less than 256.

**rgch (variable):** An array of 16-bit Unicode characters in the string.

### 2.5.97.98 SharedParsedFormula

The **SharedParsedFormula** structure specifies the formula (section [2.2.2](#)) for a shared formula.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cce             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgce (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cb              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgcb (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cce (4 bytes):** An unsigned integer that specifies the length of **rgce** in bytes. Its value MUST be greater than 0 and less than 16385.

**rgce (variable):** An **Rgce** (section [2.5.97.88](#)) that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula. MUST NOT contain **PtgExp** (section [2.5.97.40](#)), **PtgSxName** (section [2.5.97.76](#)), **PtgIsect** (section [2.5.97.50](#)), **PtgUnion** (section [2.5.97.78](#)), **PtgRange** (section [2.5.97.67](#)), **PtgArray** (section [2.5.97.23](#)), **PtgRefErr** (section [2.5.97.70](#)), **PtgAreaErr**



(section [2.5.97.20](#)), **PtgRef3d** (section [2.5.97.69](#)), **PtgArea3d**, **PtgRefErr3d** (section [2.5.97.71](#)), **PtgAreaErr3d** (section [2.5.97.21](#)), **PtgNameX** (section [2.5.97.61](#)), **PtgMemArea** (section [2.5.97.54](#)), **PtgMemErr** (section [2.5.97.55](#)), **PtgMemNoMem** (section [2.5.97.57](#)), or **PtgMemFunc** (section [2.5.97.56](#)).

If this field contains a **PtgRef** (section [2.5.97.68](#)), then the **loc.column.fColRel** and **loc.column.fRwRel** fields in the **PtgRef** MUST be 0.

If this field contains a **PtgArea** (section [2.5.97.18](#)), then the **area.columnFirst.fColRel**, **area.columnFirst.fRwRel**, **area.columnLast.fColRel**, and **area.columnLast.fRwRel** fields in the **PtgArea** MUST be 0.

If this field contains a **PtgFuncVar** (section [2.5.97.46](#)) and the **fCeFunc** field of the **PtgFuncVar** is 0, then the **tab** field of the **PtgFuncVar** MUST NOT be 0x017B.

The root node of the parse tree of this field MUST be a VALUE\_TYPE, as described in section [2.5.97.88](#).

**cb (4 bytes):** An unsigned integer that specifies the length of **rgcb** in bytes.

**rgcb (variable):** An **RgbExtra** (section [2.5.97.87](#)) structure that specifies ancillary data for the formula.

## 2.5.97.99 SxOs

The **SxOs** structure specifies a column (2) in a table.

|         |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |  |  |
|---------|---|---|---|---|---|---|---|---|---|----------|---|---|---|---|---|---|---|---|---|-------------------|---|---|---|---|---|---|---|---|---|---|---|--|--|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |  |  |
| notLast |   |   |   |   |   |   |   |   |   | reserved |   |   |   |   |   |   |   |   |   | column (variable) |   |   |   |   |   |   |   |   |   |   |   |  |  |
| ...     |   |   |   |   |   |   |   |   |   |          |   |   |   |   |   |   |   |   |   |                   |   |   |   |   |   |   |   |   |   |   |   |  |  |

**notLast (1 byte):** A **Boolean** that specifies which field of **SxSu** (section [2.5.97.100](#)) is specified by this structure. Its value MUST correspond to the following table.

| Value | Meaning  |
|-------|--|
| 0x1   | This structure specifies an <b>SxSu.sxosFirst</b> field. |
| 0x0   | This structure specifies an <b>SxSu.sxosLast</b> field.  |

**reserved (2 bytes):** Reserved. This value MUST be 0x0002.

**column (variable):** A **LPWideString** (section [2.5.91](#)) structure that specifies the column (2) name. The value of **column.cchCharacters** MUST be greater than 0.

## 2.5.97.100 SxSu

The **SxSu** structure specifies a range of columns (2) in a table.

|                     |   |   |   |   |   |   |   |   |   |       |    |    |    |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|-------|----|----|----|----|----|----|----|----|----|----------------------|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10    | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20                   | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| reserved            |   |   |   |   |   |   |   |   |   | csxos |    |    |    |    |    |    |    |    |    | sxosFirst (variable) |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |       |    |    |    |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |
| sxosLast (variable) |   |   |   |   |   |   |   |   |   |       |    |    |    |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |       |    |    |    |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |

**reserved (2 bytes):** Its value MUST be 0, and MUST be ignored.

**csxos (1 byte):** An unsigned integer that specifies the columns (2) in the range. Its value MUST correspond to the following table.

| Value | Meaning   |
|-------|---|
| 0x01  | The columns (2) of the range consist of a single column (2) specified by <b>sxosFirst</b> .   |
| 0x02  | The columns (2) of the range consist of the range of columns (2) between the column (2) specified by <b>sxosFirs</b> , and the column (2) specified by <b>sxosLast</b> , inclusive. |

**sxosFirst (variable):** A **SxOs** structure (section [2.5.97.99](#)) that specifies the first column (2). The value of **sxosFirst.notLast** MUST be 1 if **csxos** is 2. The value of **sxosFirst.notLast** MUST be 0 if **csxos** is 1.

**sxosLast (variable):** A **SxOs** structure that specifies the last column (2). The value of **sxosLast.notLast** MUST be 0.

### 2.5.97.101 VirtualPath

**VirtualPath** is an **XLUnicodeString** structure (section [2.5.97.102](#)) that specifies a path, workbook, and optionally a sheet. This value MUST be a **XLUnicodeString** in the following grammar

virt-path = volume / unc-volume / rel-volume / transfer-protocol / startup / alt-startup / library

startup = %x0001 %x0006 file-path

This code specifies that the relative-path is relative to the startup directory.

alt-startup = %x0001 %x0007 file-path

This code specifies that the relative-path is relative to the alternate startup directory.

library = %x0001 %x0008 file-path

This code specifies that the relative-path is relative to the library directory.

transfer-protocol = %x0001 %x0005 count transfer-path

This code specifies that the path is a **transfer protocol** path. The value of **count** MUST be equal to the number of characters following **count** in transfer-path.

transfer-path = transfer-base-path / "[" transfer-base-path "]" sheet-name

transfer-base-path = transfer-type "://" file-path

transfer-type = "ftp" / "http" / "https"

volume = %x0001 %x0001 volume-character file-path

This code specifies that the path is relative to a specific drive volume. The drive volume is specified in volume-character.

rel-volume = %x0001 %x0002 file-path

This code specifies that the path is relative to the drive volume of the workbook that contains the path.

unc-volume = %x0001 %x0001 %x0040 unc-path

This code specifies that the path is relative to a **UNC volume**. The computer name is specified in computer-name and the shared folder is specified in shared-folder.

unc-path = unc-base-path / "[" unc-base-path "]" sheet-name

unc-base-path = computer-name %x0003 shared-folder %x0003 relative-path

volume-character = %x0041-%x005A / %0061-%x007A

This code specifies the volume title. The volume specified is a drive volume and volume-character is the character of that drive.

file-path = relative-path / "[" relative-path "]" sheet-name

sheet-name = sheet-start-end-character \*sheet-character sheet-start-end-character / sheet-start-end-character

sheet-start-end-character = %x0001-%xFFFF

This code specifies the sheet-start-end-character MUST also not include any character that matches invalid-sheet-start-end-character.

invalid-sheet-start-end-character = %x0003 / "\*" / "?" / "" / "[" / "]" / "\" / ":" / "/"

sheet-character = %x0001-%xFFFF

This code specifies a sheet character. A sheet character MUST also not include any character that matches invalid-sheet-character.

invalid-sheet-character = %x0003 / "\*" / "?" / "[" / "]" / "\" / ":" / "/"

relative-path = directory \*(%x0003 directory)

directory = path-string

computer-name = path-string

shared-folder = path-string

path-string = 1\*path-character

path-character = %x0020-%x0021 / %x0023-%x0029 / %x002B-%x002E / %x0030-%x0039 / %x003B / %x003D / %x0040-%x005B / %x005D-%x007B / %x007D-%xFFFF

This code specifies a path character.

count = %x00-%xFF

Certain grammar rules have specific meanings, as specified in the following table.

| Rule              | Meaning   |
|-------------------|---|
| volume            | Specifies that the path is relative to a specific drive volume.<br>Volume-character specifies the drive volume.   |
| unc-volume        | Specifies that the path is relative to a UNC volume.<br>Computer-name specifies the computer.<br>Shared-folder specifies the shared folder.                         |
| transfer-protocol | Specifies that the path is a transfer protocol path.<br>The count <b>MUST</b> equal the number of characters following <b>count</b> in the <b>XLUnicodeString</b> . |
| startup           | Specifies that the relative-path is relative to the startup directory.  |
| alt-startup       | Specifies that the relative-path is relative to the alternate startup directory.  |
| library           | Specifies that the relative-path is relative to the library directory.  |
| relative-path     | Specifies a sequence of subdirectories that comprise the path from the volume or directory.   |
| sheet-name        | The name of the sheet in the workbook.  |

### 2.5.97.102 XLUnicodeString

The **XLUnicodeString** structure specifies a Unicode string.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |          |    |    |    |    |    |    |                |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----------|----|----|----|----|----|----|----------------|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17       | 18 | 19 | 20 | 21 | 22 | 23 | 24             | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cch |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | A  | reserved |    |    |    |    |    |    | rgb (variable) |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |          |    |    |    |    |    |    |                |    |    |    |    |    |    |    |

**cch (2 bytes):** An unsigned integer that specifies the count of characters in the string.

**A - fHighByte (1 bit):** A bit that specifies whether the characters in **rgb** are double-byte characters. It **MUST** be a value from the following table.

| Value | Meaning  |
|-------|--|
| 0x0   | All the characters in the string have a high byte of 0x00 and only the low bytes are in <b>rgb</b> . |
| 0x1   | All the characters in the string are saved as double-byte characters in <b>rgb</b> .                 |

**reserved (7 bits):** This value **MUST** be 0, and **MUST** be ignored.

**rgb (variable):** An array of bytes that specifies the characters. If the value of **fHighByte** is 0x0, the size of the array MUST be equal to **cch**. If the value of **fHighByte** is 0x1, the size of the array MUST be equal to **cch\*2**.

### 2.5.97.103 XtiIndex

**XtiIndex** is a 2-byte unsigned integer that identifies an **Xti** (section [2.5.172](#)) structure. Its value MUST correspond to the following table.

| Value   | Meaning  |
|---|--|
| 0xFFFF  | Specifies an invalid <b>Xti</b> .  |
| Greater than or equal to 0 and less than 0xFFFF | Specifies a zero-based index of an element in the array of <b>Xti</b> structures specified by the <b>rgXti</b> field of the <b>BrtExternSheet</b> (section <a href="#">2.4.635</a> ) record in the <b>Workbook</b> (section <a href="#">2.1.7.60</a> ) <b>part</b> . The value MUST be less than the value of the <b>cXti</b> field of the <b>BrtExternSheet</b> record. |

### 2.5.98 PCDCalcMemCommon

The **PCDCalcMemCommon** structure specifies an OLAP calculated member (3).

| 0                         | 1 | 2 | 3        | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
|---------------------------|---|---|----------|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| A                         | B | C | reserved |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| wSolveOrder               |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| fSet                      |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stName (variable)         |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stMdx (variable)          |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stMemberName (variable)   |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stSourceHier (variable)   |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| stParentUnique (variable) |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |          |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fLoadMemberName (1 bit):** A bit that specifies whether or not **stMemberName** exists. This value MUST be 1 if **fSet** is 0. It MUST be 0 if **fSet** is 1.

**B - fLoadSourceHier (1 bit):** A bit that specifies whether **stSourceHier** exists. This value MUST be 1 if **fSet** is 0. It MUST be 0 if **fSet** is 1.

**C - fLoadParentUnique (1 bit):** A bit that specifies whether **stParentUnique** exists. This value MUST be 0 if **fSet** is 1.

**reserved (29 bits):** This value MUST be 0, and MUST be ignored.

**wSolveOrder (4 bytes):** A signed integer that specifies the order in which this OLAP calculated member (3) is calculated in relation to other OLAP calculated members (3). The value is used in SOLVE\_ORDER property in the MDX statement for creating the calculated member (3). The value MUST be ignored if **fSet** is 1.

**fSet (4 bytes):** A **Boolean** (section [2.5.97.3](#)) that specifies whether this record specifies a named set (section [2.2.5.2.7.3](#)) or an OLAP calculated member (3).

| Value      | Meaning  |
|------------|--|
| 0x00000000 | This record specifies an OLAP calculated member (3). |
| 0x00000001 | This record specifies a named set.                   |

**stName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the name of the OLAP calculated member (3). The length of this value MUST be greater than zero and MUST be less than 65536 characters.

**stMdx (variable):** An **XLWideString** that specifies the multidimensional expression (MDX) of the OLAP calculated member (3). The length of this value MUST be greater than zero. If this OLAP calculated member (3) is associated with an external connection (section [2.2.8](#)) that is not associated with a **PivotCache** (section [2.2.5.2](#)), the length of this value MUST be less than 32768 characters. Otherwise, if the **bVerCacheCreated** field of the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record that immediately precedes the containing record is greater than or equal to 3, then the length of this value MUST be less than 32768 characters, otherwise it MUST be less than 2049 characters.

**stMemberName (variable):** An optional **XLWideString** that specifies the MDX unique name for the OLAP calculated member (3). The length of this value MUST be less than 65536 characters. It MUST exist only if **fLoadMemberName** is 1.

**stSourceHier (variable):** An optional **XLWideString** (section [2.5.168](#)) that specifies the name of the cache hierarchy (section [2.2.5.2.7](#)) to which the OLAP calculated member (3) belongs. The length of this value MUST be less than 65536. It MUST exist only if **fLoadSourceHier** is 1.

**stParentUnique (variable):** An optional **XLWideString** that specifies the name of the parent OLAP member of the OLAP calculated member (3). The length of this value MUST be less than 65536. If this value does not exist, this OLAP calculated member (3) has no parent OLAP member. It MUST exist only if **fLoadParentUnique** is 1.

## 2.5.99 PCDIAddInfo

The **PCDIAddInfo** structure specifies additional data associated with a cache item (section [2.2.5.2.3](#)).

|                        |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|--------|---|---|---|---|---|---|----|----|----|----|----|----|----------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3      | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16                   | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A                      | B | C | unused |   |   |   |   |   |   |    |    |    |    |    |    | stCaption (variable) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| cIMemProps             |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgIMemProps (variable) |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |                      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fGhost (1 bit):** A bit that specifies whether the cache item previously existed, but is no longer present in the source data (section [2.2.5.2.1](#)).

**B - fFmla (1 bit):** A bit that specifies whether the cache item is a calculated item (section [2.2.5.2.6](#)). This value MUST be equal to 0 if the cache item is in an OLAP **PivotCache**.

**C - fCaption (1 bit):** A bit that specifies whether **stCaption** exists. This value MUST be 0 if the cache item is not in an OLAP **PivotCache**, or if the **bVerCacheCreated** of the preceding **BrtBeginPivotCacheDef** (section [2.4.162](#)) is less than 3.

**unused (13 bits):** This value is Undefined and MUST be ignored.

**stCaption (variable):** An **XLNullableWideString** (section [2.5.166](#)) structure that specifies the caption for this cache item. It MUST exist only if **fCaption** is equal to 1. The length of this string MUST be less than or equal to 32767 characters.

**cIMemProps (4 bytes):** An unsigned integer that specifies the count of items in **rgIMemProps**. This value MUST be less than 0x1FFFFFFE. It MUST be equal to 0 if the cache item is not in an OLAP **PivotCache**. Otherwise, it MUST be less than or equal to the **cIsxtmps** of the preceding **BrtBeginPCDField** (section [2.4.130](#)).

**rgIMemProps (variable):** An array of 4-byte signed integers. Each element of the array is a signed integer that specifies the cache item index, as specified by Cache Items, in the associated cache field (section [2.2.5.2.2](#)). The associated cache field for the n<sup>th</sup> element of this array is specified by the n<sup>th</sup> element of the **rgisxtmp** array of the preceding **BrtBeginPCDField**. Each cache item specifies a member (3) property value. Each element of this array MUST be greater than or equal to -1, where -1 specifies no cache item.

## 2.5.100 PCIDDateTime

The **PCIDDateTime** structure specifies a date-time value.

|     |   |   |   |   |   |   |   |    |   |    |    |    |    |    |    |     |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|----|---|----|----|----|----|----|----|-----|----|----|----|----|----|----|----|-----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8  | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16  | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24  | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| yr  |   |   |   |   |   |   |   |    |   |    |    |    |    |    |    | mon |    |    |    |    |    |    |    |     |    |    |    |    |    |    |    |
| dom |   |   |   |   |   |   |   | hr |   |    |    |    |    |    |    | min |    |    |    |    |    |    |    | sec |    |    |    |    |    |    |    |

**yr (2 bytes):** An unsigned integer that specifies the year of the date. This value MUST be greater than or equal to 1900, and MUST be less than or equal to 9999. If **dom** is 0, **yr** MUST be 1900.

**mon (2 bytes):** An unsigned integer that specifies the month of the date. This value MUST be greater than or equal to 1 and MUST be less than or equal to 12. If **dom** is 0, **mon** MUST be 1.

**dom (1 byte):** An unsigned integer that specifies the day of month of the date. This value MUST be less than or equal to 31.

**hr (1 byte):** An unsigned integer that specifies the hour of the time. This value MUST be less than or equal to 23.

**min (1 byte):** An unsigned integer that specifies the minute of the time. This value MUST be less than or equal to 59.

**sec (1 byte):** An unsigned integer that specifies the second of the time. This value MUST be less than or equal to 59.

### 2.5.101 PCDISrvFmt

The **PCDISrvFmt** structure specifies server formatting information associated with a cached cube value, as specified in (section [2.2.5.2.11](#)).

|     |   |   |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|-------------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8                 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A   | B | C | D | E | F | G | H | isfci (optional)  |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   | cvBack (optional) |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   | cvFore (optional) |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ... |   |   |   |   |   |   |   |                   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fSrvFmtNum (1 bit):** A bit that specifies whether the cube value has number formatting applied that was provided by an OLAP server. The number formatting is specified by **isfci**.

**B - fSrvFmtBack (1 bit):** A bit that specifies whether the cube value has a background color applied that was provided by an OLAP server.

**C - fSrvFmtFore (1 bit):** A bit that specifies whether the cube value has a foreground color applied that was provided by an OLAP server.

**D - fSrvFmtItalic (1 bit):** A bit that specifies whether the cube value has italic formatting applied that was provided by an OLAP server.

**E - fSrvFmtUnderline (1 bit):** A bit that specifies whether the cube value has underline formatting applied that was provided by an OLAP server.

**F - fSrvFmtBold (1 bit):** A bit that specifies whether the cube value has bold formatting applied that was provided by an OLAP server.



**G - fSrvFmtStrikethrough (1 bit):** A bit that specifies whether the cube value has strikethrough formatting applied that was provided by an OLAP server.

**H - unused (1 bit):** Undefined. This value MUST be ignored.

**isfci (4 bytes):** An unsigned integer that specifies a zero-based index to a **BrtpCDSFCIEntry** (section 2.4.703) record in the **BrtpBeginPcdSFCIEntries** (section 2.4.159) collection in this tuple cache (section 2.2.5.2.11). The **BrtpCDSFCIEntry** record specifies the number formatting for the cube value. This value MUST exist only if **fSrvFmtNum** equals 1. It MUST be less than the value of the **centry** field of the **BrtpBeginPcdSFCIEntries** record .

**cvBack (4 bytes):** A **SrvFmtCV** (section 2.5.138) structure that specifies the background color for the cube value. This value MUST exist only if **fSrvFmtBack** equals 1.

**cvFore (4 bytes):** A **SrvFmtCV** that specifies the foreground color for the cube value. This value MUST exist only if **fSrvFmtFore** equals 1.

## 2.5.102 PhRun

The **PhRun** structure specifies a phonetic text run that is displayed above a text run.

|                    |   |   |   |         |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |
|--------------------|---|---|---|---------|---|---|---|---|---|----|----|----|----|----|----|------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|
| 0                  | 1 | 2 | 3 | 4       | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16               | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |
| ichFirst (2 bytes) |   |   |   |         |   |   |   |   |   |    |    |    |    |    |    | ichMom (2 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |
| cchMom (2 bytes)   |   |   |   |         |   |   |   |   |   |    |    |    |    |    |    | ifnt (2 bytes)   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |
| A                  |   | B |   | unused1 |   |   |   |   |   |    |    |    |    |    |    |                  |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |

**ichFirst (2 bytes):** An unsigned integer that specifies the zero-based index of a character in the **phoneticStr** field of the associated **RichStr** (section 2.5.121), where the associated **RichStr** is the **RichStr** that contains the **rgsPhRun** that contains this **PhRun** (section 2.5.102). The **ichFirst** field specifies the first character of the phonetic text run. The value of **ichFirst** MUST be less than the number of characters in the **phoneticStr** field of the associated **RichStr**.

**ichMom (2 bytes):** An unsigned integer that specifies the zero-based index of a character in the **str** field of the associated **RichStr**. The **ichMom** field specifies the location where the phonetic text run begins. The value of **ichMom** MUST be less than the number of characters in the **str** field of the associated **RichStr**.

**cchMom (2 bytes):** An unsigned integer that specifies the number of characters in the **str** field of the associated **RichStr** that this phonetic text run applies to. The value of **cchMom** MUST be less than or equal to the number of characters in the **str** field of the associated **RichStr**.

**A - ifnt (2 bytes):** An unsigned integer that specifies the zero-based index of a **BrtpFont** (section 2.4.653) record in the collection of all records directly following **BrtpBeginFonts** (section 2.4.85). The referenced **BrtpFont** specifies the font of the phonetic text run.

**B - phType (2 bits):** An unsigned integer that specifies a character set (1) used to display the phonetic text run.

| Value | Meaning  |
|-------|--|
| 0x00  | The phonetic text run is displayed using the narrow katakana character set (1). Ignored if the text is not Japanese. |
| 0x01  | The phonetic text run is displayed using the wide katakana character set (1). Ignored if the text is not Japanese.   |
| 0x02  | The phonetic text run is displayed using the hiragana character set (1). Ignored if the text is not Japanese.        |
| 0x03  | No character set (1) conversion is performed to the phonetic text run (1). Text is displayed as entered.             |

**alch (2 bits):** An unsigned integer that specifies the alignment of the phonetic text run.

| Value | Meaning   |
|-------|---|
| 0x00  | Left justify All characters of All phonetic text runs above the entire base text. |
| 0x01  | Left justify the characters of each phonetic text run above its text run.         |
| 0x02  | Center the characters of each phonetic text run above its text run.               |
| 0x03  | Distribute the characters of each phonetic text run above its text run.           |

**unused1 (12 bits):** Undefined. This value MUST be ignored.

### 2.5.103 PivotFilterType

**PivotFilterType** is a 4-byte unsigned integer that specifies the type of advanced **PivotTable** (section [2.1.7.40](#)) filter. It is used by the **BrtBeginSXFILTER** (section [2.4.236](#)) record. This value MUST correspond to the Value column in the following table.

| Category     | Value      | Meaning   |
|--------------|------------|---|
| Value Filter | 0x00000001 | "count" filter                                  |
| Value Filter | 0x00000002 | "percent" filter for numeric values             |
| Value Filter | 0x00000003 | "sum" filter for numeric values                 |
| Label Filter | 0x00000004 | "equals" filter for field captions              |
| Label Filter | 0x00000005 | "not equal" filter for field captions           |
| Label Filter | 0x00000006 | "begins with" filter for field captions         |
| Label Filter | 0x00000007 | "does not begin with" filter for field captions |
| Label Filter | 0x00000008 | "ends with" filter for field captions           |
| Label Filter | 0x00000009 | "does not end with" filter for field captions   |
| Label Filter | 0x0000000A | "contains" filter for field captions            |
| Label Filter | 0x0000000B | "does not contain" filter for field captions    |

| <b>Category</b> | <b>Value</b> | <b>Meaning</b>  |
|-----------------|--------------|---|
| Label Filter    | 0x0000000C   | "is greater than" filter for field captions                         |
| Label Filter    | 0x0000000D   | "is greater than or equal to" filter for field captions             |
| Label Filter    | 0x0000000E   | "is less than" filter for field captions                            |
| Label Filter    | 0x0000000F   | "is less than or equal to" filter for field captions                |
| Label Filter    | 0x00000010   | "is between" filter for field captions                              |
| Label Filter    | 0x00000011   | "is not between" filter for field captions                          |
| Value Filter    | 0x00000012   | "value equal" filter for text and numeric values                    |
| Value Filter    | 0x00000013   | "value not equal" filter for text and numeric values                |
| Value Filter    | 0x00000014   | "value greater than" filter for text and numeric values             |
| Value Filter    | 0x00000015   | "value greater than or equal to" filter for text and numeric values |
| Value Filter    | 0x00000016   | "value less than" filter for text and numeric values                |
| Value Filter    | 0x00000017   | "value less than or equal to" filter for text and numeric values    |
| Value Filter    | 0x00000018   | "value between" filter for text and numeric values                  |
| Value Filter    | 0x00000019   | "value not between" filter for text and numeric values              |
| Date Filter     | 0x0000001A   | "equals" filter for date values                                     |
| Date Filter     | 0x0000001B   | "older than" filter for date values                                 |
| Date Filter     | 0x0000001C   | "newer than" filter for date values                                 |
| Date Filter     | 0x0000001D   | "between" filter for date values                                    |
| Date Filter     | 0x0000001E   | "tomorrow" filter for date values                                   |
| Date Filter     | 0x0000001F   | "today" filter for date values                                      |
| Date Filter     | 0x00000020   | "yesterday" filter for date values                                  |
| Date Filter     | 0x00000021   | "next week" filter for date values                                  |
| Date Filter     | 0x00000022   | "this week" filter for date values                                  |
| Date Filter     | 0x00000023   | "last week" filter for date values                                  |
| Date Filter     | 0x00000024   | "next month" filter for date values                                 |
| Date Filter     | 0x00000025   | "this month" filter for date values                                 |
| Date Filter     | 0x00000026   | "last month" filter for date values                                 |
| Date Filter     | 0x00000027   | "next quarter" filter for date values                               |
| Date Filter     | 0x00000028   | "this quarter" filter for date values                               |
| Date Filter     | 0x00000029   | "last quarter" filter for date values                               |

| Category    | Value      | Meaning   |
|-------------|------------|---|
| Date Filter | 0x0000002A | "next year" filter for date values              |
| Date Filter | 0x0000002B | "this year" filter for date values              |
| Date Filter | 0x0000002C | "last year" filter for date values              |
| Date Filter | 0x0000002D | "year-to-date" filter for date values           |
| Date Filter | 0x0000002E | "first quarter" filter for date values          |
| Date Filter | 0x0000002F | "second quarter" filter for date values         |
| Date Filter | 0x00000030 | "third quarter" filter for date values          |
| Date Filter | 0x00000031 | "fourth quarter" filter for date values         |
| Date Filter | 0x00000032 | "January" filter for date values                |
| Date Filter | 0x00000033 | "February" filter for date values               |
| Date Filter | 0x00000034 | "March" filter for date values                  |
| Date Filter | 0x00000035 | "April" filter for date values                  |
| Date Filter | 0x00000036 | "May" filter for date values                    |
| Date Filter | 0x00000037 | "June" filter for date values                   |
| Date Filter | 0x00000038 | "July" filter for date values                   |
| Date Filter | 0x00000039 | "August" filter for date values                 |
| Date Filter | 0x0000003A | "September" filter for date values              |
| Date Filter | 0x0000003B | "October" filter for date values                |
| Date Filter | 0x0000003C | "November" filter for date values               |
| Date Filter | 0x0000003D | "December" filter for date values               |
| Date Filter | 0x0000003E | "not equal" filter for date values              |
| Date Filter | 0x0000003F | "older than or equal to" filter for date values |
| Date Filter | 0x00000040 | "newer than or equal to" filter for date values |
| Date Filter | 0x00000041 | "not between" filter for date values            |

### 2.5.104 PivotItemType

The **PivotItemType** enumeration specifies the type of a pivot item (section [2.2.5.3.3](#)) as specified by a **BrtBeginSXVI** (section [2.4.263](#)) record, or that specifies the type of a pivot line (section [2.2.5.3.8.3](#)) as specified by a **BrtBeginSXLI** (section [2.4.240](#)) record.

| Name           | Value | Meaning   |
|----------------|-------|---|
| <b>PITDATA</b> | 0x00  | Specifies no subtotal, no grand total, or no blank line behavior. |

| Name              | Value | Meaning   |
|-------------------|-------|---|
| <b>PITDEFAULT</b> | 0x01  | Specifies a subtotal using the aggregation function specified by the data items (section <a href="#">2.2.5.3.7.5.1</a> ) included in this subtotal. |
| <b>PITSUM</b>     | 0x02  | Specifies a subtotal using the Sum aggregation function.  |
| <b>PITCOUNTA</b>  | 0x03  | Specifies a subtotal using the Count aggregation function.  |
| <b>PITAVG</b>     | 0x04  | Specifies a subtotal using the Average aggregation function.  |
| <b>PITMAX</b>     | 0x05  | Specifies a subtotal using the Maximum aggregation function.  |
| <b>PITMIN</b>     | 0x06  | Specifies a subtotal using the Minimum aggregation function.  |
| <b>PITPRODUCT</b> | 0x07  | Specifies a subtotal using the Product aggregation function.  |
| <b>PITCOUNT</b>   | 0x08  | Specifies a subtotal using the Count Numbers aggregation function.  |
| <b>PITSTDDEV</b>  | 0x09  | Specifies a subtotal using the Standard Deviation aggregation function.   |
| <b>PITSTDDEVP</b> | 0x0A  | Specifies a subtotal using the Standard Deviation of a Population aggregation function.   |
| <b>PITVAR</b>     | 0x0B  | Specifies a subtotal using the Variance aggregation function.   |
| <b>PITVARP</b>    | 0x0C  | Specifies a subtotal using the Variance of a Population aggregation function.   |
| <b>PITGRAND</b>   | 0x0D  | Specifies a grand total line.   |
| <b>PITBLANK</b>   | 0x0E  | Specifies a blank line.   |

### 2.5.105 PivotNumFmt

The **PivotNumFmt** structure specifies the number format used in **PivotTables** (section [2.1.7.40](#)) and **PivotCaches** (section [2.2.5.2](#)).

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |          |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16       | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ifmt |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | reserved |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ifmt (2 bytes):** An **Ifmt** (section [2.5.76](#)) structure that specifies the number format used in PivotTables and PivotCaches.

**reserved (2 bytes):** This value MUST be 0, and MUST be ignored.

### 2.5.106 PivotNumFmtExt

A **PivotNumFmtExt** is an unsigned 32-bit integer that specifies the number format used in **PivotTables** (section [2.1.7.40](#)) and **PivotCaches** (section [2.2.5.2](#)).

| Value      | Meaning   |
|------------|---|
| 0xFFFFFFFF | Default number format. Equivalent to a <b>PivotNumFmt</b> (section <a href="#">2.5.105</a> ) with the value 0x00000000. |



- A - itmtypeData (1 bit):** A bit that specifies whether this filter includes cells that are not subtotals, grand totals, or blank lines for the pivot field, data field, or cache field associated with this record.
- B - itmtypeDEFAULT (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the default aggregation function, as specified in section [2.2.5.3.7.4.2](#). This value MUST be 0 if **itmtypeSUM**, **itmtypeCOUNTA**, **itmtypeAVERAGE**, **itmtypeMAX**, **itmtypeMIN**, **itmtypePRODUCT**, **itmtypeCOUNT**, **itmtypeSTDEV**, **itmtypeSTDEVP**, **itmtypeVAR**, or **itmtypeVARP** is 1.
- C - itmtypeSUM (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the sum of the values (see section [2.2.5.3.7.4.2](#)).
- D - itmtypeCOUNTA (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the count of the values (see section [2.2.5.3.7.4.2](#)).
- E - itmtypeAVERAGE (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the average of the values (see section [2.2.5.3.7.4.2](#)).
- F - itmtypeMAX (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the largest value (see section [2.2.5.3.7.4.2](#)).
- G - itmtypeMIN (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the smallest value (see section [2.2.5.3.7.4.2](#)).
- H - itmtypePRODUCT (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the product of the values (see section [2.2.5.3.7.4.2](#)).
- I - itmtypeCOUNT (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the count of numeric values (see section [2.2.5.3.7.4.2](#)).
- J - itmtypeSTDEV (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the estimated standard deviation for the values (see section [2.2.5.3.7.4.2](#)).
- K - itmtypeSTDEVP (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the standard deviation for the values (see section [2.2.5.3.7.4.2](#)).
- L - itmtypeVAR (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the estimated variance for the values (see section [2.2.5.3.7.4.2](#)).
- M - itmtypeVARP (1 bit):** A bit that specifies whether the pivot field associated with this filter includes the aggregation function that returns the variance for the values (see section [2.2.5.3.7.4.2](#)).
- N - reserved1 (3 bits):** This value MUST be 0, and MUST be ignored.
- O - fSelected (1 bit):** A bit that specifies whether the header of the pivot field that this filter refers to is included in this filter. This value MUST be ignored if the **PivotTable** (section [2.1.7.40](#)) is not displayed in outline form (see section [2.2.5.3.7.4.2](#)). It MUST be ignored if this field is contained in **BrBeginPRFilter14**.

**P - reserved2 (1 bit):** This value MUST be 0, and MUST be ignored.

**Q - reserved3 (1 bit):** This value MUST be 0, and MUST be ignored.

**reserved4 (5 bits):** This value MUST be 0, and MUST be ignored.

### 2.5.109 PrintErrorsAs

The **PrintErrorsAs** enumeration specifies how to represent cells containing errors when printing.

| Name                    | Value  | Meaning  |
|-------------------------|--------|--|
| <b>IERRORSDISPLAYED</b> | 0x0000 | Errors are printed as they are displayed.        |
| <b>IERRORSBLANK</b>     | 0x0001 | Errors are printed as blanks.                    |
| <b>IERRORSDASH</b>      | 0x0002 | Errors are printed as series of dash characters. |
| <b>IERRORSNA</b>        | 0x0003 | Errors are printed as "#N/A".                    |

### 2.5.110 PRuleHeaderData

The **PRuleHeaderData** structure specifies information about a **PivotTable** rule (section [2.2.5.3.9](#)).

|                             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |
|-----------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|------|----|----|----|----|----|----|----|
| 0                           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24   | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| isxvd                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |
| isxrtype                    |   |   |   |   |   |   |   | A | B | C  | D  | E  | F  | G  | H  | sxaxis |    |    |    |    |    |    |    | iDim |    |    |    |    |    | I  |    |
| rfxLoc (16 bytes, optional) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |
| ...                         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |      |    |    |    |    |    |    |    |

**isxvd (4 bytes):** A signed integer that specifies the pivot field (section [2.2.5.3.2](#)), data field (section [2.2.5.3.7.5.2](#)), or cache field (section [2.2.5.2.2](#)) information for this **PivotTable** rule.

If the record that contains this structure is in a **PivotCache Definition** (section [2.1.7.38](#)) part, then **isxvd** MUST be -1. If **isxrtype** is **ISXRTYPE\_BUTTON**, then this field is an **ISXVD** (section [2.5.83](#)) that specifies the pivot field or data field and the value of this field MUST NOT be -1. If **isxrtype** is a value other than **ISXRTYPE\_BUTTON** and there is no **BrtBeginPRFilter** record (section [2.4.172](#)) or **BrtBeginPRFilter14** record (section [2.4.173](#)) in the collection of records following the record that contains this structure, then the value of this field MUST be -1.

If **isxrtype** is a value other than **ISXRTYPE\_BUTTON** and there is at least one **BrtBeginPRFilter** or **BrtBeginPRFilter14** record in the collection of records immediately following the record that contains this structure, then the pivot field, data field, or cache field (section [2.2.5.2.2](#)) for this **PivotTable** rule is specified by the **PRFilter.isxvd** fields in the **BrtBeginPRFilter** or **BrtBeginPRFilter14** records, respectively. If the record that contains this structure is a **BrtBeginPRRule** (section [2.4.178](#)) then the value of **isxvd** MUST be either -1 or the same as the value of the **PRFilter.isxvd** field in the last **BrtBeginPRFilter** record in the collection of **BrtBeginPRFilter** records following the record



that contains this structure. If the record that contains this structure is a **BrtBeginPRule14** (section [2.4.179](#)) then the value of **isxvd** MUST be -1.

**isxrtype (8 bits):** An unsigned integer that specifies the area of the **PivotTable** (section [2.1.7.40](#)) specified by this **PivotTable** rule. This value MUST be a value from the following table.

| Name              | Value | Description  |
|-------------------|-------|--|
| ISXRTYPE_NONE     | 0x00  | This rule specifies no area.   |
| ISXRTYPE_NORMAL   | 0x01  | This rule specifies the cells in the row (2) area, column (2) area, page area (section <a href="#">2.2.5.3.8.1.3</a> ), or data area (section <a href="#">2.2.5.3.8.1.4</a> ) of the <b>PivotTable</b> report that correspond to the data items (section <a href="#">2.2.5.3.7.5.1</a> ) or pivot items (section <a href="#">2.2.5.3.3</a> ) associated with the collection of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records that immediately follow the record that contains this structure. There MUST be a collection of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records immediately following the record that contains this structure. |
| ISXRTYPE_DATA     | 0x02  | This rule specifies the data area (section <a href="#">2.2.5.3.8.1.4</a> ) of the <b>PivotTable</b> report that correspond to the data items or pivot items associated with the collection of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records that immediately follow the record that contains this structure. There MUST be a collection of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records immediately following the record that contains this structure.  |
| ISXRTYPE_ALL      | 0x03  | This rule specifies the entire <b>PivotTable</b> report. Collections of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records MUST NOT immediately follow the record that contains this structure.  |
| ISXRTYPE_ORIGIN   | 0x04  | This rule specifies the cells at the logical top-left of the <b>PivotTable</b> report body. Collections of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records MUST NOT immediately follow the record that contains this structure.   |
| ISXRTYPE_BUTTON   | 0x05  | This rule specifies the cell on the <b>PivotTable</b> report containing the pivot field caption. Collections of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records MUST NOT immediately follow the record that contains this structure.  |
| ISXRTYPE_TOPRIGHT | 0x06  | This rule specifies the cells at the <b>logical top-right</b> of the <b>PivotTable</b> report body. Collections of <b>BrtBeginPRFilter</b> or <b>BrtBeginPRFilter14</b> records MUST NOT immediately follow the record that contains this structure.   |

**isxrtype** MUST NOT be **ISXRTYPE\_BUTTON** or **ISXRTYPE\_TOPRIGHT** if the record that contains this structure is a **BrtBeginPRule14**.

**A - fDataOnly (1 bit):** A bit that specifies whether only the cells in the data area are included in this **PivotTable** rule. **fDataOnly** and **fLabelOnly** MUST NOT both be 1. This value MUST be 1 if **isxrtype** is **ISXRTYPE\_DATA**, or if the record that contains this structure is a **BrtBeginPRule14**.

**B - fLabelOnly (1 bit):** A bit that specifies whether only cells in the page area, row (2) area or column (2) area are included in this **PivotTable** rule. This value MUST be 1 if **isxrtype** is

**ISXRTYPE\_BUTTON** or **ISXRTYPE\_TOPRIGHT**. **fDataOnly** and **fLabelOnly** MUST NOT both be 1.

**C - fGrandRw (1 bit):** A bit that specifies whether cells in the grand total row (2) are included in this **PivotTable** rule.

**D - fGrandCol (1 bit):** A bit that specifies whether cells in the grand total column (2) are included in this **PivotTable** rule.

**E - fCacheBased (1 bit):** A bit that specifies whether **isxvd** specifies a cache field in the **PivotCache** (section [2.2.5.2](#)) or a pivot field or the data field in a PivotTable view (section [2.2.5.3](#)).

| Value | Meaning   |
|-------|---|
| 0     | <b>isxvd</b> specifies a pivot field or the data field in a PivotTable view.                      |
| 1     | <b>isxvd</b> specifies a cache field in the <a href="#">PivotCache</a> . <b>sxaxis</b> MUST be 0. |

This value MUST be 1 if the record that contains this structure is in a **PivotCache Definition** (section [2.1.7.38](#)) part. It MUST be 0 if the record that contains this structure is a **BrtBeginPRule14**.

**F - fLineMode (1 bit):** A bit that specifies whether the area of the **PivotTable** report specified by this **PivotTable** rule is displayed in outline form (see section [2.2.5.3.7.4.2](#)).

**G - fPart (1 bit):** A bit that specifies whether only a partial area of the **PivotTable** report is specified by this **PivotTable** rule. If **fPart** is 1, **rfxLoc** specifies the partial area.

**H - fFuzzy (1 bit):** A bit that specifies whether the pivot items of the pivot field specified by this rule are treated as subtotals for the purposes of formatting when the pivot field is displayed in outline form (see section [2.2.5.3.7.4.2](#)).

**sxaxis (4 bits):** An unsigned integer that specifies the PivotTable axis (section [2.2.5.3.7](#)) that contains the pivot field or data field specified by **isxvd**. This value MUST be a value from the following table.

| Name        | Value | Description                              |
|-------------|-------|--|
| SXAXIS_NULL | 0x0   | This rule specifies no axis.             |
| SXAXIS_RW   | 0x1   | This rule specifies the row (2) axis.    |
| SXAXIS_COL  | 0x2   | This rule specifies the column (2) axis. |
| SXAXIS_PAGE | 0x4   | This rule specifies the page axis.       |
| SXAXIS_DATA | 0x8   | This rule specifies the data axis.       |

MUST be SXAXIS\_NULL if the record that contains this structure is a **BrtBeginPRule14**.

**iDim (8 bits):** An unsigned integer that specifies the position of the pivot field or data field specified by **isxvd** within the PivotTable axis for the record that contains this structure.

If **sxaxis** is SXAXIS\_RW, then **iDim** MUST be less than the number of pivot fields on the row (2) axis.

If **sxaxis** is **SXAXIS\_COL**, then **iDim** MUST be less than the number of pivot fields on the column (2) axis.

If **sxaxis** is **SXAXIS\_PAGE**, then **iDim** MUST be less than the number of pivot fields on the page axis.

If **sxaxis** is **SXAXIS\_DATA**, then **iDim** is undefined and MUST be ignored.

If **sxaxis** is **SXAXIS\_NULL**, then **iDim** is undefined and MUST be ignored.

**I - reserved (4 bits):** This value MUST be 0, and MUST be ignored.

**rfxLoc (16 bytes):** An **UncheckedRfx** (section [2.5.153](#)) that specifies the partial area within the **PivotTable** report specified by this **PivotTable** rule. The range is specified using a relative reference that specifies the offset from the logical top-left cell of the **PivotTable** report body as specified in **PivotTable** (section [2.2.5.3.8](#)) layout. This field MUST exist only if **fPart** is 1.

### 2.5.111 QsiFieldId

**QsiFieldId** is a 4-byte unsigned integer that specifies a numeric identifier for a query table column (2).

### 2.5.112 RangeProtectionTitleSDRel

The **RangeProtectionTitleSDRel** structure specifies the title of a cell range and the security descriptor.

|                      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rgchTitle (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwsdRel              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| pSDRel (variable)    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rgchTitle (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the title of the cell range. The value MUST be unique for the sheet. The number of characters in the string MUST be greater than or equal to 1, and less than or equal to 255. The string MUST conform to the following ABNF grammar.

```
string = name-start-character *name-character
name-start-character = "_" / "\" / Unicode-character
name-character = name-start-character / Unicode-space / Unicode-digit / "?" / "."
```

In the preceding grammar, Unicode-character is any code point that is a character, as defined by the Unicode character properties, Chapter Four of [\[UNICODE4.0\]](#).

Unicode-digit is any code point that is a digit, as defined by the Unicode character properties, Chapter Four of [\[UNICODE4.0\]](#).

Unicode-space is any code point that is a space, as defined by the Unicode character properties, Chapter Four of [\[UNICODE4.0\]](#).

**dwSDRel (4 bytes):** An unsigned integer that specifies the size in bytes of the security descriptor in **pSDRel**. If the value is 0x00000000, then there is no security descriptor.

**pSDRel (variable):** An optional SECURITY\_DESCRIPTOR structure, as defined in [\[MS-DTYP\]](#) section 2.4.6, that specifies a relative security descriptor that lists users who edit the cell range without providing the password. This field MUST exist only if **dwSDRel** is greater than 0.

### 2.5.113 ReadingOrder

The **ReadingOrder** enumeration specifies the reading order.

| Name                  | Value | Meaning                      |
|-----------------------|-------|------------------------------|
| READING_ORDER_CONTEXT | 0x00  | Context reading order.       |
| READING_ORDER_LTR     | 0x01  | Left-to-right reading order. |
| READING_ORDER_RTL     | 0x02  | Right-to-left reading order. |

### 2.5.114 RelID

**RelID** is an **XLNullableWideString** (section [2.5.166](#)) structure that specifies a relationship identifier, as specified in [\[ISO/IEC29500-2:2011\]](#), section 9.3. The length of the string MUST NOT exceed 255 characters. The string MUST NOT contain a zero character (0x0000). A string that is NULL means that the relationship is not specified.

### 2.5.115 RevisionLogSheetName

**RevisionLogSheetName** is an **XLWideString** structure that specifies the name of a sheet for records in the **Revision Log** (section [2.1.7.44](#)) part ABNF of a shared workbook (section [2.2.12](#)).

The string MUST have at least 4 characters and MUST have no more than 248 characters. Strings MUST follow the preceding format.

*[filename]sheetName*

Opening square bracket followed by the name of the file, excluding directory information but including extension, followed by close-square-bracket followed by the sheet name.

The *filename* portion MUST be at least 1 character and MUST have no more than 215 characters. Any '[' (opening square bracket) characters in the *filename* portion MUST be replaced with '(' (opening parenthesis) characters and any ']' (closing square bracket) characters in the *filename* portion MUST be replaced with ')' (closing parenthesis) characters.

The *sheetName* portion MUST be a value that is valid in the **strName** field of **BrkBundSh** (section [2.4.301](#)).

## 2.5.116 RevisionType

The **RevisionType** structure specifies the type of the revision record.

| Name                    | Value  | Meaning   |
|-------------------------|--------|---|
| <b>REVTINSRW</b>        | 0x0000 | Insert Row. This value is valid only in record type <b>BrtRRInsDel</b> (section <a href="#">2.4.729</a> ).  |
| <b>REVTINSCOL</b>       | 0x0001 | Insert Column. This value is valid only in record type <b>BrtRRInsDel</b> .   |
| <b>REVTDELROW</b>       | 0x0002 | Delete Row. This value is valid only in record type <b>BrtRRInsDel</b> .  |
| <b>REVTDELROW</b>       | 0x0002 | Delete Row. This value is valid only in record type <b>BrtRRInsDel</b> .  |
| <b>REVTDELCOL</b>       | 0x0003 | Delete Column. This value is valid only in record type <b>BrtRRInsDel</b> .   |
| <b>REVTMOVE</b>         | 0x0004 | Move cell. This value is valid only in record type <b>BrtRRMove</b> (section <a href="#">2.4.731</a> ).   |
| <b>REVTINSERTSH</b>     | 0x0005 | Insert sheet. This value is valid only in record type <b>BrtRRInsertSh</b> (section <a href="#">2.4.730</a> ).                                    |
| <b>REVTCHANGECELL</b>   | 0x0008 | Change cell content, including inline formatting. This value is valid only in record type <b>BrtRRChgCell</b> (section <a href="#">2.4.720</a> ). |
| <b>REVTRENSHEET</b>     | 0x0009 | Rename sheet. This value is valid only in record type <b>BrtRRRenSheet</b> (section <a href="#">2.4.733</a> ).                                    |
| <b>REVTDEFNAME</b>      | 0x000A | Define name. This value is valid only in record type <b>BrtRRDefName</b> (section <a href="#">2.4.722</a> ).                                      |
| <b>REVTFORMAT</b>       | 0x000B | Change cell format. This value is valid only in record type <b>BrtRRFormat</b> (section <a href="#">2.4.727</a> ).                                |
| <b>REVTAUTOFMT</b>      | 0x000C | Change autofomat. This value is valid only in record type <b>BrtRRAutoFmt</b> (section <a href="#">2.4.719</a> ).                                 |
| <b>REVTNOTE</b>         | 0x000D | Change comment. This value is valid only in record type <b>BrtRRNote</b> (section <a href="#">2.4.732</a> ).                                      |
| <b>REVTHEADER</b>       | 0x0020 | Revision header. This value is valid only in record type <b>BrtRRHeader</b> (section <a href="#">2.4.728</a> ).                                   |
| <b>REVTCONFLICT</b>     | 0x0025 | This value is valid only in record type <b>BrtRRConflict</b> (section <a href="#">2.4.721</a> ).  |
| <b>REVTADDVIEW</b>      | 0x002B | This value is valid only in record type <b>BrtRRUserView</b> (section <a href="#">2.4.736</a> ).  |
| <b>REVTDELVIEW</b>      | 0x002C | This value is valid only in record type <b>BrtRRUserView</b> .  |
| <b>REVTOLDNAME</b>      | 0x0022 | This value is valid only in record type <b>BrtRRDefName</b> .   |
| <b>REVTTRASHQTFIELD</b> | 0x002E | This value is valid only in record <b>BrtRRTQSIF</b> (section <a href="#">2.4.735</a> ).  |

## 2.5.117 Rfx

The **Rfx** structure specifies a range. The range MUST NOT include any cell that lies outside the sheet's used range, as specified by **BrtWsDim** (section [2.4.812](#)).

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| rwFirst  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| rwLast   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| colFirst |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| colLast  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rwFirst (4 bytes):** A **Rw** (section [2.5.125](#)) structure that specifies the first row (2) of the range.

**rwLast (4 bytes):** A **Rw** structure that specifies the last row (2) of the range. This value MUST NOT be less than the value of **rwFirst**.

**colFirst (4 bytes):** A **Col** (section [2.5.22](#)) structure that specifies the first column (2) of the range.

**colLast (4 bytes):** A **Col** structure that specifies the last column (2) of the range. This value MUST NOT be less than the value of **colFirst**.

### 2.5.118 RfXRel

The **RfXRel** structure specifies a range that can contain a relative reference.

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 |
| rwFirst  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| rwLast   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| colFirst |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| colLast  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**rwFirst (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) structure that specifies the first row (2) of the range.

**rwLast (4 bytes):** An **UncheckedRw** structure that specifies the last row (2) of the range. This value MUST NOT be less than the value of **rwFirst**.

**colFirst (4 bytes):** A **ColRel** (section [2.5.24](#)) structure that specifies the first column (2) of the range. The associated row (2) is **rwFirst**.

**colLast (4 bytes):** A **ColRel** structure that specifies the last column (2) of the range. The associated row (2) is **rwLast**. The specified column (2) index MUST NOT be less than the column (2) index specified by **colFirst**.

### 2.5.119 RgceAreaSmall

The **RgceAreaSmall** structure is a variant of the **RgceArea** (section [2.5.97.89](#)) structure that is limited to a range reference in the first 256 columns (2) and 65536 rows (2) of a sheet.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |            |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16         | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rowFirst    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | rowLast    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| columnFirst |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | columnLast |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rowFirst (2 bytes):** A **RwShort** (section [2.5.129](#)) structure that specifies the zero-based index of the first row (2) of the range. This value MUST be less than 65536.

**rowLast (2 bytes):** A **RwShort** structure that specifies the zero-based index of the last row (2) of the range. This value MUST be greater than or equal to **rowFirst**, and MUST be less than 65536.

**columnFirst (2 bytes):** A **ColRelShort** (section [2.5.25](#)) structure that specifies the first column (2) of the cell range and that specifies relative reference information about the first column (2) and first row (2). The value of **columnFirst.col** MUST be less than 256.

**columnLast (2 bytes):** A **ColRelShort** structure that specifies the last column (2) of the cell range and that specifies relative reference information about the last column (2) and last row (2). The value of **columnLast.col** MUST be greater than or equal to **columnFirst.col** and MUST be less than 256.

### 2.5.120 RgceLocSmall

The **RgceLocSmall** structure is a variant of the **RgceLoc** (section [2.5.97.91](#)) structure that is limited to a cell reference in the first 256 columns (2) and 65536 rows (2) of a sheet.

|     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| row |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | column |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**row (2 bytes):** A **RwShort** (section [2.5.129](#)) structure that specifies the zero-based index of the row (2) of the cell reference. This value MUST be less than 65536.

**column (2 bytes):** A **ColRelShort** (section [2.5.25](#)) structure that specifies the zero-based column (2) index of the column (2) of the cell reference and that specifies relative reference information. The value of **column.col** MUST be less than 256.

### 2.5.121 RichStr

The **RichStr** structure specifies a rich string.

|                         |   |         |   |   |   |   |   |                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------------|---|---------|---|---|---|---|---|----------------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                       | 1 | 2       | 3 | 4 | 5 | 6 | 7 | 8              | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A                       | B | unused1 |   |   |   |   |   | str (variable) |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwSizeStrRun (4 bytes)  |   |         |   |   |   |   |   |                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgsStrRun (variable)    |   |         |   |   |   |   |   |                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| phoneticStr (variable)  |   |         |   |   |   |   |   |                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwPhoneticRun (4 bytes) |   |         |   |   |   |   |   |                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgsPhRun (variable)     |   |         |   |   |   |   |   |                |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fRichStr (1 bit):** A bit that specifies whether **dwSizeStrRun** and **rgsStrRun** exist.

**B - fExtStr (1 bit):** A bit that specifies whether **phoneticStr**, **dwPhoneticRun**, and **rgsPhRun** exist.

**unused1 (6 bits):** Undefined. This value MUST be ignored.

**str (variable):** An **XLWideString** (section [2.5.168](#)) structure that specifies the string. The number of Unicode characters MUST be less than or equal to 0x7FFF.

**dwSizeStrRun (4 bytes):** An unsigned integer that specifies the number of **StrRun** (section [2.5.143](#)) in **rgsStrRun**. MUST be less than or equal to 0x7FFF.

**rgsStrRun (variable):** An array of **StrRun**. Each **StrRun** specifies formatting that is applied to a text run of characters within **str**. Every **StrRun**, except the last **StrRun** in the array, specifies formatting for a text run that begins with the character specified by the **ich** field of the **StrRun** and that ends with the character that precedes the character specified by the **ich** field of the subsequent **StrRun** in the array. The last **StrRun** in the array specifies formatting for a text run that begins with the character specified by its **ich** field and ends with the last character in **str**. The value of each **ich** field of a **StrRun** in the array MUST be less than the **ich** field of the subsequent **StrRun** in the array.

**phoneticStr (variable):** An **XLWideString** structure that specifies the **phonetic string**.

**dwPhoneticRun (4 bytes):** An unsigned integer that specifies the number of **PhRun** (section [2.5.102](#)) in **rgsPhRun**. This value MUST be less than or equal to 0x7FFF.

**rgsPhRun (variable):** An array of **PhRun**. Each **PhRun** specifies a phonetic text run within **phoneticStr** that is displayed above a text run within **str**. The first character in the phonetic text run is the character specified by the **ichFirst** field of **PhRun**. The first character in the **str** that the phonetic text run appears above is specified by the **ichMom** field of **PhRun**. The number of characters in the **str** that phonetic text run appears above is specified by the **cchMom** field of **PhRun**. The value of each **ichMom** field of a **PhRun** in the array MUST be less than the **ichMom** field of the subsequent **PhRun** in the array. The value of each **ichFirst** field of a **PhRun** in the array MUST be less than the **ichFirst** field of the subsequent **PhRun** in the array. The sum of the **cchMom** fields of all **PhRun** in the array MUST be less than or equal to the number of characters in **str**.



### 2.5.122 RkNumber

The **RkNumber** structure specifies a numeric value.

|   |   |     |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|-----|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2   | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | num |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fx100 (1 bit):** A bit that specifies whether or not **num** is the value of the **RkNumber** or 100 times the value of the **RkNumber**. This value MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| 0     | The value of <b>RkNumber</b> is the value of <b>num</b> .               |
| 1     | The value of <b>RkNumber</b> is the value of <b>num</b> divided by 100. |

**B - fInt (1 bit):** A bit that specifies the type of **num**.

**num (30 bits):** A variable type field whose type and meaning is specified by the value of **fInt**, as defined in the following table.

| Value of fInt | Type of num  |
|---------------|--|
| 0             | <b>num</b> is the 30 most significant bits of a 64-bit binary floating-point number, as defined in <a href="#">[IEEE754]</a> . The remaining 34-bits of the floating-point number MUST be 0. |
| 1             | <b>num</b> is a signed integer.  |

### 2.5.123 RRd

The **RRd** structure specifies the revision record (section [2.2.12.4](#)) information used to track changes in a shared workbook (section [2.2.12](#)).

|         |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
|---------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|---------|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|
| 0       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20      | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |
| unused1 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| revid   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| revt    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | A  | B  | C  | D  | unused2 |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |
| tabid   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |         |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |

**unused1 (4 bytes):** Undefined. This value MUST be ignored.

**revid (4 bytes):** An unsigned integer that specifies the reviewable revision identifier of this revision record. The value MUST be 0, or greater than or equal to **revidMin** and less than or equal to **revidMax** as defined in the **BrRRHeader** (section [2.4.728](#)) record for this revision

part, or the same as another revision record's **revId** if this record's type is **REVTCONFLICT**. If this value is 0, this revision record cannot be reviewed.

**revt (2 bytes):** A **RevisionType** (section [2.5.116](#)) structure that specifies the type of this revision record.

**A - fAccepted (1 bit):** A bit that specifies whether or not this revision record has been reviewed.

**B - fUndoAction (1 bit):** A bit that specifies whether or not the revision record occurred because of rejected changes.

**C - reserved1 (1 bit):** A bit that specifies whether or not the revision record occurred because of a redo of the rejected changes.

**D - reserved2 (1 bit):** A bit that specifies whether or not the row (2) or column (2) that is being deleted is at the edge of a sorted range. If the value is 1, then **revt** MUST be 0x0002 or 0x0003.

**unused2 (12 bits):** Undefined. This value MUST be ignored.

**tabId (2 bytes):** An unsigned integer that specifies the **tabId** of the sheet associated with the revision record. If the value is 65535, this revision record does not apply to any sheet. Otherwise, the value MUST equal the value of the **iTabID** field in a **BrkBundSh** (section [2.4.301](#)) record.

### 2.5.124 RRdDnGrbit

The **RRdDnGrbit** structure specifies additional information, as specified by the **BrRRDefName** (section [2.4.722](#)) record.

|        |   |   |   |   |   |          |   |   |   |    |    |    |    |    |    |    |    |      |    |    |    |    |    |       |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|----------|---|---|---|----|----|----|----|----|----|----|----|------|----|----|----|----|----|-------|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6        | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18   | 19 | 20 | 21 | 22 | 23 | 24    | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| unused |   |   |   |   |   |          |   |   |   |    |    |    |    |    |    | A  | B  | fgrp |    |    |    |    |    | chKey |    |    |    |    |    |    |    |
| C      | D | E | F | G | H | reserved |   |   |   |    |    |    |    |    |    |    |    |      |    |    |    |    |    |       |    |    |    |    |    |    |    |

**unused (2 bytes):** Undefined. This value MUST be ignored.

**A - fPli (1 bit):** **fPli (1 bit):** A bit that specifies that one or more of the fields **stDescription**, **stHelptopic**, **stCustommenu**, **stStatustext**, **stOldDescription**, **stOldHelptopic**, **stOldCustommenu**, or **stOldStatustext** specified in the **BrRRDefName** record MUST NOT be empty.

**B - fFunc (1 bit):** A bit that specifies whether or not the **BrRRDefName** record specifies a name that refers to a function.

**fgrp (6 bits):** An **FnGroupID** (section [2.5.51](#)) structure that specifies the function category classification of a name that refers to a new function.

**chKey (8 bits):** An unsigned integer that specifies the shortcut key. This value MUST have the same restrictions as the **chKey** field from the **BrName** (section [2.4.680](#)) record.

- C - fHidden (1 bit):** A bit that specifies whether or not the range specified by the **BrRRDefName** record is hidden.
- D - fCustommenu (1 bit):** A bit that specifies whether or not the **stCustommenu** field from the **BrRRDefName** record is not empty.
- E - fDescription (1 bit):** A bit that specifies whether or not the **stDescription** field from the **BrRRDefName** record is empty.
- F - fHelptopic (1 bit):** A bit that specifies whether or not the **stHelptopic** field from the **BrRRDefName** record is empty.
- G - fStatustext (1 bit):** A bit that specifies whether or not the **stStatustext** field from the **BrRRDefName** record is empty.
- H - fCorruptComment (1 bit):** This value MUST be 0 and MUST be ignored.
- reserved (10 bits):** This value MUST be 0, and MUST be ignored.

### 2.5.125 Rw

**Rw** is a signed 32-bit integer that specifies a single row (2) in a sheet using a zero-based index. This value MUST be between 0 and 1048575, inclusive, and MUST be between **rwFirst** and **rwLast**, inclusive, on the **UncheckedRfX** (section [2.5.153](#)) structure specified by the **rfx** field on the sheet's **BrWsDim** (section [2.4.812](#)) record.

### 2.5.126 Rw\_Col

**Rw\_Col** is a 4-byte unsigned integer that specifies either a zero-based row (2) index or a zero-based column (2) index. This value MUST be greater than or equal to 0 and less than or equal to 1048575.

### 2.5.127 RwNullable

**RwNullable** is a signed 32-bit integer that specifies a single row (2) in a sheet.


| Value       | Meaning   |
|-------------|---|
| 0xFFFFFFFFL | Null value.   |
|             | All other values are interpreted as an <b>UncheckedRw</b> (section <a href="#">2.5.154</a> ). |

### 2.5.128 RwRelNeg

**RwRelNeg** is a 32-bit signed integer that specifies the zero-based offset of a row (2) index. This value MUST be greater than -1048576 and less than 1048576.

### 2.5.129 RwShort

The **RwShort** structure specifies a single row (2) in a sheet.

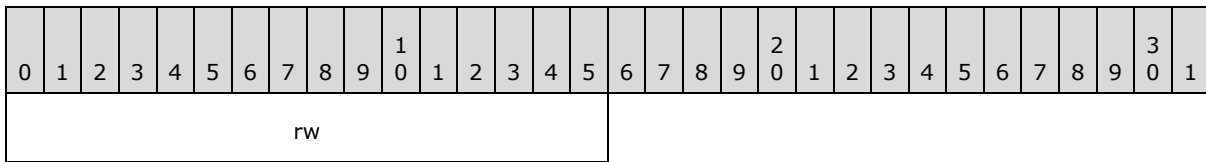

**rw (2 bytes):** An unsigned integer that specifies a single row (2) in a sheet using a zero-based index.

### 2.5.130 Script

The **Script** enumeration specifies the superscript or subscript style.

| Name            | Value  | Meaning       |
|-----------------|--------|---------------|
| <b>SSSNONE</b>  | 0x0000 | Normal script |
| <b>SSSSUPER</b> | 0x0001 | Superscript   |
| <b>SSSSUB</b>   | 0x0002 | Subscript     |


### 2.5.131 SdSetSortOrder

**SdSetSortOrder** is an enumeration that specifies the sorting order of an MDX set metadata (section [2.2.4.8.2](#)) or a tuple cache set (section [2.2.5.2.11](#)).

| Name                  | Value      | Meaning   |
|-----------------------|------------|---|
| <b>SSONONE</b>        | 0x00000000 | No sorting order.   |
| <b>SSOASC</b>         | 0x00000001 | Ascending order by tuple.   |
| <b>SSODESC</b>        | 0x00000002 | Descending order by tuple.  |
| <b>SSOALPHAASC</b>    | 0x00000003 | Ascending order by the caption.   |
| <b>SSOALPHADESC</b>   | 0x00000004 | Descending order by the caption.  |
| <b>SSONATURALASC</b>  | 0x00000005 | Ascending order by the natural order of the data, as defined by the data source (1).  |
| <b>SSONATURALDESC</b> | 0x00000006 | Descending order by the natural order of the data, as defined by the data source (1). |

### 2.5.132 ShortDtr

The **ShortDtr** structure specifies a date and time that is accurate down to the second. The year, month, day, and weekday values MUST be consistent with the Gregorian calendar.

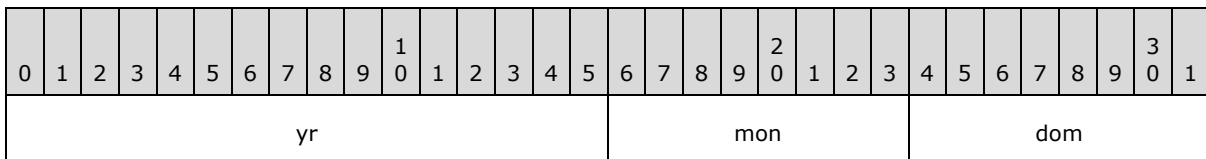

|    |      |     |     |
|----|------|-----|-----|
| hr | mint | sec | wdy |
|----|------|-----|-----|

**yr (2 bytes):** An unsigned integer that specifies the year. This value MUST be greater than or equal to 1900, and MUST be less than or equal to 9999.

**mon (1 byte):** An unsigned integer that specifies the month. This value MUST be greater than or equal to 1 and less than or equal to 12.

**dom (1 byte):** An unsigned integer that specifies the day. This value MUST be greater than or equal to 1 and less than or equal to 31.

**hr (1 byte):** An unsigned integer that specifies the hour. This value MUST be greater than or equal to 0 and less than or equal to 23.

**mint (1 byte):** An unsigned integer that specifies the minute. This value MUST be greater than or equal to 0 and less than or equal to 59.

**sec (1 byte):** An unsigned integer that specifies the second. This value MUST be greater than or equal to 0 and less than or equal to 59.

**wdy (1 byte):** An unsigned integer that specifies the weekday. The value MUST be a value from the following table.

| Value | Meaning   |
|-------|-----------|
| 0x01  | Monday    |
| 0x02  | Tuesday   |
| 0x03  | Wednesday |
| 0x04  | Thursday  |
| 0x05  | Friday    |
| 0x06  | Saturday  |
| 0x07  | Sunday    |

### 2.5.133 ShowDataAs

A **ShowDataAs** enumeration specifies display format values. It MUST be a value from the following table.

| Name               | Value      | Meaning                   |
|--------------------|------------|---------------------------|
| <b>NORMAL</b>      | 0x00000000 | Normal data type.         |
| <b>DIFFERENCE</b>  | 0x00000001 | Difference from.          |
| <b>PERCENT</b>     | 0x00000002 | Percentage of.            |
| <b>PERCENTDIFF</b> | 0x00000003 | Percentage difference of. |
| <b>RUNTTOTAL</b>   | 0x00000004 | Running total in.         |

| Name                      | Value      | Meaning                          |
|---------------------------|------------|----------------------------------|
| <b>PERCENTOFROW</b>       | 0x00000005 | Percentage of row (2).           |
| <b>PERCENTOFCOL</b>       | 0x00000006 | Percentage of column (2).        |
| <b>PERCENTOFTOTAL</b>     | 0x00000007 | Percentage of total.             |
| <b>INDEX</b>              | 0x00000008 | Index.                           |
| <b>PERCENTOFPARENTROW</b> | 0x00000009 | Percentage of parent row (2).    |
| <b>PERCENTOFPARENTCOL</b> | 0x0000000A | Percentage of parent column (2). |
| <b>PERCENTOFPARENT</b>    | 0x0000000B | Percentage of ancestor.          |
| <b>PERCENTOFRUNTOTAL</b>  | 0x0000000C | Percentage of running total.     |
| <b>RANKASCENDING</b>      | 0x0000000D | Rank Ascending.                  |
| <b>RANKDESCENDING</b>     | 0x0000000E | Rank Descending.                 |

### 2.5.134 SlicerCacheLevelData

The **SlicerCacheLevelData** record specifies the properties of an OLAP level in the OLAP hierarchy specified by this slicer cache (section [2.2.14.1](#)), whose OLAP members with no data are not displayed.

|                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cHiddenItems            |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stUniqueName (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**cHiddenItems (4 bytes):** An unsigned integer that specifies how many of the OLAP members in this OLAP level that are used in slicer cross filtering (section [2.2.14.1.5](#)) are not displayed.

**stUniqueName (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the MDX unique name of this OLAP level within the OLAP hierarchy specified by this slicer cache, whose OLAP members with no data are not displayed. The length of this string **MUST** be at least 1 character and **MUST NOT** exceed 32,767 characters.

### 2.5.135 SlicerCacheNativeItem

A **SlicerCacheNativeItem** structure specifies non-OLAP slicer item (section [2.2.14.1.4.1](#)) properties in a **BrtSlicerCacheNativeItem** (section [2.4.746](#)) record.

|        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|--------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| iCache |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|   |   |          |
|---|---|----------|
| A | B | reserved |
|---|---|----------|

**iCache (4 bytes):** An unsigned integer that specifies an index of the cache item (section [2.2.5.2.3](#)) associated with this non-OLAP slicer item. This value MUST be within the range of items as specified by the **crecords** field of the **BrtBeginPivotCacheRecords** (section [2.4.165](#)) record of the associated non-OLAP pivot cache (section [2.2.5.2](#)) specified by the **dwcacheId** field of the **BrtBeginSlicerCacheNative** (section [2.4.198](#)) record.

**A - fSelected (1 bit):** A bit that specifies whether or not this non-OLAP slicer item is selected for filtering.

**B - fNoData (1 bit):** A bit that specifies whether or not this non-OLAP slicer item contains data. This value MUST be equal to 0 if the **fCrossFilter** field of the **BrtBeginSlicerCacheNative** record is equal to 0x0. For more information see section [2.2.14.1.5](#).

**reserved (6 bits):** This value MUST be 0 and MUST be ignored.

### 2.5.136 SlicerCachePivotTable

The **SlicerCachePivotTable** structure specifies either a PivotTable view (section [2.2.5.3](#)) within the **BrtSlicerCachePivotTables** (section [2.4.748](#)) record or a Non-Worksheet PivotTable (section [2.2.5.5](#)) within the **BrtSlicerCacheBookPivotTables** (section [2.4.744](#)) record.

|                         |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|-------------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0                       | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| iTabId                  |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| stPivotTable (variable) |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
| ...                     |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

**iTabId (4 bytes):** An unsigned integer that specifies the worksheet which contains the PivotTable view specified by this structure. This value MUST match an **iTabId** of an existing **BrtBundleSh** (section [2.4.301](#)) record. This value MUST be -1 if this record specifies a Non-Worksheet PivotTable (section [2.2.5.5](#)) within the **BrtSlicerCacheBookPivotTables** (section [2.4.744](#)) record.

**stPivotTable (variable):** An **XLWideString** (section [2.5.168](#)) that specifies the PivotTable view within the scope of the worksheet specified by **iTabId**. This value MUST match an **irstName** of an existing **BrtBeginSXView** (section [2.4.264](#)) record.

### 2.5.137 SqEtxp

The **SqEtxp** structure specifies a collection of **Etxp** (section [2.5.41](#)) that specifies the font information for a **BrtRRChgCell** (section [2.4.720](#)) record.

|          |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 |
| cbrgetxp |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |

|                   |
|-------------------|
| rgetxp (variable) |
| ...               |

**cbrgetxp (4 bytes):** An unsigned integer that specifies the number of elements in **rgetxp** multiplied by 100. This value **MUST** be a multiple of 100.

**rgetxp (variable):** An array of **Etxp**. The number of elements in the array **MUST** be equal to **cbrgetxp** divided by 100.

### 2.5.138 SrvFmtCV

The **SrvFmtCV** record specifies an indexed color definition in RGB.

|       |   |   |   |   |   |   |   |   |   |         |    |    |    |    |    |    |    |    |    |        |    |    |    |    |    |        |    |    |    |    |    |
|-------|---|---|---|---|---|---|---|---|---|---------|----|----|----|----|----|----|----|----|----|--------|----|----|----|----|----|--------|----|----|----|----|----|
| 0     | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10      | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20     | 21 | 22 | 23 | 24 | 25 | 26     | 27 | 28 | 29 | 30 | 31 |
| ciRed |   |   |   |   |   |   |   |   |   | ciGreen |    |    |    |    |    |    |    |    |    | ciBlue |    |    |    |    |    | unused |    |    |    |    |    |

**ciRed (1 byte):** An unsigned integer that specifies the intensity of the color red.

**ciGreen (1 byte):** An unsigned integer that specifies the intensity of the color green.

**ciBlue (1 byte):** An unsigned integer that specifies the intensity of the color blue.

**unused (1 byte):** Undefined. This value **MUST** be ignored.

### 2.5.139 SrvFmtData

The **SrvFmtData** structure specifies the number format on the server.

|             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0           | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cb          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| dwSrvFmtNum |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cb (4 bytes):** An unsigned integer that specifies the size in bytes of the data that follows this field. Its value **MUST** be equal to 0x00000004.

**dwSrvFmtNum (4 bytes):** An unsigned integer that specifies the number format on the server, and whose value is dictated by the value of **sff.fSrvFmtNumStr** of the associated **BrBeginMdxTuple** (section [2.4.106](#)) record, as specified in the following table.

| Value of sff.fSrvFmtNumStr | Meaning of dwSrvFmtNum   |
|----------------------------|--|
| 0                          | Value specifies one of the built-in number formats as described in the following table.        |
| 1                          | Value is an index to a string in the metadata string store (section <a href="#">2.2.4.7</a> ). |



| Value of <b>sff.fSrvFmtNumStr</b> | Meaning of <b>dwSrvFmtNum</b>   |
|-----------------------------------|---|
|                                   | That string contains information about how to format the number. For more information about how format strings are interpreted, see <a href="#">[ISO/IEC29500-1:2011]</a> , section 18.8.31. The ABNF grammar for the format string is specified in <a href="#">[MS-XLS]</a> section 2.4.126. |

The value of **dwSrvFmtNum** MUST be a value from the following table when the value of **sff.fSrvFmtNumStr** is 0.

| Value      | Format specification | Example formatted data |
|------------|----------------------|------------------------|
| 0x00000000 | General              | 3.14159                |
| 0x0000000E | 0.00%                | 20.73%                 |
| 0x00000013 | m/d/yyyy             | 1/13/1999              |

### 2.5.140 SrvFmtFlags

The **SrvFmtFlags** structure specifies the properties of applied server-specified formatting.

|   |   |   |   |   |   |   |   |   |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9      | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | C | D | E | F | G | H | I | unused |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fSrvFmtNum (1 bit):** A bit that specifies whether or not the number formatting is applied.

**B - fSrvFmtNumCurrency (1 bit):** A bit that specifies whether or not the currency formatting is applied.

**C - fSrvFmtNumStr (1 bit):** A bit that specifies whether or not the number formatting is stored in the metadata string store.

**D - fSrvFmtBack (1 bit):** A bit that specifies whether or not the background color is applied.

**E - fSrvFmtFore (1 bit):** A bit that specifies whether or not the foreground color is applied.

**F - fSrvFmtItalic (1 bit):** A bit that specifies whether or not the italic formatting is applied.

**G - fSrvFmtUnderline (1 bit):** A bit that specifies whether or not the underline formatting is applied.

**H - fSrvFmtBold (1 bit):** A bit that specifies whether or not the bold formatting is applied.

**I - fSrvFmtStrikethrough (1 bit):** A bit that specifies whether or not the **strikethrough formatting** is applied.

**unused (7 bits):** Undefined. This value MUST be ignored.

### 2.5.141 SrvFmtNum

The **SrvFmtNum** structure specifies the number or currency formatting in the **BrTBeginMdxTuple** (section [2.4.106](#)) record.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| data (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**data (variable):** A field whose type and value are dictated by the value of the **sff.fSrvFmtNumCurrency** field of the associated **BrtBeginMdxTuple** record, as specified in the following table.

| Value of <b>sff.fSrvFmtNumCurrency</b> | Type of data   |
|--|--|
| 0                                      | Value is a <b>SrvFmtData</b> (section <a href="#">2.5.139</a> ).   |
| 1                                      | Value is an <b>XLNullableWideString</b> (section <a href="#">2.5.166</a> ) that specifies a language tag used to determine the currency symbol to display for currency values. For example, if the language tag is "en-us", the application formats the values with a dollar sign. If the language tag is "fr-fr" the application formats the values with a euro sign.<br><br>This value MUST <a href="#">&lt;67&gt;</a> conform to the language tagging conventions of <a href="#">[RFC3066]</a> . The pattern <language>-<COUNTRY/REGION> is used, for example "en-us" or "fr-fr". |

### 2.5.142 ST\_SheetState

The **ST\_SheetState** enumeration specifies the visibility state of a sheet.

| Name              | Value      | Meaning  |
|-------------------|------------|--|
| <b>VISIBLE</b>    | 0x00000000 | The sheet is visible.  |
| <b>HIDDEN</b>     | 0x00000001 | The sheet is hidden.   |
| <b>VERYHIDDEN</b> | 0x00000002 | The sheet is hidden and cannot be displayed by using the user interface. |

### 2.5.143 StrRun

The **StrRun** structure specifies a text run.

|               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |                |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0             | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16             | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| ich (2 bytes) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | ifnt (2 bytes) |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**ich (2 bytes):** An unsigned integer that specifies the zero-based index of a character in the **str** field of the **RichStr** (section [2.5.121](#)) that contains the **rgsStrRun** array that contains this **StrRun**. The value of **ich** MUST be less than the number of characters in the **str** field of the associated **RichStr**.

**ifnt (2 bytes):** An unsigned integer that specifies the zero-based index of a **BrtFont** (section [2.4.653](#)) record in the collection of all records directly following **BrtBeginFonts** (section [2.4.85](#)). The referenced **BrtFont** specifies the font for the text run.

## 2.5.144 StyleFlags

The **StyleFlags** structure specifies properties of a **BrtStyle** (section [2.4.755](#)) record.

|   |   |   |        |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|--------|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3      | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | C | unused |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - fBuiltIn (1 bit):** A bit that specifies whether or not the associated cell style (section [2.2.6.1.2](#)) is a built-in cell style.

**B - fHidden (1 bit):** A bit that specifies whether or not the associated cell style is displayed in the UI.

**C - fCustom (1 bit):** A bit that specifies whether or not the associated cell style is a built-in cell style that is customized. If this bit is set, the **fBuiltIn** bit MUST be set. Customized built-in cell styles MUST be saved with the workbook, even if they are not currently in use.

**unused (13 bits):** This value MUST be 0, and MUST be ignored.

## 2.5.145 SXAxis

The **SXAxis** structure specifies which PivotTable axis (section [2.2.5.3.7](#)) is being referred to.

|   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| A | B | C | D | E |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**A - sxaxisRw (1 bit):** A bit that specifies whether or not the row (2) axis is being referred to.

**B - sxaxisCol (1 bit):** A bit that specifies whether or not the column (2) axis is being referred to.

**C - sxaxisPage (1 bit):** A bit that specifies whether or not the page axis (section [2.2.5.3.7.1](#)) is being referred to.

**D - sxaxisData (1 bit):** A bit that specifies whether or not the data axis is being referred to.

**E - reserved (4 bits):** This value MUST be 0, and MUST be ignored.

## 2.5.146 SXET

The **SXET** enumeration specifies the type of the modified value in the PivotTable data area using PivotTable What if Analysis (section [2.2.5.3.10](#)).

| Name                 | Value | Meaning              |
|----------------------|-------|----------------------|
| <b>SXET_FMLA</b>     | 0x01  | Formula value.       |
| <b>SXET_NUM</b>      | 0x02  | Numerical value.     |
| <b>SXET_DATETIME</b> | 0x03  | Date and time value. |

| Name               | Value | Meaning        |
|--------------------|-------|----------------|
| <b>SXET_STRING</b> | 0x04  | String value.  |
| <b>SXET_BOOL</b>   | 0x05  | Boolean value. |
| <b>SXET_ERROR</b>  | 0x07  | Error value.   |

### 2.5.147 SXMA

The **SXMA** enumeration specifies the allocation method for the **PivotTable** What-if Analysis (section [2.2.5.3.10](#)).

| Name                       | Value      | Meaning                        |
|----------------------------|------------|--------------------------------|
| <b>EQUAL_ALLOCATION</b>    | 0x00000000 | Equal allocation.              |
| <b>EQUAL_INCREMENT</b>     | 0x00000001 | Equal increment allocation.    |
| <b>WEIGHTED_ALLOCATION</b> | 0x00000002 | Weighted allocation.           |
| <b>WEIGHTED_INCREMENT</b>  | 0x00000003 | Weighted increment allocation. |


### 2.5.148 TagFnMdx

The **TagFnMdx** enumeration specifies cube function types.

| Name                         | Value      | Meaning             |
|------------------------------|------------|---------------------|
| <b>TFNCUBEMEMBER</b>         | 0x00000001 | CUBEMEMBER.         |
| <b>TFNCUBEVALUE</b>          | 0x00000002 | CUBEVALUE.          |
| <b>TFNCUBESET</b>            | 0x00000003 | CUBESET.            |
| <b>TFNCUBESETCOUNT</b>       | 0x00000004 | CUBESETCOUNT.       |
| <b>TFNCUBERANKEDMEMBER</b>   | 0x00000005 | CUBERANKEDMEMBER.   |
| <b>TFNCUBEMEMBERPROPERTY</b> | 0x00000006 | CUBEMEMBERPROPERTY. |
| <b>TFNCUBEKPIPROPERTY</b>    | 0x00000007 | CUBEKPIMEMBER.      |

### 2.5.149 TSEType

**TSEType** is an unsigned integer that specifies the area of the table, **PivotTable** (section [2.1.7.40](#)), slicer (section [2.2.14](#)) or timeline (section [2.2.15](#)) to which a table style element (section [2.2.6.2.2](#)) applies.

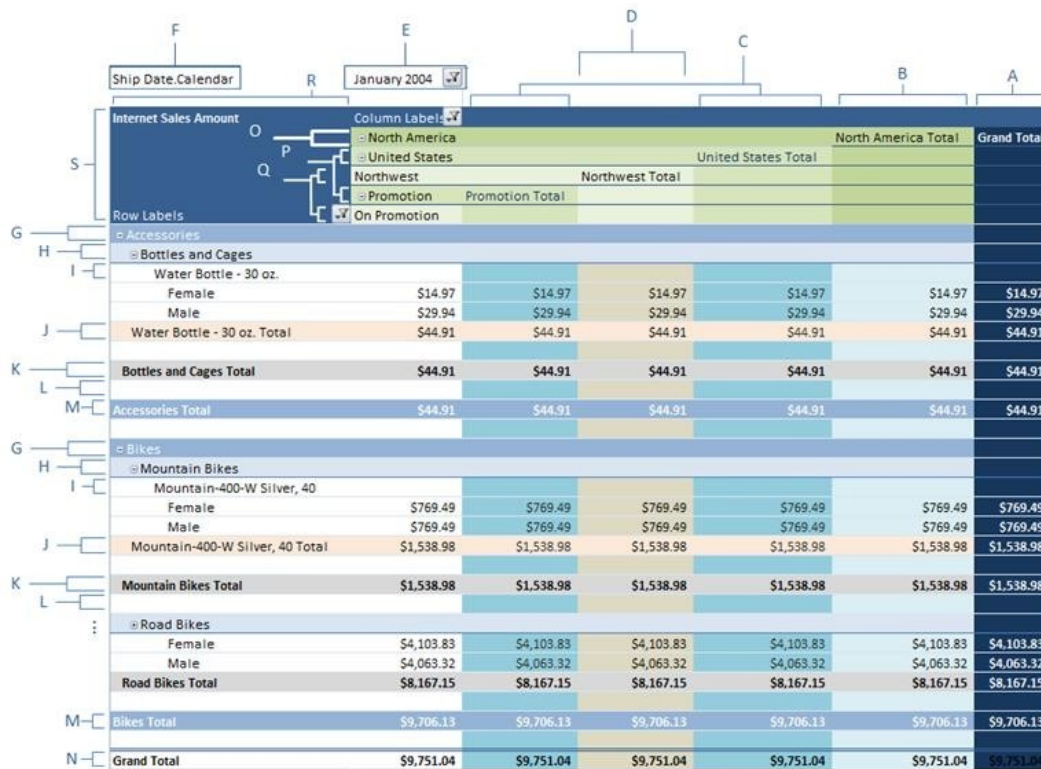

**Figure 20: PivotTable Style Diagram**

MUST be a value from the following table:

| Name                  | Value      | Meaning   |
|-----------------------|------------|---|
| <b>TSEWHOLETABLE</b>  | 0x00000000 | Whole table, slicer or timeline. If this table style (section 2.2.6.3) is applied to a <b>PivotTable</b> , this formatting type also applies to page field captions and page item captions.                                     |
| <b>TSEHEADERROW</b>   | 0x00000001 | Header row (1). If this table style is applied to a <b>PivotTable</b> , this formatting type applies to the collection of rows (2) above the data region. See S in the preceding <b>PivotTable</b> Style Diagram.               |
| <b>TSETOTALROW</b>    | 0x00000002 | Total row. If this table style is applied to a <b>PivotTable</b> , this formatting type applies to the grand total row (2). See N in the preceding <b>PivotTable</b> Style Diagram. Does not apply to slicers (section 2.2.14). |
| <b>TSEFIRSTCOLUMN</b> | 0x00000003 | First column (2). If this table style is applied to a <b>PivotTable</b> , this formatting type applies to the row (2) label area, which can span multiple columns (2). See R in the preceding <b>PivotTable</b> Style Diagram.  |

| Name                      | Value      | Meaning   |
|---------------------------|------------|---|
|                           |            | Diagram. Does not apply to slicers.   |
| <b>TSELASTCOLUMN</b>      | 0x00000004 | Last column (2). If this table style is applied to a PivotTable, this formatting type applies to the grand total column (2). See <i>A</i> in the preceding PivotTable Style Diagram. Does not apply to slicers.   |
| <b>TSEROWSTRIPE1</b>      | 0x00000005 | Row (2) stripe band 1. Does not apply to slicers.   |
| <b>TSEROWSTRIPE2</b>      | 0x00000006 | Row (2) stripe band 2. Does not apply to slicers.   |
| <b>TSECOLUMNSTRIPE1</b>   | 0x00000007 | Column (2) stripe band 1. Does not apply to slicers.  |
| <b>TSECOLUMNSTRIPE2</b>   | 0x00000008 | Column (2) stripe band 2. Does not apply to slicers.  |
| <b>TSEFIRSTHEADERCELL</b> | 0x00000009 | First cell of header row (1). If this table style is applied to a PivotTable, this formatting type applies to cells contained in the area intersected by the header row (1) and first column (2). Does not apply to slicers.  |
| <b>TSELASTHEADERCELL</b>  | 0x0000000A | Last cell of header row (1). MUST be ignored if this table style is applied to a PivotTable. Does not apply to slicers.   |
| <b>TSEFIRSTTOTALCELL</b>  | 0x0000000B | First cell of total row. MUST be ignored if this table style is applied to a PivotTable. Does not apply to slicers.   |
| <b>TSELASTTOTALCELL</b>   | 0x0000000C | Last cell of total row. MUST be ignored if this table style is applied to a PivotTable. Does not apply to slicers.  |
| <b>TSESUBTOTALCOLUMN1</b> | 0x0000000D | Outermost subtotal columns (2) in a PivotTable, specified by the columns (2) displaying subtotals for the first <b>SXVD</b> (section <a href="#">2.5.83</a> ) record in the <b>ISXVDCOLS</b> collection (see section <a href="#">2.1.7.40</a> ). See <i>B</i> in the preceding PivotTable Style Diagram. Used for PivotTables only. |
| <b>TSESUBTOTALCOLUMN2</b> | 0x0000000E | Alternating even subtotal columns (2) in a PivotTable, specified by the columns (2) displaying subtotals for <b>SXVD</b> records for which the zero-based index in the record in the <b>ISXVDCOLS</b> collection is an odd number. See <i>C</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.               |
| <b>TSESUBTOTALCOLUMN3</b> | 0x0000000F | Alternating odd subtotal columns (2) in a PivotTable, specified by the columns (2)  |

| Name                         | Value      | Meaning   |
|------------------------------|------------|---|
|                              |            | displaying subtotals for <b>SXVD</b> records for which the zero-based index in the record in the <b>ISXVDCOLS</b> collection is an even number greater than 0. See <i>D</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.   |
| <b>TSESUBTOTALROW1</b>       | 0x00000010 | Outermost subtotal rows (2) in a PivotTable, specified by the rows (2) displaying subtotals for the first <b>SXVD</b> record in the <b>ISXTHRWS</b> collection (see section <a href="#">2.1.7.40</a> ). See <i>M</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.  |
| <b>TSESUBTOTALROW2</b>       | 0x00000011 | Alternating even subtotal rows (2) in a PivotTable, specified by the rows (2) displaying subtotals for <b>SXVD</b> records for which the zero-based index in the <b>SXVD</b> record in the <b>ISXTHRWS</b> collection is an odd number. See <i>K</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.                |
| <b>TSESUBTOTALROW3</b>       | 0x00000012 | Alternating odd subtotal rows (2) in a PivotTable, specified by the rows (2) displaying subtotals for <b>SXVD</b> records for which the zero-based index in the <b>SXVD</b> record in the <b>ISXTHRWS</b> collection is an even number greater than 0. See <i>J</i> in the preceding PivotTable Style Diagram. Used for PivotTables only. |
| <b>TSEBLANKROW</b>           | 0x00000013 | Empty rows (2) after each subtotal row (2). See <i>L</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.  |
| <b>TSECOLUMNSSUBHEADING1</b> | 0x00000014 | Outermost column (2) subheadings in a PivotTable, specified by the columns (2) displaying pivot field (section <a href="#">2.2.5.3.2</a> ) captions for the first <b>SXVD</b> record in the <b>ISXVDCOLS</b> collection. See <i>O</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.                               |
| <b>TSECOLUMNSSUBHEADING2</b> | 0x00000015 | Alternating even column (2) subheadings in a PivotTable, specified by the columns (2) displaying pivot field captions for <b>SXVD</b> records for which the zero-based index in the <b>ISXVDCOLS</b> collection is an odd number. See <i>P</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.                      |
| <b>TSECOLUMNSSUBHEADING3</b> | 0x00000016 | Alternating odd column (2) subheadings in a PivotTable, specified by the columns (2) displaying pivot field captions for  |

| Name                                | Value      | Meaning  |
|-------------------------------------|------------|--|
|                                     |            | <b>SXVD</b> records for which the zero-based index in the <b>ISXVDCOLS</b> collection is an even number greater than 0. See <i>Q</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.   |
| <b>TSEROWSUBHEADING1</b>            | 0x00000017 | Outermost row (2) subheadings in a PivotTable, specified by the rows (2) displaying pivot field captions for the first <b>SXVD</b> record in the <b>ISXTHRWS</b> collection. See <i>G</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.  |
| <b>TSEROWSUBHEADING2</b>            | 0x00000018 | Alternating even row (2) subheadings in a PivotTable, specified by the rows (2) displaying pivot field captions for <b>SXVD</b> records for which the zero-based index in the <b>ISXTHRWS</b> collection is an odd number. See <i>H</i> in the preceding PivotTable Style Diagram. Used for PivotTables only.                |
| <b>TSEROWSUBHEADING3</b>            | 0x00000019 | Alternating odd row (2) subheadings in a PivotTable, specified by the rows (2) displaying pivot field captions for <b>SXVD</b> records for which the zero-based index in the <b>ISXTHRWS</b> collection is an even number greater than 0. See <i>I</i> in the preceding PivotTable Style Diagram. Used for PivotTables only. |
| <b>TSEPAGEFIELDLABELS</b>           | 0x0000001A | Page field captions in a PivotTable, specified by the cells displaying pivot field captions for the <b>SXVD</b> records in the <b>SXPIS</b> rule (defined in section <a href="#">2.1.7.40</a> ). See <i>F</i> in the PivotTable Style Diagram. Used for PivotTables only.  |
| <b>TSEPAGEFIELDVALUES</b>           | 0x0000001B | Page item captions in a <b>PivotTable</b> , specified by the cells displaying pivot item (section <a href="#">2.2.5.3.3</a> ) captions for the <b>SXVD</b> records in the <b>SXPIS</b> . See <i>E</i> in the preceding <b>PivotTable</b> Style Diagram. Used for PivotTables only.   |
| <b>TSESLICERITEMUNSELECTED</b>      | 0x0000001C | A slicer item with data that is not selected. Used for slicers only.   |
| <b>TSESLICERITEMNODATA</b>          | 0x0000001D | A slicer item with no data that is not selected. Used for slicers only.  |
| <b>TSESLICERITEMSELECTED</b>        | 0x0000001E | A selected slicer item with data. Used for slicers only.   |
| <b>TSESLICERITEMNODATASELECTED</b>  | 0x0000001F | A selected slicer item with no data. Used for slicers only.  |
| <b>TSESLICERITEMUNSELECTEDHOVER</b> | 0x00000020 | A slicer item with data that is not  |



| Name                                     | Value      | Meaning  |
|--|------------|--|
|  |            | selected and over which the mouse is hovering. Used for slicers only.  |
| <b>TSESLICERITEMSELECTEDHOVER</b>        | 0x00000021 | A selected slicer item with data and over which the mouse is hovering. Used for slicers only.  |
| <b>TSESLICERITEMNODATAHOVER</b>          | 0x00000022 | A slicer item with no data that is not selected and over which the mouse is hovering. Used for slicers only.   |
| <b>TSESLICERITEMNODATASELECTEDHOVER</b>  | 0x00000023 | A selected slicer item with no data and over which the mouse is hovering. Used for slicers only.   |
| <b>TSETIMELINESELECTIONLABEL</b>         | 0x00000024 | Timeline style element that applies to the selection label which is the label that indicates the period that has been selected on the timeline. Used for timelines only.   |
| <b>TSETIMELINETIMELEVEL</b>              | 0x00000025 | Timeline style element that applies to the time level which is the level that indicates the time granularity of the timeline. Used for timelines only.                     |
| <b>TSETIMELINEPERIODLABEL1</b>           | 0x00000026 | Timeline style element that applies to the upper row of the time block labels. Used for timelines only.  |
| <b>TSETIMELINEPERIODLABEL2</b>           | 0x00000027 | Timeline style element that applies to the lower row of the time block labels. Used for timelines only.  |
| <b>TSETIMELINESELECTEDTIMEBLOCK</b>      | 0x00000028 | Timeline style element that applies to the selected time blocks which are the segments on the timeline that have been selected by the user. Used for timelines only.       |
| <b>TSETIMELINEUNSELECTEDTIMEBLOCK</b>    | 0x00000029 | Timeline style element that applies to the unselected time blocks which are the segments on the timeline that have not been selected by the user. Used for timelines only. |
| <b>TSETIMELINESELECTEDTIMEBLOCKSPACE</b> | 0x0000002A | Timeline style element that applies to the area between any two selected time blocks. Used for timelines only.   |

### 2.5.150 TwS

The **TwS** enumeration specifies type of an object published.

| Name               | Value | Meaning          |
|--------------------|-------|------------------|
| <b>TWSWORKBOOK</b> | 0x00  | Entire workbook. |

| Name                 | Value | Meaning                       |
|----------------------|-------|-------------------------------|
| <b>TWSSHEET</b>      | 0x01  | Entire sheet.                 |
| <b>TWSPRINTAREA</b>  | 0x02  | Print area.                   |
| <b>TWSAUTFILTER</b>  | 0x03  | AutoFilter.                   |
| <b>TWSREF</b>        | 0x04  | A rectangular range of cells. |
| <b>TWSCHART</b>      | 0x05  | Chart.                        |
| <b>TWSPIVOTTABLE</b> | 0x06  | <b>PivotTable</b> .           |
| <b>TWSQUERY</b>      | 0x07  | Query table.                  |
| <b>TWSLABEL</b>      | 0x08  | Named range of cells.         |

### 2.5.151 TypeSql

The **TypeSql** signed integer specifies the SQL data type. Example data types supported by ODBC are specified in the following table. For more information about ODBC, see [\[MSDN-ODBC\]](#).

| Value  | SQL Type      | Data Type                                |
|--------|---------------|--|
| 0x0001 | SQL_CHAR      | Fixed-length string of ANSI characters . |
| 0x0003 | SQL_DECIMAL   | Fixed-precision, Fixed-scale numbers.    |
| 0x0004 | SQL_INTEGER   | 32-bit signed integer.                   |
| 0x0005 | SQL_SMALLINT  | 16-bit signed integer.                   |
| 0x0006 | SQL_FLOAT     | User-specified precision floating-point. |
| 0x0007 | SQL_REAL      | Single-precision floating-point.         |
| 0x0008 | SQL_DOUBLE    | Double-precision floating-point.         |
| 0x000B | SQL_TIMESTAMP | Date and Time.                           |
| 0x000C | SQL_VARCHAR   | Variable-length string of characters .   |
| 0xFFF9 | SQL_BIT       | Bit (1 or 0).                            |
| 0xFFFE | SQL_BINARY    | Fixed-length binary data.                |

### 2.5.152 UncheckedCol

**UncheckedCol** is a signed 32-bit integer that specifies a single column (2) in a sheet using a zero-based index. Its value **MUST** be greater than or equal to 0 and less than or equal to 16383.

### 2.5.153 UncheckedRfX

The **UncheckedRfX** structure specifies an unchecked cell range. The range can reference cells that lie outside the sheet's used range, as specified by **BrtWsDim** (section [2.4.812](#)). When all the fields in this structure are set to their maximum value, the structure specifies an invalid cell range.

|          |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0        | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| rwFirst  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rwLast   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colFirst |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| colLast  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**rwFirst (4 bytes):** An **UncheckedRw** (section [2.5.154](#)) structure that specifies the first row (2) of the range.

**rwLast (4 bytes):** An **UncheckedRw** structure that specifies the last row (2) of the range. Its value MUST NOT be less than **rwFirst**.

**colFirst (4 bytes):** An **UncheckedCol** (section [2.5.152](#)) structure that specifies the first column (2) of the range.

**colLast (4 bytes):** An **UncheckedCol** structure that specifies the last column (2) of the range. Its value MUST NOT be less than **colFirst**.

### 2.5.154 UncheckedRw

**UncheckedRW** is a signed 32-bit integer that specifies a single row (2) in a sheet using a zero-based index. Its value MUST be greater than or equal to 0 and less than or equal to 1048575.

### 2.5.155 UncheckedSqRfX

The **UncheckedSqRfX** structure specifies a set of unchecked ranges.

|                  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| crfx             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgrfx (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**crfx (4 bytes):** A signed integer that specifies the count of **UncheckedRfX** (section [2.5.153](#)) in **rgrfx**. The value MUST be greater than or equal to -1 and less than or equal to 2147483647. A value of -1 specifies that the SqRfX is null. A value of 0 specifies that the SqRfX is empty.

**rgrfx (variable):** An array of **UncheckedRfX** that specifies the set of ranges.

### 2.5.156 Underline

The **Underline** enumeration specifies the underline style.

| Name                | Value  | Meaning            |
|---------------------|--------|--------------------|
| ULSNONE             | 0x0000 | No underline.      |
| ULSSINGLE           | 0x0001 | Single.            |
| ULSDOUBLE           | 0x0002 | Double.            |
| ULSSINGLEACCOUNTANT | 0x0021 | Single accounting. |
| ULSDOUBLEACCOUNTANT | 0x0022 | Double accounting. |

### 2.5.157 VertAlign

The **VertAlign** enumeration specifies the vertical alignment.

| Name     | Value | Meaning                |
|----------|-------|------------------------|
| ALCVTOP  | 0x00  | Top alignment.         |
| ALCVCTR  | 0x01  | Center alignment.      |
| ALCVBOT  | 0x02  | Bottom alignment.      |
| ALCVJUST | 0x03  | Justify alignment.     |
| ALCVDIST | 0x04  | Distributed alignment. |

### 2.5.158 XFProp

The **XFProp** structure specifies a formatting property. Instances of this structure appear as elements in the **xfPropArray** field of an **XFProps** (section [2.5.163](#)) structure.

|                           |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                         | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| xfPropType                |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | cb |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xfPropDataBlob (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**xfPropType (2 bytes):** An unsigned integer that specifies the type of the formatting property. This value MUST be greater than or equal to 0x0000 and less than or equal to 0x002C, and it MUST NOT be equal to 0x0027 or 0x0028. For more information about the meaning of this field, see the table in the description for **xfPropDataBlob**.

**cb (2 bytes):** An unsigned integer that specifies the size of this **XFProp** (section [2.5.158](#)) structure.

**xfPropDataBlob (variable):** A field that specifies the formatting property data. The size and data type of this field varies based on the property type as specified in **xfPropType**.


| <b>xfPropType value</b> | <b>xfPropDataBlob field Data and Meaning</b>   |
|-------------------------|--|
| 0x0000                  | A <b>FillPattern</b> (section <a href="#">2.5.50</a> ) that specifies the fill pattern.  |
| 0x0001                  | An <b>XFPPropColor</b> (section <a href="#">2.5.160</a> ) that specifies the foreground color.   |
| 0x0002                  | An <b>XFPPropColor</b> that specifies the background color.  |
| 0x0003                  | An <b>XFPPropGradient</b> (section <a href="#">2.5.161</a> ) that specifies the gradient fill. This is often followed in the same <b>xfPropArray</b> field of the <b>XFPProps</b> record by one or more <b>XFPProp</b> structures with <b>xfPropType</b> equal to 0x0004, which provides additional specifications for the gradient fill.            |
| 0x0004                  | An <b>XFPPropGradientStop</b> (section <a href="#">2.5.162</a> ) that specifies a gradient stop for a preceding <b>XFPProp</b> with <b>xfPropType</b> equal to 0x0003 in the same <b>xfPropArray</b> field in the <b>XFPProps</b> record.  |
| 0x0005                  | An <b>XFPPropColor</b> that specifies the text color.  |
| 0x0006                  | An <b>XFPPropBorder</b> (section <a href="#">2.5.159</a> ) that specifies the top border formatting.   |
| 0x0007                  | An <b>XFPPropBorder</b> that specifies the bottom border formatting.   |
| 0x0008                  | An <b>XFPPropBorder</b> that specifies the left border formatting.   |
| 0x0009                  | An <b>XFPPropBorder</b> that specifies the right border formatting.  |
| 0x000A                  | An <b>XFPPropBorder</b> that specifies the diagonal border formatting.   |
| 0x000B                  | An <b>XFPPropBorder</b> that specifies the vertical border formatting.   |
| 0x000C                  | An <b>XFPPropBorder</b> that specifies the horizontal border formatting.   |
| 0x000D                  | A 1-byte unsigned integer that specifies whether a <b>diagonal-up</b> border is used. Its value MUST be 0 or 1. A value of 1 means that a diagonal-up border is used.  |
| 0x000E                  | A 1-byte unsigned integer that specifies whether a <b>diagonal-down</b> border is used. Its value MUST be 0 or 1. A value of 1 means that a diagonal-down border is used.  |
| 0x000F                  | A <b>HorizAlign</b> (section <a href="#">2.5.73</a> ) that specifies the <b>horizontal alignment</b> .   |
| 0x0010                  | A <b>VertAlign</b> (section <a href="#">2.5.157</a> ) that specifies the <b>vertical alignment</b> .   |
| 0x0011                  | An <b>XFPPropTextRotation</b> (section <a href="#">2.5.164</a> ) that specifies the text rotation.   |
| 0x0012                  | A 2-byte unsigned integer that specifies the absolute text indentation level. This value MUST be less than or equal to 15. The absolute indentation level replaces any previous indentation.   |
| 0x0013                  | A <b>ReadingOrder</b> (section <a href="#">2.5.113</a> ) that specifies the reading order.   |
| 0x0014                  | A 1-byte unsigned integer that specifies whether cell text is wrapped. This value MUST be 0 or 1. A value of 1 means that the text is wrapped.   |
| 0x0015                  | A 1-byte unsigned integer that specifies whether cell text is <b>justify distributed</b> . This value MUST be 0 or 1. A value of 1 means that the text is justify distributed. If this value is 1, then an <b>XFPProp</b> with <b>xfPropType</b> equal to 0x000F MUST exist in this <b>xfPropArray</b> field of <b>XFPProps</b> and MUST equal 0x07. |
| 0x0016                  | A 1-byte unsigned integer that specifies whether the cell is shrink to fit. This value   |

| <b>xfPropType value</b> | <b>xfPropDataBlob field Data and Meaning</b>   |
|-------------------------|--|
|                         | MUST be 0 or 1. A value of 1 means that the cell is shrink to fit.   |
| 0x0017                  | A 1-byte unsigned integer that specifies whether the cell is merged. This value MUST be 0 or 1. A value of 1 means that the cell is merged.  |
| 0x0018                  | An <b>LPWideString</b> (section <a href="#">2.5.91</a> ) that specifies the font name used by the cell data. This value MUST be less than or equal to 32 characters in length.   |
| 0x0019                  | A <b>Bold</b> (section <a href="#">2.5.5</a> ) that specifies the font face weight.  |
| 0x001A                  | An <b>Underline</b> (section <a href="#">2.5.156</a> ) that specifies the underline style.   |
| 0x001B                  | A <b>Script</b> (section <a href="#">2.5.130</a> ) that specifies the superscript or subscript style.  |
| 0x001C                  | A 1-byte unsigned integer that specifies whether text is italicized. This value MUST be 0 or 1. The value of 1 means that the text is italic.  |
| 0x001D                  | A 1-byte unsigned integer that specifies whether text has strikethrough formatting applied. This value MUST be 0 or 1. A value of 1 means that the text has strikethrough formatting applied.  |
| 0x001E                  | A 1-byte unsigned integer that specifies whether text has an outline style. This value MUST be 0 or 1. A value of 1 means that the text is outline style.  |
| 0x001F                  | A 1-byte unsigned integer that specifies whether text has a shadow style. This value MUST be 0 or 1. A value of 1 means that the text is shadow style.   |
| 0x0020                  | A 1-byte unsigned integer that specifies whether text is condensed. This value MUST be 0 or 1. A value of 1 means that the text is condensed.  |
| 0x0021                  | A 1-byte unsigned integer that specifies whether text is extended. This value MUST be 0 or 1. A value of 1 means that the text is extended.  |
| 0x0022                  | A 1-byte unsigned integer that specifies a character set (1). For more information about character sets (1), see the Windows API LOGFONT structure in <a href="#">[MSDN-FONTS]</a> .   |
| 0x0023                  | A 1-byte unsigned integer that specifies a font family. For more information about font families, see the Windows API LOGFONT structure in <a href="#">[MSDN-FONTS]</a> . This value MUST be greater than or equal to 0 and less than or equal to 5.   |
| 0x0024                  | A 4-byte unsigned integer that specifies text size in twips. This value MUST be greater than or equal to 20 and less than or equal to 8191.  |
| 0x0025                  | A <b>FontScheme</b> (section <a href="#">2.5.53</a> ) structure that specifies the font scheme of a theme font.  |
| 0x0026                  | A number format as specified by <a href="#">[MS-XLS]</a> section 2.5.126 that specifies the number format string.  |
| 0x0029                  | An <b>Ifmt</b> (section <a href="#">2.5.76</a> ) that specifies the identifier of a number format.   |
| 0x002A                  | A 2-byte signed integer that specifies the relative text indentation level. The relative indentation level is added to any previous indentation. The value MUST either be greater than or equal to -15 and less than or equal to 15, or it MUST be 255. Values -15 through 15 specify a relative indentation level, and the value 255 specifies the absence of a relative indentation level. |

| xfPropType value | xfPropDataBlob field Data and Meaning  |
|------------------|--|
| 0x002B           | A 1-byte unsigned integer that specifies whether or not the locked protection property is set to true. This value MUST be 0 or 1. A value of 1 means that the property is set to true. |
| 0x002C           | A 1-byte unsigned integer that specifies whether the hidden protection property is set to true. This value MUST be 0 or 1. A value of 1 means that the property is set to true.        |

### 2.5.159 XFPropBorder

The **XFPropBorder** structure specifies border formatting.

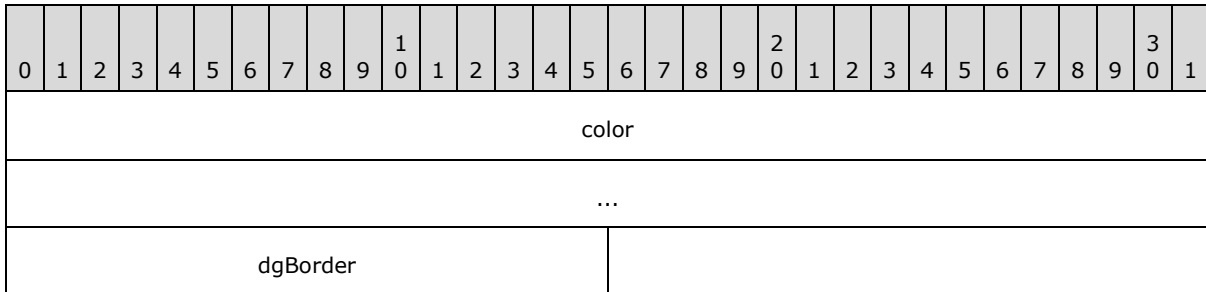


**color (8 bytes):** An **XFPropColor** (section [2.5.160](#)) structure that specifies the border color.

**dgBorder (2 bytes):** A **BorderStyle** (section [2.5.7](#)) structure that specifies the border **line style**.

### 2.5.160 XFPropColor

The **XFPropColor** structure specifies a color.

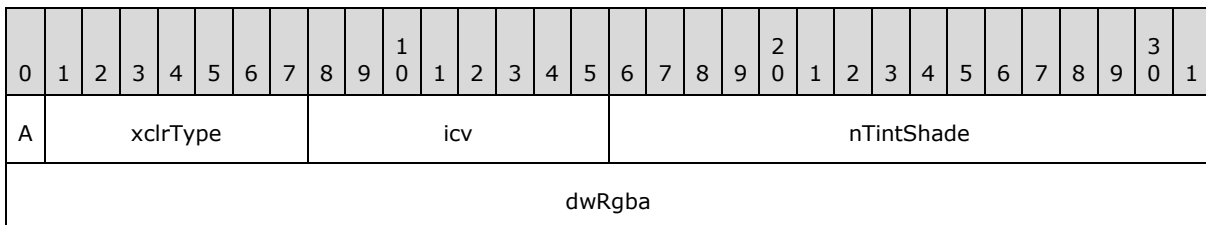

**A - fValidRGBA (1 bit):** A bit that specifies whether the **xclrType**, **icv** and **nTintShade** fields are used to set the **dwRgba** field.

**xclrType (7 bits):** An unsigned integer that specifies how the color information is stored. This value MUST be a value from the following table:

| Value | Meaning   |
|-------|---|
| 0x00  | Automatic foreground and background colors  |
| 0x01  | <b>Palette color</b> . The value of <b>icv</b> MUST be less than or equal to 220. |

| Value | Meaning  |
|-------|--|
| 0x02  | RGBA color   |
| 0x03  | Theme color. The value of <b>icv</b> MUST be less than or equal to 11. |
| 0x04  | Color not set.   |

**icv (1 byte):** An unsigned integer that specifies color information. The type and meaning of this field depends on the value of the **xclrType** field and is specified by the following tables.

| Value of xclrType | Meaning of icv field  |
|-------------------|---|
| 0x00              | Undefined and MUST be ignored.  |
| 0x01              | An <b>Icv</b> (section <a href="#">2.5.75</a> ) that specifies a color from a color palette.  |
| 0x02              | Undefined and MUST be ignored.  |
| 0x03              | An unsigned integer that specifies a subelement of the <b>clrScheme</b> element in the <b>Theme</b> (section <a href="#">2.1.7.52</a> ) part ABNF, as defined in <a href="#">[ISO/IEC29500-1:2011]</a> , section 20.1.6.2, that specifies a color. The following table specifies which subelement of <b>clrScheme</b> to use for each legal value of the index. |

| Value of index | Sub-element of clrScheme |
|----------------|--------------------------|
| 0x00           | dk1                      |
| 0x01           | lt1                      |
| 0x02           | dk2                      |
| 0x03           | lt2                      |
| 0x04           | accent1                  |
| 0x05           | accent2                  |
| 0x06           | accent3                  |
| 0x07           | accent4                  |
| 0x08           | accent5                  |
| 0x09           | accent6                  |
| 0x0A           | hlink                    |
| 0x0B           | folHlink                 |

**nTintShade (2 bytes):** A signed integer that specifies the tint of the color. This value is mapped to the range -1.0 to 1.0. Positive values lighten the color and negative values darken the color. This value MUST NOT equal -32768.

**dwRgba (4 bytes):** A **LongRGBA** (section [2.5.89](#)) structure that specifies the color.



## 2.5.161 XFPropGradient

The **XFPropGradient** structure specifies a gradient fill.

|                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0               | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| type            |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| numDegree       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| numFillToLeft   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| numFillToRight  |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| numFillToTop    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| numFillToBottom |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...             |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**type (4 bytes):** A signed integer that specifies the gradient type. This value MUST be a value from the following table.

| Value      | Meaning               |
|------------|-----------------------|
| 0x00000000 | Linear gradient.      |
| 0x00000001 | Rectangular gradient. |

**numDegree (8 bytes):** An **Xnum** (section [2.5.171](#)) structure that specifies the gradient angle, in degrees, for linear gradients. The gradient angle specifies the angle at which gradient strokes are drawn. If **type** equals 0x00000001, this value MUST equal 0.0.

**numFillToLeft (8 bytes):** An **Xnum** structure that specifies the left coordinate of the inner rectangle for rectangular gradients, where (0.0,0.0) is the upper-left corner of the inner rectangle. This value MUST be greater than or equal to 0.0 and less than or equal to 1.0. If **type** equals 0x00000000, this value MUST equal 0.0.

**numFillToRight (8 bytes):** An **Xnum** structure that specifies the right coordinate of the inner rectangle for rectangular gradients, where (0.0,0.0) is the upper-left corner of the inner rectangle. This value MUST be greater than or equal to 0.0 and less than or equal to 1.0. If **type** equals 0x00000000, this value MUST equal 0.0.

**numFillToTop (8 bytes):** An **Xnum** structure that specifies the top coordinate of the inner rectangle for rectangular gradients, where (0.0,0.0) is the upper-left corner of the inner rectangle. This value MUST be greater than or equal to 0.0 and less than or equal to 1.0. If **type** equals 0x00000000, this value MUST equal 0.0.

**numFillToBottom (8 bytes):** An **Xnum** structure that specifies the bottom coordinate of the inner rectangle for rectangular gradients, where (0.0,0.0) is the upper-left corner of the inner rectangle. This value MUST be greater than or equal to 0.0 and less than or equal to 1.0. If **type** equals 0x00000000, this value MUST equal 0.0.

### 2.5.162 XFPropGradientStop

The **XFPropGradientStop** structure specifies a gradient stop for a gradient fill.

|        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|-------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16          | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| unused |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | numPosition |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | color       |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |             |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**unused (2 bytes):** Undefined. This value MUST be ignored.

**numPosition (8 bytes):** An **Xnum** (section [2.5.171](#)) structure that specifies the gradient stop position. The gradient stop position is the position within the gradient range where this gradient stop's color begins. This value MUST be greater than or equal to 0.0 and less than or equal to 1.0.

**color (8 bytes):** An **XFPropColor** (section [2.5.160](#)) structure that specifies the gradient stop color.

### 2.5.163 XFProps

The **XFProps** structure specifies an array of formatting properties.

|                        |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|------------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|--------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                      | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16     | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| reserved               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    | cprops |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| xfPropArray (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |        |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**reserved (2 bytes):** This value MUST be 0 and MUST be ignored.

**cprops (2 bytes):** An unsigned integer that specifies the number of **XFProp** (section [2.5.158](#)) structures in **xfPropArray**. This value **MUST** match the number of **XFProp** structures.

**xfPropArray (variable):** An array of **XFProp**. Each array element specifies a formatting property. The array of properties specifies the full set of formatting properties. If the array contains an **XFProp** with an **xfPropType** field equaling 0, the array **MUST NOT** contain any **XFProp** elements with **xfPropType** fields equaling 3 or 4. If the array contains an **XFProp** with an **xfPropType** field equaling 3 or 4, the array **MUST NOT** contain any **XFProp** elements with an **xfPropType** field equaling 0.

### 2.5.164 XFPropTextRotation

The **XFPropTextRotation** structure specifies the text rotation.

|      |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |
|------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|--|--|--|
| 0    | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |  |  |  |  |  |
| trot |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |  |  |  |

**trot (1 byte):** An unsigned integer that specifies the text rotation. This value **MUST** correspond to the following table.

| Value                    | Meaning  |
|--------------------------|--|
| 0x00 to 0x5A (0 to 90)   | Text rotated counterclockwise 0 to 90 degrees. |
| 0x5B to 0xB4 (91 to 180) | Text rotated clockwise 1 to 90 degrees.        |
| 0xFE (254)               | Context dependent text rotation.               |
| 0xFF (255)               | Vertical text.                                 |

### 2.5.165 XLNameWideString

The **XLNameWideString** structure specifies a defined name.

|                   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| string (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...               |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**string (variable):** An **XLWideString** (section [2.5.168](#)) structure that specifies the name. The length of the string **MUST NOT** exceed 255 characters.

The string **MUST** adhere to the following grammar:

```
string = name-start-character *name-character
name-start-character = "_" / "\" / az-letter / Unicode-character
```

```
name-character = name-start-character / "?" / 0x061F / "." / Unicode-digit
```

This applies where Unicode-character is any code point greater than 0x7F that is a character as defined by the Unicode character properties, section 4 of [UNICODE4.0](#).

Unicode-digit is any code point that is a digit as defined by the Unicode character properties, Chapter Four of [UNICODE4.0](#).

The string MUST NOT equal "TRUE" or "FALSE" (case-insensitive).

The string MUST NOT be an A1 cell reference and MUST NOT begin with an R1C1 cell reference.

An R1C1 cell reference is defined to be:

```
R1C1-cell-reference = R1C1-row / R1C1-column / R1C1-row R1C1-column / R1C1-column
R1C1-row

R1C1-row = letter-r row-number

letter-r = "R" / "r"

R1C1-column = letter-c column-number

letter-c = "C" / "c"
column-number = 1-16384
; A string composed of Unicode digits (see earlier definition) that represents an
unsigned integer that is greater than or equal to 1 and less than or equal to 16384
row-number = 1-1048576
; A string composed of Unicode digits (see earlier definition) that represents an
unsigned integer that is greater than or equal to 1 and less than or equal to
1048576.
```

An A1 cell reference is defined to be:

```
A1-reference = A1-column A1-Row

A1-row = row-number

; See definition of row-number in R1C1 cell reference grammar earlier.

A1-column = 1*2 az-letter / aw-letter az-letter az-letter / "X" ae-letter az-letter / "X" "F"
ad-letter

ad-letter = "A" / "B" / "C" / "D" / "a" / "b" / "c" / "d"
```

ae-letter = ad-letter / "E" / "e"

```
aw-letter = ae-letter / "F" / "G" / "H" / "I" / "J" / "K" / "L" / "M" / "N" / "O" / "P" / "Q"
/ "R" / "S" / "T" / "U" / "V" / "W" / "f" / "g" / "h" / "i" / "j" / "k" / "l" / "m" / "n" /
"o" / "p" / "q" / "r" / "s" / "t" / "u" / "v" / "w"

az-letter = aw-letter / "X" / "Y" / "Z" / "x" / "y" / "z"
```

### 2.5.166 XLNullableWideString

The **XLNullableWideString** specifies a length-prefixed Unicode string that can additionally specify a string that is NULL. For convenience, references to characters in a string specified by this or a derived type use those Unicode characters.

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cchCharacters       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgchData (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cchCharacters (4 bytes):** An unsigned integer that specifies the number of characters. This value MUST be 0xFFFFFFFF if a NULL string is specified.

**rgchData (variable):** An array of Unicode characters that specifies the characters of the string. If a NULL string is specified, the size of this array in bytes MUST be 0. If a NULL string is not specified, the size of this array in bytes MUST equal the following formula:

$$\text{size} = \text{cchCharacters} * 2$$

### 2.5.167 XLView

The **XLView** enumeration specifies the way information is displayed in a sheet view.

| Name                      | Value      | Meaning  |
|---------------------------|------------|--|
| <b>XLVNORMAL</b>          | 0x00000000 | Information is displayed in Normal view.             |
| <b>XLVSHEETLAYOUTVIEW</b> | 0x00000001 | Information is displayed in Page Break Preview view. |
| <b>XLVPAGELAYOUTVIEW</b>  | 0x00000002 | Information is displayed in Page Layout view.        |

### 2.5.168 XLWideString

The **XLWideString** type specifies a length-prefixed Unicode string. For convenience, references to characters in a string specified by this or a derived type use those Unicode characters.

|                     |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|---------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0                   | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| cchCharacters       |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| rgchData (variable) |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| ...                 |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**cchCharacters (4 bytes):** An unsigned integer that specifies the number of characters. This value MUST be greater than or equal to 0x00000000 and less than 0xFFFFFFFF.

**rgchData (variable):** An array of Unicode characters that specifies the characters of the string. The size of this array in bytes MUST equal the following formula:

**cchCharacters \* 2**

### 2.5.169 XmlDataType

An **XMLDataType** enumeration specifies a subset of XML data types, as specified by [\[W3C-XSD\]](#). It MUST correspond to a value from the following table. Note that the following table uses *xs* as the prefix for the namespace "http://www.w3.org/2001/XMLSchema".

| Name                             | Value      | Meaning                                   |
|----------------------------------|------------|---|
| <b>MSOXIDTSTRING</b>             | 0x00000001 | Specifies the xs:string type.             |
| <b>MSOXIDTNORMALIZEDSTRING</b>   | 0x00000002 | Specifies the xs:normalizedString type.   |
| <b>MSOXIDTTOKEN</b>              | 0x00000003 | Specifies the xs:token type.              |
| <b>MSOXIDTBYTE</b>               | 0x00000004 | Specifies the xs:byte type.               |
| <b>MSOXIDTUNSIGNEDBYTE</b>       | 0x00000005 | Specifies the xs:unsignedByte type.       |
| <b>MSOXIDTBASE64BINARY</b>       | 0x00000006 | Specifies the xs:base64Binary type.       |
| <b>MSOXIDTHEXBINARY</b>          | 0x00000007 | Specifies the xs:hexBinary type.          |
| <b>MSOXIDTINTEGER</b>            | 0x00000008 | Specifies the xs:integer type.            |
| <b>MSOXIDTPOSITIVEINTEGER</b>    | 0x00000009 | Specifies the xs:positiveInteger type.    |
| <b>MSOXIDTNEGATIVEINTEGER</b>    | 0x0000000A | Specifies the xs:negativeInteger type.    |
| <b>MSOXIDTNONPOSITIVEINTEGER</b> | 0x0000000B | Specifies the xs:nonPositiveInteger type. |
| <b>MSOXIDTNONNEGATIVEINTEGER</b> | 0x0000000C | Specifies the xs:nonNegativeInteger type. |
| <b>MSOXIDTINT</b>                | 0x0000000D | Specifies the xs:int type.                |
| <b>MSOXIDTUNSIGNEDINT</b>        | 0x0000000E | Specifies the xs:unsignedInt type.        |
| <b>MSOXIDTLONG</b>               | 0x0000000F | Specifies the xs:long type.               |
| <b>MSOXIDTUNSIGNEDLONG</b>       | 0x00000010 | Specifies the xs:unsignedLong type.       |
| <b>MSOXIDTSHORT</b>              | 0x00000011 | Specifies the xs:short type.              |
| <b>MSOXIDTUNSIGNEDSHORT</b>      | 0x00000012 | Specifies the xs:unsignedShort type.      |
| <b>MSOXIDTDECIMAL</b>            | 0x00000013 | Specifies the xs:decimal type.            |
| <b>MSOXIDTFLOAT</b>              | 0x00000014 | Specifies the xs:float type.              |
| <b>MSOXIDTDOUBLE</b>             | 0x00000015 | Specifies the xs:double type.             |
| <b>MSOXIDTBOOLEAN</b>            | 0x00000016 | Specifies the xs:boolean type.            |
| <b>MSOXIDTTIME</b>               | 0x00000017 | Specifies the xs:time type.               |
| <b>MSOXIDTDATE</b>               | 0x00000018 | Specifies the xs:date type.               |

| Name                    | Value      | Meaning                           |
|-------------------------|------------|-----------------------------------|
| <b>MSOXIDTDURATION</b>  | 0x00000019 | Specifies the xs:duration type.   |
| <b>MSOXIDTDATE</b>      | 0x0000001A | Specifies the xs:date type.       |
| <b>MSOXIDTMONTH</b>     | 0x0000001B | Specifies the xs:gMonth type.     |
| <b>MSOXIDTYEAR</b>      | 0x0000001C | Specifies the xs:gYear type.      |
| <b>MSOXIDTYEARMONTH</b> | 0x0000001D | Specifies the xs:gYearMonth type. |
| <b>MSOXIDTDAY</b>       | 0x0000001E | Specifies the xs:gDay type.       |
| <b>MSOXIDTMONTHDAY</b>  | 0x0000001F | Specifies the xs:gMonthDay type.  |
| <b>MSOXIDTNAME</b>      | 0x00000020 | Specifies the xs:Name type.       |
| <b>MSOXIDTQNAME</b>     | 0x00000021 | Specifies the xs:QName type.      |
| <b>MSOXIDTNCNAME</b>    | 0x00000022 | Specifies the xs:NCName type.     |
| <b>MSOXIDTANYURI</b>    | 0x00000023 | Specifies the xs:anyURI type.     |
| <b>MSOXIDTLANGUAGE</b>  | 0x00000024 | Specifies the xs:language type.   |
| <b>MSOXIDTID</b>        | 0x00000025 | Specifies the xs:ID type.         |
| <b>MSOXIDTIDREF</b>     | 0x00000026 | Specifies the xs:IDREF type.      |
| <b>MSOXIDTIDREFS</b>    | 0x00000027 | Specifies the xs:IDREFS type.     |
| <b>MSOXIDTENTITY</b>    | 0x00000028 | Specifies the xs:ENTITY type.     |
| <b>MSOXIDTENTITIES</b>  | 0x00000029 | Specifies the xs:ENTITIES type.   |
| <b>MSOXIDTNOTATION</b>  | 0x0000002A | Specifies the xs:NOTATION type.   |
| <b>MSOXIDTNMTOKEN</b>   | 0x0000002B | Specifies the xs:NMTOKEN type.    |
| <b>MSOXIDTNMTOKENS</b>  | 0x0000002C | Specifies the xs: NMTOKENS type.  |
| <b>MSOXIDTANYTYPE</b>   | 0x0000002D | Specifies the xs:anyType type.    |

### 2.5.170 XmlMappedXPath

The **XmlMappedXPath** structure is an **XLWideString** (section [2.5.168](#)) structure that represents the XPath to the element this column (2) is associated with. The length of this string MUST be greater than or equal to 1 and less than or equal to 31999.

An XPath specified by this structure MUST have the following properties.

- The XPath MUST be an absolute path.
- The XPath MUST return a simple content element or an attribute (as described in [\[XPATH\]](#))
- The XPath MUST NOT express an explicit XPath axes (as described in [\[XPATH\]](#)).

If an XPath specifies an XPath predicate (as described in [\[XPATH\]](#)), it MUST have the following properties.

- The XPath predicate MUST immediately follow a simple content element name.
- The XPath predicate MUST contain a single **XPath expression** comparing an attribute identified by name (as described in [\[XPATH\]](#)) of the preceding element to a specific value.

### 2.5.171 Xnum

**Xnum** is a 64-bit binary **floating-point number** as defined in [\[IEEE754\]](#). This value MUST NOT [<68>](#) be infinity, denormalized, not-a-number (NaN), or negative zero.

### 2.5.172 Xti

The **Xti** structure specifies a supporting link record and scope information for a Supporting Link (section [2.2.7.2](#)).

|              |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|--------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 0            | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 |
| externalLink |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| firstSheet   |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| lastSheet    |   |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

**externalLink (4 bytes):** An unsigned integer that specifies a zero-based index to a supporting link record in the collection of supporting link records (section [2.2.7.3](#)) in the **Workbook** (section [2.1.7.60](#)) part ABNF. This value MUST be less than the count of the supporting link records in that part.

**firstSheet (4 bytes):** A signed integer that specifies the scope of the supporting link. If **externalLink** refers to a **BrtSupAddin** (section [2.4.756](#)), a **BrtSupSame** (section [2.4.769](#)), or a **BrtSupBookSrc** (section [2.4.757](#)) that specifies a DDE data source (section [2.2.7.4.2](#)) or OLE data source (section [2.2.7.4.3](#)), this field MUST be -2.

If **externalLink** refers to a **BrtSupSelf** (section [2.4.770](#)) or a **BrtSupBookSrc** that specifies an external workbook link (section [2.2.7.4.1](#)), this field MUST be a value from the following table.

| Value | Meaning  |
|-------|--|
| -2    | Workbook-level reference that applies to the entire workbook.  |
| -1    | Sheet-level reference. The first sheet in the reference cannot be found.   |
| >= 0  | Sheet-level reference. This value specifies the first sheet in the reference.<br>If <b>externalLink</b> specifies a <b>BrtSupSelf</b> record, then this value specifies a zero-based index of a <b>BrtBundleSh</b> (section <a href="#">2.4.301</a> ) record in the collection of all records directly following <b>BrtBeginBundleShs</b> (section <a href="#">2.4.13</a> ) in the <b>Workbook</b> (section <a href="#">2.1.7.60</a> ) part.<br>If <b>externalLink</b> specifies a <b>BrtSupBookSrc</b> record, then this value specifies a zero-based index of an <b>XLWideString</b> in the array specified by the <b>sheetNames</b> field in the <b>BrtSupTabs</b> (section <a href="#">2.4.771</a> ) record in the <b>External Link</b> (section <a href="#">2.1.7.25</a> ) part ABNF external link part that is specified by the <b>BrtSupBookSrc</b> record. The sheet specified by the part specified by the <b>BrtBundleSh</b> record, or the sheet identified by the sheet name specified by the item in the <b>sheetNames</b> field, MUST be a worksheet or macro sheet. |



**lastSheet (4 bytes):** A signed integer that specifies the scope of the supporting link. If **externalLink** refers to a **BrtSupAddin**, a **BrtSupSame**, or a **BrtSupBookSrc** that specifies a DDE Data Source or OLE Data Source, this field MUST be -2.

If **externalLink** refers to a **BrtSupSelf** or a **BrtSupBookSrc** that specifies an external workbook link, this field MUST be a value from the following table.

| Value | Meaning   |
|-------|---|
| -2    | Workbook-level reference. MUST be used if <b>firstSheet</b> equals -2.  |
| -1    | Sheet-level reference. The last sheet in the reference cannot be found. <69> MUST NOT be used if <b>firstSheet</b> equals -2.   |
| >= 0  | <p>Sheet-level reference. This value specifies the last sheet in the reference. MUST NOT be used if <b>firstSheet</b> equals -2.</p> <p>If <b>externalLink</b> specifies a <b>BrtSupSelf</b> record, then this value specifies a zero-based index of a <b>BrtBundleSh</b> record in the collection of all records directly following <b>BrtBeginBundleShs</b> in the <b>Workbook</b> (section <a href="#">2.1.7.60</a>) <b>part</b>. If <b>externalLink</b> specifies a <b>BrtSupBookSrc</b> record, then this value specifies a zero-based index of an <b>XLWideString</b> in the array specified by the <b>sheetNames</b> field in the <b>BrtSupTabs</b> record in the external link part that is specified by the <b>BrtSupBookSrc</b> record. The sheet specified by the part specified by the <b>BrtBundleSh</b> record, or the sheet identified by the sheet name specified by the item in the <b>sheetNames</b> field, MUST be a worksheet or macro sheet.</p> <p>This value MUST be greater than or equal to <b>firstSheet</b>.</p> |

### 3 Structure Examples


This section contains examples of some of the most commonly used data structures in Excel Binary File Format files. The examples are meant to be a starting point for an implementer learning the file format. They are not meant to cover all records in the file format.

The following conventions are followed for all of the examples, unless noted otherwise:

- The order of the records, structures, and field within the example match their corresponding order in the file format.
- The examples begin with the first record relevant to the example and end with the last record relevant to the example. An example cannot be used as a complete and standalone MS-XLSB file.
- The examples are self-contained and contiguous; no records or structures are omitted in the middle of an example.
- Undefined and ignored fields are not included in the field explanations.
- Offsets for records and structures are omitted because these values can vary depending on how the files are created and what optional records applications choose to include in files.

#### 3.1 Conditional Formatting

In this example, cell A2 has had conditional formatting applied such that the cell displays a light red background when the cell value is greater than or equal to 1.5 and less than or equal to 2.5, as illustrated in the following figure.

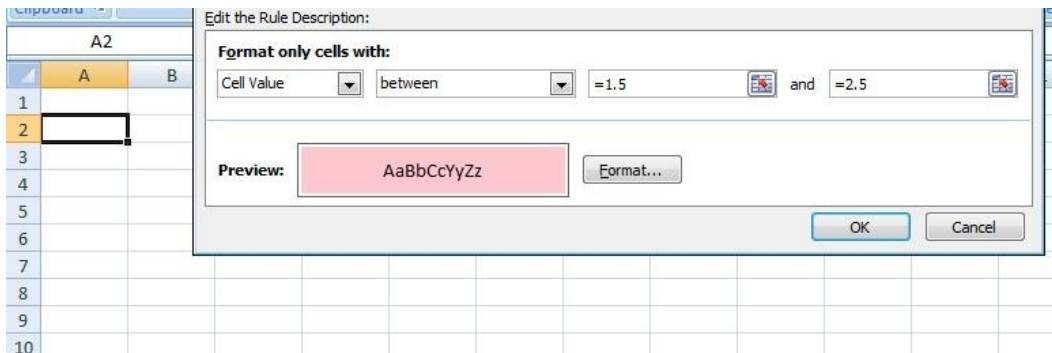

**Figure 21: Conditional formatting within a sheet**

The set of records in this example includes all records in the **Worksheet** part ABNF (section [2.1.7.61](#)) appear between the **BrtBeginConditionalFormatting** (section [2.4.32](#)) and **BrtEndConditionalFormatting** (section [2.4.371](#)) records.

The range of cells to which the formatting is applied is defined in the **BrtBeginConditionalFormatting** record. Then, a **BrtBeginCFRule** (section [2.4.21](#)) record specifies the properties of the conditional formatting rule; it contains a **BrtBeginCFRule** record that defines the conditional formatting rule.

### 3.1.1 Conditional Formatting: **BrBeginConditionalFormatting**

In this example, cell A2 has had conditional formatting applied such that the cell displays a light red background when the cell value is greater than or equal to 1.5 and less than or equal to 2.5.

This set of records in this example includes all records in the **Worksheet** part ABNF (section [2.1.7.61](#)) appear between the **BrBeginConditionalFormatting** (section [2.4.32](#)) and **BrEndConditionalFormatting** (section [2.4.371](#)) records.

The range to which the formatting is applied is defined in the **BrBeginConditionalFormatting** record. A **BrBeginCFRule** (section [2.4.21](#)) record specifies the rule properties of the conditional formatting. A **BrDXF** (section [2.4.342](#)) record specifies the cell formatting properties of the conditional formatting.

The first record in this example, **BrBeginConditionalFormatting**, specifies the target range of cells to which the conditional formatting is applied, as specified in the following table.

| Structure of <b>BrBeginConditionalFormatting</b> |  |            |
|--|--|------------|
| Size   | Structure  | Value      |
| 001C   | <b>BrBeginConditionalFormatting - BrBeginConditionalFormatting</b> |            |
| 0004   | LONG - <b>ccf</b>  | 0x00000001 |
| 0004   | BOOL - <b>fPivot</b>   | 0x00000000 |
| 0014   | SQRFX - <b>sqrfx</b>   |            |
| 0004   | LONG - <b>crfx</b>   | 0x00000001 |
| 0010   | UncheckedRgRfx - <b>rgrfx</b>                                      |            |
| 0010   | <a href="#">UncheckedRfx</a> - <b>rfx[0]</b>                       |            |
| 0004   | LONG - <b>rwFirst</b>  | 0x00000001 |
| 0004   | LONG - <b>rwLast</b>   | 0x00000001 |
| 0004   | LONG - <b>colFirst</b>   | 0x00000000 |
| 0004   | LONG - <b>colLast</b>  | 0x00000000 |

**ccf:** 0x00000001 specifies that there is one related **BrBeginCFRule** record in the **BrBeginConditionalFormatting** collection.

**fPivot:** 0x00000000 specifies that this conditional formatting rule applies to cells that are not part of a **PivotTable** (section [2.1.7.40](#)).

**sqrfx:** An **UncheckedSqRfx** (section [2.5.155](#)) that specifies a set of **UncheckedRfx** (section [2.5.153](#)).

**sqrfx.crfx:** 0x00000001 specifies that there is one **UncheckedRfx** structure in **sqrfx.rgrfx**.

**sqrfx.rgrfx:** An array of **UncheckedRfx** structures.

**sqrfx.rgrfx.rfx[0]:** An **UncheckedRfx** structure that specifies the conditional formatting rule's target range.

**sqrfx.rgrfx.rfx[0].rwFirst:** 0x00000001 specifies that the first row (2) in the target range is row (2) 2.

**sqrfx.rgrfx.rfx[0].rwLast:** 0x00000001 specifies that the last row (2) in the target range is row (2) 2.

**sqrfx.rgrfx.rfx[0].colFirst:** 0x00000000 specifies that the first column (2) in the target range is column (2) A.

**sqrfx.rgrfx.rfx[0].colLast:** 0x00000000 specifies that the last column (2) in the target range is column (2) A.

### 3.1.2 Conditional Formatting: BrtBeginCFRule

This record specifies a conditional formatting rule for the range defined in the **BrtBeginConditionalFormatting** (section [2.4.32](#)) record, as specified in the following table.

| Structure of BrtBeginCFRule |   |             |
|-----------------------------|---|-------------|
| Size                        | Structure                                       | Value       |
| 0050                        | <a href="#">BrtBeginCFRule</a> - BrtBeginCFRule |             |
| 0004                        | <a href="#">CFType</a> - iType                  | 0x00000001  |
| 0004                        | <a href="#">CFTemp</a> - iTemplate              | 0x00000000  |
| 0004                        | DWORD - dxId                                    | 0x00000000  |
| 0004                        | LONG - iPri                                     | 0x00000001  |
| 0004                        | LONG - iParam                                   | 0x00000001  |
| 0004                        | LONG - reserved1                                | 0x00000000  |
| 0004                        | LONG - reserved2                                | 0x00000000  |
| 1 bit                       | WORD - reserved3                                | 0x0         |
| 1 bit                       | WORD - fStopTrue                                | 0x0         |
| 1 bit                       | WORD - fAbove                                   | 0x0         |
| 1 bit                       | WORD - fBottom                                  | 0x0         |
| 1 bit                       | WORD - fPercent                                 | 0x0         |
| 11 bits                     | WORD - reserved4                                | 0x000       |
| 0004                        | DWORD - cbfmla1                                 | 0x00000009  |
| 0004                        | DWORD - cbfmla2                                 | 0x00000009  |
| 0004                        | DWORD - cbfmla3                                 | 0x00000000  |
| 0004                        | <a href="#">XLNullableWideString</a> - strParam | null string |
| 0011                        | <a href="#">CFParsedFormula</a> - rgce1         |             |
| 0004                        | DWORD - cce                                     | 0x00000009  |

| Structure of BrtBeginCFRule |  |                    |
|-----------------------------|--|--------------------|
| 0009                        | <a href="#">Rgce</a> - <b>rgce</b>     |                    |
| 0009                        | ptg - <b>rgce[0]</b>                   |                    |
| 0009                        | <a href="#">PtgNum</a> - <b>PtgNum</b> |                    |
| 7 bits                      | BYTE - <b>ptg</b>                      | 0x1F               |
| 1 bit                       | BYTE - <b>reserved0</b>                | 0x0                |
| 0008                        | Double - <b>value</b>                  | 0x3FF8000000000000 |
| 0004                        | DWORD - <b>cb</b>                      | 0x00000000         |
| 0011                        | CFParsedFormula - <b>rgce2</b>         |                    |
| 0004                        | DWORD - <b>cce</b>                     | 0x00000009         |
| 0009                        | Rgce - <b>rgce</b>                     |                    |
| 0009                        | ptg - <b>rgce[0]</b>                   |                    |
| 0009                        | PtgNum - <b>PtgNum</b>                 |                    |
| 7 bits                      | BYTE - <b>ptg</b>                      | 0x1F               |
| 1 bit                       | BYTE - <b>reserved0</b>                | 0x0                |
| 0008                        | Double - <b>value</b>                  | 0x4004000000000000 |
| 0004                        | DWORD - <b>cb</b>                      | 0x00000000         |

**iType:** 0x00000001 corresponds to the **CFType** (section [2.5.17](#)) value of CF\_TYPE\_CELLIS and specifies that cells will be formatted based on their values.

**iTemplate:** 0x00000000 corresponds to the **CFTemp** (section [2.5.15](#)) value of CF\_TEMPLATE\_EXPR and is required because **iType** is equal to CR\_TYPE\_CELLIS. This value specifies that cells will be formatted based on their values.

**dxId:** 0x00000000 specifies that the formatting style applied to the cells when the condition is true is specified in the first **BrtDXF** (section [2.4.342](#)) record in the collection of records directly following **BrtBeginDXFs** (section [2.4.55](#)) in the **Styles** (section [2.1.7.50](#)) part ABNF.

**iPri:** 0x00000001 specifies that this rule is evaluated first when multiple **BrtBeginCFRule** (section [2.4.21](#)) records are present.

**iParam:** 0x00000001 corresponds to the **CFOper** (section [2.5.14](#)) value of CF\_OPER\_BN. This value specifies that this rule evaluates to True when the cell value is greater than or equal to the value specified by **rgce1** and less than or equal to the value specified by **rgce2**.

**fStopTrue:** 0x0 specifies that conditional formatting rules with larger **iPri** values than this **BrtBeginCFRule** will be evaluated whether the rule evaluates to True or False.

**fAbove:** 0x0 because **iTemplate** is not equal to CF\_TEMPLATE\_ABOVEAVERAGE or CF\_TEMPLATE\_EQUALABOVEAVERAGE.

**fBottom:** 0x0 because **iType** is not equal to CF\_TYPE\_FILTER.

**fPercent:** 0x0 because **iType** is not equal to CF\_TYPE\_FILTER.

**cbfmla1:** 0x00000009 specifies that there are 9 bytes in **rgce1.rgce**.

**cbfmla2:** 0x00000009 specifies that there are 9 bytes in **rgce2.rgce**.

**cbfmla3:** 0x00000000 specifies that **rgce3** does not exist.

**strParam:** A null string because the value of **iTemplate** is not CF\_TEMPLATE\_CONTAINSTEXT.

**rgce1.cce:** 0x00000009 specifies that there are 9 bytes in **rgce1.rgce**.

**rgce1.rgce:** A **CFParsedFormula** (section [2.5.97.6](#)) that specifies the first formula (section [2.2.2](#)) used in this conditional formatting rule.

**rgce1.rgce.rgce[0]:** An **Rgce** (section [2.5.97.88](#)) that specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula.

**rgce1.rgce.rgce[0].PtgNum:** An operand (section [2.5.97.88](#)) that specifies a floating point value. This is the lower limit for the Between condition of this conditional formatting rule.

**rgce1.rgce.rgce[0].PtgNum.ptg:** 0x1F specifies that this parse token, as specified in section [2.2.2](#), is of type **PtgNum** (section [2.5.97.63](#)).

**rgce1.rgce.rgce[0].PtgNum.value:** 0x3FF8000000000000 specifies a 64-bit binary floating-point number as defined in [\[IEEE754\]](#), representing a value of 1.5.

**rgce1.cb:** 0x00000000 specifies that the **rgcb** field does not exist.

**rgce2.cce:** 0x00000009 specifies that there are 9 bytes in **rgce2.rgce**.

**rgce2.rgce.rgce[0]:** An **Rgce** (section [2.5.97.88](#)) that specifies the sequence of **Ptg** structures for the formula.

**rgce2.rgce.rgce[0].PtgNum:** An operand (section [2.5.97.88](#)) that specifies a floating point value. This is the upper limit for the Between condition of this conditional formatting rule.

**rgce2.rgce.rgce[0].PtgNum.ptg:** 0x1F specifies that this parse token is of type **PtgNum**.

**rgce2.rgce.rgce[0].PtgNum.value:** 0x4004000000000000 specifies a 64-bit binary floating-point number as defined in [\[IEEE754\]](#), representing a value of 2.5.

**rgce2.cb:** 0x00000000 specifies that the **rgcb** field does not exist.

### 3.1.3 Conditional Formatting: BrtEndCFRule

This record indicates the end of the conditional formatting rule, as specified in the following table.

| Structure of BrtEndCFRule |  |
|---------------------------|--|
| Size                      | Structure  |
| 0000                      | <a href="#">BrtEndCFRule</a> - <b>BrtEndCFRule</b> |

### 3.1.4 Conditional Formatting: BrtEndConditionalFormatting

This record indicates the end of conditional formatting information for a range, as specified in the following table.

| Structure of BrtEndConditionalFormatting |  |
|--|--|
| Size                                     | Structure  |
| 0000                                     | <a href="#">BrtEndConditionalFormatting</a> - <b>BrtEndConditionalFormatting</b> |

### 3.1.5 Conditional Formatting: BrtDXF

The next record in this example is the [BrtDXF](#) referenced by the **dxId** field of the [BrtBeginCFRule](#) record, which specifies the formatting that will be applied to the range specified by [BrtBeginConditionalFormatting](#) when the condition evaluates to True. This BrtDXF record is specified in the following table.

| Structure of BrtDxf |  |        |
|---------------------|--|--------|
| Size                | Structure  | Value  |
| 0012                | Brtdxf - <b>Brtdxf</b>                           |        |
| 15 bits             | WORD - <b>unused</b>                             | 0x0000 |
| 1 bit               | WORD - <b>fNewBorder</b>                         | 0x1    |
| 0010                | <a href="#">XFProps</a> - <b>xfprops</b>         |        |
| 0002                | USHORT - <b>reserved</b>                         | 0x0000 |
| 0002                | USHORT - <b>cprops</b>                           | 0x0001 |
| 000C                | XfPropArray - <b>xfPropArray</b>                 |        |
| 000C                | <a href="#">XFProp</a> - <b>xfProp[0]</b>        |        |
| 0002                | USHORT - <b>xfpropType</b>                       | 0x0002 |
| 0002                | USHORT - <b>cb</b>                               | 0x000C |
| 0008                | XfPropDataBlob - <b>xfPropDataBlob</b>           |        |
| 0008                | <a href="#">XFPropColor</a> - <b>XfPropColor</b> |        |
| 1 bit               | BYTE - <b>fValidRGBA</b>                         | 0x1    |
| 7 bits              | BYTE - <b>xclrType</b>                           | 0x02   |
| 0001                | XfPropColorICV - <b>icv</b>                      |        |
| 0002                | SHORT - <b>nTintShade</b>                        | 0x0000 |
| 0004                | <a href="#">LongRGBA</a> - <b>dwRgba</b>         |        |
| 0001                | BYTE - <b>red</b>                                | 0xFF   |
| 0001                | BYTE - <b>green</b>                              | 0xC7   |

| Structure of BrtDxf |                     |      |
|---------------------|---------------------|------|
| 0001                | BYTE - <b>blue</b>  | 0xCE |
| 0001                | BYTE - <b>alpha</b> | 0xFF |

**fNewBorder:** 0x1 specifies that internal border formatting can be used in the XFProps specified in **xfprops**.

**xfprops:** An XFProps structure that specifies cell formatting properties.

**xfprops.cprops:** 0x0001 specifies that there is one XFProp structure in **xfprops.xfPropArray**.

**xfprops.xfPropArray:** An array of XFProp structures. Each array element specifies a cell formatting property.

**xfprops.xfPropArray.xfProp[0]:** An XFProp structure that specifies a cell formatting property.

**xfprops.xfPropArray.xfProp[0].xfPropType:** 0x0002 specifies that this cell formatting property specifies a cell background color.

**xfprops.xfPropArray.xfProp[0].cb:** 0x000C specifies that the size of this XFProp structure is 12 bytes.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob:** A variable field that specifies the cell formatting property data.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor:** An XFPropColor structure that specifies the background color that will be applied to the cell if the conditional formatting rule evaluates to True.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.fValidRGBA:** 0x1 specifies that the **xclrType**, **icv** and **nTintShade** fields have been used to set the **dwRgba** field.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.xclrType:** 0x02 specifies that the color information is stored as RGBA.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.icv:** Undefined and ignored because **xclrType** is 0x02.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.nTintShade:** 0x0000 specifies that the color defined in **dwRgba** will be used without being lightened or darkened.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.dwRgba:** A LongRGBA that specifies a light red background color.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.dwRgba.red:** 0xFF specifies the relative intensity of the red component of this color.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.dwRgba.green:** 0xC7 specifies the relative intensity of the green component of this color.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.dwRgba.blue:** 0xCE specifies the relative intensity of the blue component of this color.

**xfprops.xfPropArray.xfProp[0].xfPropDataBlob.XfPropColor.dwRgba.alpha:** 0xFF specifies the alpha component of this color.



## 3.2 Defined Name

This example shows a defined name that refers to the absolute cell reference \$E\$4 on the second sheet of the file, as illustrated in the following figure. The defined name is specified by a **BrName** (section 2.4.680) record.

This example includes all of the records that define supporting links (section 2.2.7.2) for the defined name. Together, these records specify which workbook and which sheet the defined name is referring to. Two records are stored between the **BrBeginExternals** (section 2.4.78) and **BrEndExternals** (section 2.4.414) records: **BrSupSelf** (section 2.4.770) and **BrExternSheet** (section 2.4.635).

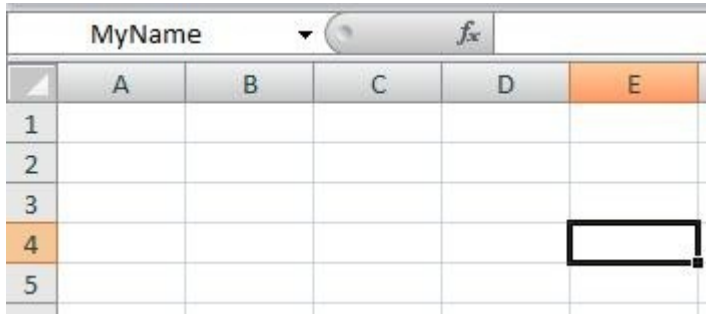


Figure 22: Defined name within a sheet

### 3.2.1 Defined Name: BrName

The first record in this example, **BrName** (section 2.4.680), defines the properties of the defined name, as specified in the following table.

| Structure of BrName |                               |        |
|---------------------|-------------------------------|--------|
| Size                | Structure                     | Value  |
| 002E                | BrName - <b>BrName</b>        |        |
| 1 bit               | DWORD - <b>fHidden</b>        | 0x0    |
| 1 bit               | DWORD - <b>fFunc</b>          | 0x0    |
| 1 bit               | DWORD - <b>fOB</b>            | 0x0    |
| 1 bit               | DWORD - <b>fProc</b>          | 0x0    |
| 1 bit               | DWORD - <b>fCalcExp</b>       | 0x0    |
| 1 bit               | DWORD - <b>fBuiltin</b>       | 0x0    |
| 9 bits              | DWORD - <b>fgrp</b>           | 0x000  |
| 1 bit               | DWORD - <b>fPublished</b>     | 0x0    |
| 1 bit               | DWORD - <b>fWorkbookParam</b> | 0x0    |
| 1 bit               | DWORD - <b>unused</b>         | 0x0    |
| 14 bits             | DWORD - <b>reserved</b>       | 0x0000 |

| Structure of BrtName |  |            |
|----------------------|--|------------|
| 0001                 | BYTE - <b>chKey</b>                                    | 0x00       |
| 0004                 | DWORD - <b>itab</b>                                    | 0xFFFFFFFF |
| 0010                 | <a href="#">XLNameWideString</a> - <b>name</b>         | MyName     |
| 0011                 | <a href="#">NameParsedFormula</a> - <b>formula</b>     |            |
| 0004                 | DWORD - <b>cce</b>                                     | 0x00000009 |
| 0009                 | <a href="#">Rgce</a> - <b>rgce</b>                     |            |
| 0009                 | <a href="#">PtgRef3d</a> - <b>PtgRef3d</b>             |            |
| 0001                 | BYTE - <b>ptg</b>                                      | 0x1A       |
| 0001                 | <a href="#">PtgDataType</a> - <b>type</b>              | 0x01       |
| 0001                 | BYTE - <b>reserved</b>                                 | 0x00       |
| 0002                 | USHORT - <b>ixti</b>                                   | 0x0000     |
| 0006                 | <a href="#">RgceLoc</a> - <b>loc</b>                   |            |
| 0004                 | UncheckedRw - <b>row</b>                               | 0x00000003 |
| 0002                 | <a href="#">ColRelShort</a> - <b>column</b>            |            |
| 14 bits              | USHORT - <b>col</b>                                    | 0x0004     |
| 1 bit                | DWORD - <b>fColRel</b>                                 | 0x0        |
| 1 bit                | DWORD - <b>fRwRel</b>                                  | 0x0        |
| 0004                 | DWORD - <b>cb</b>                                      | 0x00000000 |
| 0004                 | <a href="#">XLSNullableWideString</a> - <b>comment</b> |            |

**fHidden:** 0x0 specifies that the defined name is not hidden.

**fFunc:** 0x0 specifies that the defined name does not represent an XLM macro.

**fOB:** 0x0 specifies that the defined name does not represent a **VBA** macro.

**fProc:** 0x0 specifies that the defined name does not represent a macro.

**fCalcExp:** 0x0 specifies that the **formula.rgce** field does not contain a call to a function that can return an array.

**fBuiltin:** 0x0 specifies that the defined name does not represent a built-in name.

**fPublished:** 0x0 specifies that the defined name was not published.

**fWorkbookParam:** 0x0 specifies that the defined name is not a workbook parameter.

**chKey:** 0x00 specifies that there is no shortcut key for the macro represented by the defined name. This is equal to 0 because **fProc** is 0.

**itab:** 0xFFFFFFFF specifies that the scope of the defined name is the entire workbook.

**name:** "MyName" specifies the name of the defined name.

**formula:** A **NameParsedFormula** (section [2.5.97.12](#)) that contains the formula (section [2.2.2](#)) that specifies the sheet and cell range of the workbook associated with the name.

**formula.cce:** 0x00000009 specifies that there are 9 bytes in **formula.rgce**.

**formula.rgce:** An **Rgce** (section [2.5.97.88](#)) that contains the **Ptg** (section [2.5.97.16](#)) structures that make up the formula.

**formula.rgce.PtgRef3d:** A **Ptg** in the formula.

**formula.rgce.PtgRef3d.ptg:** 0x1A specifies that this **Ptg** is of type **PtgRef3d** (section [2.5.97.69](#)).

**formula.rgce.PtgRef3d.type:** 0x01 specifies that this **PtgRef3d** specifies a reference to a range of cells.

**formula.rgce.PtgRef3d.ixti:** 0x0000 specifies that this **PtgRef3d** refers to the first **Xti** (section [2.5.172](#)) in the **BrtExternSheet** (section [2.4.635](#)) record shown in this example.

**formula.rgce.PtgRef3d.loc:** A **RgceLoc** (section [2.5.97.91](#)) that specifies the coordinates of the referenced cell.

**formula.rgce.PtgRef3d.loc.row:** 0x00000003 specifies that the defined name refers to row (2) 4 of the worksheet.

**formula.rgce.PtgRef3d.loc.column:** Specifies the column (2) and that the row (2) and column (2) references are **absolute references**.

**formula.rgce.PtgRef3d.loc.column.col:** 0x0004 specifies that the defined name refers to column (2) E of the worksheet.

**formula.rgce.PtgRef3d.loc.column.fColRel:** 0x0 specifies that the column (2) is an absolute reference.

**formula.rgce.PtgRef3d.loc.column.fRwRel:** 0x0 specifies that the row (2) is an absolute reference.

**comment:** An **XLNullableWideString** (section [2.5.166](#)) that specifies a NULL string, which means that there is no comment.

### 3.2.2 Defined Name: BrtBeginExternals

The next record in this example, **BrtBeginExternals** (section [2.4.78](#)), specifies the beginning of a collection of supporting links (section [2.2.7.2](#)), as specified in the following table.

| Structure of BrtBeginExternals |  |
|--------------------------------|--|
| Size                           | Structure                                    |
| 0000                           | BrtBeginExternals - <b>BrtBeginExternals</b> |

### 3.2.3 Defined Name: BrtSupSelf

The next record in this example, a **BrtSupSelf** (section [2.4.770](#)) record, specifies that this supporting link (section [2.2.7.2](#)) points back into the same workbook, as specified in the following table.

| Structure of BrtSupSelf |                                |
|-------------------------|--------------------------------|
| Size                    | Structure                      |
| 0000                    | BrtSupSelf - <b>BrtSupSelf</b> |

### 3.2.4 Defined Name: BrtExternSheet

The next record in this example, **BrtExternSheet** (section [2.4.635](#)), contains the set of supporting links (section [2.2.7.2](#)) and specifies the scope of those links, as specified in the following table.

| Structure of BrtExternSheet |  |            |
|-----------------------------|--|------------|
| Size                        | Structure                              | Value      |
| 0010                        | BrtExternSheet - <b>BrtExternSheet</b> |            |
| 0004                        | DWORD - <b>cXti</b>                    | 0x00000001 |
| 000C                        | RgXti - <b>rgXti</b>                   |            |
| 000C                        | <a href="#">Xti</a> - <b>xti[0]</b>    |            |
| 0004                        | DWORD - <b>externalLink</b>            | 0x00000000 |
| 0004                        | LONG - <b>firstSheet</b>               | 0x00000001 |
| 0004                        | LONG - <b>lastSheet</b>                | 0x00000001 |

**cXti:** 0x00000001 specifies that there is 1 **Xti** (section [2.5.172](#)) record in the **rgXti** field.

**rgXti.xti[0].externalLink:** 0x00000000 specifies that this **Xti** record refers to the first supporting link record (section [2.2.7.3](#)) in the collection of supporting link records (section [2.2.7.3](#)), which is the **BrtSupSelf** (section [2.4.770](#)) record as specified earlier.

**rgXti.xti[0].firstSheet:** 0x00000001 specifies that the first sheet referenced by the defined name is the second sheet in the workbook (Sheet2). The related **BrtBundleSh** (section [2.4.301](#)) record has been omitted for brevity.

**rgXti.xti[0].lastSheet:** 0x00000001 specifies that the last sheet referenced by the defined name is the second sheet in the workbook (Sheet2).

### 3.2.5 Defined Name: BrtEndExternals

The last record in this example, **BrtEndExternals** (section [2.4.414](#)), specifies the end of a collection of supporting links (section [2.2.7.2](#)), as specified in the following table.

| Structure of BrtEndExternals |   |
|------------------------------|---|
| Size                         | Structure                               |
| 0000                         | BrtEndExternals - <b>BrEndExternals</b> |

### 3.3 Table

This example is a workbook where the range C4:E7 contains values and is formatted as a table. The column (2) "Sales Tax" is a calculated column that contains the formula (section 2.2.2) " $=Table1[[\#This Row],[Price]]*.08$ ". The following figure shows a possible implementation of the table in this example.

|   | A | B | C        | D     | E         |
|---|---|---|----------|-------|-----------|
| 1 |   |   |          |       |           |
| 2 |   |   |          |       |           |
| 3 |   |   |          |       |           |
| 4 |   |   | Item     | Price | Sales Tax |
| 5 |   |   | Bicycle  | 50    | 4         |
| 6 |   |   | Backpack | 24    | 1.92      |
| 7 |   |   | Shoes    | 60    | 4.8       |

**Figure 23: Table within a sheet**

This example specifies a table as a collection of records between **BrtListPart** (section 2.4.670) and **BrtEndList** (section 2.4.432) records in the **Worksheet** part ABNF (section 2.1.7.61). The table properties are specified with the **BrtBeginList** (section 2.4.96), **BrtBeginListCols** (section 2.4.98), **BrtBeginListCol** (section 2.4.97), **BrtEndListCol** (section 2.4.433), **BrtEndListCols** (section 2.4.434), **BrtListCCFmla** (section 2.4.669), **BrtTableStyleClient** (section 2.4.790) records in the **Table** (section 2.1.7.51) part ABNF. The table AutoFilter settings are specified with **BrtBeginAFilter** (section 2.4.8) and **BrtEndAFilter** (section 2.4.347) in the **Worksheet** part.

#### 3.3.1 Table: BrtListPart

The first record in this example is the **BrtListPart** (section 2.4.670) record, which appears in the **Worksheet** part ABNF (section 2.1.7.61) and indicates the **Table** (section 2.1.7.51) part ABNF associated with the table. The example **BrtListPart** record is specified in the following table.

| Structure of BrtListPart |  |       |
|--------------------------|--|-------|
| Size                     | Structure                              | Value |
| 000C                     | BrtListPart - <b>BrListPart</b>        |       |
| 000C                     | <a href="#">RelID</a> - <b>stRelID</b> | rId3  |

**stRelID:** "rId3" specifies the **RelID** (section 2.5.114) listed in the relationship (section 2.1.3) part (section 2.1.2) for this sheet. This **RelID** identifies the relationship (section 2.1.3) element that specifies the path to the **Table** (section 2.1.7.51) part ABNF within the **package** (section 2.1.1).

#### 3.3.2 Table: BrtBeginList

The next record in this example, **BrtBeginList** (section 2.4.96), specifies the table properties and specifies the beginning of the collection of records that specify this table. The example **BrtBeginList** record is specified in the following table.

| Structure of BrtBeginList |  |              |
|---------------------------|--|--------------|
| Size                      | Structure  | Value        |
| 0064                      | BrtBeginList - <b>BrtBeginList</b>                   |              |
| 0010                      | <a href="#">Rfx</a> - <b>rfxList</b>                 |              |
| 0004                      | LONG - <b>rwFirst</b>                                | 0x00000003   |
| 0004                      | LONG - <b>rwLast</b>                                 | 0x00000006   |
| 0004                      | LONG - <b>colFirst</b>                               | 0x00000002   |
| 0004                      | LONG - <b>colLast</b>                                | 0x00000004   |
| 0004                      | <a href="#">ListType</a> - <b>lt</b>                 | 0x00000000   |
| 0004                      | DWORD - <b>idList</b>                                | 0x00000001   |
| 0004                      | DWORD - <b>crwHeader</b>                             | 0x00000001   |
| 0004                      | DWORD - <b>crwTotals</b>                             | 0x00000000   |
| 1 bit                     | DWORD - <b>fShownTotalRow</b>                        | 0x0          |
| 1 bit                     | DWORD - <b>fSingleCell</b>                           | 0x0          |
| 1 bit                     | DWORD - <b>fForceInsertToBeVisible</b>               | 0x0          |
| 1 bit                     | DWORD - <b>fInsertRowInsCells</b>                    | 0x0          |
| 1 bit                     | DWORD - <b>fPublished</b>                            | 0x0          |
| 27 bits                   | DWORD - <b>reserved</b>                              | 0x00000000   |
| 0004                      | DWORD - <b>nDxfHeader</b>                            | 0xFFFFFFFF   |
| 0004                      | DWORD - <b>nDxfData</b>                              | 0xFFFFFFFF   |
| 0004                      | DWORD - <b>nDxfAgg</b>                               | 0xFFFFFFFF   |
| 0004                      | DWORD - <b>nDxfBorder</b>                            | 0xFFFFFFFF   |
| 0004                      | DWORD - <b>nDxfHeaderBorder</b>                      | 0xFFFFFFFF   |
| 0004                      | DWORD - <b>nDxfAggBorder</b>                         | 0xFFFFFFFF   |
| 0004                      | DWORD - <b>dwConnID</b>                              | 0x00000000   |
| 0004                      | <a href="#">XLNullableWideString</a> - <b>stName</b> | null string  |
| 0010                      | XLNullableWideString - <b>stDisplayName</b>          | Table1       |
| 0004                      | XLNullableWideString - <b>stComment</b>              | empty string |
| 0004                      | <a href="#">CellStyleName</a> - <b>stStyleHeader</b> | null string  |
| 0004                      | CellStyleName - <b>stStyleData</b>                   | null string  |
| 0004                      | CellStyleName - <b>stStyleAgg</b>                    | null string  |

**rfxList:** This specifies the range of cells that the table occupies. This refers to the range C4:E7.

**rfxList.rwFirst:** 0x00000003 specifies that the first row (2) of the range is 4.

**rfxList.rwLast:** 0x00000006 specifies that the last row (2) of the range is 7.

**rfxList.colFirst:** 0x00000002 specifies that the first column (2) of the range is C.

**rfxList.colLast:** 0x00000004 specifies that the last column (2) of the range is E.

**It:** 0x00000000 specifies that the table is a standard table.

**idList:** 0x00000001 specifies that the numeric identifier of the table is 1.

**crwHeader:** 0x00000001 specifies that the header row (1) is displayed.

**crwTotals:** 0x00000000 specifies that the total row is hidden.

**fShownTotalRow:** 0x0 specifies that the table total row has never been displayed for this table.

**fSingleCell:** 0x0 specifies that the table is not a single cell table.

**fForceInsertToBeVisible:** 0x0 specifies that the table insert row is not displayed.

**fInsertRowInsCells:** 0x0 specifies that cells in the sheet were not automatically inserted when the table insert row was displayed for this table.

**fPublished:** 0x0 specifies that the table is not published.

**nDxfHeader:** 0xFFFFFFFF specifies that differential formatting (section [2.2.6.2](#)) is not applied to the table header row (2).

**nDxfData:** 0xFFFFFFFF specifies that differential formatting is not applied to the table data region.

**nDxfAgg:** 0xFFFFFFFF specifies that differential formatting is not applied to the table total row.

**nDxfBorder:** 0xFFFFFFFF specifies that differential formatting is not applied to the borders of the table data region.

**nDxfHeaderBorder:** 0xFFFFFFFF specifies that differential formatting is not applied to the borders of the table header row (2).

**nDxfAggBorder:** 0xFFFFFFFF specifies that differential formatting is not applied to the borders of the table total row.

**dwConnID:** 0x00000000 specifies that there is no external connection (section [2.2.8](#)) for this table. This value is required in this field because the **It** field is not equal to LTXML.

**stName:** NULL string specifies that the **stDisplayName** field is the name used for programmatic purposes.

**stDisplayName:** "Table1" specifies the string identifier of the table. This identifier is used for both programmatic purposes and for the displayed string in formulas (section [2.2.2](#)) because **stName** is NULL.

**stComment:** The empty string specifies that there is no comment.

**stStyleHeader:** NULL specifies that no cell style (section [2.2.6.1.2](#)) is applied to the table header row (2).

**stStyleData:** NULL specifies that no cell style is applied to the table data region.

**stStyleAgg:** NULL specifies that no cell style is applied table total row.

### 3.3.3 Table: BrtBeginAFilter

The next record in this example, **BrtBeginAFilter** (section [2.4.8](#)), specifies the range of cells the AutoFilter applies to and specifies the beginning of the collection of records that specifies the AutoFilter for the table. The example **BrtBeginAFilter** (section [2.4.8](#)) record is specified in the following table.

| Structure of BrtBeginAfilter |   |            |
|------------------------------|---|------------|
| Size                         | Structure                                 | Value      |
| 0010                         | BrtBeginAFilter - <b>BrtBeginAfilter</b>  |            |
| 0010                         | <a href="#">UncheckedRfx</a> - <b>rfx</b> |            |
| 0004                         | LONG - <b>rwFirst</b>                     | 0x00000003 |
| 0004                         | LONG - <b>rwLast</b>                      | 0x00000006 |
| 0004                         | LONG - <b>colFirst</b>                    | 0x00000002 |
| 0004                         | LONG - <b>colLast</b>                     | 0x00000004 |

**rfx:** Specifies the range of cells the AutoFilter applies to. This range, which is the same as the range of the table, is C4:E7.

**rfx.rwFirst:** 0x00000003 specifies the first row (2) of the range is 4.

**rfx.rwLast:** 0x00000006 specifies the last row (2) of the range is 7.

**rfx.colFirst:** 0x00000002 specifies the first column (2) of the range is C.

**rfx.colLast:** 0x00000004 specifies the last column (2) of the range is E.

### 3.3.4 Table: BrtEndAFilter

The next record in this example, **BrtEndAFilter** (section [2.4.347](#)), specifies the end of the collection of records that specify the AutoFilter for the table. No filtering is applied because there are zero records between the preceding **BrtBeginAFilter** record and this record. The example **BrtEndAFilter** record is specified in the following table.

| Structure of BrtEndAfilter |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtEndAFilter - <b>BrtEndAfilter</b> |



### 3.3.5 Table: BrtBeginListCols

The next record in this example, **BrtBeginListCols** (section [2.4.98](#)), specifies the number of table columns (2) and specifies the beginning of the collection of records that specifies the set of table columns (2) for this table. The example **BrtBeginListCols** record is specified in the following table.

| Structure of BrtBeginListCols |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                  | Value      |
| 0004                          | BrtBeginListCols - <b>BrtBeginListCols</b> |            |
| 0004                          | ULONG - <b>nCols</b>                       | 0x00000003 |

**nCols:** 0x00000003 specifies that the table has three columns (2).

### 3.3.6 Table: BrtBeginListCol 1

The next record in this example, **BrtBeginListCol** (section [2.4.97](#)), specifies the properties of the first column (2) in the table, which begins with the header "Item" and specifies the beginning of a collection of records that specify additional properties of the table column (2). The example **BrtBeginListCol** record is specified in the following table.

| Structure of BrtBeginListCol |   |             |
|------------------------------|---|-------------|
| Size                         | Structure   | Value       |
| 0038                         | BrtBeginListCol - <b>BrtBeginListCol</b>                |             |
| 0004                         | DWORD - <b>idField</b>                                  | 0x00000001  |
| 0004                         | <a href="#">ListTotalRowFunction</a> - <b>ilta</b>      | 0x00000000  |
| 0004                         | DWORD - <b>nDxfHdr</b>                                  | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>nDxfInsertRow</b>                            | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>nDxfAgg</b>                                  | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>idqsif</b>                                   | 0x00000000  |
| 0004                         | <a href="#">XLNullableWideString</a> - <b>stName</b>    | null string |
| 000C                         | <a href="#">XLNullableWideString</a> - <b>stCaption</b> | Item        |
| 0004                         | <a href="#">XLNullableWideString</a> - <b>stTotal</b>   | null string |
| 0004                         | <a href="#">CellStyleName</a> - <b>stStyleHeader</b>    | null string |
| 0004                         | <a href="#">CellStyleName</a> - <b>stStyleInsertRow</b> | null string |
| 0004                         | <a href="#">CellStyleName</a> - <b>stStyleAgg</b>       | null string |

**idField:** 0x00000001 specifies the numeric identifier of the table column (2).

**ilta:** 0x00000000 specifies that no operation is performed in the total row aggregation function for this table column (2).

**nDxfHdr:** 0xFFFFFFFF specifies that no [differential formatting](#) (section [2.2.6.2](#)) is applied to the header row (1). This value is required because the **crwHeader** field of the preceding **BrBeginList** (section [2.4.96](#)) record is equal to 1.

**nDxfInsertRow:** 0xFFFFFFFF specifies that no differential formatting is applied to the table insert row of this table column (2).

**nDxfAgg:** 0xFFFFFFFF specifies that no differential formatting is applied to the table total row of this table column (2).

**idqsif:** 0x00000000 specifies that there is no query table column (2) associated with this column (2). This value is required because the **It** field of the preceding **BrBeginList** record is not equal to LTEXTDATA.

**stName:** NULL string because the **It** field of the preceding **BrBeginList** record is equal to LTRANGE.

**stCaption:** "Item" specifies the caption of this table column (2) displayed in the sheet.

**stTotal:** NULL specifies that no text is displayed in the table total row of this table column (2).

**stStyleHeader:** NULL string because the **crwHeader** field of the preceding **BrBeginList** record is equal to 1.

**stStyleInsertRow:** NULL specifies that no cell style (section [2.2.6.1.2](#)) is applied to the table insert row of this table column (2).

**stStyleAgg:** NULL specifies that no cell style is applied to the total row of this table column (2).

### 3.3.7 Table: BrtEndListCol 1

The next record in this example, **BrEndListCol** (section [2.4.433](#)), specifies the end of the collection of records that specifies the first table column (2). The table column (2) does not have a calculated column formula (section [2.2.2](#)), a total row formula, or any XML map information because this collection is empty. The example **BrEndListCol** record is specified in the following table.

| Structure of BrtEndListCol |                                    |
|----------------------------|------------------------------------|
| Size                       | Structure                          |
| 0000                       | BrEndListCol - <b>BrEndListCol</b> |

### 3.3.8 Table: BrtBeginListCol 2

The next record in this example, **BrBeginListCol** (section [2.4.97](#)), specifies the second column (2) in the table. This is the second column (2) of the example table, and it has the header "Price". The example **BrBeginListCol** record is specified in the following table.

| Structure of BrtBeginListCol |  |            |
|------------------------------|--|------------|
| Size                         | Structure                              | Value      |
| 003A                         | BrBeginListCol - <b>BrBeginListCol</b> |            |
| 0004                         | DWORD - <b>idField</b>                 | 0x00000002 |

| Structure of BrtBeginListCol |  |             |
|------------------------------|--|-------------|
| 0004                         | <a href="#">ListTotalRowFunction</a> - <b>ilta</b>   | 0x00000000  |
| 0004                         | DWORD - <b>nDxfHdr</b>                               | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>nDxfInsertRow</b>                         | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>nDxfAgg</b>                               | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>idqsif</b>                                | 0x00000000  |
| 0004                         | <a href="#">XLNullableWideString</a> - <b>stName</b> | null string |
| 000E                         | XLNullableWideString - <b>stCaption</b>              | Price       |
| 0004                         | XLNullableWideString - <b>stTotal</b>                | null string |
| 0004                         | <a href="#">CellStyleName</a> - <b>stStyleHeader</b> | null string |
| 0004                         | CellStyleName - <b>stStyleInsertRow</b>              | null string |
| 0004                         | CellStyleName - <b>stStyleAgg</b>                    | null string |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**idField:** 0x00000002 specifies the numeric identifier of the table column (2).

**stCaption:** "Price" specifies the caption of this table column (2) displayed in the sheet.

### 3.3.9 Table: BrtEndListCol 2

The next record in this example, **BrtEndListCol** (section [2.4.433](#)), specifies the end of the collection of records that specifies the second table column (2). The second table column (2) does not have a calculated column formula (section [2.2.2](#)), a total row formula, or any XML map information because this collection is empty. The example **BrtEndListCol** record is specified in the following table.

| Structure of BrtEndListCol |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtEndListCol - <b>BrtEndListCol</b> |

### 3.3.10 Table: BrtBeginListCol 3

The next record in this example, **BrtBeginListCol** (section [2.4.97](#)), specifies the properties of the third table column (2) and specifies the beginning of the collection of records that specifies additional properties of that table column (2). The third column (2) of the table has the header "Sales Tax" and contains a calculated column. The example **BrtBeginListCol** record is specified in the following table.

| Structure of BrtBeginListCol |  |       |
|------------------------------|--|-------|
| Size                         | Structure                                | Value |
| 0042                         | BrtBeginListCol - <b>BrtBeginListCol</b> |       |

| Structure of BrtBeginListCol |  |             |
|------------------------------|--|-------------|
| 0004                         | DWORD - <b>idField</b>                               | 0x00000003  |
| 0004                         | <a href="#">ListTotalRowFunction</a> - <b>ilta</b>   | 0x00000000  |
| 0004                         | DWORD - <b>nDxfHdr</b>                               | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>nDxfInsertRow</b>                         | 0x00000000  |
| 0004                         | DWORD - <b>nDxfAgg</b>                               | 0xFFFFFFFF  |
| 0004                         | DWORD - <b>idqsif</b>                                | 0x00000000  |
| 0004                         | <a href="#">XLNullableWideString</a> - <b>stName</b> | null string |
| 0016                         | XLNullableWideString - <b>stCaption</b>              | Sales Tax   |
| 0004                         | XLNullableWideString - <b>stTotal</b>                | null string |
| 0004                         | <a href="#">CellStyleName</a> - <b>stStyleHeader</b> | null string |
| 0004                         | CellStyleName - <b>stStyleInsertRow</b>              | null string |
| 0004                         | CellStyleName - <b>stStyleAgg</b>                    | null string |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**idField:** 0x00000003 specifies the numeric identifier of the table column (2).

**stCaption:** "Sales Tax" specifies the caption of the table column (2) displayed in the sheet.

### 3.3.11 Table: BrtListCCFmla

The next record in this example, the **BrtListCCFmla** (section [2.4.669](#)) record between the third **BrtBeginListCol** (section [2.4.97](#)) and the third **BrtEndListCol** (section [2.4.433](#)), specifies the calculated column formula (section [2.2.2](#)) for the third table column (2). The example **BrtListCCFmla** record is specified in the following table.

| Structure of BrtListCcFmla |  |            |
|----------------------------|--|------------|
| Size                       | Structure  | Value      |
| 0021                       | BrListCCFmla - <b>BrtListCcFmla</b>                |            |
| 1 bit                      | BYTE - <b>reserved1</b>                            | 0x0        |
| 1 bit                      | BYTE - <b>fArray</b>                               | 0x0        |
| 6 bits                     | BYTE - <b>reserved2</b>                            | 0x00       |
| 0020                       | <a href="#">ListParsedFormula</a> - <b>formula</b> |            |
| 0004                       | DWORD - <b>cce</b>                                 | 0x00000018 |
| 0018                       | <a href="#">Rgce</a> - <b>rgce</b>                 |            |
| 000E                       | <a href="#">Ptg</a> - <b>Ptg[0]</b>                |            |

| Structure of BrtListCcFmla |   |                    |
|----------------------------|---|--------------------|
| 000E                       | <a href="#">PtgList</a> - <b>PtgList</b>    |                    |
| 7 bits                     | BYTE - <b>ptg</b>                           | 0x18               |
| 1 bit                      | BYTE - <b>reserved1</b>                     | 0x0                |
| 8 bits                     | BYTE - <b>eptg</b>                          | 0x19               |
| 0002                       | USHORT - <b>ixti</b>                        | 0x0000             |
| 2 bits                     | BYTE - <b>columns</b>                       | 0x1                |
| 5 bits                     | <a href="#">PtgRowType</a> - <b>rowType</b> | 0x10               |
| 1 bit                      | BYTE - <b>squareBracketSpace</b>            | 0x0                |
| 1 bit                      | BYTE - <b>commaSpace</b>                    | 0x0                |
| 1 bit                      | BYTE - <b>unused</b>                        | 0x1                |
| 2 bits                     | BYTE - <b>type</b>                          | 0x1                |
| 1 bit                      | BYTE - <b>invalid</b>                       | 0x0                |
| 1 bit                      | BYTE - <b>nonresident</b>                   | 0x0                |
| 2 bits                     | BYTE - <b>reserved2</b>                     | 0x0                |
| 0004                       | DWORD - <b>listIndex</b>                    | 0x00000001         |
| 0002                       | WORD - <b>colFirst</b>                      | 0x0001             |
| 0002                       | WORD - <b>colLast</b>                       | 0x0001             |
| 0009                       | Ptg - <b>Ptg[1]</b>                         |                    |
| 0009                       | <a href="#">PtgNum</a> - <b>PtgNum</b>      |                    |
| 7 bits                     | BYTE - <b>ptg</b>                           | 0x1F               |
| 1 bit                      | BYTE - <b>reserved0</b>                     | 0x0                |
| 0008                       | Double - <b>value</b>                       | 0x3FB47AE147AE147B |
| 0001                       | Ptg - <b>Ptg[2]</b>                         |                    |
| 0001                       | <a href="#">PtgMul</a> - <b>PtgMul</b>      |                    |
| 7 bits                     | BYTE - <b>ptg</b>                           | 0x05               |
| 1 bit                      | BYTE - <b>reserved0</b>                     | 0x0                |
| 0004                       | DWORD - <b>cb</b>                           | 0x00000000         |

**fArray:** 0x0 specifies that the calculated column formula is not an array formula.

**formula:** Specifies the calculated column formula associated with the table column (2). This formula is "=Table1[[#This Row],[Price]]\*.08". The Ptg (section [2.5.97.16](#)) structures that

specify this formula conform to the ABNF grammar in **ListParsedFormula** (section [2.5.97.11](#)).

**formula.cce**: 0x00000018 specifies that the **rgce** field is 18 bytes long.

**formula.rgce**: Specifies the sequence of **Ptg** structures for the formula "=Table1[[#This Row],[Price]]\*.08".

**formula.rgce.Ptg[0].PtgList**: Specifies that the first parse token in the formula is a **PtgList** (section [2.5.97.52](#)) operand token (section [2.2.2.2](#)) that specifies a rectangular range of cells in a table that corresponds to the reference "Table1[[#This Row],[Price]]" in the formula.

**formula.rgce.Ptg[0].PtgList.ptg**: 0x18 is required in this field.

**formula.rgce.Ptg[0].PtgList.eptg**: 0x19 is required in this field.

**formula.rgce.Ptg[0].PtgList.ixti**: 0x0000 specifies that the first **Xti** (section [2.5.172](#)) structure in the **rgXti** field of the **BrtExternSheet** (section [2.4.635](#)) record that specifies the location of the table. This location is the first sheet of this workbook. This record is omitted from this example for brevity. For an example of the **BrtExternSheet** record, see the External References (section [3.5](#)) or Defined Name (section [2.2.7.4.1.1](#)) examples.

**formula.rgce.Ptg[0].PtgList.columns**: 0x1 specifies that the rectangular area is one column (2) wide.

**formula.rgce.Ptg[0].PtgList.rowType**: 0x10 specifies that the rows (2) of the referenced area consist of the current row (2).

**formula.rgce.Ptg[0].PtgList.squareBracketSpace**: 0x0 specifies not to display spacing around the intra-table portion of the string representation of this formula element.

**formula.rgce.Ptg[0].PtgList.commaSpace**: 0x0 specifies not to display spacing between column (2) references in the string representation of this formula element.

**formula.rgce.Ptg[0].PtgList.type**: 0x1 specifies that this structure contains a value.

**formula.rgce.Ptg[0].PtgList.invalid**: 0x0 specifies that this structure specifies a valid area.

**formula.rgce.Ptg[0].PtgList.nonresident**: 0x0 specifies that the table is in the same workbook as the **Rgce** (section [2.5.97.88](#)) structure.

**formula.rgce.Ptg[0].PtgList.listIndex**: 0x00000001 specifies the numeric identifier of the referenced table.

**formula.rgce.Ptg[0].PtgList.colFirst**: 0x0001 specifies that the first column (2) of the referenced area of the table is the second column (2) of the table.

**formula.rgce.Ptg[0].PtgList.colLast**: 0x0001 specifies that the last column (2) of the referenced area of the table is the second column (2) of the table.

**formula.rgce.Ptg[1].PtgNum**: Specifies that the second parse token in the formula is a **PtgNum** (section [2.5.97.63](#)) operand token that specifies the floating point value (0.08) in the formula.

**formula.rgce.Ptg[1].PtgNum.ptg**: 0x1F is required in this field.

**formula.rgce.Ptg[1].PtgNum.value**: 0x3FB47AE147AE147B specifies the **Xnum** (section [2.5.171](#)) representation of the value 0.08.

**formula.rgce.Ptg[2].PtgMul:** Specifies that the third parse token in the formula is the **PtgMul** (section [2.5.97.59](#)) binary-value-operator (section [2.5.97.88](#)). This **Ptg** specifies that the first and second expressions in the binary-value-expression (section [2.5.97.88](#)), which in this formula correspond to the PtgList and PtgNum operator tokens, are multiplied together.

**formula.rgce.Ptg[2].PtgMul.ptg:** 0x05 is required in this field.

**formula.cb:** 0x00000000 specifies the length of **rgcb** in bytes.

### 3.3.12 Table: BrtEndListCol 3

The next record in this example, **BrtEndListCol** (section [2.4.433](#)), specifies the end of the collection of records that specifies the third table column (2). The second table column (2) does not have a total row formula (section [2.2.2](#)), or any XML map information, because this collection only contained a **BrtListCCFmla** (section [2.4.669](#)). The example **BrtEndListCol** record is specified in the following table.

| Structure of BrtEndListCol |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtEndListCol - <b>BrtEndListCol</b> |

### 3.3.13 Table: BrtEndListCols

The next record in this example, **BrtEndListCols** (section [2.4.434](#)), specifies the end of the collection of records that specifies the table columns (2) for this table. The example **BrtEndListCols** record is specified in the following table.

| Structure of BrtEndListCols |  |
|-----------------------------|--|
| Size                        | Structure                              |
| 0000                        | BrtEndListCols - <b>BrtEndListCols</b> |

### 3.3.14 Table: BrtTableStyleClient

The next record in this example, **BrtTableStyleClient** (section [2.4.790](#)), specifies information about the table style (section [2.2.6.3](#)) applied to the table. The example **BrtTableStyleClient** record is specified in the following table.

| Structure of BrtTableStyleClient |  |       |
|----------------------------------|--|-------|
| Size                             | Structure  | Value |
| 0028                             | BrtTableStyleClient - <b>BrtTableStyleClient</b> |       |
| 1 bit                            | WORD - <b>fFirstColumn</b>                       | 0x0   |
| 1 bit                            | WORD - <b>fLastColumn</b>                        | 0x0   |
| 1 bit                            | WORD - <b>fRowStripes</b>                        | 0x1   |
| 1 bit                            | WORD - <b>fColumnStripes</b>                     | 0x0   |
| 1 bit                            | WORD - <b>fRowHeaders</b>                        | 0x0   |

| Structure of BrtTableStyleClient |                                |                   |
|----------------------------------|--------------------------------|-------------------|
| 1 bit                            | WORD - <b>fColumnHeaders</b>   | 0x0               |
| 10 bits                          | WORD - <b>reserved</b>         | 0x000             |
| 0026                             | TableName - <b>stStyleName</b> | TableStyleMedium9 |

**fFirstColumn:** 0x0 specifies that the first column (2) in the table does not have the table style element (section [2.2.6.2.2](#)) applied.

**fLastColumn:** 0x0 specifies that the last column (2) in the table does not have the table style element applied.

**fRowStripes:** 0x1 specifies that the table has the row (2) stripe formatting table style element applied.

**fColumnStripes:** 0x0 specifies that the table does not have the column (2) stripe formatting table style element applied.

**fRowHeaders:** 0x0 is ignored because this is a table.

**fColumnHeaders:** 0x0 is ignored because this is a table.

**stStyleName:** "TableStyleMedium9" specifies the table style (section [2.2.6.3](#)) applied to the table.

Records specifying the table style itself are omitted from this example for brevity.

### 3.3.15 Table: BrtEndList

The next record in this example, **BrtEndList** (section [2.4.432](#)), specifies the end of the collection of records that specifies this table. The example **BrtEndList** record is specified in the following table.


| Structure of BrtEndList |                                |
|-------------------------|--------------------------------|
| Size                    | Structure                      |
| 0000                    | BrtEndList - <b>BrtEndList</b> |

## 3.4 Filters

This example shows how an AutoFilter is applied to a range of cells (C4:C8) on a sheet. The AutoFilter displays numbers that are greater than 70, as illustrated in the following figure.

The example includes all of the records between **BrtBeginAFilter** (section [2.4.8](#)) and **BrtEndAFilter** (section [2.4.347](#)) in the **Worksheet** (section [2.1.7.61](#)) part. In this example, these are **BrtBeginFilterColumn** (section [2.4.80](#)), **BrtBeginCustomFilters** (section [2.4.38](#)), **BrtCustomFilter** (section [2.4.332](#)), **BrtEndCustomFilters** (section [2.4.377](#)) and **BrtEndFilterColumn** (section [2.4.416](#)).



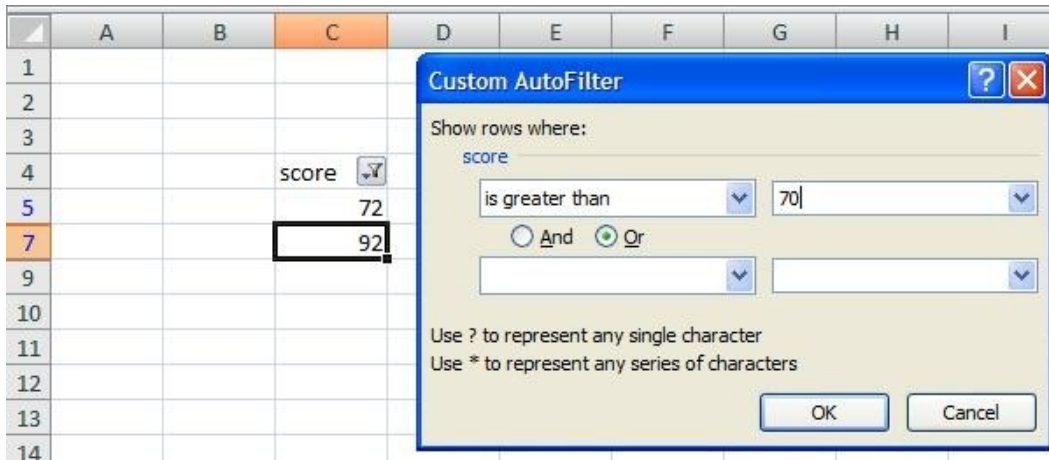

**Figure 24: AutoFilter within a sheet**

### 3.4.1 Filters: BrtBeginAFilter

The **BrtBeginAFilter** (section 2.4.8) specifies the beginning of a collection of records that define the AutoFilter and specifies the range of cells the AutoFilter applies to, as specified in the following table.

| Structure of BrtBeginAFilter |                                    |            |
|------------------------------|------------------------------------|------------|
| Size                         | Structure                          | Value      |
| 0010                         | BrtBeginAFilter - BrtBeginAfilter  |            |
| 0010                         | <a href="#">UncheckedRfX</a> - rfx |            |
| 0004                         | LONG - <b>rwFirst</b>              | 0x00000003 |
| 0004                         | LONG - <b>rwLast</b>               | 0x00000007 |
| 0004                         | LONG - <b>colFirst</b>             | 0x00000002 |
| 0004                         | LONG - <b>colLast</b>              | 0x00000002 |

**rfx:** an **UncheckedRfX** (section 2.5.153) that specifies that the AutoFilter is applied to the range C4:C8.

**rfx.rwFirst:** 0x00000003 specifies that the first row (2) of the filtered range is row (2) 4 of the sheet.

**rfx.rwLast:** 0x00000007 specifies that the last row (2) of the filtered range is row (2) 8 of the sheet.

**rfx.colFirst:** 0x00000002 specifies that the first column (2) of the filtered range is column (2) C of the sheet.

**rfx.colLast:** 0x00000002 specifies that the last column (2) of the filtered range is column (2) C of the sheet.

### 3.4.2 Filters: BrtBeginFilterColumn

The next record in this example, **BrtBeginFilterColumn** (section [2.4.80](#)), specifies the properties of an AutoFilter column (2), as specified in the following table.

| Structure of BrtBeginFilterColumn |  |            |
|-----------------------------------|--|------------|
| Size                              | Structure  | Value      |
| 0006                              | BrtBeginFilterColumn - <b>BrtBeginFilterColumn</b> |            |
| 0004                              | DWORD - <b>dwCol</b>                               | 0x00000000 |
| 1 bit                             | WORD - <b>fHideArrow</b>                           | 0x0        |
| 1 bit                             | WORD - <b>fNoBtn</b>                               | 0x0        |
| 14 bits                           | WORD - <b>reserved</b>                             | 0x0000     |

**dwCol:** 0x00000000 specifies that the properties are applied to the first column (2) in the range to which the AutoFilter is applied. This is column (2) C in this example.

**fHideArrow:** 0x0 specifies that the user interface that displays the AutoFilter button is displayed.

**fNoBtn:** 0x0 specifies that the user interface that displays the AutoFilter button does not get displayed in the next column (2).

### 3.4.3 Filters: BrtBeginCustomFilters

The next record in this example, **BrtBeginCustomFilters** (section [2.4.38](#)), specifies additional properties that are set on the AutoFilter, as specified in the following table.

| Structure of BrtBeginCustomFilters |  |            |
|------------------------------------|--|------------|
| Size                               | Structure  | Value      |
| 0004                               | BrtBeginCustomFilters - <b>BrtBeginCustomFilters</b> |            |
| 0004                               | DWORD - <b>fAnd</b>                                  | 0x00000000 |

**fAnd:** 0x00000000 specifies that a logical AND relationship is used when evaluating filtering criteria, stored in the **BrtCustomFilter** (section [2.4.332](#)) records that follow.

### 3.4.4 Filters: BrtCustomFilters

The next record in this example, **BrtCustomFilter** (section [2.4.332](#)), specifies the filtering criteria used for this AutoFilter, as specified in the following table.

| Structure of BrtCustomFilter |  |       |
|------------------------------|--|-------|
| Size                         | Structure                                | Value |
| 000A                         | BrtCustomFilter - <b>BrtCustomFilter</b> |       |
| 0001                         | BYTE - <b>vts</b>                        | 0x04  |
| 0001                         | BYTE - <b>grbitSgn</b>                   | 0x04  |

| Structure of BrtCustomFilter |                              |                    |
|------------------------------|------------------------------|--------------------|
| 0008                         | <a href="#">Xnum</a> - union | 0x4051800000000000 |

**vt**s: 0x04 specifies that filtering will be based on the criteria specified by a numeric value.

**grbitSgn**: 0x04 specifies that the comparison operation is Greater Than.

**union**: 0x4051800000000000 specifies the floating-point value of 70. This is the value used for the comparison criteria by this AutoFilter.

### 3.4.5 Filters: BrtEndCustomFilters

The next record in this example, **BrtEndCustomFilters** (section [2.4.377](#)), specifies the end of the collection that was started by the previous **BrtBeginCustomFilters** (section [2.4.38](#)) record, as specified in the following table.

| Structure of BrtEndCustomFilters |  |
|----------------------------------|--|
| Size                             | Structure  |
| 0000                             | BrtEndCustomFilters - <b>BrtEndCustomFilters</b> |

### 3.4.6 Filters: BrtEndFilterColumn

The next record in this example, **BrtEndFilterColumn** (section [2.4.416](#)), specifies the end of the collection that was started by the **BrtBeginFilterColumn** (section [2.4.80](#)) record, as specified in the following table.

| Structure of BrtEndFilterColumn |  |
|---------------------------------|--|
| Size                            | Structure                                      |
| 0000                            | BrtEndFilterColumn - <b>BrtEndFilterColumn</b> |

### 3.4.7 Filters: BrtEndAFilter

The last record in this example, **BrtEndAFilter** (section [2.4.347](#)), specifies the end of the collection that was started by the **BrtBeginAFilter** (section [2.4.8](#)) record, as specified in the following table.

| Structure of BrtEndAfilter |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtEndAFilter - <b>BrtEndAFilter</b> |

## 3.5 External References

This example shows how a cell (F5) contains a reference to a cell (B3) in a different workbook (Book1.xlsx). The workbook that contains this example and Book1.xlsx are in the same folder. The cell (B3) in Book1.xlsx contains the string "External Cell", as illustrated by the following figure.

This example includes the **BrtRowHdr** (section [2.4.718](#)) and **BrtFmlaString** (section [2.4.650](#)) records that appear in the **Worksheet** (section [2.1.7.61](#)) part.

This example also includes all records between **BrtBeginSupBook** (section 2.4.223) and **BrtEndSupBook** (section 2.4.558) in the external link (section 2.1.7.25) part. In this example these records are the **BrtBeginSupBook**, **BrtSupTabs** (section 2.4.771), **BrtExternTableStart** (section 2.4.637), **BrtExternRowHdr** (section 2.4.634), **BrtExternCellString** (section 2.4.633), **BrtExternTableEnd** (section 2.4.636), and **BrtEndSupBook** records.

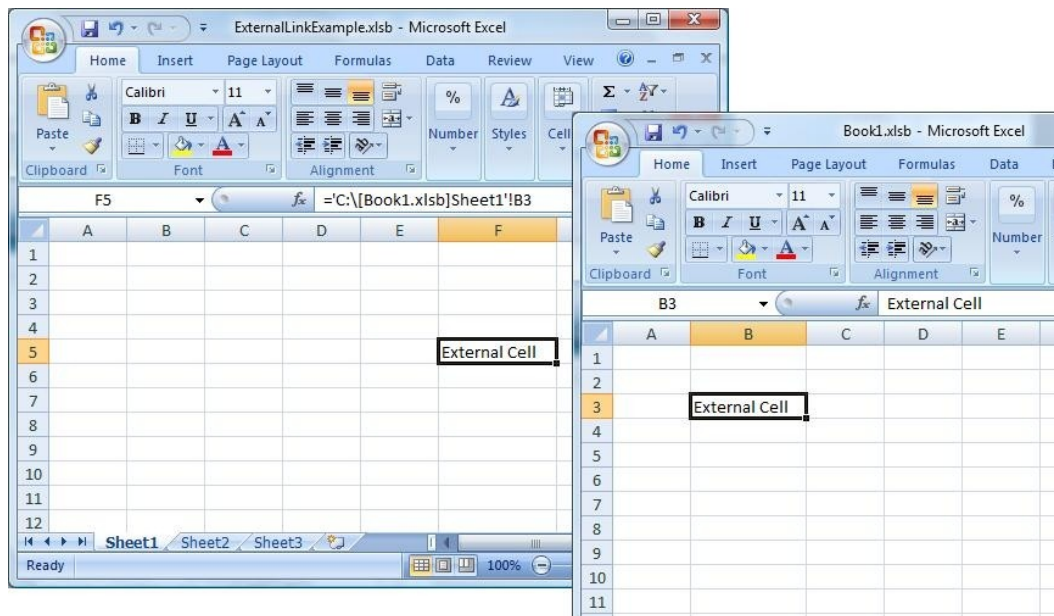


Figure 25: External reference within a sheet

### 3.5.1 External References: BrtRowHdr

The first record in this example, **BrtRowHdr** (section 2.4.718), specifies information about the row (2) that contains the external reference and specifies the beginning of a collection of records that contain information about the row (2), as specified in the following table.

| Structure of BrtRowHdr |                              |            |
|------------------------|------------------------------|------------|
| Size                   | Structure                    | Value      |
| 0019                   | BrtRowHdr - <b>BrtRowHdr</b> |            |
| 0004                   | ULONG - <b>rw</b>            | 0x00000004 |
| 0004                   | DWORD - <b>ixfe</b>          | 0x00000000 |
| 0002                   | WORD - <b>miyRw</b>          | 0x012C     |
| 1 bit                  | BYTE - <b>fExtraAsc</b>      | 0x0        |
| 1 bit                  | BYTE - <b>fExtraDsc</b>      | 0x0        |
| 6 bits                 | BYTE - <b>reserved1</b>      | 0x00       |
| 3 bits                 | BYTE - <b>iOutLevel</b>      | 0x0        |
| 1 bit                  | BYTE - <b>fCollapsed</b>     | 0x0        |

| Structure of BrtRowHdr |  |            |
|------------------------|--|------------|
| 1 bit                  | BYTE - <b>fDyZero</b>                            | 0x0        |
| 1 bit                  | BYTE - <b>fUnsynced</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fGhostDirty</b>                        | 0x0        |
| 1 bit                  | BYTE - <b>fReserved</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fPhShow</b>                            | 0x0        |
| 7 bits                 | BYTE - <b>reserved2</b>                          | 0x00       |
| 0004                   | DWORD - <b>ccolspan</b>                          | 0x00000001 |
| 0008                   | <a href="#">BrtColSpan</a> - <b>rgBrtColspan</b> |            |
| 0008                   | BrtColSpan - <b>brtBrtColspan[0]</b>             |            |
| 0004                   | ULONG - <b>colMic</b>                            | 0x00000005 |
| 0004                   | ULONG - <b>colLast</b>                           | 0x00000005 |

**rw:** 0x00000004 specifies that the external reference is in row (2) 5 of the worksheet.

**ixfe:** 0x00000000 specifies that the formatting properties of the cell are specified by the first **BrtXF** (section [2.4.816](#)) record in the collection of records directly following the **BrtBeginCellXFs** (section [2.4.20](#)) record in the **Styles** (section [2.1.7.50](#)) part. The referenced **BrtXF** and **BrtBeginCellXFs** records are not included in this example for brevity.

**miyRw:** 0x012C specifies that the height of this row (2) is 300 twips.

**fExtraAsc:** 0x0 specifies not to allocate padding to the top of this row (2).

**fExtraDsc:** 0x0 specifies not to allocate padding to the bottom of this row (2).

**iOutLevel:** 0x0 specifies the outline level (1) for this row (2).

**fCollapsed:** 0x0 specifies that zero rows (2) with an **iOutLevel** greater than 0 are in the collapsed outline state.

**fDyZero:** 0x0 specifies that this row (2) is not hidden.

**fUnsynced:** 0x0 specifies that the height of this row (2) is not manually specified.

**fGhostDirty:** 0x0 specifies that the row (2) style (section [2.2.6](#)) as specified by **ixfe** is not applied.

**fPhShow:** 0x0 specifies that this row (2) defaults to having the phonetic guide disabled.

**ccolspan:** 0x00000001 specifies that there is one **BrtColSpan** (section [2.5.8](#)) element in **rgBrtColspan**. This means that the external reference is in the first 1024 columns (2) of the row (2) specified by this **BrtRowHdr** (section [2.4.718](#)).

**rgBrtColspan:** An array with one **BrtColSpan** element.

**rgBrtColspan.brtBrtColspan[0]:** The **BrtColSpan** element that specifies the cells that contain data in the first 1024 column (2) wide segment of this row (2).

**rgBrColspan.brtBrColspan[0].colMic:** 0x00000005 specifies that the first cell that contains data in the row (2) specified by this **BrRowHdr** is in column (2) F.

**rgBrColspan.brtBrColspan[0].colLast:** 0x00000005 specifies that the last cell that contains data in the row (2) specified by this **BrRowHdr** (section [2.4.718](#)) is in column (2) F.

### 3.5.2 External References: BrtFmlaString

The next record in this example, **BrtFmlaString** (section [2.4.650](#)), specifies that the cell that contains the external reference contains a formula (section [2.2.2](#)) that most recently evaluated to a string value, as specified in the following table. That string value is the string value contained in the cell in the external workbook (section [2.2.7.4.1](#)) named Book1.xlsb.

| Structure of BrtFmlaString |  |               |
|----------------------------|--|---------------|
| Size                       | Structure  | Value         |
| 0039                       | BrtFmlaString - <b>BrtFmlaString</b>               |               |
| 0008                       | <a href="#">Cell</a> - <b>cell</b>                 |               |
| 0004                       | LONG - <b>column</b>                               | 0x00000005    |
| 24 bits                    | DWORD - <b>iStyleRef</b>                           | 0x00000000    |
| 1 bit                      | DWORD - <b>fPhShow</b>                             | 0x0           |
| 7 bits                     | DWORD - <b>reserved</b>                            | 0x00          |
| 001E                       | <a href="#">XLWideString</a> - <b>value</b>        | External Cell |
| 0002                       | <a href="#">GrbitFmla</a> - <b>grbitFlags</b>      |               |
| 1 bit                      | WORD - <b>reserved</b>                             | 0x0           |
| 1 bit                      | WORD - <b>fAlwaysCalc</b>                          | 0x0           |
| 14 bits                    | WORD - <b>unused</b>                               | 0x0000        |
| 0011                       | <a href="#">CellParsedFormula</a> - <b>formula</b> |               |
| 0004                       | DWORD - <b>cce</b>                                 | 0x00000009    |
| 0009                       | <a href="#">Rgce</a> - <b>rgce</b>                 |               |
| 0009                       | <a href="#">Ptq</a> - <b>sequence</b>              |               |
| 0009                       | <a href="#">PtgRef3d</a> - <b>PtgRef3D</b>         |               |
| 5 bits                     | BYTE - <b>ptg</b>                                  | 0x1A          |
| 2 bits                     | <a href="#">PtgDataType</a> - <b>type</b>          | 0x2           |
| 1 bit                      | BYTE - <b>reserved</b>                             | 0x0           |
| 0002                       | USHORT - <b>ixti</b>                               | 0x0000        |
| 0006                       | <a href="#">RgceLoc</a> - <b>loc</b>               |               |
| 0004                       | <a href="#">UncheckedRw</a> - <b>row</b>           | 0x00000002    |

| Structure of BrtFmlaString |                                      |            |
|----------------------------|--------------------------------------|------------|
| 0002                       | <a href="#">ColRelShort</a> - column | 0xC001     |
| 0004                       | DWORD - cb                           | 0x00000000 |

**cell:** A **Cell** (section [2.5.9](#)) that specifies information about the cell that contains the external reference.

**cell.column:** 0x00000005 specifies that the cell is in column (2) F.

**cell.iStyleRef:** 0x000000 specifies that the formatting properties of the cell are specified by the first **BrtXF** (section [2.4.816](#)) record in the collection of records directly following the **BrtBeginCellXFs** (section [2.4.20](#)) record in the **Styles** (section [2.1.7.50](#)) part. For brevity, the referenced **BrtXF** and **BrtBeginCellXFs** records are not included in this example.

**cell.fPhShow:** 0x0 specifies that the cell does not show phonetic information.

**value:** "External Cell" specifies the string value to which the formula (section [2.2.2](#)) in this cell evaluated. This is the string value contained in the external referenced cell.

**gbitFlags.fAlwaysCalc:** 0x0000 specifies that this formula is not to be reevaluated when the document is loaded.

**formula:** A **CellParsedFormula** (section [2.5.97.4](#)) that specifies the formula (section [2.2.2](#)) stored in this cell. This formula contains the information necessary to reference the cell in the external workbook (section [2.2.7.4.1](#)) named Book1.xlwb.

**formula.cce:** 0x00000009 specifies that the length of the **formula.rgce** field is 9 bytes.

**formula.rgce:** An **Rgce** (section [2.5.97.88](#)) that specifies a sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula.

**formula.rgce.sequence:** A sequence of **Ptg** structures that contains a single **Ptg**.

**formula.rgce.sequence.PtgRef3D:** An operand that references the cell in the external workbook (section [2.2.7.4.1](#)), Book1.xlwb.

**formula.rgce.sequence.PtgRef3D.ptg:** 0x1A specifies that this **Ptg** is a **PtgRef3D** (section [2.5.97.69](#)).

**formula.rgce.sequence.PtgRef3D.type:** 0x2 specifies that this **Ptg** specifies a single value, which is a string simple type.

**formula.rgce.sequence.PtgRef3D.ixti:** 0x0000 specifies that the external link information is specified by the first **Xti** (section [2.5.172](#)) record in the collection of records directly following the **BrtExternSheet** (section [2.4.635](#)) record. The referenced **Xti** record is not included in this example for brevity.

**formula.rgce.sequence.PtgRef3D.loc:** Specifies the coordinates of the referenced cell in the external workbook (section [2.2.7.4.1](#)).

**formula.rgce.sequence.PtgRef3D.loc.row:** 0x00000002 specifies that the referenced cell is in row (2) 3.

**formula.rgce.sequence.PtgRef3D.loc.column:** 0x0001 specifies that the referenced cell is in column (2) B.

**formula.cb:** 0x00000000 specifies that there is no ancillary data for this formula (section [2.2.2](#)).

### 3.5.3 External References: BrtBeginSupBook

The next record in this example, **BrtBeginSupBook** (section [2.4.223](#)), specifies the properties of the external link (section [2.2.7.4](#)) and specifies the beginning of a collection of records that specify information about the external link, as specified in the following table.

| Structure of BrtBeginSupBook |   |        |
|------------------------------|---|--------|
| Size                         | Structure   | Value  |
| 0012                         | BrtBeginSupBook - <b>BrtBeginSupBook</b>              |        |
| 0002                         | <a href="#">ExternalReferenceType</a> - <b>sbt</b>    | 0x0000 |
| 000C                         | <a href="#">RelID</a> - <b>string1</b>                | rId1   |
| 0004                         | <a href="#">XLNullableWideString</a> - <b>string2</b> |        |

**sbt:** 0x0000 specifies that the external link (section [2.2.7.4](#)) type is an external workbook link (section [2.2.7.4.1](#)).

**string1:** "rId1" specifies a **RelID** (section [2.5.114](#)) that specifies the external workbook. The entity referenced by the **RelID** is not included in this example for brevity.

**string2:** A NULL string because the external link type is an external workbook link.

### 3.5.4 External References: BrtSupTabs

The next record in this example, **BrtSupTabs** (section [2.4.771](#)), specifies the names of the sheets in the external workbook (section [2.1.10](#)), Book1.xlsb, as specified in the following table.

| Structure of BrtSupTabs |   |            |
|-------------------------|---|------------|
| Size                    | Structure   | Value      |
| 0034                    | BrtSupTabs - <b>BrtSupTabs</b>                      |            |
| 0004                    | DWORD - <b>ctab</b>                                 | 0x00000003 |
| 0030                    | <a href="#">XLWideString</a> - <b>sheetNames</b>    |            |
| 0010                    | <a href="#">XLWideString</a> - <b>sheetNames[0]</b> | Sheet1     |
| 0010                    | <a href="#">XLWideString</a> - <b>sheetNames[1]</b> | Sheet2     |
| 0010                    | <a href="#">XLWideString</a> - <b>sheetNames[2]</b> | Sheet3     |

**ctab:** 0x00000003 specifies that there are three sheets in the external workbook (section [2.1.10](#)).

**sheetNames:** Specifies the array of sheet names in the external workbook.

**sheetNames.sheetNames[0]:** "Sheet1" specifies the name of the first sheet in the external workbook.



**sheetNames.sheetNames[1]:** "Sheet2" specifies the name of the second sheet in the external workbook.

**sheetNames.sheetNames[2]:** "Sheet3" specifies the name of the third and last sheet in the external workbook.

### 3.5.5 External References: BrtExternTableStart 1

The next record in this example, **BrtExternTableStart** (section [2.4.637](#)), specifies properties of the External Cell Cache (section [2.2.7.4.1.2](#)) and specifies the beginning of a collection of records that specify the External Cell Cache, as specified in the following table.

| Structure of BrtExternTableStart |  |            |
|----------------------------------|--|------------|
| Size                             | Structure  | Value      |
| 0005                             | BrtExternTableStart - <b>BrtExternTableStart</b> |            |
| 0004                             | DWORD - <b>itab</b>                              | 0x00000000 |
| 1 bit                            | BYTE - <b>fRefreshError</b>                      | 0x0        |
| 7 bits                           | BYTE - <b>reserved</b>                           | 0x00       |

**itab:** 0x00000000 specifies that the External Cell Cache (section [2.2.7.4.1.2](#)) references the first **sheetNames** field in the **BrtSupTabs** (section [2.4.771](#)) record in this external link (section [2.2.7.4](#)).

**fRefreshError:** 0x0 specifies that no error occurred during the last refresh of this External Cell Cache.

### 3.5.6 External References: BrtExternRowHdr

The next record in this example, **BrtExternRowHdr** (section [2.4.634](#)), specifies properties of the row (2) that contains data from the external workbook (section [2.2.7.4.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)), and specifies the beginning of a collection of records that specifies information about this row (2), as specified in the following table.

| Structure of BrtExternRowHdr |  |            |
|------------------------------|--|------------|
| Size                         | Structure                                | Value      |
| 0004                         | BrtExternRowHdr - <b>BrtExternRowHdr</b> |            |
| 0004                         | DWORD - <b>rw</b>                        | 0x00000002 |

**rw:** 0x00000002 specifies that the referenced row (2) in the External Cell Cache (section [2.2.7.4.1.2](#)) is row (2) 3.

### 3.5.7 External References: BrtExternCellString

The next record in this example, **BrtExternCellString** (section [2.4.633](#)), specifies an External Cell (section [2.2.7.4.1.2.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)) that contains the string value from the external workbook (section [2.2.7.4.1](#)), as specified in the following table.

| Structure of BrtExternCellString |  |               |
|----------------------------------|--|---------------|
| Size                             | Structure  | Value         |
| 0022                             | BrtExternCellString - <b>BrtExternCellString</b> |               |
| 0004                             | <a href="#">UncheckedCol</a> - <b>col</b>        | 0x00000001    |
| 001E                             | <a href="#">XLWideString</a> - <b>value</b>      | External Cell |

**col:** 0x00000001 specifies that the column (2) of the External Cell (section [2.2.7.4.1.2.1](#)) in the External Cell Cache (section [2.2.7.4.1.2](#)) is column (2) B.

**value:** "External Cell" is the value of the External Cell in the External Cell Cache.

### 3.5.8 External References: BrtExternTableEnd 1

The next record in this example, **BrtExternTableEnd** (section [2.4.636](#)), specifies the end of the collection of records that specify the External Cell Cache (section [2.2.7.4.1.2](#)), as specified in the following table.

| Structure of BrtExternTableEnd |  |       |
|--------------------------------|--|-------|
| Size                           | Structure                                    | Value |
| 0000                           | BrtExternTableEnd - <b>BrtExternTableEnd</b> |       |

### 3.5.9 External References: BrtExternTableStart 2

The next record in this example, **BrtExternTableStart** (section [2.4.637](#)), is present because the external workbook (section [2.2.7.4.1](#)) contains a second worksheet. There is no relevant data in this worksheet, as specified in the following table.

| Structure of BrtExternTableStart |  |            |
|----------------------------------|--|------------|
| Size                             | Structure  | Value      |
| 0005                             | BrtExternTableStart - <b>BrtExternTableStart</b> |            |
| 0004                             | DWORD - <b>itab</b>                              | 0x00000001 |
| 0001                             | ExternTableStartBit - <b>grbit</b>               |            |
| 0001                             | BYTE - <b>fRefreshError</b>                      | 0x00       |
| 0001                             | BYTE - <b>reserved</b>                           | 0x00       |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**itab:** 0x00000001 specifies that the External Cell Cache (section [2.2.7.4.1.2](#)) references the second **sheetNames** field in the **BrtSupTabs** (section [2.4.771](#)) record in this external link part.

### 3.5.10 External References: BrtExternTableEnd 2

The next record in this example, **BrtExternTableEnd** (section [2.4.636](#)), specifies the end of the collection of records that specify the External Cell Cache (section [2.2.7.4.1.2](#)) for the second worksheet, as specified in the following table.

| Structure of BrtExternTableEnd |  |
|--------------------------------|--|
| Size                           | Structure                                    |
| 0000                           | BrtExternTableEnd - <b>BrtExternTableEnd</b> |

### 3.5.11 External References: BrtExternTableStart 3

The next record in this example, **BrtExternTableStart** (section [2.4.637](#)), is present because the external workbook (section [2.2.7.4.1](#)) contains a third worksheet, as specified in the following table. There is no relevant data in this worksheet.

| Structure of BrtExternTableStart |  |            |
|----------------------------------|--|------------|
| Size                             | Structure  | Value      |
| 0005                             | BrtExternTableStart - <b>BrtExternTableStart</b> |            |
| 0004                             | DWORD - <b>itab</b>                              | 0x00000002 |
| 0001                             | ExternTableStartBit - <b>grbit</b>               |            |
| 0001                             | BYTE - <b>fRefreshError</b>                      | 0x00       |
| 0001                             | BYTE - <b>reserved</b>                           | 0x00       |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**itab:** 0x00000002 specifies that the External Cell Cache (section [2.2.7.4.1.2](#)) references the third **sheetNames** field in the **BrtSupTabs** (section [2.4.771](#)) record in this external link part.

### 3.5.12 External References: BrtExternTableEnd 3

The next record in this example, **BrtExternTableEnd** (section [2.4.636](#)), specifies the end of the collection of records that specify the External Cell Cache (section [2.2.7.4.1.2](#)) for the third worksheet, as specified in the following table.

| Structure of BrtExternTableEnd |  |
|--------------------------------|--|
| Size                           | Structure                                    |
| 0000                           | BrtExternTableEnd - <b>BrtExternTableEnd</b> |

### 3.5.13 External References: BrtEndSupBook

The next record in this example, **BrtEndSupBook** (section [2.4.558](#)), specifies the end of the collection of records that specify information about the external link (section [2.2.7.4](#)), as specified in the following table.

| Structure of BrtEndSupBook |                                     |
|----------------------------|-------------------------------------|
| Size                       | Structure                           |
| 0000                       | BrtEndSupBook - <b>BrEndSupBook</b> |

### 3.6 Formatting

In this example, cell formatting and number formats are applied to the following three cells in the sheet:

Cell B3 contains the value 1.2345 and is formatted using the built-in "0.00" number format.

Cell B4 contains the value 1.2345 and is formatted using the custom "0.00000" number format.

Cell B5 contains the value 1.2345 and is formatted with a yellow background color, the font is bold, and the font color is blue.

This example is illustrated by the following figure.

|   | A | B             | C |
|---|---|---------------|---|
| 1 |   |               |   |
| 2 |   |               |   |
| 3 |   | 1.23          |   |
| 4 |   | 1.23450       |   |
| 5 |   | <b>1.2345</b> |   |
| 6 |   |               |   |
| 7 |   |               |   |

**Figure 26: Formatting within a sheet**

This example begins with **BrtCellReal** (section [2.4.310](#)) records in the **Worksheet** (section [2.1.7.61](#)) part ABNF that specify the cell value and number formats for each of the three cells. Number formats are specified with **BrtBeginFmts** (section [2.4.83](#)), **BrtFmt** (section [2.4.651](#)), and **BrtEndFmts** (section [2.4.419](#)) records in the **Styles** (section [2.1.7.50](#)) part ABNF. Cell formatting is specified with **BrtBeginFonts** (section [2.4.85](#)), **BrtFont** (section [2.4.653](#)), **BrtEndFonts** (section [2.4.421](#)), **BrtBeginFills** (section [2.4.79](#)), **BrtFill** (section [2.4.644](#)), **BrtEndFills** (section [2.4.415](#)), **BrtBeginCellStyleXFs** (section [2.4.18](#)), **BrtXF** (section [2.4.816](#)), **BrtEndCellStyleXFs** (section [2.4.357](#)), **BrtBeginCellIXFs** (section [2.4.20](#)), **BrtXF**, and **BrtEndCellIXFs** (section [2.4.359](#)) records in the **Styles** part ABNF.

#### 3.6.1 Formatting: BrtCellReal 1

This is the first of three **BrtCellReal** (section [2.4.310](#)) records that each specifies a cell value and cell formatting. This record specifies cell B3, as specified in the following table.

| Structure of BrtCellReal |                                    |            |
|--------------------------|------------------------------------|------------|
| Size                     | Structure                          | Value      |
| 0010                     | BrtCellReal - <b>BrCellReal</b>    |            |
| 0008                     | <a href="#">Cell</a> - <b>cell</b> |            |
| 0004                     | LONG - <b>column</b>               | 0x00000001 |
| 24 bits                  | DWORD - <b>iStyleRef</b>           | 0x000001   |

| Structure of BrtCellReal |                                    |                    |
|--------------------------|------------------------------------|--------------------|
| 1 bit                    | DWORD - <b>fPhShow</b>             | 0x0                |
| 7 bits                   | DWORD - <b>reserved</b>            | 0x00               |
| 0008                     | <a href="#">Xnum</a> - <b>xnum</b> | 0x3FF3C083126E978D |

**cell:** Specifies a cell that contains the real number 1.2345 formatted using the cell formatting specified by the second **BrtXF** (section [2.4.816](#)) record following **BrtBeginCellIXFs** (section [2.4.20](#)) as defined by the **Styles** (section [2.1.7.50](#)) part ABNF.

**cell.column:** 0x00000001 specifies that the cell is in column (2) B.

**cell.iStyleRef:** 0x000001 specifies that the cell formatting applied to the cell is specified by the second **BrtXF** record in the collection of all records following **BrtBeginCellIXFs** as defined by the **Styles** part ABNF.

**cell.fPhShow:** 0x0 specifies that the cell does not show phonetic information.

**xnum:** 0x3FF3C083126E978D specifies the floating-point number 1.2345.

### 3.6.2 Formatting: BrtCellReal 2

The next **BrtCellReal** (section [2.4.310](#)) record in this example specifies the cell value and cell formatting for cell B4, as specified in the following table.

| Structure of BrtCellReal |                                    |                    |
|--------------------------|------------------------------------|--------------------|
| Size                     | Structure                          | Value              |
| 0010                     | BrtCellReal - <b>BrtCellReal</b>   |                    |
| 0008                     | <a href="#">Cell</a> - <b>cell</b> |                    |
| 0004                     | LONG - <b>column</b>               | 0x00000001         |
| 24 bits                  | DWORD - <b>iStyleRef</b>           | 0x0000002          |
| 1 bit                    | DWORD - <b>fPhShow</b>             | 0x0                |
| 7 bits                   | DWORD - <b>reserved</b>            | 0x00               |
| 0008                     | <a href="#">Xnum</a> - <b>xnum</b> | 0x3FF3C083126E978D |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**cell:** Specifies a cell that contains the real number 1.2345 formatted using the cell formatting specified by the third **BrtXF** (section [2.4.816](#)) record following **BrtBeginCellIXFs** (section [2.4.20](#)) as defined by the **Styles** (section [2.1.7.50](#)) part ABNF.

**cell.iStyleRef:** 0x000002 specifies that the cell formatting applied to the cell is specified by the third **BrtXF** record in the collection of all records following **BrtBeginCellIXFs** as defined by the **Styles** part ABNF.

### 3.6.3 Formatting: BrtCellReal 3

The next **BrtCellReal** (section [2.4.310](#)) record in this example specifies the cell value and cell formatting for cell B5, as specified in the following table.

| Structure of BrtCellReal |                                    |                    |
|--------------------------|------------------------------------|--------------------|
| Size                     | Structure                          | Value              |
| 0010                     | BrtCellReal - <b>BrtCellReal</b>   |                    |
| 0008                     | <a href="#">Cell</a> - <b>cell</b> |                    |
| 0004                     | LONG - <b>column</b>               | 0x00000001         |
| 24 bits                  | DWORD - <b>iStyleRef</b>           | 0x000003           |
| 1 bit                    | DWORD - <b>fPhShow</b>             | 0x0                |
| 7 bits                   | DWORD - <b>reserved</b>            | 0x00               |
| 0008                     | <a href="#">Xnum</a> - <b>xnum</b> | 0x3FF3C083126E978D |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**cell:** Specifies a cell that contains the real number 1.2345 formatted using the cell formatting specified by the fourth **BrtXF** (section [2.4.816](#)) record following **BrtBeginCellXFs** (section [2.4.20](#)) as defined by the **Styles** (section [2.1.7.50](#)) part ABNF.

**cell.iStyleRef:** 0x000003 specifies that the cell formatting applied to the cell is specified by the fourth **BrtXF** record in the collection of all records following **BrtBeginCellXFs** as defined by the **Styles** part ABNF.

### 3.6.4 Formatting: BrtBeginFmts

The next record in this example, **BrtBeginFmts** (section [2.4.83](#)), specifies the beginning of a collection of **BrtFmt** (section [2.4.651](#)) records, as specified in the following table.

| Structure of BrtBeginFmts |                                    |            |
|---------------------------|------------------------------------|------------|
| Size                      | Structure                          | Value      |
| 0004                      | BrtBeginFmts - <b>BrtBeginFmts</b> |            |
| 0004                      | ULONG - <b>cfmts</b>               | 0x00000001 |

**cfmts:** 0x00000001 specifies that there is one **BrtFmt** (section [2.4.651](#)) record in the collection that specifies custom number formats. This custom number format is referenced by the **iFmt.ifmt** of the **BrtXF** (section [2.4.816](#)) record that is referenced by the **cell.iStyleRef** field of the **BrtCellReal** (section [2.4.310](#)) record that specifies cell B4.

### 3.6.5 Formatting: BrtFmt

The next record in this example, **BrtFmt** (section [2.4.651](#)), specifies the number format properties for the first number format in the collection of custom number formats, as specified in the following table. This format is applied to cell B4.

| Structure of BrtFmt |   |         |
|---------------------|---|---------|
| Size                | Structure                                       | Value   |
| 0014                | BrtFmt - <b>BrtFmt</b>                          |         |
| 0002                | WORD - <b>ifmt</b>                              | 0x00A6  |
| 0012                | <a href="#">XLWideString</a> - <b>stFmtCode</b> | 0.00000 |

**ifmt:** 0x00A6 specifies the identifier for the custom number format "0.00000".

**stFmtCode:** "0.00000" specifies the format string for this number format.

### 3.6.6 Formatting: BrtEndFmts

The next record in this example, **BrtEndFmts** (section [2.4.419](#)), specifies the end of the collection of **BrtFmt** (section [2.4.651](#)) records, as specified in the following table.

| Structure of BrtEndFmts |                                |       |
|-------------------------|--------------------------------|-------|
| Size                    | Structure                      | Value |
| 0000                    | BrtEndFmts - <b>BrtEndFmts</b> |       |

### 3.6.7 Formatting: BrtBeginFonts

The next record in this example, **BrtBeginFonts** (section [2.4.85](#)), specifies a count of **BrtFont** (section [2.4.653](#)) records and the beginning of a collection of **BrtFont** records that specifies the fonts used in the workbook, as specified in the following table.

| Structure of BrtBeginFonts |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginFonts - <b>BrtBeginFonts</b> |            |
| 0004                       | ULONG - <b>cfonts</b>                | 0x00000002 |

**cfonts:** 0x00000002 specifies that there are two **BrtFont** (section [2.4.653](#)) records in this collection.

### 3.6.8 Formatting: BrtFont 1

The next record in this example, **BrtFont** (section [2.4.653](#)), specifies the properties of the default font used by cells in this workbook, as specified in the following table. This record is referenced in **ifmt.ifmt** of the **BrtXF** (section [2.4.816](#)) record that is referenced by the **cell.iStyleRef** field of the **BrtCellReal** (section [2.4.310](#)) records that specify cells B3 and B4.

| Structure of BrtFont |                          |       |
|----------------------|--------------------------|-------|
| Size                 | Structure                | Value |
| 0027                 | BrtFont - <b>BrtFont</b> |       |

| Structure of BrtFont |  |         |
|----------------------|--|---------|
| 0002                 | SHORT - <b>dyHeight</b>                    | 0x00DC  |
| 0002                 | <a href="#">FontFlags</a> - <b>grbit</b>   |         |
| 1 bit                | WORD - <b>unused1</b>                      | 0x0     |
| 1 bit                | WORD - <b>ftalic</b>                       | 0x0     |
| 1 bit                | WORD - <b>unused2</b>                      | 0x0     |
| 1 bit                | WORD - <b>fStrikeout</b>                   | 0x0     |
| 1 bit                | WORD - <b>fOutline</b>                     | 0x0     |
| 1 bit                | WORD - <b>fShadow</b>                      | 0x0     |
| 1 bit                | WORD - <b>fCondense</b>                    | 0x0     |
| 1 bit                | WORD - <b>fExtend</b>                      | 0x0     |
| 8 bits               | WORD - <b>unused3</b>                      | 0x00    |
| 0002                 | SHORT - <b>bls</b>                         | 0x0190  |
| 0002                 | SHORT - <b>sss</b>                         | 0x0000  |
| 0001                 | BYTE - <b>uls</b>                          | 0x00    |
| 0001                 | BYTE - <b>bFamily</b>                      | 0x02    |
| 0001                 | BYTE - <b>bCharSet</b>                     | 0x00    |
| 0001                 | BYTE - <b>unused</b>                       | 0x00    |
| 0008                 | <a href="#">BrtColor</a> - <b>brtColor</b> |         |
| 1 bit                | BYTE - <b>fValidRGB</b>                    | 0x1     |
| 7 bits               | XColorType - <b>xColorType</b>             | 0x03    |
| 0001                 | BYTE - <b>index</b>                        | 0x01    |
| 0002                 | SHORT - <b>nTintAndShade</b>               | 0x0000  |
| 0001                 | BYTE - <b>bRed</b>                         | 0x00    |
| 0001                 | BYTE - <b>bGreen</b>                       | 0x00    |
| 0001                 | BYTE - <b>bBlue</b>                        | 0x00    |
| 0001                 | BYTE - <b>bAlpha</b>                       | 0xFF    |
| 0001                 | BYTE - <b>bFontScheme</b>                  | 0x02    |
| 0012                 | <a href="#">XLWideString</a> - <b>name</b> | Calibri |

**dyHeight:** 0x00DC specifies that the height of the font is 220 twips.

**grbit:** Specifies the font attributes.



**grbit.fItalic:** 0x0000 specifies that the font is not italic.

**grbit.fStrikeout:** 0x0000 specifies that the font does not have strikethrough formatting.

**grbit.fOutline:** 0x0000 specifies that the font is not an outline.

**grbit.fShadow:** 0x0000 specifies that the font does not have a shadow applied.

**grbit.fCondense:** 0x0000 specifies that the font is not condensed.

**grbit.fExtend:** 0x0000 specifies that the font is not extended.

**bls:** 0x0190 specifies that the font is normal weight.

**sss:** 0x0000 specifies that the font is not a superscript font or a subscript font.

**uls:** 0x00 specifies that the font has no underline type.

**bFamily:** 0x02 specifies that the font belongs to the Swiss font family.

**bCharSet:** 0x00 specifies that the font belongs to the ANSI character set.

**brtColor:** This **BrtColor** (section [2.4.321](#)) record specifies the color properties of the font.

**brtColor.fValidRGB:** 0x1 specifies that the color specified by **brtColor.index** matches the color specified by **brtColor.bRed**, **brtColor.bGreen**, **brtColor.bBlue**, and **brtColor.bAlpha**.

**brtColor.xColorType:** 0x03 specifies that the color is a theme color and is specified by **brtColor.index**.

**brtColor.index:** 0x01 specifies an **Icv** (section [2.5.75](#)) that specifies a color from a color palette. The color is black.

**brtColor.nTintAndShade:** 0x0000 specifies that no tint or shade is applied.

**brtColor.bRed:** 0x00 specifies that the color has no red intensity.

**brtColor.bGreen:** 0x00 specifies that the color has no green intensity.

**brtColor.bBlue:** 0x00 specifies that the color has no blue intensity.

**brtColor.bAlpha:** 0xFF specifies that the color is completely opaque.

**bFontScheme:** 0x02 specifies that the font belongs to the minor scheme.

**name:** "Calibri" specifies the name of the font.

### 3.6.9 Formatting: BrtFont 2

The next record in this example, **BrtFont** (section [2.4.653](#)), specifies the properties of the font used in cell B5, as specified in the following table.

| Structure of BrtFont |                          |       |
|----------------------|--------------------------|-------|
| Size                 | Structure                | Value |
| 0027                 | BrtFont - <b>BrtFont</b> |       |

| Structure of BrtFont |  |         |
|----------------------|--|---------|
| 0002                 | SHORT - <b>dyHeight</b>                    | 0x00DC  |
| 0002                 | <a href="#">FontFlags</a> - <b>grbit</b>   |         |
| 1 bit                | WORD - <b>unused1</b>                      | 0x0     |
| 1 bit                | WORD - <b>ftalic</b>                       | 0x0     |
| 1 bit                | WORD - <b>unused2</b>                      | 0x0     |
| 1 bit                | WORD - <b>fStrikeout</b>                   | 0x0     |
| 1 bit                | WORD - <b>fOutline</b>                     | 0x0     |
| 1 bit                | WORD - <b>fShadow</b>                      | 0x0     |
| 1 bit                | WORD - <b>fCondense</b>                    | 0x0     |
| 1 bit                | WORD - <b>fExtend</b>                      | 0x0     |
| 8 bits               | WORD - <b>unused3</b>                      | 0x00    |
| 0002                 | SHORT - <b>bls</b>                         | 0x02BC  |
| 0002                 | SHORT - <b>sss</b>                         | 0x0000  |
| 0001                 | BYTE - <b>uls</b>                          | 0x00    |
| 0001                 | BYTE - <b>bFamily</b>                      | 0x02    |
| 0001                 | BYTE - <b>bCharSet</b>                     | 0x00    |
| 0001                 | BYTE - <b>unused</b>                       | 0x00    |
| 0008                 | <a href="#">BrtColor</a> - <b>brtColor</b> |         |
| 1 bit                | BYTE - <b>fValidRGB</b>                    | 0x1     |
| 7 bits               | XColorType - <b>xColorType</b>             | 0x02    |
| 0001                 | BYTE - <b>index</b>                        | 0xFF    |
| 0002                 | SHORT - <b>nTintAndShade</b>               | 0x0000  |
| 0001                 | BYTE - <b>bRed</b>                         | 0x00    |
| 0001                 | BYTE - <b>bGreen</b>                       | 0x70    |
| 0001                 | BYTE - <b>bBlue</b>                        | 0xC0    |
| 0001                 | BYTE - <b>bAlpha</b>                       | 0xFF    |
| 0001                 | BYTE - <b>bFontScheme</b>                  | 0x02    |
| 0012                 | <a href="#">XLWideString</a> - <b>name</b> | Calibri |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**bls:** 0x02BC specifies that the font is bold.

**brtColor.fValidRGB:** 0x01 because **brtColor.xColorType** is 0x02.

**brtColor.xColorType:** 0x02 specifies that this color is a standard RGBA color and is specified by the values in **brtColor.bRed**, **brtColor.bGreen**, **brtColor.bBlue**, and **brtColor.bAlpha**.

**brtColor.index:** This field is ignored because **brtColor.xColorType** is 0x02.

**brtColor.bRed:** 0x00 specifies that the color has no red intensity.

**brtColor.bGreen:** 0x70 specifies that the color has a medium green intensity.

**brtColor.bBlue:** 0xC0 specifies that the color has a medium-strong blue intensity.

### 3.6.10 Formatting: BrtEndFonts

The next record in this example, **BrtEndFonts** (section [2.4.421](#)), specifies the end of the collection of **BrtFont** (section [2.4.653](#)) records, as specified in the following table.

| Structure of BrtEndFonts |                                  |
|--------------------------|----------------------------------|
| Size                     | Structure                        |
| 0000                     | BrtEndFonts - <b>BrtEndFonts</b> |

### 3.6.11 Formatting: BrtBeginFills

The next record in this example, **BrtBeginFills** (section [2.4.79](#)), specifies the count of **BrtFill** (section [2.4.644](#)) records and the beginning of a collection of **BrtFill** records that specifies the cell fill pattern applied to the cells in the example, as specified in the following table.

| Structure of BrtBeginFills |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginFills - <b>BrtBeginFills</b> |            |
| 0004                       | ULONG - <b>cfills</b>                | 0x00000003 |

**cfills:** 0x00000003 specifies that there are three **BrtFill** records in this collection.

### 3.6.12 Formatting: BrtFill 1

The next record in this example, **BrtFill** (section [2.4.644](#)), specifies the default fill pattern (no fill) applied to cells, as specified in the following table. The cells that reference this fill pattern in this example are cells B3 and B4.

| Structure of BrtFill |  |            |
|----------------------|--|------------|
| Size                 | Structure                                      | Value      |
| 0044                 | BrtFill - <b>BrtFill</b>                       |            |
| 0004                 | DWORD - <b>fls</b>                             | 0x00000000 |
| 0008                 | <a href="#">BrtColor</a> - <b>brtColorFore</b> |            |

| Structure of BrtFill |  |                    |
|----------------------|--|--------------------|
| 1 bit                | BYTE - <b>fValidRGB</b>                  | 0x1                |
| 7 bits               | XColorType - <b>xColorType</b>           | 0x01               |
| 0001                 | BYTE - <b>index</b>                      | 0x40               |
| 0002                 | SHORT - <b>nTintAndShade</b>             | 0x0000             |
| 0001                 | BYTE - <b>bRed</b>                       | 0x00               |
| 0001                 | BYTE - <b>bGreen</b>                     | 0x00               |
| 0001                 | BYTE - <b>bBlue</b>                      | 0x00               |
| 0001                 | BYTE - <b>bAlpha</b>                     | 0xFF               |
| 0008                 | BrintColor - <b>brtColorBack</b>         |                    |
| 1 bit                | BYTE - <b>fValidRGB</b>                  | 0x1                |
| 7 bits               | XColorType - <b>xColorType</b>           | 0x01               |
| 0001                 | BYTE - <b>index</b>                      | 0x41               |
| 0002                 | SHORT - <b>nTintAndShade</b>             | 0x0000             |
| 0001                 | BYTE - <b>bRed</b>                       | 0xFF               |
| 0001                 | BYTE - <b>bGreen</b>                     | 0xFF               |
| 0001                 | BYTE - <b>bBlue</b>                      | 0xFF               |
| 0001                 | BYTE - <b>bAlpha</b>                     | 0xFF               |
| 0004                 | LONG - <b>iGradientType</b>              | 0x00000000         |
| 0008                 | <a href="#">Xnum</a> - <b>xnumDegree</b> | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToLeft</b>             | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToRight</b>            | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToTop</b>              | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToBottom</b>           | 0x0000000000000000 |
| 0004                 | DWORD - <b>cNumStop</b>                  | 0x00000000         |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**fls:** 0x00000000 specifies that no fill pattern is applied.

**brtColorFore:** Specifies the foreground color of the cell fill pattern. Because **fls** is 0x00000000, which specifies that no fill pattern is applied, values for **brtColorFore.fValidRGB**, **brtColorFore.xColorType**, **brtColorFore.index**, **brtColorFore.nTintAndShade**, **brtColorFore.bRed**, **brtColorFore.bGreen**, **brtColorFore.bBlue**, and **brtColorFore.bAlpha** are ignored and are omitted for brevity.

**brtColorBack:** Specifies the background color of the cell fill pattern. Because **fls** is 0x00000000, which specifies that no fill pattern is applied, values for **brtColorBack.fValidRGB**, **brtColorBack.xColorType**, **brtColorBack.index**, **brtColorBack.nTintAndShade**, **brtColorBack.bRed**, **brtColorBack.bGreen**, **brtColorBack.bBlue**, and **brtColorBack.bAlpha** are ignored and are omitted for brevity.

**iGradientType:** 0x00000000 specifies that the gradient fill applied is a linear gradient. This field is 0 and is ignored because **fls** is not 0x0028, which specifies that no gradient fill is applied.

**xnumDegree:** 0x0000000000000000 specifies that the **gradient vector** applied is horizontal from left to right. This field is 0 and is ignored because **fls** is not 0x0028, which specifies that no gradient fill is applied.

**xnumFillToLeft:** 0x0000000000000000 specifies that the left edge of the inner rectangle is the left edge of the cell. This field is 0 and is ignored because **fls** is not 0x0028, which specifies that no gradient fill is applied.

**xnumFillToRight:** 0x0000000000000000 specifies that the right edge of the inner rectangle is the right edge of the cell. This field is 0 and is ignored because **fls** is not 0x0028, which specifies that no gradient fill is applied.

**xnumFillToTop:** 0x0000000000000000 specifies that the top edge of the inner rectangle is the top edge of the cell. This field is 0 and is ignored because **fls** is not 0x0028, which specifies that no gradient fill is applied.

**xnumFillToBottom:** 0x0000000000000000 specifies that the bottom edge of the inner rectangle is the bottom edge of the cell. This field is 0 and is ignored because **fls** is not 0x0028, which specifies that no gradient fill is applied.

**cNumStop:** 0x00000000 specifies that there are no **GradientStop** (section 2.5.67) structures. This field is 0 and is ignored because **fls** is not 0x0028, which specifies that no gradient fill is applied.

The next record in this example, **BrftFill** (section 2.4.644), specifies a legacy fill pattern that is always written but not referenced by this example and is omitted for brevity.

### 3.6.13 Formatting: BrftFill 2

The next record in this example, **BrftFill** (section 2.4.644), specifies the fill pattern applied to cell B5, as specified in the following table.

| Structure of BrftFill |   |            |
|-----------------------|---|------------|
| Size                  | Structure                                       | Value      |
| 0044                  | BrftFill - <b>BrftFill</b>                      |            |
| 0004                  | DWORD - <b>fls</b>                              | 0x00000001 |
| 0008                  | <a href="#">BrftColor</a> - <b>brtColorFore</b> |            |
| 1 bit                 | BYTE - <b>fValidRGB</b>                         | 0x1        |
| 7 bits                | XColorType - <b>xColorType</b>                  | 0x02       |
| 0001                  | BYTE - <b>index</b>                             | 0xFF       |

| Structure of BrtFill |  |                    |
|----------------------|--|--------------------|
| 0002                 | SHORT - <b>nTintAndShade</b>             | 0x0000             |
| 0001                 | BYTE - <b>bRed</b>                       | 0xFF               |
| 0001                 | BYTE - <b>bGreen</b>                     | 0xFF               |
| 0001                 | BYTE - <b>bBlue</b>                      | 0x00               |
| 0001                 | BYTE - <b>bAlpha</b>                     | 0xFF               |
| 0008                 | BrtColor - <b>brtColorBack</b>           |                    |
| 1 bit                | BYTE - <b>fValidRGB</b>                  | 0x1                |
| 7 bits               | XColorType - <b>xColorType</b>           | 0x01               |
| 0001                 | BYTE - <b>index</b>                      | 0x40               |
| 0002                 | SHORT - <b>nTintAndShade</b>             | 0x0000             |
| 0001                 | BYTE - <b>bRed</b>                       | 0x00               |
| 0001                 | BYTE - <b>bGreen</b>                     | 0x00               |
| 0001                 | BYTE - <b>bBlue</b>                      | 0x00               |
| 0001                 | BYTE - <b>bAlpha</b>                     | 0xFF               |
| 0004                 | LONG - <b>iGradientType</b>              | 0x00000000         |
| 0008                 | <a href="#">Xnum</a> - <b>xnumDegree</b> | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToLeft</b>             | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToRight</b>            | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToTop</b>              | 0x0000000000000000 |
| 0008                 | Xnum - <b>xnumFillToBottom</b>           | 0x0000000000000000 |
| 0004                 | DWORD - <b>cNumStop</b>                  | 0x00000000         |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**fls:** 0x00000001 specifies that the fill pattern is a solid fill.

**brtColorFore:** Specifies that the foreground color of the cell fill pattern is yellow.

**brtColorFore.fValidRGB:** 0x01 specifies that the color specified by **brtColor.index** matches the color specified by **brtColor.bRed**, **brtColor.bGreen**, **brtColor.bBlue**, and **brtColor.bAlpha**

**brtColorFore.xColorType:** 0x02 specifies that this color is a standard RGBA color and is specified by the values in **brtColorFore.bRed**, **brtColorFore.bGreen**, **brtColorFore.bBlue**, and **brtColorFore.bAlpha**.

**brtColorFore.index:** This field is ignored because **brtColor.xColorType** is 0x02.

**brtColorFore.nTintAndShade:** 0x0000 specifies that no tint or shade is applied.

**brtColorFore.bRed:** 0xFF specifies that the color has maximum red intensity.

**brtColorFore.bGreen:** 0xFF specifies that the color has maximum green intensity.

**brtColorFore.bBlue:** 0x00 specifies that the color has no blue intensity.

**brtColorFore.bAlpha:** 0xFF specifies that the color is completely is completely opaque.

**brtColorBack:** Specifies the background color of the cell fill pattern. Because **fls** is 0x00000000, which specifies that no fill pattern is applied, values for **brtColorBack.fValidRGB**, **brtColorBack.xColorType**, **brtColorBack.index**, **brtColorBack.nTintAndShade**, **brtColorBack.bRed**, **brtColorBack.bGreen**, **brtColorBack.bBlue**, and **brtColorBack.bAlpha** are ignored and are omitted for brevity.

### 3.6.14 Formatting: BrtEndFills

The next record in this example, **BrtEndFills** (section [2.4.415](#)), specifies the end of the collection of **BrtFill** (section [2.4.644](#)) records, as specified in the following table.

| Structure of BrtEndFills |                                  |
|--------------------------|----------------------------------|
| Size                     | Structure                        |
| 0000                     | BrtEndFills - <b>BrtEndFills</b> |

### 3.6.15 Formatting: BrtBeginCellStyleXfs

The next record in this example, **BrtBeginCellStyleXfs** (section [2.4.18](#)), specifies a count of **BrtXF** (section [2.4.816](#)) records and the beginning of a collection of **BrtXF** records that specifies the cell style Xfs (section [2.2.6.1.2.1](#)) in the workbook, as specified in the following table.

| Structure of BrtBeginCellStyleXfs |  |            |
|-----------------------------------|--|------------|
| Size                              | Structure  | Value      |
| 0004                              | BrtBeginCellStyleXfs - <b>BrtBeginCellStyleXfs</b> |            |
| 0004                              | DWORD - <b>cxfs</b>                                | 0x00000001 |

**cxfs:** 0x00000001 specifies that there is one **BrtXF** record in this collection.

### 3.6.16 Formatting: BrtXF 1

The next record in this example, **BrtXF** (section [2.4.816](#)), specifies the formatting properties for the cell style Xfs (section [2.2.6.1.2.1](#)), as specified in the following table.

| Structure of BrtXf |                                    |        |
|--------------------|------------------------------------|--------|
| Size               | Structure                          | Value  |
| 0010               | BrtXF - <b>BrtXf</b>               |        |
| 0002               | WORD - <b>ixfeParent</b>           | 0xFFFF |
| 0002               | <a href="#">Ifmt</a> - <b>iFmt</b> |        |

| Structure of BrtXf |                             |        |
|--------------------|-----------------------------|--------|
| 0002               | WORD - <b>ifmt</b>          | 0x0000 |
| 0002               | WORD - <b>iFont</b>         | 0x0000 |
| 0002               | WORD - <b>iFill</b>         | 0x0000 |
| 0002               | WORD - <b>ixBorder</b>      | 0x0000 |
| 0001               | BYTE - <b>trot</b>          | 0x00   |
| 0001               | BYTE - <b>indent</b>        | 0x00   |
| 3 bits             | BYTE - <b>alc</b>           | 0x0    |
| 3 bits             | BYTE - <b>alcv</b>          | 0x2    |
| 1 bit              | BYTE - <b>fWrap</b>         | 0x0    |
| 1 bit              | BYTE - <b>fJustLast</b>     | 0x0    |
| 1 bit              | BYTE - <b>fShrinkToFit</b>  | 0x0    |
| 1 bit              | BYTE - <b>fMergeCell</b>    | 0x0    |
| 2 bits             | BYTE - <b>iReadingOrder</b> | 0x0    |
| 1 bit              | BYTE - <b>fLocked</b>       | 0x1    |
| 1 bit              | BYTE - <b>fHidden</b>       | 0x0    |
| 1 bit              | BYTE - <b>fSxButton</b>     | 0x0    |
| 1 bit              | BYTE - <b>f123Prefix</b>    | 0x0    |
| 6 bits             | WORD - <b>xfGrbitAtr</b>    | 0x00   |
| 10 bits            | WORD - <b>unused</b>        | 0x000  |

**ixfeParent:** 0xFFFF specifies that this record is a cell style (section [2.2.6.1.2](#)) **BrtXF** (section [2.4.816](#)) record.

**iFmt:** Specifies the index of the **BrtFmt** (section [2.4.651](#)) that specifies the number format of the cell.

**iFmt.ifmt:** 0x0000 specifies that the number format of the cell is specified by the first **BrtFmt** record following **BrtBeginFmts** (section [2.4.83](#)).

**iFont:** 0x0000 specifies that the font of the cell is specified by the first **BrtFont** (section [2.4.653](#)) record following **BrtBeginFonts** (section [2.4.85](#)).

**iFill:** 0x0000 specifies that the fill properties of the cell are specified by the first **BrtFill** (section [2.4.644](#)) record following **BrtBeginFills** (section [2.4.79](#)).

**ixBorder:** 0x0000 specifies that the border properties of the cell are specified by the first **BrtBorder** (section [2.4.299](#)) record following **BrtBeginBorders** (section [2.4.12](#)). **BrtBorder** records are omitted for brevity.

**trot:** 0x00 specifies that the text rotation is horizontal.



**indent:** 0x00 specifies that there is no indentation for the text in the cell.

**alc:** 0x00 specifies that the cell has a general horizontal alignment.

**alcv:** 0x02 specifies that the cell has a bottom vertical alignment.

**fWrap:** 0x00 specifies that the text in the cell is not line-wrapped within the cell.

**fJustLast:** 0x00 specifies that the **justify alignment** or distributed alignment is not applied to the last line of text in the cell.

**fShrinkToFit:** 0x00 specifies that shrink to fit is not applied to the text in the cell.

**fMergeCell:** 0x00 specifies that the cell is not a part of a merged cell.

**iReadingOrder:** 0x00 specifies that the reading order of the cell is context-dependent.

**fLocked:** 0x01 specifies that the cell is locked for user editing.

**fHidden:** 0x00 specifies that the cell is not hidden.

**fSxButton:** 0x00 specifies that the cell does not have a **PivotTable** (section [2.2.5](#)) dropdown button.

**f123Prefix:** 0x00 specifies that the text in the cell is not prefixed by a single quote mark.

**xfGrbitAtr:** 0x0000 specifies the cell formatting properties applied to the cell according to the following table:

| Offset | Field Name  | Bits | Meaning  |
|--------|-------------|------|--|
| 0      | ibitAtrNum  | 1    | 0x0 specifies that the number property of the formatting for this cell is applied.     |
| 1      | ibitAtrFmt  | 1    | 0x0 specifies that the font property of the formatting for this cell is applied.       |
| 2      | ibitAtrAlc  | 1    | 0x0 specifies that the alignment property of the formatting for this cell is applied.  |
| 3      | ibitAtrBdr  | 1    | 0x0 specifies that the border property of the formatting for this cell is applied.     |
| 4      | ibitAtrPat  | 1    | 0x0 specifies that the fill property of the formatting for this cell is applied.       |
| 5      | ibitAtrProt | 1    | 0x0 specifies that the protection property of the formatting for this cell is applied. |

### 3.6.17 Formatting: BrtEndCellStyleXFs

The next record in this example, **BrtEndCellStyleXFs** (section [2.4.357](#)), specifies the end of the collection of **BrtXF** (section [2.4.816](#)) records that specifies all cell style XFs (section [2.2.6.1.2.1](#)) in the workbook, as specified in the following table.

| Structure of BrtEndCellStyleXfs |  |
|---------------------------------|--|
| Size                            | Structure                                      |
| 0000                            | BrtEndCellStyleXfs - <b>BrtEndCellStyleXfs</b> |

### 3.6.18 Formatting: BrtBeginCellXfs

The next record in this example, **BrtBeginCellXfs** (section [2.4.20](#)), specifies a count of **BrtXF** (section [2.4.816](#)) records and the beginning of a collection of **BrtXF** records that specifies all cell **XFs** (section [2.2.6.1.1](#)) in the workbook, as specified in the following table.

| Structure of BrtBeginCellXfs |  |            |
|------------------------------|--|------------|
| Size                         | Structure                                | Value      |
| 0004                         | BrtBeginCellXfs - <b>BrtBeginCellXfs</b> |            |
| 0004                         | ULONG - <b>cxfs</b>                      | 0x00000004 |

**cxfs:** 0x00000004 specifies that there are four **BrtXF** records in this collection.

### 3.6.19 Formatting: BrtXF 2

The next record in this example, **BrtXF** (section [2.4.816](#)), specifies the default cell formatting for the workbook, as specified in the following table.

| Structure of BrtXf |                                    |        |
|--------------------|------------------------------------|--------|
| Size               | Structure                          | Value  |
| 0010               | BrtXF - <b>BrtXf</b>               |        |
| 0002               | WORD - <b>ixfeParent</b>           | 0x0000 |
| 0002               | <a href="#">Ifmt</a> - <b>iFmt</b> |        |
| 0002               | WORD - <b>ifmt</b>                 | 0x0000 |
| 0002               | WORD - <b>iFont</b>                | 0x0000 |
| 0002               | WORD - <b>iFill</b>                | 0x0000 |
| 0002               | WORD - <b>ixBorder</b>             | 0x0000 |
| 0001               | BYTE - <b>trot</b>                 | 0x00   |
| 0001               | BYTE - <b>indent</b>               | 0x00   |
| 3 bits             | BYTE - <b>alc</b>                  | 0x0    |
| 3 bits             | BYTE - <b>alcv</b>                 | 0x2    |
| 1 bit              | BYTE - <b>fWrap</b>                | 0x0    |
| 1 bit              | BYTE - <b>fJustLast</b>            | 0x0    |
| 1 bit              | BYTE - <b>fShrinkToFit</b>         | 0x0    |

| Structure of BrtXf |                             |       |
|--------------------|-----------------------------|-------|
| 1 bit              | BYTE - <b>fMergeCell</b>    | 0x0   |
| 2 bits             | BYTE - <b>iReadingOrder</b> | 0x0   |
| 1 bit              | BYTE - <b>fLocked</b>       | 0x1   |
| 1 bit              | BYTE - <b>fHidden</b>       | 0x0   |
| 1 bit              | BYTE - <b>fSxButton</b>     | 0x0   |
| 1 bit              | BYTE - <b>f123Prefix</b>    | 0x0   |
| 6 bits             | WORD - <b>xfGrbitAtr</b>    | 0x00  |
| 10 bits            | WORD - <b>unused</b>        | 0x000 |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**ixfeParent:** 0x0000 specifies that the parent cell style (section [2.2.6.1.2](#)) is the first **BrtXF** (section [2.4.816](#)) in the **BrtBeginCellStyleXFs** (section [2.4.18](#)) collection.

**xfGrbitAtr:** 0x0000 specifies the cell formatting properties that are overwritten according to the following table:

| Offset | Field Name  | Bits | Meaning  |
|--------|-------------|------|--|
| 0      | ibitAtrNum  | 1    | 0x0 specifies that the number property of the formatting for this cell is not inherited.     |
| 1      | ibitAtrFmt  | 1    | 0x0 specifies that the font property of the formatting for this cell is not inherited.       |
| 2      | ibitAtrAlc  | 1    | 0x0 specifies that the alignment property of the formatting for this cell is not inherited.  |
| 3      | ibitAtrBdr  | 1    | 0x0 specifies that the border property of the formatting for this cell is not inherited.     |
| 4      | ibitAtrPat  | 1    | 0x0 specifies that the fill property of the formatting for this cell is not inherited.       |
| 5      | ibitAtrProt | 1    | 0x0 specifies that the protection property of the formatting for this cell is not inherited. |

### 3.6.20 Formatting: BrtXF 3

The next record in this example, **BrtXF** (section [2.4.816](#)), specifies the formatting for cells in this workbook, as specified in the following table. The cell that references this formatting in this example is cell B3.

| Structure of BrtXf |                      |       |
|--------------------|----------------------|-------|
| Size               | Structure            | Value |
| 0010               | BrtXF - <b>BrtXF</b> |       |

| Structure of BrtXf |                                    |        |
|--------------------|------------------------------------|--------|
| 0002               | WORD - <b>ixfeParent</b>           | 0x0000 |
| 0002               | <a href="#">Ifmt</a> - <b>iFmt</b> |        |
| 0002               | WORD - <b>ifmt</b>                 | 0x0002 |
| 0002               | WORD - <b>iFont</b>                | 0x0000 |
| 0002               | WORD - <b>iFill</b>                | 0x0000 |
| 0002               | WORD - <b>ixBorder</b>             | 0x0000 |
| 0001               | BYTE - <b>trot</b>                 | 0x00   |
| 0001               | BYTE - <b>indent</b>               | 0x00   |
| 3 bits             | BYTE - <b>alc</b>                  | 0x0    |
| 3 bits             | BYTE - <b>alcv</b>                 | 0x2    |
| 1 bit              | BYTE - <b>fWrap</b>                | 0x0    |
| 1 bit              | BYTE - <b>fJustLast</b>            | 0x0    |
| 1 bit              | BYTE - <b>fShrinkToFit</b>         | 0x0    |
| 1 bit              | BYTE - <b>fMergeCell</b>           | 0x0    |
| 2 bits             | BYTE - <b>iReadingOrder</b>        | 0x0    |
| 1 bit              | BYTE - <b>fLocked</b>              | 0x1    |
| 1 bit              | BYTE - <b>fHidden</b>              | 0x0    |
| 1 bit              | BYTE - <b>fSxButton</b>            | 0x0    |
| 1 bit              | BYTE - <b>f123Prefix</b>           | 0x0    |
| 6 bits             | WORD - <b>xfGrbitAtr</b>           | 0x01   |
| 10 bits            | WORD - <b>unused</b>               | 0x000  |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**iFmt.ifmt:** 0x0002 specifies that the number format of the cell is specified by the third **BrtFmt** (section [2.4.651](#)) record following **BrtBeginFmts** (section [2.4.83](#)).

**xfGrbitAtr:** 0x0001 specifies the cell formatting properties that are overwritten according to this table:

| Offset | Field Name | Bits | Meaning  |
|--------|------------|------|--|
| 0      | ibitAtrNum | 1    | 0x1 specifies that the number property of the formatting for this cell is overwritten. |
| 1      | ibitAtrFmt | 1    | 0x0 specifies that the font property of the formatting for this cell is not inherited. |

| Offset | Field Name  | Bits | Meaning  |
|--------|-------------|------|--|
| 2      | ibitAtrAlc  | 1    | 0x0 specifies that the alignment property of the formatting for this cell is not inherited.  |
| 3      | ibitAtrBdr  | 1    | 0x0 specifies that the border property of the formatting for this cell is not inherited.     |
| 4      | ibitAtrPat  | 1    | 0x0 specifies that the fill property of the formatting for this cell is not inherited.       |
| 5      | ibitAtrProt | 1    | 0x0 specifies that the protection property of the formatting for this cell is not inherited. |

### 3.6.21 Formatting: BrtXF 4

The next record in this example, **BrtXF** (section [2.4.816](#)), specifies the formatting for cell B4, as specified in the following table.

| Structure of BrtXf |                                    |        |
|--------------------|------------------------------------|--------|
| Size               | Structure                          | Value  |
| 0010               | BrTXf - <b>BrTXf</b>               |        |
| 0002               | WORD - <b>ixfeParent</b>           | 0x0000 |
| 0002               | <a href="#">Ifmt</a> - <b>iFmt</b> |        |
| 0002               | WORD - <b>ifmt</b>                 | 0x00A6 |
| 0002               | WORD - <b>iFont</b>                | 0x0000 |
| 0002               | WORD - <b>iFill</b>                | 0x0000 |
| 0002               | WORD - <b>ixBorder</b>             | 0x0000 |
| 0001               | BYTE - <b>trot</b>                 | 0x00   |
| 0001               | BYTE - <b>indent</b>               | 0x00   |
| 3 bits             | BYTE - <b>alc</b>                  | 0x0    |
| 3 bits             | BYTE - <b>alcv</b>                 | 0x2    |
| 1 bit              | BYTE - <b>fWrap</b>                | 0x0    |
| 1 bit              | BYTE - <b>fJustLast</b>            | 0x0    |
| 1 bit              | BYTE - <b>fShrinkToFit</b>         | 0x0    |
| 1 bit              | BYTE - <b>fMergeCell</b>           | 0x0    |
| 2 bits             | BYTE - <b>iReadingOrder</b>        | 0x0    |
| 1 bit              | BYTE - <b>fLocked</b>              | 0x1    |
| 1 bit              | BYTE - <b>fHidden</b>              | 0x0    |

| Structure of BrtXf |                          |       |
|--------------------|--------------------------|-------|
| 1 bit              | BYTE - <b>fSxButton</b>  | 0x0   |
| 1 bit              | BYTE - <b>f123Prefix</b> | 0x0   |
| 6 bits             | WORD - <b>xfGrbitAtr</b> | 0x01  |
| 10 bits            | WORD - <b>unused</b>     | 0x000 |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**iFmt.ifmt:** 0x00A6 specifies the identifier of the custom number format for cell B4.

### 3.6.22 Formatting: BrtXF 5

The next record in this example, **BrtXF** (section [2.4.816](#)), specifies the formatting for cell B5, as specified in the following table.

| Structure of BrtXf |                                    |        |
|--------------------|------------------------------------|--------|
| Size               | Structure                          | Value  |
| 0010               | BrtXF - <b>BrtXF</b>               |        |
| 0002               | WORD - <b>ixfeParent</b>           | 0x0000 |
| 0002               | <a href="#">Ifmt</a> - <b>iFmt</b> |        |
| 0002               | WORD - <b>ifmt</b>                 | 0x0000 |
| 0002               | WORD - <b>iFont</b>                | 0x0001 |
| 0002               | WORD - <b>iFill</b>                | 0x0002 |
| 0002               | WORD - <b>ixBorder</b>             | 0x0000 |
| 0001               | BYTE - <b>trot</b>                 | 0x00   |
| 0001               | BYTE - <b>indent</b>               | 0x00   |
| 3 bits             | BYTE - <b>alc</b>                  | 0x0    |
| 3 bits             | BYTE - <b>alcv</b>                 | 0x2    |
| 1 bit              | BYTE - <b>fWrap</b>                | 0x0    |
| 1 bit              | BYTE - <b>fJustLast</b>            | 0x0    |
| 1 bit              | BYTE - <b>fShrinkToFit</b>         | 0x0    |
| 1 bit              | BYTE - <b>fMergeCell</b>           | 0x0    |
| 2 bits             | BYTE - <b>iReadingOrder</b>        | 0x0    |
| 1 bit              | BYTE - <b>fLocked</b>              | 0x1    |
| 1 bit              | BYTE - <b>fHidden</b>              | 0x0    |

| Structure of BrtXf |                          |       |
|--------------------|--------------------------|-------|
| 1 bit              | BYTE - <b>fSxButton</b>  | 0x0   |
| 1 bit              | BYTE - <b>f123Prefix</b> | 0x0   |
| 6 bits             | WORD - <b>xfGrbitAtr</b> | 0x12  |
| 10 bits            | WORD - <b>unused</b>     | 0x000 |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**iFont:** 0x0001 specifies that the font of cell B5 is specified by the second **BrtFont** (section [2.4.653](#)) record following **BrtBeginFonts** (section [2.4.85](#)).

**iFill:** 0x0002 specifies that the fill properties of cell B5 are specified by the third **BrtFill** (section [2.4.644](#)) record following **BrtBeginFills** (section [2.4.79](#)).

**xfGrbitAtr:** 0x0012 specifies the cell formatting properties that are overwritten according to the following table:

| Offset | Field Name  | Bits | Meaning  |
|--------|-------------|------|--|
| 0      | ibitAtrNum  | 1    | 0x0 specifies that the number property of the formatting for this cell is overwritten.     |
| 1      | ibitAtrFnt  | 1    | 0x1 specifies that the font property of the formatting for this cell is not overwritten.   |
| 2      | ibitAtrAlc  | 1    | 0x0 specifies that the alignment property of the formatting for this cell is overwritten.  |
| 3      | ibitAtrBdr  | 1    | 0x0 specifies that the border property of the formatting for this cell is overwritten.     |
| 4      | ibitAtrPat  | 1    | 0x1 specifies that the fill property of the formatting for this cell is not overwritten.   |
| 5      | ibitAtrProt | 1    | 0x0 specifies that the protection property of the formatting for this cell is overwritten. |

### 3.6.23 Formatting: BrtEndCellXfs

This **BrtEndCellXfs** (section [2.4.359](#)) record specifies the end of the collection of **BrtXF** (section [2.4.816](#)) records that specifies all cell **XFs** (section [2.2.6.1.1](#)) in the workbook, as specified in the following table.

| Structure of BrtEndCellXfs |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtEndCellXfs - <b>BrtEndCellXfs</b> |

### 3.7 Workbook

This example shows a workbook that contains three worksheets (section [2.1.7.61](#)). The sheet names are Sheet1, Sheet2 and Sheet3. On Sheet1, there is content in the following cells:

- Cell B4 has a string "Number"
- Cell B5 has the number 1
- Cell B6 has a string "Formula"
- Cell B7 has the following formula (section [2.2.2](#)): =SQRT(B5\*2)

Sheet2 and Sheet3 are empty sheets and their record details are not documented in this example.

This example is illustrated by the following figure.

The **BrtBeginBook** (section [2.4.10](#)) and **BrtEndBook** (section [2.4.349](#)) records and all the records in between are contained in the **Workbook** (section [2.1.7.60](#)) part ABNF.

|    | A | B        | C | D |
|----|---|----------|---|---|
| 1  |   |          |   |   |
| 2  |   |          |   |   |
| 3  |   |          |   |   |
| 4  |   | Number   |   |   |
| 5  |   | 1        |   |   |
| 6  |   | Formula  |   |   |
| 7  |   | 1.414214 |   |   |
| 8  |   |          |   |   |
| 9  |   |          |   |   |
| 10 |   |          |   |   |
| 11 |   |          |   |   |
| 12 |   |          |   |   |

**Figure 27: Sheet within a workbook**

#### 3.7.1 Workbook: BrtBeginBook

The first record in this example specifies the beginning of a collection of records that specifies properties of a workbook, as specified in the following table.

| Structure of BrtBeginBook |  |
|---------------------------|--|
| Size                      | Structure  |
| 0000                      | <a href="#">BrtBeginBook</a> - <b>BrtBeginBook</b> |

#### 3.7.2 Workbook: BrtFileVersion

This next record in this example, **BrtFileVersion** (section [2.4.643](#)), specifies which application and which versions of that application accessed the data contained in the file, as specified in the following table.



| Structure of BrtFileVersion |   |                                    |
|-----------------------------|---|------------------------------------|
| Size                        | Structure   | Value                              |
| 0030                        | BrtFileVersion - <b>BrtFileVersion</b>                  |                                    |
| 0010                        | GUID - <b>guidCodeName</b>                              | 0x00000000000000000000000000000000 |
| 0008                        | <a href="#">XLNullableWideString</a> - <b>stAppName</b> | xl                                 |
| 0006                        | XLNullableWideString - <b>stLastEdited</b>              | 4                                  |
| 0006                        | XLNullableWideString - <b>stLowestEdited</b>            | 4                                  |
| 000C                        | XLNullableWideString - <b>stRupBuild</b>                | 4505                               |

**guidCodeName:** 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 specifies that the VBA project needs to be recompiled on load.

**stAppName:** "xl" specifies that Excel is the application name.

**stLastEdited:** "4" specifies that Microsoft Office Excel 2007 is the version of the application that last saved the file.

**stLowestEdited:** "4" specifies that Office Excel 2007 is the earliest version of the application that saved the file.

**stRupBuild:** "4505" specifies the build number of the application.

### 3.7.3 Workbook: BrtWbProp

The next record in this example, **BrtWbProp** (section [2.4.807](#)), specifies properties of the workbook, as specified in the following table.

| Structure of BrtWbProp |  |       |
|------------------------|--|-------|
| Size                   | Structure                              | Value |
| 000C                   | BrtWbProp - <b>BrtWbProp</b>           |       |
| 1 bit                  | BOOL - <b>f1904</b>                    | 0x0   |
| 1 bit                  | BOOL - <b>reserved1</b>                | 0x0   |
| 1 bit                  | BOOL - <b>fHideBorderUnselLists</b>    | 0x0   |
| 1 bit                  | BOOL - <b>fFilterPrivacy</b>           | 0x0   |
| 1 bit                  | BOOL - <b>fBuggedUserAboutSolution</b> | 0x0   |
| 1 bit                  | BOOL - <b>fShowInkAnnotation</b>       | 0x1   |
| 1 bit                  | BOOL - <b>fBackup</b>                  | 0x0   |
| 1 bit                  | BOOL - <b>fNoSaveSup</b>               | 0x0   |
| 2 bits                 | DWORD - <b>grbitUpdateLinks</b>        | 0x0   |
| 1 bit                  | BOOL - <b>fHidePivotTableFList</b>     | 0x0   |

| Structure of BrtWbProp |   |              |
|------------------------|---|--------------|
| 1 bit                  | BOOL - <b>fPublishedBookItems</b>         | 0x0          |
| 1 bit                  | BOOL - <b>fCheckCompat</b>                | 0x0          |
| 2 bits                 | DWORD - <b>mdDspObj</b>                   | 0x0          |
| 1 bit                  | BOOL - <b>fShowPivotChartFilter</b>       | 0x0          |
| 1 bit                  | BOOL - <b>fAutoCompressPictures</b>       | 0x1          |
| 1 bit                  | BOOL - <b>reserved2</b>                   | 0x0          |
| 1 bit                  | BOOL - <b>fRefreshAll</b>                 | 0x0          |
| 13 bits                | DWORD - <b>unused</b>                     | 0x0000       |
| 0004                   | DWORD - <b>dwThemeVersion</b>             | 0x0001E542   |
| 0004                   | <a href="#">CodeName</a> - <b>strName</b> | empty string |

**f1904:** 0x0 specifies that the 1900 date system is the date system used in this workbook.

**fHideBorderUnsellLists:** 0x0 specifies that table borders are not visible when a table is not active.

**fFilterPrivacy:** 0x0 specifies that personally identifiable information is not removed from this workbook on save.

**fBuggedUserAboutSolution:** 0x0 specifies that a warning will not appear before opening a smart document **manifest** file.

**fShowInkAnnotation:** 0x1 specifies that ink comments are visible in this workbook.

**fBackup:** 0x0 specifies that the backup feature is not enabled for the workbook.

**fNoSaveSup:** 0x0 specifies that the external link values are not cached with the workbook on save.

**grbitUpdateLinks:** 0x0 specifies that the link update behavior is application specific.

**fHidePivotTableFList:** 0x0 specifies that PivotTable view (section [2.2.5.3](#)) field lists are not hidden.

**fPublishedBookItems:** 0x0 specifies each sheet is published according to its own publishing state as specified by the **fPublish** field of the **BrtWsProp** (section [2.4.815](#)) structure.

**fCheckCompat:** 0x0 specifies that the file format compatibility checker for the workbook is not enabled.

**mdDspObj:** 0x0 specifies that the shapes in the workbook are visible.

**fShowPivotChartFilter:** 0x0 specifies that the pivot chart (section [2.2.3.2](#)) filter pane is not visible.

**fAutoCompressPictures:** 0x1 specifies that the pictures in the workbook are compressed when the workbook is saved.

**fRefreshAll:** 0x0 specifies that external connections (section [2.2.8](#)) in the workbook are not refreshed when the workbook is opened.

**dwThemeVersion:** 0x0001E542 specifies the version number of the theme applied to the workbook.

**strName:** The empty string specifies this workbook doesn't contain a VBA project.

### 3.7.4 Workbook: BrtBeginBookViews

The next record in this example, **BrtBeginBookViews** (section [2.4.11](#)), specifies the beginning of a collection of **BrtBookView** (section [2.4.298](#)) records, as specified in the following table.

| Structure of BrtBeginBookViews |  |
|--------------------------------|--|
| Size                           | Structure                                    |
| 0000                           | BrtBeginBookViews - <b>BrtBeginBookViews</b> |

### 3.7.5 Workbook: BrtBookView

The next record in this example, **BrtBookView** (section [2.4.298](#)) specifies a single workbook view, as specified in the following table.

| Structure of BrtBookView |                                  |            |
|--------------------------|----------------------------------|------------|
| Size                     | Structure                        | Value      |
| 001D                     | BrtBookView - <b>BrtBookView</b> |            |
| 0004                     | LONG - <b>xWn</b>                | 0x00000078 |
| 0004                     | LONG - <b>yWn</b>                | 0x0000001E |
| 0004                     | DWORD - <b>dxWn</b>              | 0x00005CD0 |
| 0004                     | DWORD - <b>dyWn</b>              | 0x00003930 |
| 0004                     | DWORD - <b>iTabRatio</b>         | 0x00000258 |
| 0004                     | DWORD - <b>itabFirst</b>         | 0x00000000 |
| 0004                     | DWORD - <b>itabCur</b>           | 0x00000000 |
| 1 bit                    | BYTE - <b>fHidden</b>            | 0x0        |
| 1 bit                    | BYTE - <b>fVeryHidden</b>        | 0x0        |
| 1 bit                    | BYTE - <b>fIconic</b>            | 0x0        |
| 1 bit                    | BYTE - <b>fDspHScroll</b>        | 0x1        |
| 1 bit                    | BYTE - <b>fDspVScroll</b>        | 0x1        |
| 1 bit                    | BYTE - <b>fBotAdornment</b>      | 0x1        |
| 1 bit                    | BYTE - <b>fAFDateGroup</b>       | 0x1        |

| Structure of BrtBookView |                      |     |
|--------------------------|----------------------|-----|
| 1 bit                    | BYTE - <b>unused</b> | 0x0 |

**xWn:** 0x00000078 specifies that the X coordinate for the top-left corner of the window that contains the workbook is 120 twips.

**yWn:** 0x0000001E specifies that the Y coordinate for the top-left corner of the window that contains the workbook is 30 twips.

**dxWn:** 0x00005CD0 specifies that the width of the window that contains the workbook is 23760 twips.

**dyWn:** 0x00003930 specifies that the height of the window that contains the workbook is 14640 twips.

**iTabRatio:** 0x00000258 specifies that the ratio of the width of the sheet tabs to the width of the horizontal scroll bar is 600.

**itabFirst:** 0x00000000 specifies the first sheet in this workbook view, which is the **BrtBundleSh** (section [2.4.301](#)) record in the collection of all records directly following **BrtBeginBundleShs** (section [2.4.13](#)).

**itabCur:** 0x00000000 specifies the active sheet in this workbook view, which is the **BrtBundleSh** record in the collection of all records directly following **BrtBeginBundleShs**.

**fHidden:** 0x0 specifies that the window that contains the workbook is not hidden.

**fVeryHidden:** 0x0 specifies that the window that contains the workbook is not hidden.

**fIconic:** 0x0 specifies that the window that contains the workbook is not minimized.

**fDspHScroll:** 0x1 specifies that the horizontal scrollbar is displayed in the workbook view.

**fDspVScroll:** 0x1 specifies that the vertical scrollbar is displayed in the workbook view.

**fBotAdornment:** 0x1 specifies that the sheet tabs are displayed in the workbook view.

**fAFDateGroup:** 0x1 specifies to group dates with the filtering options in the user interface.

### 3.7.6 Workbook: BrtEndBookViews

The next record in this example, **BrtEndBookViews** (section [2.4.350](#)), specifies the end of a collection of **BrtBookView** (section [2.4.298](#)) records, as specified in the following table.

| Structure of BrtEndBookViews |  |
|------------------------------|--|
| Size                         | Structure                                |
| 0000                         | BrtEndBookViews - <b>BrtEndBookViews</b> |

### 3.7.7 Workbook: BrtBeginBundleShs

The next record in this example, **BrtBeginBundleShs** (section [2.4.13](#)), specifies the beginning of a collection of **BrtBundleSh** (section [2.4.301](#)) records, as specified in the following table.

| Structure of BrtBeginBundleShs |  |
|--------------------------------|--|
| Size                           | Structure                                    |
| 0000                           | BrtBeginBundleShs - <b>BrtBeginBundleShs</b> |

### 3.7.8 Workbook: BrtBundleSh 1

The next record in this example, **BrtBundleSh** (section [2.4.301](#)), specifies the first sheet in the workbook, as specified in the following table.

| Structure of BrtBundleSh |  |            |
|--------------------------|--|------------|
| Size                     | Structure                                      | Value      |
| 0024                     | BrtBundleSh - <b>BrtBundleSh</b>               |            |
| 0004                     | <a href="#">ST_SheetState</a> - <b>hsState</b> | 0x00000000 |
| 0004                     | DWORD - <b>itabID</b>                          | 0x00000001 |
| 000C                     | <a href="#">RelID</a> - <b>strRelID</b>        | rId1       |
| 0010                     | <a href="#">XLWideString</a> - <b>strName</b>  | Sheet1     |

**hsState:** 0x00000000 specifies that the sheet is visible.

**itabID:** 0x00000001 specifies the unique identifier for the sheet.

**strRelID:** "rId1" specifies the **RelID** (section [2.5.114](#)) listed in the sheet1.bin.rels part that identifies the path to the table part within the package.

**strName:** "Sheet1" specifies the unique case-insensitive name of the sheet.

### 3.7.9 Workbook: BrtBundleSh 2

The next record in this example specifies the second sheet in the workbook, as specified in the following table.

| Structure of BrtBundleSh |  |            |
|--------------------------|--|------------|
| Size                     | Structure  | Value      |
| 0024                     | <a href="#">BrtBundleSh</a> - <b>BrtBundleSh</b> |            |
| 0004                     | <a href="#">ST_SheetState</a> - <b>hsState</b>   | 0x00000000 |
| 0004                     | DWORD - <b>itabID</b>                            | 0x00000002 |
| 000C                     | <a href="#">RelID</a> - <b>strRelID</b>          | rId2       |
| 0010                     | <a href="#">XLWideString</a> - <b>strName</b>    | Sheet2     |

Fields in this record are explained in a previous record in this example and are omitted for brevity.

### 3.7.10 Workbook: BrtBundleSh 3

The next record in this example specifies the third sheet in the workbook, as specified in the following table.

| Structure of BrtBundleSh |  |            |
|--------------------------|--|------------|
| Size                     | Structure  | Value      |
| 0024                     | <a href="#">BrtBundleSh</a> - <b>BrtBundleSh</b> |            |
| 0004                     | <a href="#">ST_SheetState</a> - <b>hsState</b>   | 0x00000000 |
| 0004                     | DWORD - <b>itabID</b>                            | 0x00000003 |
| 000C                     | <a href="#">RelID</a> - <b>strRelID</b>          | rId3       |
| 0010                     | <a href="#">XLWideString</a> - <b>strName</b>    | Sheet3     |

Fields in this record are explained in a previous record in this example and are omitted for brevity.

### 3.7.11 Workbook: BrtEndBundleShs

The next record in this example, **BrtEndBundleShs** (section [2.4.352](#)), specifies the end of a collection of **BrtBundleSh** (section [2.4.301](#)) records, as specified in the following table.

| Structure of BrtEndBundleShs |  |
|------------------------------|--|
| Size                         | Structure                                |
| 0000                         | BrtEndBundleShs - <b>BrtEndBundleShs</b> |

### 3.7.12 Workbook: BrtCalcProp

The next record in this example, **BrtCalcProp** (section [2.4.302](#)), specifies workbook calculation properties, as specified in the following table.

| Structure of BrtCalcProp |   |                    |
|--------------------------|---|--------------------|
| Size                     | Structure                               | Value              |
| 001A                     | BrtCalcProp - <b>BrtCalcProp</b>        |                    |
| 0004                     | DWORD - <b>recalcID</b>                 | 0x0001EB1D         |
| 0004                     | LONG - <b>fAutoRecalc</b>               | 0x00000001         |
| 0004                     | DWORD - <b>cCalcCount</b>               | 0x00000064         |
| 0008                     | <a href="#">Xnum</a> - <b>xnumDelta</b> | 0x3F50624DD2F1A9FC |
| 0004                     | LONG - <b>cUserThreadCount</b>          | 0x00000001         |
| 1 bit                    | WORD - <b>fFullCalcOnLoad</b>           | 0x0                |
| 1 bit                    | WORD - <b>fRefA1</b>                    | 0x1                |

| Structure of BrtCalcProp |                                   |      |
|--------------------------|-----------------------------------|------|
| 1 bit                    | WORD - <b>fIter</b>               | 0x0  |
| 1 bit                    | WORD - <b>fFullPrec</b>           | 0x1  |
| 1 bit                    | WORD - <b>fSomeUncalced</b>       | 0x0  |
| 1 bit                    | WORD - <b>fSaveRecalc</b>         | 0x1  |
| 1 bit                    | WORD - <b>fMTREnabled</b>         | 0x1  |
| 1 bit                    | WORD - <b>fUserSetThreadCount</b> | 0x0  |
| 1 bit                    | WORD - <b>fNoDeps</b>             | 0x0  |
| 7 bits                   | WORD - <b>reserved</b>            | 0x00 |

**recalcID:** 0x0001EB1D specifies the version of the calculation engine that was last used to calculate values in the workbook.

**fAutoRecalc:** 0x00000001 specifies that the workbook is in automatic calculation mode.

**cCalcCount:** 0x00000064 specifies that the number of iterations to run when calculating a workbook in iterative calculation mode is 100.

**xnumDelta:** 0x3F50624DD2F1A9FC specifies an **Xnum** (section [2.5.171](#)) value of 0.001 that specifies that the application stops calculating after **cCalcCount** iterations or after all values in the circular reference change by less than .001 between iterations, whichever comes first.

**cUserThreadCount:** 0x00000001 specifies that one concurrent calculation process is to be used to calculate this workbook.

**fFullCalcOnLoad:** 0x0 specifies not to perform a full calculation on load.

**fRefA1:** 0x1 specifies that the A1 reference style is used in the workbook.

**fIter:** 0x0 specifies that the application does not attempt to calculate formulas (section [2.2.2](#)) that contain circular references.

**fFullPrec:** 0x1 specifies that the precision as displayed mode is not selected.

**fSomeUncalced:** 0x0 specifies that the workbook is recalculated fully before save.

**fSaveRecalc:** 0x1 specifies that the application will recalculate values in the workbook on save when in manual calculation mode.

**fMTREnabled:** 0x1 specifies that concurrent calculation processes are enabled for this workbook.

**fUserSetThreadCount:** 0x0 specifies that the user has not set the number of concurrent calculation processes for this workbook.

**fNoDeps:** 0x0 specifies that dependencies are respected and only formulas that depend on cells that changed in the workbook are calculated.

### 3.7.13 Workbook: BrtWbFactoid

The next record in this example, **BrtWbFactoid** (section [2.4.806](#)), specifies a collection of properties for smart tags, as specified in the following table.

| Structure of BrtWbFactoid |                                    |       |
|---------------------------|------------------------------------|-------|
| Size                      | Structure                          | Value |
| 0001                      | BrtWbFactoid - <b>BrtWbFactoid</b> |       |
| 1 bit                     | BYTE - <b>fEmbedFactoids</b>       | 0x0   |
| 2 bits                    | BYTE - <b>mdFactoidDisplay</b>     | 0x0   |
| 5 bits                    | BYTE - <b>unused</b>               | 0x00  |

**fEmbedFactoids:** 0x00 specifies that smart tags are not saved with the workbook.

**mdFactoidDisplay:** 0x00 specifies that the smart tag actions button and the smart tag indicator are visible at runtime.

### 3.7.14 Workbook: BrtFileRecover

The next record in this example, **BrtFileRecover** (section [2.4.640](#)), specifies the state of the workbook file for AutoRecover information, as specified in the following table.

| Structure of BrtFileRecover |  |       |
|-----------------------------|--|-------|
| Size                        | Structure                              | Value |
| 0001                        | BrtFileRecover - <b>BrtFileRecover</b> |       |
| 1 bit                       | BYTE - <b>fDontAutoRecover</b>         | 0x0   |
| 1 bit                       | BYTE - <b>fSavedDuringRecovery</b>     | 0x0   |
| 1 bit                       | BYTE - <b>fCreatedViaMinimalSave</b>   | 0x0   |
| 1 bit                       | BYTE - <b>fOpenedViaDataRecovery</b>   | 0x0   |
| 1 bit                       | BYTE - <b>fOpenedViaSafeLoad</b>       | 0x0   |
| 3 bits                      | BYTE - <b>reserved</b>                 | 0x0   |

**fDontAutoRecover:** 0x00 specifies that the AutoRecover information has not been disabled for the workbook.

**fSavedDuringRecovery:** 0x00 specifies that the workbook was not saved during the AutoRecover process.

**fCreatedViaMinimalSave:** 0x00 specifies that the workbook was not created by a minimal save during data recovery.

**fOpenedViaDataRecovery:** 0x00 specifies that the workbook was not opened by a data recovery operation.

**fOpenedViaSafeLoad:** 0x00 specifies that the workbook was not opened in safe load mode.



### 3.7.15 Workbook: BrtEndBook

The next record in this example, **BrtEndBook** (section [2.4.349](#)), specifies the end of a collection of records that specifies properties of the workbook, as specified in the following table.

| Structure of BrtEndBook |                                |
|-------------------------|--------------------------------|
| Size                    | Structure                      |
| 0000                    | BrtEndBook - <b>BrtEndBook</b> |

### 3.7.16 Workbook: BrtBeginSst

The next record in this example, **BrtBeginSst** (section [2.4.219](#)), specifies properties of a shared string table and the beginning of a collection of **BrtSSTItem** (section [2.4.753](#)) records, as specified in the following table.

| Structure of BrtBeginSst |                                  |            |
|--------------------------|----------------------------------|------------|
| Size                     | Structure                        | Value      |
| 0008                     | BrtBeginSst - <b>BrtBeginSst</b> |            |
| 0004                     | DWORD - <b>cstTotal</b>          | 0x00000002 |
| 0004                     | DWORD - <b>cstUnique</b>         | 0x00000002 |

**cstTotal:** 0x00000002 specifies that the total number of references in the workbook to strings in the **BrtSSTItem** collection is 2.

**cstUnique:** 0x00000002 specifies that the number of unique strings in the **BrtSSTItem** collection is 2.

### 3.7.17 Workbook: BrtSSTItem 1

The next record in this example, **BrtSSTItem** (section [2.4.753](#)), specifies an individual string in the shared string table, as specified in the following table.

| Structure of BrtSstItem |  |        |
|-------------------------|--|--------|
| Size                    | Structure                                | Value  |
| 0011                    | BrtSSTItem - <b>BrtSstItem</b>           |        |
| 0011                    | <a href="#">RichStr</a> - <b>richStr</b> | Number |

**richStr:** "Number" specifies the type of the string.

### 3.7.18 Workbook: BrtSSTItem 2

The next record in this example, **BrtSSTItem** (section [2.4.753](#)), specifies an individual string in the shared string table, as specified in the following table.

| Structure of BrtSstItem |  |         |
|-------------------------|--|---------|
| Size                    | Structure                                | Value   |
| 0013                    | BrtSSTItem - <b>BrtSstItem</b>           |         |
| 0013                    | <a href="#">RichStr</a> - <b>richStr</b> | Formula |

**richStr:** "Formula" specifies the type of the string.

### 3.7.19 Workbook: BrtEndSst

The next record in this example, **BrtEndSst** (section [2.4.554](#)), specifies the end of a collection of **BrtSSTItem** (section [2.4.753](#)) records, as specified in the following table.

| Structure of BrtEndSst |                              |
|------------------------|------------------------------|
| Size                   | Structure                    |
| 0000                   | BrtEndSst - <b>BrtEndSst</b> |

### 3.7.20 Workbook: BrtBeginSheet

The next record in this example, **BrtBeginSheet** (section [2.4.188](#)), specifies the beginning of a collection of records that specifies sheets, as specified in the following table. Every sheet in the workbook starts with this record and ends with the **BrtEndSheet** (section [2.4.523](#)) record.

| Structure of BrtBeginSheet |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtBeginSheet - <b>BrtBeginSheet</b> |

The records for the second and third sheets in the workbook are not included in this example.

### 3.7.21 Workbook: BrtWsProp

The next record in this example, **BrtWsProp** (section [2.4.815](#)), specifies properties for the worksheet, as specified in the following table.

| Structure of BrtWsProp |                                 |       |
|------------------------|---------------------------------|-------|
| Size                   | Structure                       | Value |
| 0017                   | BrtWsProp - <b>BrtWsProp</b>    |       |
| 1 bit                  | USHORT - <b>fShowAutoBreaks</b> | 0x1   |
| 2 bits                 | USHORT - <b>reserved1</b>       | 0x0   |
| 1 bit                  | USHORT - <b>fPublish</b>        | 0x1   |
| 1 bit                  | USHORT - <b>fDialog</b>         | 0x0   |
| 1 bit                  | USHORT - <b>fApplyStyles</b>    | 0x0   |

| Structure of BrtWsProp |   |              |
|------------------------|---|--------------|
| 1 bit                  | USHORT - <b>fRowSumsBelow</b>                 | 0x1          |
| 1 bit                  | USHORT - <b>fColSumsRight</b>                 | 0x1          |
| 1 bit                  | USHORT - <b>fFitToPage</b>                    | 0x0          |
| 1 bit                  | USHORT - <b>reserved2</b>                     | 0x0          |
| 1 bit                  | USHORT - <b>fShowOutlineSymbols</b>           | 0x1          |
| 1 bit                  | USHORT - <b>reserved3</b>                     | 0x0          |
| 1 bit                  | USHORT - <b>fSyncHoriz</b>                    | 0x0          |
| 1 bit                  | USHORT - <b>fSyncVert</b>                     | 0x0          |
| 1 bit                  | USHORT - <b>fAltExprEval</b>                  | 0x0          |
| 1 bit                  | USHORT - <b>fAltFormulaEntry</b>              | 0x0          |
| 1 bit                  | BYTE - <b>fFilterMode</b>                     | 0x0          |
| 1 bit                  | BYTE - <b>fCondFmtCalc</b>                    | 0x1          |
| 6 bits                 | BYTE - <b>reserved4</b>                       | 0x00         |
| 0008                   | <a href="#">BrtColor</a> - <b>brtcolorTab</b> |              |
| 1 bit                  | BYTE - <b>fValidRGB</b>                       | 0x0          |
| 7 bits                 | XColorType - <b>xColorType</b>                | 0x00         |
| 0001                   | BYTE - <b>index</b>                           | 0x40         |
| 0002                   | SHORT - <b>nTintAndShade</b>                  | 0x0000       |
| 0001                   | BYTE - <b>bRed</b>                            | 0x00         |
| 0001                   | BYTE - <b>bGreen</b>                          | 0x00         |
| 0001                   | BYTE - <b>bBlue</b>                           | 0x00         |
| 0001                   | BYTE - <b>bAlpha</b>                          | 0x00         |
| 0004                   | <a href="#">Rw</a> - <b>rwSync</b>            |              |
| 0004                   | <a href="#">RwNullable</a> - <b>rw</b>        | 0xFFFFFFFF   |
| 0004                   | <a href="#">Col</a> - <b>colSync</b>          |              |
| 0004                   | <a href="#">ColNullable</a> - <b>col</b>      | 0xFFFFFFFF   |
| 0004                   | <a href="#">CodeName</a> - <b>strName</b>     | empty string |

**fShowAutoBreaks:** 0x1 specifies that each automatic page break (2) is visible on this sheet.

**fPublish:** 0x1 specifies that the publish to server feature is enabled for this sheet.

**fDialog:** 0x0 specifies that the sheet is not a dialog sheet.

**fApplyStyles:** 0x0 specifies not to apply the built-in cell style (section [2.2.6.1.2](#)) when an outline is applied.

**fRowSumsBelow:** 0x1 specifies that a summary row (2) appears below the detailed data rows (2).

**fColSumsRight:** 0x1 specifies that the summary columns (2) appear to the right in a sheet that is displayed left-to-right.

**fFitToPage:** 0x0 specifies not to fit the printable contents in a single page when printing this sheet.

**fShowOutlineSymbols:** 0x1 specifies that the sheet outline symbols are visible for the sheet.

**fSyncHoriz:** 0x0 specifies that horizontal scrolling is not synchronized across multiple windows that display this sheet.

**fSyncVert:** 0x0 specifies vertical scrolling is not synchronized across multiple windows that display this sheet.

**fAltExprEval:** 0x0 specifies that the sheet does not use transition formula evaluation.

**fAltFormulaEntry:** 0x0 specifies that the sheet does not use transition formula entry.

**fFilterMode:** 0x0 specifies that there are no AutoFilters on the sheet.

**fCondFmtCalc:** 0x1 specifies that conditional formatting is evaluated normally and all the existing conditional formatting will be updated as the cells associated with the conditional formatting change.

**brtcolorTab:** Specifies the background color of the sheet tab.

**brtcolorTab.fValidRGB:** 0x00 specifies that the color specified by the **index** field does not match the color specified by the **bRed**, **bGreen**, **bBlue**, and **bAlpha** fields.

**brtcolorTab.xColorType:** 0x00 specifies that color information is automatically determined by the application.

**brtcolorTab.index:** 0x40 specifies this value is undefined and ignored.

**brtcolorTab.nTintAndShade:** 0x0000 specifies the amount of tint or shade applied to the color specified by the **index** field or the **bRed**, **bGreen**, **bBlue**, and **bAlpha** fields.

**brtcolorTab.bRed:** 0x00 specifies the intensity of the color red in this color.

**brtcolorTab.bGreen:** 0x00 specifies the intensity of the color green in this color.

**brtcolorTab.bBlue:** 0x00 specifies the intensity of the color blue in this color.

**brtcolorTab.bAlpha:** 0x00 specifies the transparency of this color.

**rwSync:** Specifies the anchor row (2) for synchronous vertical scrolling.

**rwSync.rw:** 0xFFFFFFFF specifies that this value is ignored.

**colSync:** Specifies the anchor column (2) for synchronous horizontal scrolling.

**colSync.col:** 0xFFFFFFFF specifies that this value is ignored.

**strName:** The empty string specifies that there is no **module** associated with the sheet.

### 3.7.22 Workbook: BrtWsDim

The next record in this example, **BrtWsDim** (section [2.4.812](#)), specifies the row (2) and column (2) bounds of used cells in the sheet, as specified in the following table. Used cells include all cells with data, formulas (section [2.2.2](#)), or formatting applied directly to the cell.

| Structure of BrtWsDim |   |            |
|-----------------------|---|------------|
| Size                  | Structure                                 | Value      |
| 0010                  | BrtsWsDim - <b>BrtsWsDim</b>              |            |
| 0010                  | <a href="#">UncheckedRfx</a> - <b>rfx</b> |            |
| 0004                  | LONG - <b>rwFirst</b>                     | 0x00000003 |
| 0004                  | LONG - <b>rwLast</b>                      | 0x00000006 |
| 0004                  | LONG - <b>colFirst</b>                    | 0x00000001 |
| 0004                  | LONG - <b>colLast</b>                     | 0x00000001 |

**rfx:** Specifies the row (2) and column (2) bounds of all the non-empty cells in this sheet, which is B4:B7.

**rfx.rwFirst:** 0x00000003 specifies the first row (2) of the range, which is row (2) 4.

**rfx.rwLast:** 0x00000006 specifies the last row (2) of the range, which is row (2) 7.

**rfx.colFirst:** 0x00000001 specifies the first column (2) of the range, which is column (2) B.

**rfx.colLast:** 0x00000001 specifies the last column (2) of the range, which is column (2) B.

### 3.7.23 Workbook: BrtBeginWsViews

The next record in this example, **BrtBeginWsViews** (section [2.4.293](#)), specifies the beginning of a collection of sheet views, as specified in the following table.

| Structure of BrtBeginWsViews |  |
|------------------------------|--|
| Size                         | Structure                                  |
| 0000                         | BrtsBeginWsViews - <b>BrtsBeginWsViews</b> |

### 3.7.24 Workbook: BrtBeginWsView

The next record in this example, **BrtBeginWsView** (section [2.4.292](#)), specifies sheet view properties, as specified in the following table.

| Structure of BrtBeginWsView |  |       |
|-----------------------------|--|-------|
| Size                        | Structure                                | Value |
| 001E                        | BrtsBeginWsView - <b>BrtsBeginWsView</b> |       |

| Structure of BrtBeginWsView |  |            |
|-----------------------------|--|------------|
| 1 bit                       | USHORT - <b>fWnProt</b>                | 0x0        |
| 1 bit                       | USHORT - <b>fDspFmla</b>               | 0x0        |
| 1 bit                       | USHORT - <b>fDspGrid</b>               | 0x1        |
| 1 bit                       | USHORT - <b>fDspRwCol</b>              | 0x1        |
| 1 bit                       | USHORT - <b>fDspZeros</b>              | 0x1        |
| 1 bit                       | USHORT - <b>fRightToLeft</b>           | 0x0        |
| 1 bit                       | USHORT - <b>fSelected</b>              | 0x0        |
| 1 bit                       | USHORT - <b>fDspRuler</b>              | 0x1        |
| 1 bit                       | USHORT - <b>fDspGuts</b>               | 0x1        |
| 1 bit                       | USHORT - <b>fDefaultHdr</b>            | 0x1        |
| 1 bit                       | USHORT - <b>fWhitespaceHidden</b>      | 0x0        |
| 5 bits                      | USHORT - <b>reserved1</b>              | 0x00       |
| 0004                        | <a href="#">XLView</a> - <b>xlView</b> | 0x00000000 |
| 0004                        | LONG - <b>rwTop</b>                    | 0x00000000 |
| 0004                        | LONG - <b>colLeft</b>                  | 0x00000000 |
| 0001                        | BYTE - <b>icvHdr</b>                   | 0x40       |
| 0001                        | BYTE - <b>reserved2</b>                | 0x00       |
| 0002                        | WORD - <b>reserved3</b>                | 0x0000     |
| 0002                        | USHORT - <b>wScale</b>                 | 0x0064     |
| 0002                        | USHORT - <b>wScaleNormal</b>           | 0x0000     |
| 0002                        | USHORT - <b>wScaleSLV</b>              | 0x0000     |
| 0002                        | USHORT - <b>wScalePLV</b>              | 0x0000     |
| 0004                        | DWORD - <b>iWbkView</b>                | 0x00000000 |

**fWnProt:** 0x0 specifies that the window that displays the sheet view is not locked because of window protection.

**fDspFmla:** 0x0 specifies that formulas (section [2.2.2](#)) are not displayed in cells in the sheet view.

**fDspGrid:** 0x1 specifies that gridlines are displayed in the sheet view.

**fDspRwCol:** 0x1 specifies that row (2) and column (2) headings are displayed in the sheet view.

**fDspZeros:** 0x1 specifies that cells with a value of 0 are displayed as numbers.

**fRightToLeft:** 0x0 specifies that the sheet view is displayed left-to-right.

**fSelected:** 0x0 specifies that the sheet is not selected in the sheet view.

**fDspRuler:** 0x1 specifies that this value is ignored because **xlView** is not in Page Layout view.

**fDspGuts:** 0x1 specifies that outline symbols are displayed in sheet view.

**fDefaultHdr:** 0x1 specifies that the default color is used for the gridlines.

**fWhitespaceHidden:** 0x0 specifies that page margins, headers and footers are not hidden.

**xlView:** 0x00000000 specifies that the type of sheet view is XLVNORMAL, which indicates that information is displayed in Normal view.

**rwTop:** 0x00000000 specifies that the first row (2) that is displayed in the sheet view is row (2) 1.

**colLeft:** 0x00000000 specifies that the first column (2) that is displayed in the sheet view is column (2) A.

**icvHdr:** 0x40 specifies that the color of the gridlines displayed in the sheet view is the system color for text in the window.

**wScale:** 0x0064 specifies that the zoom level percentage of the sheet displayed in the sheet view is 100%.

**wScaleNormal:** 0x0000 specifies that the zoom level percentage of the sheet when displayed in Normal view is 100.

**wScaleSLV:** 0x0000 specifies that the zoom level percentage of the sheet when displayed in Page Break Preview view is 100.

**wScalePLV:** 0x0000 specifies that the zoom level percentage of the sheet when displayed in Page Layout view is 100.

**iWbkView:** 0x00000000 specifies the workbook view that this sheet view is associated with.

### 3.7.25 Workbook: BrtSel

The next record in this example, **BrtSel** (section [2.4.738](#)), specifies the cell selection for a sheet, as specified in the following table.

| Structure of BrtSel |   |            |
|---------------------|---|------------|
| Size                | Structure                                     | Value      |
| 0024                | BrtSel - <b>BrtSel</b>                        |            |
| 0004                | <a href="#">Pnn</a> - <b>pnn</b>              | 0x00000003 |
| 0004                | LONG - <b>rwAct</b>                           | 0x00000000 |
| 0004                | LONG - <b>colAct</b>                          | 0x00000000 |
| 0004                | DWORD - <b>dwRfxAct</b>                       | 0x00000000 |
| 0014                | <a href="#">UncheckedSqRfx</a> - <b>sqrfx</b> |            |
| 0004                | LONG - <b>crfx</b>                            | 0x00000001 |

| Structure of BrtSel |   |            |
|---------------------|---|------------|
| 0010                | <a href="#">UncheckedRfx</a> - <b>rgrfx</b> |            |
| 0010                | UncheckedRfx - <b>rfx[0]</b>                |            |
| 0004                | LONG - <b>rwFirst</b>                       | 0x00000000 |
| 0004                | LONG - <b>rwLast</b>                        | 0x00000000 |
| 0004                | LONG - <b>colFirst</b>                      | 0x00000000 |
| 0004                | LONG - <b>colLast</b>                       | 0x00000000 |

**pnn:** 0x00000003 specifies that the selection belongs to the top-left pane.

**rwAct:** 0x00000000 specifies the row (2) of the active cell.

**colAct:** 0x00000000 specifies the column (2) of the active cell.

**dwRfxAct:** 0x00000000 specifies the zero-based index of the **Rfx** (section [2.5.117](#)) structure in the **sqrfx** array.

**sqrfx:** Specifies a collection of all non-contiguous ranges within the selection.

**sqrfx.crfx:** 0x00000001 specifies the count of the **UncheckedRfx** (section [2.5.153](#)) structures in **rgrfx**.

**sqrfx.rgrfx:** Specifies the set of ranges that are selected.

**sqrfx.rgrfx.rfx[0]:** Specifies the first range.

**sqrfx.rgrfx.rfx[0].rwFirst:** 0x00000000 specifies that the first row (2) in the range is row (2) 1.

**sqrfx.rgrfx.rfx[0].rwLast:** 0x00000000 specifies that the last row (2) in the range is row (2) 1.

**sqrfx.rgrfx.rfx[0].colFirst:** 0x00000000 specifies that the first column (2) in the range is column (2) A.

**sqrfx.rgrfx.rfx[0].colLast:** 0x00000000 specifies that the last column (2) in the range is column (2) A.

### 3.7.26 Workbook: BrtEndWsView

The next record in this example, **BrtEndWsView** (section [2.4.626](#)), specifies the end of a collection of **BrtBeginWsView** (section [2.4.292](#)) records, as specified in the following table.

| Structure of BrtEndWsView |                                    |
|---------------------------|------------------------------------|
| Size                      | Structure                          |
| 0000                      | BrtEndWsView - <b>BrtEndWsView</b> |



### 3.7.27 Workbook: BrtEndWsViews

The next record in this example, **BrtEndWsViews** (section [2.4.627](#)), specifies the end of a collection of **BrtBeginWsViews** (section [2.4.293](#)) record, as specified in the following table.

| Structure of BrtEndWsViews |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtEndWsViews - <b>BrtEndWsViews</b> |

### 3.7.28 Workbook: BrtWsFmtInfo

The next record in this example, **BrtWsFmtInfo** (section [2.4.813](#)), specifies sheet formatting properties, as specified in the following table.

| Structure of BrtWsFmtInfo |                                    |            |
|---------------------------|------------------------------------|------------|
| Size                      | Structure                          | Value      |
| 000C                      | BrtWsFmtInfo - <b>BrtWsFmtInfo</b> |            |
| 0004                      | DWORD - <b>dxGCol</b>              | 0xFFFFFFFF |
| 0002                      | WORD - <b>cchDefColWidth</b>       | 0x0008     |
| 0002                      | WORD - <b>miyDefRwHeight</b>       | 0x012C     |
| 1 bit                     | DWORD - <b>fUnsynced</b>           | 0x0        |
| 1 bit                     | DWORD - <b>fDyZero</b>             | 0x0        |
| 1 bit                     | DWORD - <b>fExAsc</b>              | 0x0        |
| 1 bit                     | DWORD - <b>fExDesc</b>             | 0x0        |
| 12 bits                   | DWORD - <b>reserved</b>            | 0x000      |
| 8 bits                    | DWORD - <b>iOutLevelRw</b>         | 0x00       |
| 8 bits                    | DWORD - <b>iOutLevelCol</b>        | 0x00       |

**dxGCol:** 0xFFFFFFFF specifies that this value is ignored.

**cchDefColWidth:** 0x0008 specifies that the default column (2) width is 8.

**miyDefRwHeight:** 0x012C specifies that this field is ignored when **fUnsynced** is 0.

**fUnsynced:** 0x0 specifies that **miyDefRwHeight** has been determined by the application.

**fDyZero:** 0x0 specifies that rows (2) are not hidden by default.

**fExAsc:** 0x0 specifies that rows (2) do not have a thick top border by default.

**fExDesc:** 0x0 specifies that rows (2) do not have a thick bottom border by default.

**iOutLevelRw:** 0x00 specifies the highest number of outline levels (1) for rows (2) in this sheet.

**iOutLevelCol:** 0x00 specifies the highest number of outline levels (1) for columns (2) in this sheet.

### 3.7.29 Workbook: BrtBeginSheetData

The next record in this example, **BrtBeginSheetData** (section [2.4.189](#)), specifies the beginning of the cell table (section [2.2.1](#)) on this sheet, as specified in the following table.

| Structure of BrtBeginSheetData |  |
|--------------------------------|--|
| Size                           | Structure                                    |
| 0000                           | BrtBeginSheetData - <b>BrtBeginSheetData</b> |

### 3.7.30 Workbook: BrtRowHdr 1

The next record in this example, **BrtRowHdr** (section [2.4.718](#)), specifies row (2) information, as specified in the following table.

| Structure of BrtRowHdr |  |            |
|------------------------|--|------------|
| Size                   | Structure  | Value      |
| 0019                   | BrtRowHdr - <b>BrtRowHdr</b>                     |            |
| 0004                   | LONG - <b>rw</b>                                 | 0x00000003 |
| 0004                   | DWORD - <b>ixfe</b>                              | 0x00000000 |
| 0002                   | WORD - <b>miyRw</b>                              | 0x012C     |
| 1 bit                  | BYTE - <b>fExtraAsc</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fExtraDsc</b>                          | 0x0        |
| 6 bits                 | BYTE - <b>reserved1</b>                          | 0x00       |
| 3 bits                 | BYTE - <b>iOutLevel</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fCollapsed</b>                         | 0x0        |
| 1 bit                  | BYTE - <b>fDyZero</b>                            | 0x0        |
| 1 bit                  | BYTE - <b>fUnsynced</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fGhostDirty</b>                        | 0x0        |
| 1 bit                  | BYTE - <b>fReserved</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fPhShow</b>                            | 0x0        |
| 7 bits                 | BYTE - <b>reserved2</b>                          | 0x00       |
| 0004                   | DWORD - <b>ccolspan</b>                          | 0x00000001 |
| 0008                   | <a href="#">BrtColSpan</a> - <b>rgBrtColspan</b> |            |
| 0008                   | BrtColSpan - <b>brtcolspan[0]</b>                |            |

| Structure of BrtRowHdr |                       |            |
|------------------------|-----------------------|------------|
| 0004                   | LONG - <b>colMic</b>  | 0x00000001 |
| 0004                   | LONG - <b>colLast</b> | 0x00000001 |

**rw:** 0x00000003 specifies that the index of the row (2) is the fourth row (2).

**ixfe:** 0x00000000 specifies a zero-based index of a **BrtXF** (section [2.4.816](#)) record that specifies the format to apply as the default format for the row (2). The indexed **BrtXF** is not included in this example.

**miyRw:** 0x012C specifies that this value is ignored because the **fUnsynced** field is 0x0.

**fExtraAsc:** 0x0 specifies that padding will not be allocated for the top of this row (2) for a thick upper cell border.

**fExtraDsc:** 0x0 specifies that padding will not be allocated for the bottom of this row (2) for a medium or thick bottom cell border.

**iOutLevel:** 0x0 specifies the outline level (1) for this row (2).

**fCollapsed:** 0x0 specifies that preceding rows (2) are not in the collapsed **outline state**.

**fDyZero:** 0x0 specifies that the row (2) is not hidden.

**fUnsynced:** 0x0 specifies the row (2) height has not been manually specified.

**fGhostDirty:** 0x0 specifies the row (2) style as specified by the **ixfe** field is not applied.

**fPhShow:** 0x0 specifies the cells in this row (2) do not have the phonetic guide enabled.

**ccolspan:** 0x00000001 specifies the number of **BrtColSpan** (section [2.5.8](#)) elements in **rgBrtColspan** is 1.

**rgBrtColspan:** Specifies the permissible locations for cells within this row (2).

**rgBrtColspan.brtcolspan[0]:** An array of **BrtColSpan** structures that specify the permissible locations for cells within this row (2).

**rgBrtColspan.brtcolspan[0].colMic:** 0x00000001 specifies that the first column (2) with data in this span is column (2) B.

**rgBrtColspan.brtcolspan[0].colLast:** 0x00000001 specifies that the last column (2) with data in this span is column (2) B.

### 3.7.31 Workbook: BrtCellIsst 1

The next record in this example, **BrtCellIsst** (section [2.4.308](#)), specifies a cell that contains a string, as specified in the following table.

| Structure of BrtCellIsst |                                  |       |
|--------------------------|----------------------------------|-------|
| Size                     | Structure                        | Value |
| 000C                     | BrtCellIsst - <b>BrtCellIsst</b> |       |

| Structure of BrtCellIsst |                             |            |
|--------------------------|-----------------------------|------------|
| 0008                     | <a href="#">Cell</a> - cell |            |
| 0004                     | LONG - <b>column</b>        | 0x00000001 |
| 24 bits                  | DWORD - <b>iStyleRef</b>    | 0x0000000  |
| 1 bit                    | DWORD - <b>fPhShow</b>      | 0x0        |
| 7 bits                   | DWORD - <b>reserved</b>     | 0x00       |
| 0004                     | DWORD - <b>isst</b>         | 0x00000000 |

**cell:** Specifies cell information.

**cell.column:** 0x00000001 specifies that column (2) B contains the cell.

**cell.iStyleRef:** 0x0000000 specifies a zero-based index of a **BrtXF** (section [2.4.816](#)) record that specifies the cell formatting for this cell. The indexed **BrtXF** is not included in this example.

**cell.fPhShow:** 0x0 specifies the sheet does not show phonetic information for this cell.

**isst:** 0x00000000 specifies a zero-based index of a **BrtSSTItem** (section [2.4.753](#)) that specifies the string "Number" that this cell contains.

### 3.7.32 Workbook: BrtRowHdr 2

The next record in this example, **BrtRowHdr** (section [2.4.718](#)), specifies row (2) information, as specified in the following table.

| Structure of BrtRowHdr |                              |            |
|------------------------|------------------------------|------------|
| Size                   | Structure                    | Value      |
| 0019                   | BrtRowHdr - <b>BrtRowHdr</b> |            |
| 0004                   | LONG - <b>rw</b>             | 0x00000004 |
| 0004                   | DWORD - <b>ixfe</b>          | 0x00000000 |
| 0002                   | WORD - <b>miyRw</b>          | 0x012C     |
| 1 bit                  | BYTE - <b>fExtraAsc</b>      | 0x0        |
| 1 bit                  | BYTE - <b>fExtraDsc</b>      | 0x0        |
| 6 bits                 | BYTE - <b>reserved1</b>      | 0x00       |
| 3 bits                 | BYTE - <b>iOutLevel</b>      | 0x0        |
| 1 bit                  | BYTE - <b>fCollapsed</b>     | 0x0        |
| 1 bit                  | BYTE - <b>fDyZero</b>        | 0x0        |
| 1 bit                  | BYTE - <b>fUnsynced</b>      | 0x0        |
| 1 bit                  | BYTE - <b>fGhostDirty</b>    | 0x0        |

| Structure of BrtRowHdr |  |            |
|------------------------|--|------------|
| 1 bit                  | BYTE - <b>fReserved</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fPhShow</b>                            | 0x0        |
| 7 bits                 | BYTE - <b>reserved2</b>                          | 0x00       |
| 0004                   | DWORD - <b>ccolspan</b>                          | 0x00000001 |
| 0008                   | <a href="#">BrtColSpan</a> - <b>rgBrtColspan</b> |            |
| 0008                   | BrtColSpan - <b>brtcolspan[0]</b>                |            |
| 0004                   | LONG - <b>colMic</b>                             | 0x00000001 |
| 0004                   | LONG - <b>colLast</b>                            | 0x00000001 |

Fields in this record are explained in a previous **BrtRowHdr** (section [2.4.718](#)) record in this example and are omitted for brevity.

### 3.7.33 Workbook: BrtCellRk

The next record in this example, **BrtCellRk** (section [2.4.311](#)), specifies a cell that contains a number, as specified in the following table.

| Structure of BrtCellRk |   |            |
|------------------------|---|------------|
| Size                   | Structure                               | Value      |
| 000C                   | BrtCellRk - <b>BrtCellRk</b>            |            |
| 0008                   | <a href="#">Cell</a> - <b>cell</b>      |            |
| 0004                   | LONG - <b>column</b>                    | 0x00000001 |
| 24 bits                | DWORD - <b>iStyleRef</b>                | 0x0000000  |
| 1 bit                  | DWORD - <b>fPhShow</b>                  | 0x0        |
| 7 bits                 | DWORD - <b>unused</b>                   | 0x00       |
| 0004                   | <a href="#">RkNumber</a> - <b>value</b> |            |
| 1 bit                  | ULONG - <b>FX100</b>                    | 0x0        |
| 1 bit                  | ULONG - <b>FInt</b>                     | 0x0        |
| 30 bits                | ULONG - <b>num</b>                      | 0x0FFC0000 |

**cell:** Specifies cell information.

**cell.column:** 0x00000001 specifies that column (2) B contains the cell.

**cell.iStyleRef:** 0x0000000 specifies a zero-based index of a **BrtXF** (section [2.4.816](#)) record that specifies the cell formatting for this cell. The indexed **BrtXF** is not included in this example.

**cell.fPhShow:** 0x0 specifies that the sheet does not show phonetic information for this cell.

**value:** The **RkNumber** (section [2.5.122](#)) which specifies the value in the cell.

**value.FX100:** 0x0 specifies that the value in the **value.num** field was not multiplied by 100 when it was saved.

**value.FInt:** 0x0 specifies that the value in the **value.num** field is the 30 most significant bits of a 64-bit binary floating point number.

**value.num:** 0x0FFC0000 specifies the 30 most significant bits of a 64-bit binary floating-point number whose remaining bits are 0. That number is 1.

### 3.7.34 Workbook: BrtRowHdr 3

The next record in this example, **BrtRowHdr** (section [2.4.718](#)), specifies row (2) information, as specified in the following table.

| Structure of BrtRowHdr |  |            |
|------------------------|--|------------|
| Size                   | Structure  | Value      |
| 0019                   | BrtRowHdr - <b>BrtRowHdr</b>                     |            |
| 0004                   | LONG - <b>rw</b>                                 | 0x00000005 |
| 0004                   | DWORD - <b>ixfe</b>                              | 0x00000000 |
| 0002                   | WORD - <b>miyRw</b>                              | 0x012C     |
| 1 bit                  | BYTE - <b>fExtraAsc</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fExtraDsc</b>                          | 0x0        |
| 6 bits                 | BYTE - <b>reserved1</b>                          | 0x00       |
| 3 bits                 | BYTE - <b>iOutLevel</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fCollapsed</b>                         | 0x0        |
| 1 bit                  | BYTE - <b>fDyZero</b>                            | 0x0        |
| 1 bit                  | BYTE - <b>fUnsynced</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fGhostDirty</b>                        | 0x0        |
| 1 bit                  | BYTE - <b>fReserved</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fPhShow</b>                            | 0x0        |
| 7 bits                 | BYTE - <b>reserved2</b>                          | 0x00       |
| 0004                   | DWORD - <b>ccolspan</b>                          | 0x00000001 |
| 0008                   | <a href="#">BrtColSpan</a> - <b>rgBrtColspan</b> |            |
| 0008                   | BrtColSpan - <b>brtcolspan[0]</b>                |            |
| 0004                   | LONG - <b>colMic</b>                             | 0x00000001 |
| 0004                   | LONG - <b>colLast</b>                            | 0x00000001 |

Fields in this record are explained in a previous **BrRowHdr** (section [2.4.718](#)) record in this example and are omitted for brevity.

### 3.7.35 Workbook: BrtCellIsst 2

The next record in this example, **BrtCellIsst** (section [2.4.308](#)), specifies a cell that contains a string, as specified in the following table.

| Structure of BrtCellIsst |                                    |            |
|--------------------------|------------------------------------|------------|
| Size                     | Structure                          | Value      |
| 000C                     | BrtCellIsst - <b>BrtCellIsst</b>   |            |
| 0008                     | <a href="#">Cell</a> - <b>cell</b> |            |
| 0004                     | LONG - <b>column</b>               | 0x00000001 |
| 24 bits                  | DWORD - <b>iStyleRef</b>           | 0x000000   |
| 1 bit                    | DWORD - <b>fPhShow</b>             | 0x0        |
| 7 bits                   | DWORD - <b>reserved</b>            | 0x00       |
| 0004                     | DWORD - <b>isst</b>                | 0x00000001 |

**cell:** Specifies cell information.

**cell.column:** 0x00000001 specifies that column (2) B contains the cell.

**cell.iStyleRef:** 0x000000 specifies the formatting for a cell. The **BrXF** (section [2.4.816](#)) record is not included in the example.

**cell.fPhShow:** 0x0 specifies that the sheet does not show phonetic information for this cell.

**isst:** 0x00000001 specifies the zero-based index of a **BrtSSTItem** (section [2.4.753](#)) that specifies the string "Formula" that this cell contains.

### 3.7.36 Workbook: BrtRowHdr 4

The next record in this example, **BrRowHdr** (section [2.4.718](#)), specifies row (2) information, as specified in the following table.

| Structure of BrtRowHdr |                            |            |
|------------------------|----------------------------|------------|
| Size                   | Structure                  | Value      |
| 0019                   | BrRowHdr - <b>BrRowHdr</b> |            |
| 0004                   | LONG - <b>rw</b>           | 0x00000006 |
| 0004                   | DWORD - <b>ixfe</b>        | 0x00000000 |
| 0002                   | WORD - <b>miyRw</b>        | 0x012C     |
| 1 bit                  | BYTE - <b>fExtraAsc</b>    | 0x0        |
| 1 bit                  | BYTE - <b>fExtraDsc</b>    | 0x0        |

| Structure of BrtRowHdr |  |            |
|------------------------|--|------------|
| 6 bits                 | BYTE - <b>reserved1</b>                          | 0x00       |
| 3 bits                 | BYTE - <b>iOutLevel</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fCollapsed</b>                         | 0x0        |
| 1 bit                  | BYTE - <b>fDyZero</b>                            | 0x0        |
| 1 bit                  | BYTE - <b>fUnsynced</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fGhostDirty</b>                        | 0x0        |
| 1 bit                  | BYTE - <b>fReserved</b>                          | 0x0        |
| 1 bit                  | BYTE - <b>fPhShow</b>                            | 0x0        |
| 7 bits                 | BYTE - <b>reserved2</b>                          | 0x00       |
| 0004                   | DWORD - <b>ccolspan</b>                          | 0x00000001 |
| 0008                   | <a href="#">BrtColSpan</a> - <b>rgBrtColspan</b> |            |
| 0008                   | BrtColSpan - <b>brtcolspan[0]</b>                |            |
| 0004                   | LONG - <b>colMic</b>                             | 0x00000001 |
| 0004                   | LONG - <b>colLast</b>                            | 0x00000001 |

Fields in this record are explained in a previous **BrtRowHdr** (section [2.4.718](#)) record in this example and are omitted for brevity.

### 3.7.37 Workbook: BrtFmlaNum

The next record in this example, **BrtFmlaNum** (section [2.4.649](#)), specifies a cell that contains a formula (section [2.2.2](#)) where the most recent evaluation resulted in a numeric value, as specified in the following table.

| Structure of BrtFmlaNum |   |                    |
|-------------------------|---|--------------------|
| Size                    | Structure                                     | Value              |
| 0028                    | BrtFmlaNum - <b>BrtFmlaNum</b>                |                    |
| 0008                    | <a href="#">Cell</a> - <b>cell</b>            |                    |
| 0004                    | LONG - <b>column</b>                          | 0x00000001         |
| 24 bits                 | DWORD - <b>iStyleRef</b>                      | 0x0000000          |
| 1 bit                   | DWORD - <b>fPhShow</b>                        | 0x0                |
| 7 bits                  | DWORD - <b>reserved</b>                       | 0x00               |
| 0008                    | <a href="#">Xnum</a> - <b>xnum</b>            | 0x3FF6A09E667F3BCD |
| 0002                    | <a href="#">GrbitFmla</a> - <b>grbitFlags</b> |                    |



| Structure of BrtFmlaNum |  |            |
|-------------------------|--|------------|
| 1 bit                   | WORD - <b>fReserved</b>                            | 0x0        |
| 1 bit                   | WORD - <b>fAlwaysCalc</b>                          | 0x0        |
| 14 bits                 | WORD - <b>unused</b>                               | 0x0000     |
| 0016                    | <a href="#">CellParsedFormula</a> - <b>formula</b> |            |
| 0004                    | DWORD - <b>cce</b>                                 | 0x0000000E |
| 000E                    | <a href="#">Rgce</a> - <b>rgce</b>                 |            |
| 0007                    | <a href="#">Ptg</a> - <b>Ptg[0]</b>                |            |
| 0007                    | <a href="#">PtgRef</a> - <b>PtgRef</b>             |            |
| 5 bits                  | BYTE - <b>ptg</b>                                  | 0x04       |
| 2 bits                  | <a href="#">PtgDataType</a> - <b>type</b>          | 0x2        |
| 1 bit                   | BYTE - <b>reserved</b>                             | 0x0        |
| 0006                    | <a href="#">RgceLoc</a> - <b>loc</b>               |            |
| 0004                    | <a href="#">UncheckedRw</a> - <b>row</b>           | 0x00000004 |
| 0002                    | <a href="#">ColRelShort</a> - <b>column</b>        |            |
| 14 bits                 | USHORT - <b>col</b>                                | 0x0001     |
| 1 bit                   | USHORT - <b>fColRel</b>                            | 0x1        |
| 1 bit                   | USHORT - <b>fRwRel</b>                             | 0x1        |
| 0003                    | Ptg - <b>Ptg[1]</b>                                |            |
| 0003                    | <a href="#">PtgInt</a> - <b>PtgInt</b>             |            |
| 7 bits                  | BYTE - <b>ptg</b>                                  | 0x1E       |
| 1 bit                   | BYTE - <b>reserved0</b>                            | 0x0        |
| 0002                    | WORD - <b>integer</b>                              | 0x0002     |
| 0001                    | Ptg - <b>Ptg[2]</b>                                |            |
| 0001                    | <a href="#">PtgMul</a> - <b>PtgMul</b>             |            |
| 7 bits                  | BYTE - <b>ptg</b>                                  | 0x05       |
| 1 bit                   | BYTE - <b>reserved0</b>                            | 0x0        |
| 0003                    | Ptg - <b>Ptg[3]</b>                                |            |
| 0003                    | <a href="#">PtgFunc</a> - <b>PtgFunc</b>           |            |
| 5 bits                  | BYTE - <b>ptg</b>                                  | 0x01       |
| 2 bits                  | PtgDataType - <b>type</b>                          | 0x2        |

| Structure of BrtFmlaNum |                                     |            |
|-------------------------|-------------------------------------|------------|
| 1 bit                   | BYTE - <b>reserved</b>              | 0x0        |
| 0002                    | <a href="#">Ftab</a> - <b>iftab</b> |            |
| 0002                    | WORD - <b>iftab</b>                 | 0x0014     |
| 0004                    | DWORD - <b>cb</b>                   | 0x00000000 |

**cell:** Specifies the cell that contains the formula (section [2.2.2](#)).

**cell.column:** 0x00000001 specifies that column (2) B contains this cell.

**cell.iStyleRef:** 0x000000 specifies the zero-based index to a **BrtXF** (section [2.4.816](#)) record that the formatting style. The **BrtXF** record is not included in the example.

**cell.fPhShow:** 0x0 specifies that the cell does not show phonetic information.

**xnum:** 0x3FF6A09E667F3BCD specifies an **Xnum** (section [2.5.171](#)) value of 1.4142135623730951 that specifies the value to which this formula is evaluated.

**gbitFlags.fAlwaysCalc:** 0x0 specifies that the formula does not need to be reevaluated when the document is loaded.

**formula:** Specifies a formula stored in a cell.

**formula.cce:** 0x0000000E specifies that the length of **rgce** in bytes is 14.

**formula.rgce:** Specifies the sequence of **Ptg** (section [2.5.97.16](#)) structures for the formula.

**formula.rgce.Ptg[0]:** Specifies a single element of a formula (section [2.2.2](#)).

**formula.rgce.Ptg[0].PtgRef:** Specifies a reference to a single cell.

**formula.rgce.Ptg[0].PtgRef.ptg:** 0x04 is required in this field.

**formula.rgce.Ptg[0].PtgRef.type:** 0x2 specifies a single value of a simple type.

**formula.rgce.Ptg[0].PtgRef.loc:** Specifies that a reference to single cell relative references is stored as coordinates.

**formula.rgce.Ptg[0].PtgRef.loc.row:** 0x00000004 specifies that the row (2) coordinate of the cell reference is 5.

**formula.rgce.Ptg[0].PtgRef.loc.column:** Specifies the column (2) coordinate of the cell reference.

**formula.rgce.Ptg[0].PtgRef.loc.column.col:** 0x0001 specifies column (2) B.

**formula.rgce.Ptg[0].PtgRef.loc.column.fColRel:** 0x1 specifies that the associated row (2) and column (2) pair is a relative reference with respect to columns (2).

**formula.rgce.Ptg[0].PtgRef.loc.column.fRwRel:** 0x1 specifies that the associated row (2) and column (2) pair is a relative reference with respect to rows (2).

**formula.rgce.Ptg[1]:** Specifies a single element of a formula (section [2.2.2](#)).

**formula.rgce.Ptg[1].PtgInt:** Specifies a value.

**formula.rgce.Ptg[1].PtgInt.ptg:** 0x1E is required in this field.

**formula.rgce.Ptg[1].PtgInt.integer:** 0x0002 specifies that the value is 2.

**formula.rgce.Ptg[2]:** Specifies a single element of a formula (section [2.2.2](#)).

**formula.rgce.Ptg[2].PtgMul:** Specifies a binary value operator that multiplies the first and second expression in a binary value expression.

**formula.rgce.Ptg[2].PtgMul.ptg:** 0x05 is required in this field.

**formula.rgce.Ptg[3]:** Specifies a single element of a formula.

**formula.rgce.Ptg[3].PtgFunc:** Specifies a call to a function with a fixed number of parameters.

**formula.rgce.Ptg[3].PtgFunc.ptg:** 0x01 is required in this field.

**formula.rgce.Ptg[3].PtgFunc.type:** 0x2 specifies the data type for the value of this **Ptg** is VALUE.

**formula.rgce.Ptg[3].PtgFunc.iftab:** Specifies the function to be called.

**formula.rgce.Ptg[3].PtgFunc.iftab.iftab:** 0x0014 specifies that the function being called is SQRT.

**formula.cb:** 0x00000000 specifies that the length of the **rgcb** field is 0.

### 3.7.38 Workbook: BrtEndSheetData

The next record in this example, **BrtEndSheetData** (section [2.4.524](#)), specifies the end of the cell table (section [2.2.1](#)) on the sheet, as specified in the following table.

| Structure of BrtEndSheetData |  |
|------------------------------|--|
| Size                         | Structure                                |
| 0000                         | BrtEndSheetData - <b>BrtEndSheetData</b> |

### 3.7.39 Workbook: BrtSheetProtection

The next record in this example, **BrtSheetProtection** (section [2.4.740](#)), specifies protection options for a sheet, as specified in the following table.

| Structure of BrtSheetProtection |  |            |
|---------------------------------|--|------------|
| Size                            | Structure                                      | Value      |
| 0042                            | BrtSheetProtection - <b>BrtSheetProtection</b> |            |
| 0002                            | WORD - <b>protpwd</b>                          | 0x0000     |
| 0004                            | DWORD - <b>fLocked</b>                         | 0x00000000 |
| 0004                            | DWORD - <b>fObjects</b>                        | 0x00000001 |
| 0004                            | DWORD - <b>fScenarios</b>                      | 0x00000001 |

| Structure of BrtSheetProtection |                                  |            |
|---------------------------------|----------------------------------|------------|
| 0004                            | DWORD - <b>fFormatCells</b>      | 0x00000000 |
| 0004                            | DWORD - <b>fFormatColumns</b>    | 0x00000000 |
| 0004                            | DWORD - <b>fFormatRows</b>       | 0x00000000 |
| 0004                            | DWORD - <b>fInsertColumns</b>    | 0x00000000 |
| 0004                            | DWORD - <b>fInsertRows</b>       | 0x00000000 |
| 0004                            | DWORD - <b>fInsertHyperlinks</b> | 0x00000000 |
| 0004                            | DWORD - <b>fDeleteColumns</b>    | 0x00000000 |
| 0004                            | DWORD - <b>fDeleteRows</b>       | 0x00000000 |
| 0004                            | DWORD - <b>fSelLockedCells</b>   | 0x00000001 |
| 0004                            | DWORD - <b>fSort</b>             | 0x00000000 |
| 0004                            | DWORD - <b>fAutoFilter</b>       | 0x00000000 |
| 0004                            | DWORD - <b>fPivotTables</b>      | 0x00000000 |
| 0004                            | DWORD - <b>fSelUnlockedCells</b> | 0x00000001 |

**protpwd:** 0x0000 specifies that there is no password set.

**fLocked:** 0x00000000 specifies that the sheet and contents of locked cells are not protected.

**fObjects:** 0x00000001 specifies that this field is undefined and ignored because **fLocked** is 0.

**fScenarios:** 0x00000001 specifies that this field is undefined and ignored because **fLocked** is 0.

**fFormatCells:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fFormatColumns:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fFormatRows:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fInsertColumns:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fInsertRows:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fInsertHyperlinks:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fDeleteColumns:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fDeleteRows:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fSelLockedCells:** 0x00000001 specifies that this field is undefined and ignored because **fLocked** is 0.

**fSort:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fAutoFilter:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fPivotTables:** 0x00000000 specifies that this field is undefined and ignored because **fLocked** is 0.

**fSelUnlockedCells:** 0x00000001 specifies that this field is undefined and ignored because **fLocked** is 0.

### 3.7.40 Workbook: BrtPrintOptions

The next record in this example, **BrtPrintOptions** (section [2.4.711](#)), specifies the options for printing the sheet, as specified in the following table.

| Structure of BrtPrintOptions |  |       |
|------------------------------|--|-------|
| Size                         | Structure                                | Value |
| 0002                         | BrtPrintOptions - <b>BrtPrintOptions</b> |       |
| 1 bit                        | WORD - <b>fHCenter</b>                   | 0x0   |
| 1 bit                        | WORD - <b>fVCenter</b>                   | 0x0   |
| 1 bit                        | WORD - <b>fPrintHeaders</b>              | 0x0   |
| 1 bit                        | WORD - <b>fPrintGrid</b>                 | 0x0   |
| 1 bit                        | WORD - <b>unused</b>                     | 0x1   |
| 11 bits                      | WORD - <b>reserved</b>                   | 0x000 |

**fHCenter:** 0x0 specifies not to center the printed content horizontally on the page.

**fVCenter:** 0x0 specifies not to center the printed content vertically on the page.

**fPrintHeaders:** 0x0 specifies that the header rows (1) and column (2) heading will not be printed.

**fPrintGrid:** 0x0 specifies that gridlines will not be printed.

### 3.7.41 Workbook: BrtMargins

The next record in this example, **BrtMargins**, specifies the page margins for the sheet, as specified in the following table.

| Structure of BrtMargins |  |       |
|-------------------------|--|-------|
| Size                    | Structure                                      | Value |
| 0030                    | <a href="#">BrtMargins</a> - <b>BrtMargins</b> |       |
| 0008                    | <a href="#">Margin</a> - <b>xnumLeft</b>       |       |

| Structure of BrtMargins |                               |                    |
|-------------------------|-------------------------------|--------------------|
| 0008                    | <a href="#">Xnum</a> - margin | 0x3FE6666666666666 |
| 0008                    | Margin - <b>xnumRight</b>     |                    |
| 0008                    | Xnum - margin                 | 0x3FE6666666666666 |
| 0008                    | Margin - <b>xnumTop</b>       |                    |
| 0008                    | Xnum - margin                 | 0x3FE8000000000000 |
| 0008                    | Margin - <b>xnumBottom</b>    |                    |
| 0008                    | Xnum - margin                 | 0x3FE8000000000000 |
| 0008                    | Margin - <b>xnumHeader</b>    |                    |
| 0008                    | Xnum - margin                 | 0x3FD3333333333333 |
| 0008                    | Margin - <b>xnumFooter</b>    |                    |
| 0008                    | Xnum - margin                 | 0x3FD3333333333333 |

**xnumLeft:** Specifies the left page margin.

**xnumLeft.margin:** 0x3FE6666666666666 specifies an **Xnum** (section [2.5.171](#)) value of 0.7 that specifies the left page margin size in inches.

**xnumRight:** Specifies the right page margin.

**xnumRight.margin:** 0x3FE6666666666666 specifies an **Xnum** value of 0.7 that specifies the right page margin size in inches.

**xnumTop:** Specifies the top page margin.

**xnumTop.margin:** 0x3FE8000000000000 specifies an **Xnum** value of 0.75 that specifies the top page margin size in inches.

**xnumBottom:** Specifies the bottom page margin.

**xnumBottom.margin:** 0x3FE8000000000000 specifies an **Xnum** value of 0.75 that specifies the bottom page margin size in inches.

**xnumHeader:** Specifies the header page margin.

**xnumHeader.margin:** 0x3FD3333333333333 specifies an **Xnum** (section [2.5.171](#)) value of 0.3 that specifies the header page margin size in inches.

**xnumFooter:** Specifies the footer page margin.

**xnumFooter.margin:** 0x3FD3333333333333 specifies an **Xnum** value of 0.3 that specifies the footer page margin size in inches.

### 3.7.42 Workbook: BrtEndSheet

The last record in this example, **BrtEndSheet** (section [2.4.523](#)), specifies the end of a collection of records that specifies properties of the sheet.

| Structure of BrtEndSheet |                                  |
|--------------------------|----------------------------------|
| Size                     | Structure                        |
| 0000                     | BrtEndSheet - <b>BrtEndSheet</b> |

### 3.8 PivotTable

This example shows a **PivotTable** (section [2.1.7.40](#)) and its associated **PivotCache** (section [2.2.5.2](#)). The **PivotTable** uses a range of cells (A1:E45) in the "Source Data" sheet as its source data (section [2.2.5.2.1](#)). The "CustomerName" and "ProductName" fields have been added to the row (2) area, "Quantity" to the data area (section [2.2.5.3.8.1.4](#)), and "OrderDate" to the page area (section [2.2.5.3.8.1.3](#)) of this PivotTable view (section [2.2.5.3](#)). The "OrderDate" field has two dates selected in the filter (12/23/1997 and 12/26/1997) and the rest have been filtered out.

The following figure illustrates the **PivotTable** (section [2.1.7.40](#)) discussed in this example.

|    | A | B                  | C                         |
|----|---|--------------------|---------------------------|
| 1  |   |                    |                           |
| 2  |   |                    |                           |
| 3  |   | OrderDate          | (Multiple Items) [Filter] |
| 4  |   |                    |                           |
| 5  |   | Row Labels         | Sum of Quantity           |
| 6  |   | Island Trading     | 55                        |
| 7  |   | Ipoh Coffee        | 55                        |
| 8  |   | Königlich Essen    | 71                        |
| 9  |   | Geitost            | 23                        |
| 10 |   | Perth Pasties      | 48                        |
| 11 |   | Richter Supermarkt | 31                        |
| 12 |   | Grand Total        | 157                       |

**Figure 28: PivotTable Example**

This example covers **PivotTable** records that are members of the **Workbook** (section [2.1.7.60](#)), **PivotCache** Definition (section [2.1.7.38](#)), **PivotCache** Records (section [2.1.7.39](#)), and **PivotTable** (section [2.1.7.40](#)) parts ABNF. The first set of records between **BrtBeginPivotCacheIDs** (section [2.4.164](#)) and **BrtEndPivotCacheIDs** (section [2.4.499](#)) are contained in the **Workbook** part ABNF. The records between **BrtBeginPivotCacheDef** (section [2.4.162](#)) and **BrtEndPivotCacheDef** (section [2.4.497](#)) are contained in the **PivotCache** Definition part ABNF. The records between **BrtBeginPivotCacheRecords** (section [2.4.165](#)) and **BrtEndPivotCacheRecords** (section [2.4.500](#)) are contained in the **PivotCache** Records part ABNF. The records between **BrtBeginSXView** (section [2.4.264](#)) and **BrtEndSXView** (section [2.4.599](#)) are contained in the **PivotTable** (section [2.1.7.40](#)) part ABNF.

#### 3.8.1 PivotTable: BrtBeginPivotCacheIDs

The first record in this example, **BrtBeginPivotCacheIDs** (section [2.4.164](#)), represents the beginning of the collection of **BrtBeginPivotCacheID** (section [2.4.163](#)) records in the **Workbook** (section [2.1.7.60](#)) part ABNF, as specified in the following table.

| Structure of BrtBeginPivotCacheIDs |  |
|------------------------------------|--|
| Size                               | Structure  |
| 0000                               | BrtBeginPivotCacheIDs - <b>BrtBeginPivotCacheIDs</b> |

### 3.8.2 PivotTable: BrtBeginPivotCacheID

The **BrtBeginPivotCacheID** (section [2.4.163](#)) record specifies the relationship between the **PivotCache** (section [2.2.5.2](#)) identifier and its associated **PivotCache** Definition (section [2.1.7.38](#)), as specified in the following table.

| Structure of BrtBeginPivotCacheID |  |            |
|-----------------------------------|--|------------|
| Size                              | Structure  | Value      |
| 0010                              | BrtBeginPivotCacheID - <b>BrtBeginPivotCacheID</b> |            |
| 0004                              | DWORD - <b>idSx</b>                                | 0x00000041 |
| 000C                              | <a href="#">RelID</a> - <b>irstcacheRelID</b>      | rId3       |

**idSx**: 0x00000041 specifies the identifier of the **PivotCache** Definition (section [2.1.7.38](#)). This identifier corresponds to the **idCache** field of the PivotTable view (section [2.2.5.3](#)) as specified in **BrtBeginSXView** (section [2.4.264](#)).

**irstcacheRelID**: rId3 specifies the relationship identifier of the workbook part containing the **PivotTable** (section [2.1.7.40](#)).

### 3.8.3 PivotTable: BrtBeginPivotCacheDef

Next, the **BrtBeginPivotCacheDef** (section [2.4.162](#)) record specifies the properties of the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtBeginPivotCacheDef |  |       |
|------------------------------------|--|-------|
| Size                               | Structure  | Value |
| 0039                               | BrtBeginPivotCacheDef - <b>BrtBeginPivotCacheDef</b> |       |
| 0001                               | AppVersion - <b>bVerCacheLastRefresh</b>             | 0x03  |
| 0001                               | AppVersion - <b>bVerCacheRefreshableMin</b>          | 0x03  |
| 0001                               | AppVersion - <b>bVerCacheCreated</b>                 | 0x03  |
| 1 bit                              | BYTE - <b>fSaveData</b>                              | 0x1   |
| 1 bit                              | BYTE - <b>fInvalid</b>                               | 0x0   |
| 1 bit                              | BYTE - <b>fRefreshOnLoad</b>                         | 0x0   |
| 1 bit                              | BYTE - <b>fOptimizeCache</b>                         | 0x0   |
| 1 bit                              | BYTE - <b>fEnableRefresh</b>                         | 0x1   |
| 1 bit                              | BYTE - <b>fBackgroundQuery</b>                       | 0x0   |



| Structure of BrtBeginPivotCacheDef |   |                    |
|------------------------------------|---|--------------------|
| 1 bit                              | BYTE - <b>fUpgradeOnRefresh</b>                       | 0x0                |
| 1 bit                              | BYTE - <b>fSheetData</b>                              | 0x0                |
| 0004                               | LONG - <b>citmGhostMax</b>                            | 0xFFFFFFFF         |
| 0008                               | <a href="#">DateAsXnum</a> - <b>xnumRefreshedDate</b> |                    |
| 0008                               | <a href="#">Xnum</a> - <b>dateNum</b>                 | 0x40E355758E27E5E8 |
| 1 bit                              | BYTE - <b>fLoadRefreshedWho</b>                       | 0x1                |
| 1 bit                              | BYTE - <b>fLoadRelIDRecords</b>                       | 0x1                |
| 1 bit                              | BYTE - <b>fSupportSubquery</b>                        | 0x0                |
| 1 bit                              | BYTE - <b>fSupportAttribDrill</b>                     | 0x0                |
| 4 bits                             | BYTE - <b>reserved</b>                                | 0x0                |
| 0004                               | DWORD - <b>crecords</b>                               | 0x0000002C         |
| 0018                               | <a href="#">XLWideString</a> - <b>stRefreshedWho</b>  | John Smith         |
| 000C                               | <a href="#">RelID</a> - <b>stRelIDRecords</b>         | rId1               |

Fields in this record that are ignored because they apply only to OLAP or ODBC data sources (1) are omitted for brevity.

**bVerCacheLastRefresh:** 0x03 specifies the data functionality level (section [2.2.5.1](#)) of the application that last refreshed the **PivotCache** (section [2.2.5.2](#)).

**bVerCacheRefreshableMin:** 0x03 specifies the lowest data functionality level (section [2.2.5.1](#)) of the application that is required to refresh the **PivotCache**.

**bVerCacheCreated:** 0x03 specifies the data functionality level (section [2.2.5.1](#)) of the application that created the **PivotCache**.

**fSaveData:** 0x1 specifies that the cache records (section [2.2.5.2.10](#)) exist.

**fInvalid:** 0x0 specifies that the **PivotCache** (section [2.2.5.2](#)) is valid and does not need a refresh before the next recalculation.

**fRefreshOnLoad:** 0x0 specifies that the **PivotCache** is not refreshed when the workbook is opened.

**fOptimizeCache:** 0x0 specifies that optimizations to reduce memory are not applied to the **PivotCache** (section [2.2.5.2](#)).

**fEnableRefresh:** 0x1 specifies that the user can refresh the **PivotCache**.

**fBackgroundQuery:** 0x0 specifies that the **PivotCache** is not refreshed asynchronously.

**fUpgradeOnRefresh:** 0x0 specifies that the **PivotCache** is not scheduled for a version upgrade at the next refresh.

**citmGhostMax:** 0xFFFFFFFF specifies the number of unused cache items (section [2.2.5.2.3](#)) to allow before they are discarded, which is 4294967295.

**xnumRefreshedDate:** 0x40E355758E27E5E8 represents 5/27/2008 4:09:59PM, which is when the **PivotCache** (section [2.2.5.2](#)) was last refreshed.

**fLoadRefreshedWho:** 0x1 specifies that the **stRefreshedWho** field exists.

**fLoadRelIDRecords:** 0x1 specifies that the **stRelIDRecords** field exists.

**crecords:** 0x0000002C specifies that the number of cache records (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)) is 44.

**stRefreshedWho:** "John Smith" specifies the name of the user who last refreshed the **PivotCache**.

**stRelIDRecords:** "rId1" specifies the unique identifier that corresponds to the related cache records.

### 3.8.4 PivotTable: BrtBeginPCDSorce

The **BrtBeginPCDSorce** (section [2.4.160](#)) record specifies the type of the **PivotCache** (section [2.2.5.2](#)) source data (section [2.2.5.2.1](#)), as specified in the following table.

| Structure of BrtBeginPCDSorce |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                  | Value      |
| 0008                          | BrtBeginPCDSorce - <b>BrtBeginPCDSorce</b> |            |
| 0004                          | LONG - <b>iSrcType</b>                     | 0x00000000 |
| 0004                          | DWORD - <b>dwConnID</b>                    | 0x00000000 |

**iSrcType:** 0x00000000 specifies that the **PivotCache** (section [2.2.5.2](#)) source data (section [2.2.5.2.1](#)) is a range.

**dwConnID:** 0x00000000 specifies the unique identifier of the external connection (section [2.2.8](#)). This value is ignored, because the value of **iSrcType** is 0x00000000.

### 3.8.5 PivotTable: BrtBeginPCDSRange

The **BrtBeginPCDSRange** (section [2.4.161](#)) record specifies the properties of the range-based source data (section [2.2.5.2.1](#)) for this **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtBeginPCDSRange |  |       |
|--------------------------------|--|-------|
| Size                           | Structure                                    | Value |
| 002D                           | BrtBeginPCDSRange - <b>BrtBeginPCDSRange</b> |       |
| 1 bit                          | BYTE - <b>fName</b>                          | 0x0   |
| 7 bits                         | BYTE - <b>reserved1</b>                      | 0x00  |
| 1 bit                          | BYTE - <b>fBuiltIn</b>                       | 0x0   |

| Structure of BrtBeginPCDSRange |   |             |
|--------------------------------|---|-------------|
| 7 bits                         | BYTE - <b>reserved2</b>                         | 0x00        |
| 1 bit                          | BYTE - <b>fLoadRelId</b>                        | 0x0         |
| 1 bit                          | BYTE - <b>fLoadSheet</b>                        | 0x1         |
| 6 bits                         | BYTE - <b>reserved3</b>                         | 0x00        |
| 001A                           | <a href="#">XLWideString</a> - <b>sheetName</b> | Source Data |
| 0010                           | <a href="#">RfX</a> - <b>range</b>              |             |
| 0004                           | LONG - <b>rwFirst</b>                           | 0x00000000  |
| 0004                           | LONG - <b>rwLast</b>                            | 0x0000002C  |
| 0004                           | LONG - <b>colFirst</b>                          | 0x00000000  |
| 0004                           | LONG - <b>colLast</b>                           | 0x00000004  |

**fName:** 0x0 specifies that the source data (section [2.2.5.2.1](#)) is not a defined name.

**fBuiltIn:** 0x0 specifies that the defined name is not a built-in name. This field is ignored, because the source data is not a defined name.

**fLoadRelId:** 0x0 specifies that the source data is not in an external workbook (section [2.1.10](#)).

**fLoadSheet:** 0x1 specifies that the source data is scoped to a single sheet.

**sheetName:** Source Data specifies the name of the sheet to which the source data is scoped.

**range:** Specifies the source data range.

**range.rwFirst:** 0x00000000 specifies that the first row (2) of the source data (section [2.2.5.2.1](#)) range is row (2) 1.

**range.rwLast:** 0x0000002C specifies that the last row (2) of the source data range is row (2) 45.

**range.colFirst:** 0x00000000 specifies that the first column (2) of the source data range is column (2) A.

**range.colLast:** 0x00000004 specifies that the last column (2) of the source data range is column (2) E.

### 3.8.6 PivotTable: BrtBeginPCDFields

Next, **BrtBeginPCDFields** (section [2.4.131](#)) specifies the beginning of the collection of cache fields (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)) and the count of the cache fields, as specified in the following table.

| Structure of BrtBeginPCDFields |  |       |
|--------------------------------|--|-------|
| Size                           | Structure                                    | Value |
| 0004                           | BrtBeginPCDFields - <b>BrtBeginPCDFields</b> |       |

| Structure of BrtBeginPCDFields |                        |            |
|--------------------------------|------------------------|------------|
| 0004                           | DWORD - <b>cfields</b> | 0x00000005 |

**cfields:** 0x00000005 specifies that there are five cache fields (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)).

### 3.8.7 PivotTable: BrtBeginPCDField 1

The first **BrtBeginPCDField** (section [2.4.130](#)) record specifies the properties of the "CustomerName" cache field (section [2.2.5.2.2](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtBeginPCDField |   |              |
|-------------------------------|---|--------------|
| Size                          | Structure                                       | Value        |
| 0030                          | BrtBeginPCDField - <b>BrtBeginPCDField</b>      |              |
| 1 bit                         | BYTE - <b>fServerBased</b>                      | 0x0          |
| 1 bit                         | BYTE - <b>fCantGetUniqueItems</b>               | 0x0          |
| 1 bit                         | BYTE - <b>fSrcField</b>                         | 0x1          |
| 1 bit                         | BYTE - <b>fCaption</b>                          | 0x0          |
| 1 bit                         | BYTE - <b>fOlapMemPropField</b>                 | 0x0          |
| 3 bits                        | BYTE - <b>reserved1</b>                         | 0x0          |
| 1 bit                         | BYTE - <b>fLoadFmla</b>                         | 0x0          |
| 1 bit                         | BYTE - <b>fLoadPropName</b>                     | 0x0          |
| 6 bits                        | BYTE - <b>reserved2</b>                         | 0x00         |
| 0004                          | <a href="#">PivotNumFmt</a> - <b>ifmt</b>       |              |
| 0002                          | <a href="#">Ifmt</a> - <b>ifmt</b>              |              |
| 0002                          | WORD - <b>ifmt</b>                              | 0x0000       |
| 0002                          | WORD - <b>reserved</b>                          | 0x0000       |
| 0002                          | SHORT - <b>wTypeSql</b>                         | 0x0000       |
| 0004                          | DWORD - <b>ihdb</b>                             | 0x00000000   |
| 0004                          | DWORD - <b>isxtl</b>                            | 0x00000000   |
| 0004                          | DWORD - <b>cIsxtmps</b>                         | 0x00000000   |
| 001C                          | <a href="#">XLWideString</a> - <b>stFldName</b> | CustomerName |

Fields in this record that are ignored because they apply only to OLAP or ODBC data sources (1) are omitted for brevity.

**fSrcField:** 0x1 specifies that this cache field (section [2.2.5.2.2](#)) was created based on a column (2) in the source data (section [2.2.5.2.1](#)).

**fCaption:** 0x0 specifies that the **stFldCaption** field, which specifies the caption of this cache field, does not exist after the fixed size portion of the record.

**fLoadFmla:** 0x0 specifies that the **fldFmla** field, which specifies the formula (section [2.2.2](#)) for a calculated field (section [2.2.5.2.5](#)), does not exist after the fixed-size portion of the record.

**ifmt:** Specifies the number format applied to all items in this cache field (section [2.2.5.2.2](#)).

**ifmt.ifmt.ifmt:** 0x0000 specifies that all the items in the cache field are in the General number format as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.8.30.

**stFldName:** CustomerName specifies the name of the cache field.

### 3.8.8 PivotTable: BrtBeginPCDFatbl

The **BrtBeginPCDFatbl** (section [2.4.125](#)) record specifies properties of the "CustomerName" cache field (section [2.2.5.2.2](#)) and begins the collection of cache item (section [2.2.5.2.3](#)) records shared by the cache field in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtBeginPCDFatbl |   |            |
|-------------------------------|---|------------|
| Size                          | Structure                                 | Value      |
| 0006                          | BrBeginPCDFatbl - <b>BrtBeginPCDFatbl</b> |            |
| 1 bit                         | WORD - <b>fTextEtcField</b>               | 0x1        |
| 1 bit                         | WORD - <b>fNonDates</b>                   | 0x1        |
| 1 bit                         | WORD - <b>fDateInField</b>                | 0x0        |
| 1 bit                         | WORD - <b>fHasTextItem</b>                | 0x1        |
| 1 bit                         | WORD - <b>fHasBlankItem</b>               | 0x0        |
| 1 bit                         | WORD - <b>fMixedTypesIgnoringBlanks</b>   | 0x0        |
| 1 bit                         | WORD - <b>fNumField</b>                   | 0x0        |
| 1 bit                         | WORD - <b>fIntField</b>                   | 0x0        |
| 1 bit                         | WORD - <b>fNumMinMaxValid</b>             | 0x0        |
| 1 bit                         | WORD - <b>fHasLongTextItem</b>            | 0x0        |
| 6 bits                        | WORD - <b>reserved</b>                    | 0x00       |
| 0004                          | DWORD - <b>citems</b>                     | 0x00000005 |

**fTextEtcField:** 0x1 specifies that this cache field (section [2.2.5.2.2](#)) contains at least one cache item (section [2.2.5.2.3](#)) that is a text, blank, Boolean, or error value.

**fNonDates:** 0x1 specifies that this cache field contains at least one cache item that is not a date.

**fDateInField:** 0x0 specifies that this cache field does not contain a cache item that is a date.

**fHasTextItem:** 0x1 specifies that this cache field contains a cache item that is a text value.

**fHasBlankItem:** 0x0 specifies that this cache field does not contain a cache item that is a blank value.

**fMixedTypesIgnoringBlanks:** 0x0 specifies that this cache field does not contain cache items that are more than one of the following types of values: text, numeric, or date.

**fNumField:** 0x0 specifies that this cache field does not contain a cache item that is a numeric value.

**fIntField:** 0x0 specifies that this cache field does not contain a cache item (section [2.2.5.2.3](#)) that is an integer.

**fNumMinMaxValid:** 0x0 specifies that **xnumMin** and **xnumMax** do not follow the fixed portion of this record.

**fHasLongTextItem:** 0x0 specifies that this cache field does not contain a cache item that is a string over 255 characters.

**citems:** 0x00000005 specifies that there are five cache items in this collection.

### 3.8.9 PivotTable: BrtPCDIString 1

The next record, **BrtPCDIString** (section [2.4.702](#)), specifies the value of the "Great Lakes Food Market" cache item (section [2.2.5.2.3](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCDIString |  |                         |
|----------------------------|--|-------------------------|
| Size                       | Structure                                | Value                   |
| 0032                       | BrtPCDIString - <b>BrtPCDIString</b>     |                         |
| 0032                       | <a href="#">XLWideString</a> - <b>st</b> | Great Lakes Food Market |

**st:** Great Lakes Food Market specifies the string type value of this record.

### 3.8.10 PivotTable: BrtPCDIString 2

This **BrtPCDIString** (section [2.4.702](#)) record specifies the value of the "Island Trading" cache item (section [2.2.5.2.3](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCDIString |  |                |
|----------------------------|--|----------------|
| Size                       | Structure                                | Value          |
| 0020                       | BrtPCDIString - <b>BrtPCDIString</b>     |                |
| 0020                       | <a href="#">XLWideString</a> - <b>st</b> | Island Trading |

**st:** Island Trading specifies the string type value of this record.

The remaining **BrtPCDIString** (section [2.4.702](#)) records are omitted for brevity.

### 3.8.11 PivotTable: BrtBeginPCDField 2

The next **BrtBeginPCDField** (section [2.4.130](#)) record specifies the "OrderDate" cache field (section [2.2.5.2.2](#)) that corresponds to the pivot field (section [2.2.5.3.2](#)) displayed on the page axis (section [2.2.5.3.7.1](#)) in this example, as specified in the following table.

| Structure of BrtBeginPCDField |   |            |
|-------------------------------|---|------------|
| Size                          | Structure                                       | Value      |
| 002A                          | BrtBeginPCDField - <b>BrtBeginPCDField</b>      |            |
| 1 bit                         | BYTE - <b>fServerBased</b>                      | 0x0        |
| 1 bit                         | BYTE - <b>fCantGetUniqueItems</b>               | 0x0        |
| 1 bit                         | BYTE - <b>fSrcField</b>                         | 0x1        |
| 1 bit                         | BYTE - <b>fCaption</b>                          | 0x0        |
| 1 bit                         | BYTE - <b>fOlapMemPropField</b>                 | 0x0        |
| 3 bits                        | BYTE - <b>reserved1</b>                         | 0x0        |
| 1 bit                         | BYTE - <b>fLoadFmla</b>                         | 0x0        |
| 1 bit                         | BYTE - <b>fLoadPropName</b>                     | 0x0        |
| 6 bits                        | BYTE - <b>reserved2</b>                         | 0x00       |
| 0004                          | <a href="#">PivotNumFmt</a> - <b>ifmt</b>       |            |
| 0002                          | <a href="#">Ifmt</a> - <b>ifmt</b>              |            |
| 0002                          | WORD - <b>ifmt</b>                              | 0x000E     |
| 0002                          | WORD - <b>reserved</b>                          | 0x0000     |
| 0002                          | SHORT - <b>wTypeSql</b>                         | 0x0000     |
| 0004                          | DWORD - <b>ihdb</b>                             | 0x00000000 |
| 0004                          | DWORD - <b>isxtl</b>                            | 0x00000000 |
| 0004                          | DWORD - <b>cIsxtmps</b>                         | 0x00000000 |
| 0016                          | <a href="#">XLWideString</a> - <b>stFldName</b> | OrderDate  |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**ifmt.ifmt.ifmt:** 0x000E specifies all the items in the cache field are in **mm-dd-yy** format as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.8.30.

**stFldName:** OrderDate specifies the name of the cache field (section [2.2.5.2.2](#)).

### 3.8.12 PivotTable: BrtBeginPCDFAtbl 1

The next **BrtBeginPCDFAtbl** (section [2.4.125](#)) record specifies properties of the "OrderDate" cache field (section [2.2.5.2.2](#)) and begins the collection of cache item (section [2.2.5.2.3](#)) records shared by the cache field in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtBeginPCDFAtbl |  |                    |
|-------------------------------|--|--------------------|
| Size                          | Structure                                  | Value              |
| 0016                          | BrtBeginPCDFAtbl - <b>BrtBeginPCDFAtbl</b> |                    |
| 1 bit                         | WORD - <b>fTextEtcField</b>                | 0x0                |
| 1 bit                         | WORD - <b>fNonDates</b>                    | 0x0                |
| 1 bit                         | WORD - <b>fDateInField</b>                 | 0x1                |
| 1 bit                         | WORD - <b>fHasTextItem</b>                 | 0x0                |
| 1 bit                         | WORD - <b>fHasBlankItem</b>                | 0x0                |
| 1 bit                         | WORD - <b>fMixedTypesIgnoringBlanks</b>    | 0x0                |
| 1 bit                         | WORD - <b>fNumField</b>                    | 0x0                |
| 1 bit                         | WORD - <b>fIntField</b>                    | 0x0                |
| 1 bit                         | WORD - <b>fNumMinMaxValid</b>              | 0x1                |
| 1 bit                         | WORD - <b>fHasLongTextItem</b>             | 0x0                |
| 6 bits                        | WORD - <b>reserved</b>                     | 0x00               |
| 0004                          | DWORD - <b>citems</b>                      | 0x00000014         |
| 0008                          | <a href="#">Xnum</a> - <b>xnumMin</b>      | 0x40E15C8000000000 |
| 0008                          | Xnum - <b>xnumMax</b>                      | 0x40E17D6000000000 |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**fTextEtcField:** 0x0 specifies that this cache field (section [2.2.5.2.2](#)) does not contain at least one cache item (section [2.2.5.2.3](#)) that is a text, blank, Boolean, or error value.

**fNonDates:** 0x0 specifies that this cache field does not contain a cache item that is a non-date value.

**fDateInField:** 0x1 specifies that this cache field contains at least one cache item that is a date.

**fHasTextItem:** 0x0 specifies that this cache field does not contain a cache item that is a text value.

**fNumMinMaxValid:** 0x1 specifies that **xnumMin** and **xnumMax** exist in the record.

**citems:** 0x00000014 specifies that there are 20 cache items in this collection.

**xnumMin:** 0x40E15C8000000000 specifies that the earliest date specified among all the **BrtPCDIDatetime** (section [2.4.697](#)) records in this collection is May 6, 1997.

**xnumMax:** 0x40E17D6000000000 specifies that the latest date specified among all the **BrtPCDIDatetime** records in this collection is January 24, 1998.



### 3.8.13 PivotTable: BrtBeginPCDIRun

The **BrtBeginPCDIRun** (section [2.4.141](#)) record specifies the sequence of **PCDIDateTime** (section [2.5.100](#)) cache items (section [2.2.5.2.3](#)), as specified in the following table.

| Structure of BrtBeginPCDIRun |  |            |
|------------------------------|--|------------|
| Size                         | Structure                              | Value      |
| 00A6                         | BrBeginPCDIRun - <b>BrBeginPCDIRun</b> |            |
| 0002                         | SHORT - <b>mdSxoper</b>                | 0x0020     |
| 0004                         | DWORD - <b>cItems</b>                  | 0x00000014 |
| 00A0                         | PCDIDateTime - <b>rgPCDIDatetime</b>   |            |
| 0008                         | PCDIDateTime - <b>PCDIDatetime[0]</b>  |            |
| 0002                         | USHORT - <b>yr</b>                     | 0x07CD     |
| 0002                         | USHORT - <b>mon</b>                    | 0x0005     |
| 0001                         | BYTE - <b>dom</b>                      | 0x06       |
| 0001                         | BYTE - <b>hr</b>                       | 0x00       |
| 0001                         | BYTE - <b>min</b>                      | 0x00       |
| 0001                         | BYTE - <b>sec</b>                      | 0x00       |
| 0008                         | PCDIDateTime - <b>PCDIDatetime[1]</b>  |            |
| 0002                         | USHORT - <b>yr</b>                     | 0x07CD     |
| 0002                         | USHORT - <b>mon</b>                    | 0x0005     |
| 0001                         | BYTE - <b>dom</b>                      | 0x0F       |
| 0001                         | BYTE - <b>hr</b>                       | 0x00       |
| 0001                         | BYTE - <b>min</b>                      | 0x00       |
| 0001                         | BYTE - <b>sec</b>                      | 0x00       |
| 0008                         | PCDIDateTime - <b>PCDIDatetime[2]</b>  |            |
| 0002                         | USHORT - <b>yr</b>                     | 0x07CD     |
| 0002                         | USHORT - <b>mon</b>                    | 0x0006     |
| 0001                         | BYTE - <b>dom</b>                      | 0x13       |
| 0001                         | BYTE - <b>hr</b>                       | 0x00       |
| 0001                         | BYTE - <b>min</b>                      | 0x00       |
| 0001                         | BYTE - <b>sec</b>                      | 0x00       |
| 0008                         | PCDIDateTime - <b>PCDIDatetime[3]</b>  |            |

| <b>Structure of BrtBeginPCDIRun</b> |  |        |
|-------------------------------------|--|--------|
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0006 |
| 0001                                | BYTE - <b>dom</b>                      | 0x18   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatettime[4]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0007 |
| 0001                                | BYTE - <b>dom</b>                      | 0x0F   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatettime[5]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0007 |
| 0001                                | BYTE - <b>dom</b>                      | 0x1F   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatettime[6]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0008 |
| 0001                                | BYTE - <b>dom</b>                      | 0x05   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatettime[7]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0008 |

| <b>Structure of BrtBeginPCDIRun</b> |  |        |
|-------------------------------------|--|--------|
| 0001                                | BYTE - <b>dom</b>                      | 0x0E   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[8]</b>  |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0009 |
| 0001                                | BYTE - <b>dom</b>                      | 0x04   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[9]</b>  |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0009 |
| 0001                                | BYTE - <b>dom</b>                      | 0x0F   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[10]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x0009 |
| 0001                                | BYTE - <b>dom</b>                      | 0x16   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[11]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x000A |
| 0001                                | BYTE - <b>dom</b>                      | 0x10   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |

| <b>Structure of BrtBeginPCDIRun</b> |  |        |
|-------------------------------------|--|--------|
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[12]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x000A |
| 0001                                | BYTE - <b>dom</b>                      | 0x1B   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[13]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x000B |
| 0001                                | BYTE - <b>dom</b>                      | 0x14   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[14]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x000B |
| 0001                                | BYTE - <b>dom</b>                      | 0x18   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |
| 0008                                | PCDIDateTime - <b>PCDIDatetime[15]</b> |        |
| 0002                                | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                                | USHORT - <b>mon</b>                    | 0x000B |
| 0001                                | BYTE - <b>dom</b>                      | 0x1C   |
| 0001                                | BYTE - <b>hr</b>                       | 0x00   |
| 0001                                | BYTE - <b>min</b>                      | 0x00   |
| 0001                                | BYTE - <b>sec</b>                      | 0x00   |

| Structure of BrtBeginPCDIRun |  |        |
|------------------------------|--|--------|
| 0008                         | PCDIDateTime - <b>PCDIDatetime[16]</b> |        |
| 0002                         | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                         | USHORT - <b>mon</b>                    | 0x000C |
| 0001                         | BYTE - <b>dom</b>                      | 0x17   |
| 0001                         | BYTE - <b>hr</b>                       | 0x00   |
| 0001                         | BYTE - <b>min</b>                      | 0x00   |
| 0001                         | BYTE - <b>sec</b>                      | 0x00   |
| 0008                         | PCDIDateTime - <b>PCDIDatetime[17]</b> |        |
| 0002                         | USHORT - <b>yr</b>                     | 0x07CD |
| 0002                         | USHORT - <b>mon</b>                    | 0x000C |
| 0001                         | BYTE - <b>dom</b>                      | 0x1A   |
| 0001                         | BYTE - <b>hr</b>                       | 0x00   |
| 0001                         | BYTE - <b>min</b>                      | 0x00   |
| 0001                         | BYTE - <b>sec</b>                      | 0x00   |
| 0008                         | PCDIDateTime - <b>PCDIDatetime[18]</b> |        |
| 0002                         | USHORT - <b>yr</b>                     | 0x07CE |
| 0002                         | USHORT - <b>mon</b>                    | 0x0001 |
| 0001                         | BYTE - <b>dom</b>                      | 0x06   |
| 0001                         | BYTE - <b>hr</b>                       | 0x00   |
| 0001                         | BYTE - <b>min</b>                      | 0x00   |
| 0001                         | BYTE - <b>sec</b>                      | 0x00   |
| 0008                         | PCDIDateTime - <b>PCDIDatetime[19]</b> |        |
| 0002                         | USHORT - <b>yr</b>                     | 0x07CE |
| 0002                         | USHORT - <b>mon</b>                    | 0x0001 |
| 0001                         | BYTE - <b>dom</b>                      | 0x17   |
| 0001                         | BYTE - <b>hr</b>                       | 0x00   |
| 0001                         | BYTE - <b>min</b>                      | 0x00   |
| 0001                         | BYTE - <b>sec</b>                      | 0x00   |

**mdSxoper:** 0x0020 specifies that the date-time type field is used to store cache items (section [2.2.5.2.3](#)) and is defined by **rgPCDIDateTime**.

**cItems:** 0x00000014 specifies that the number of cache items in the array is 20.

**rgPCDIDatetime:** Specifies an array of 20 unique **PCDIDateTime** (section [2.5.100](#)) fields, three of which are described following this sentence, that specify the date-time values of the cache items.

**rgPCDIDatetime.PCDIDatetime[0]:** specifies the value of May 6, 1997 00:00:00.

**rgPCDIDatetime.PCDIDatetime[0].yr:** 0x07CD specifies the year to be 1997.

**rgPCDIDatetime.PCDIDatetime[0].mon:** 0x0005 specifies the month to be May.

**rgPCDIDatetime.PCDIDatetime[0].dom:** 0x06 specifies the day of the month to be the 6th.

**rgPCDIDatetime.PCDIDatetime[0].hr:** 0x00 specifies the hour to be 0.

**rgPCDIDatetime.PCDIDatetime[0].min:** 0x00 specifies the minute to be 0.

**rgPCDIDatetime.PCDIDatetime[0].sec:** 0x00 specifies the second to be 0.

**rgPCDIDatetime.PCDIDatetime[16]:** Specifies the date-time value of December 23, 1997 00:00:00.

**rgPCDIDatetime.PCDIDatetime[16].yr:** 0x07CD specifies the year to be 1997.

**rgPCDIDatetime.PCDIDatetime[16].mon:** 0x000C specifies the month to be December.

**rgPCDIDatetime.PCDIDatetime[16].dom:** 0x17 specifies the date to be the 23rd.

**rgPCDIDatetime.PCDIDatetime[16].hr:** 0x00 specifies the hour to be 0.

**rgPCDIDatetime.PCDIDatetime[16].min:** 0x00 specifies the minute to be 0.

**rgPCDIDatetime.PCDIDatetime[16].sec:** 0x00 specifies the second to be 0.

**rgPCDIDatetime.PCDIDatetime[17]:** Specifies the date-time value of December 26, 1997 00:00:00

**rgPCDIDatetime.PCDIDatetime[17].yr:** 0x07CD specifies the year is 1997 in the date.

**rgPCDIDatetime.PCDIDatetime[17].mon:** 0x000C specifies the month to be December.

**rgPCDIDatetime.PCDIDatetime[17].dom:** 0x1A specifies the date to be the 26th.

**rgPCDIDatetime.PCDIDatetime[17].hr:** 0x00 specifies the hour to be 0.

**rgPCDIDatetime.PCDIDatetime[17].min:** 0x00 specifies the minute to be 0.

**rgPCDIDatetime.PCDIDatetime[17].sec:** 0x00 specifies the second to be 0.

### 3.8.14 PivotTable: BrtBeginPCDField 3

The next **BrtBeginPCDField** (section [2.4.130](#)) record specifies the "ProductName" cache field (section [2.2.5.2.2](#)), as specified in the following table.

| Structure of BrtBeginPCDField |   |             |
|-------------------------------|---|-------------|
| Size                          | Structure                                       | Value       |
| 002E                          | BrtBeginPCDField - <b>BrtBeginPCDField</b>      |             |
| 1 bit                         | BYTE - <b>fServerBased</b>                      | 0x0         |
| 1 bit                         | BYTE - <b>fCantGetUniqueItems</b>               | 0x0         |
| 1 bit                         | BYTE - <b>fSrcField</b>                         | 0x1         |
| 1 bit                         | BYTE - <b>fCaption</b>                          | 0x0         |
| 1 bit                         | BYTE - <b>fOlapMemPropField</b>                 | 0x0         |
| 3 bits                        | BYTE - <b>reserved1</b>                         | 0x0         |
| 1 bit                         | BYTE - <b>fLoadFmla</b>                         | 0x0         |
| 1 bit                         | BYTE - <b>fLoadPropName</b>                     | 0x0         |
| 6 bits                        | BYTE - <b>reserved2</b>                         | 0x00        |
| 0004                          | <a href="#">PivotNumFmt</a> - <b>ifmt</b>       |             |
| 0002                          | <a href="#">Ifmt</a> - <b>ifmt</b>              |             |
| 0002                          | WORD - <b>ifmt</b>                              | 0x0000      |
| 0002                          | WORD - <b>reserved</b>                          | 0x0000      |
| 0002                          | SHORT - <b>wTypeSql</b>                         | 0x0000      |
| 0004                          | DWORD - <b>ihdb</b>                             | 0x00000000  |
| 0004                          | DWORD - <b>isxtl</b>                            | 0x00000000  |
| 0004                          | DWORD - <b>cIsxtmps</b>                         | 0x00000000  |
| 001A                          | <a href="#">XLWideString</a> - <b>stFldName</b> | ProductName |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**stFldName:** ProductName specifies the name of this cache field (section [2.2.5.2.2](#)).

The **BrtBeginPCDFatbl** (section [2.4.125](#)) and **BrtBeginPCDIRun** (section [2.4.141](#)) records following this record are omitted for brevity.

### 3.8.15 PivotTable: BrtBeginPCDField 4

The next **BrtBeginPCDField** (section [2.4.130](#)) record specifies the "UnitPrice" cache field (section [2.2.5.2.2](#)), as specified in the following table.

| Structure of BrtBeginPCDField |  |       |
|-------------------------------|--|-------|
| Size                          | Structure                                  | Value |
| 002A                          | BrtBeginPCDField - <b>BrtBeginPCDField</b> |       |

| Structure of BrtBeginPCDField |   |            |
|-------------------------------|---|------------|
| 1 bit                         | BYTE - <b>fServerBased</b>                      | 0x0        |
| 1 bit                         | BYTE - <b>fCantGetUniqueItems</b>               | 0x0        |
| 1 bit                         | BYTE - <b>fSrcField</b>                         | 0x1        |
| 1 bit                         | BYTE - <b>fCaption</b>                          | 0x0        |
| 1 bit                         | BYTE - <b>fOlapMemPropField</b>                 | 0x0        |
| 3 bits                        | BYTE - <b>reserved1</b>                         | 0x0        |
| 1 bit                         | BYTE - <b>fLoadFmla</b>                         | 0x0        |
| 1 bit                         | BYTE - <b>fLoadPropName</b>                     | 0x0        |
| 6 bits                        | BYTE - <b>reserved2</b>                         | 0x00       |
| 0004                          | <a href="#">PivotNumFmt</a> - <b>ifmt</b>       |            |
| 0002                          | <a href="#">Ifmt</a> - <b>ifmt</b>              |            |
| 0002                          | WORD - <b>ifmt</b>                              | 0x002C     |
| 0002                          | WORD - <b>reserved</b>                          | 0x0000     |
| 0002                          | SHORT - <b>wTypeSql</b>                         | 0x0000     |
| 0004                          | DWORD - <b>ihdb</b>                             | 0x00000000 |
| 0004                          | DWORD - <b>isxtl</b>                            | 0x00000000 |
| 0004                          | DWORD - <b>cIsxtmps</b>                         | 0x00000000 |
| 0016                          | <a href="#">XLWideString</a> - <b>stFldName</b> | UnitPrice  |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**ifmt.ifmt.ifmt:** 0x002C specifies that the number formatting style applied is style 44 from the built-in number formats as specified in [\[ISO/IEC29500-1:2011\]](#), section 18.8.30.

**stFldName:** UnitPrice specifies the name of this cache field (section [2.2.5.2.2](#)).

The **BrtBeginPCDFAtbl** (section [2.4.125](#)) record following this record is omitted for brevity.

### 3.8.16 PivotTable: BrtBeginPCDField 5

The next **BrtBeginPCDField** (section [2.4.130](#)) record describes the "Quantity" cache field (section [2.2.5.2.2](#)), as specified in the following table.

| Structure of BrtBeginPCDField |  |       |
|-------------------------------|--|-------|
| Size                          | Structure                                  | Value |
| 0028                          | BrtBeginPCDField - <b>BrtBeginPCDField</b> |       |
| 1 bit                         | BYTE - <b>fServerBased</b>                 | 0x0   |



| Structure of BrtBeginPCDField |   |            |
|-------------------------------|---|------------|
| 1 bit                         | BYTE - <b>fCantGetUniqueItems</b>               | 0x0        |
| 1 bit                         | BYTE - <b>fSrcField</b>                         | 0x1        |
| 1 bit                         | BYTE - <b>fCaption</b>                          | 0x0        |
| 1 bit                         | BYTE - <b>fOlapMemPropField</b>                 | 0x0        |
| 3 bits                        | BYTE - <b>reserved1</b>                         | 0x0        |
| 1 bit                         | BYTE - <b>fLoadFmla</b>                         | 0x0        |
| 1 bit                         | BYTE - <b>fLoadPropName</b>                     | 0x0        |
| 6 bits                        | BYTE - <b>reserved2</b>                         | 0x00       |
| 0004                          | <a href="#">PivotNumFmt</a> - ifmt              |            |
| 0002                          | <a href="#">Ifmt</a> - ifmt                     |            |
| 0002                          | WORD - ifmt                                     | 0x0000     |
| 0002                          | WORD - <b>reserved</b>                          | 0x0000     |
| 0002                          | SHORT - <b>wTypeSql</b>                         | 0x0000     |
| 0004                          | DWORD - <b>ihdb</b>                             | 0x00000000 |
| 0004                          | DWORD - <b>isxtl</b>                            | 0x00000000 |
| 0004                          | DWORD - <b>cIsxtmps</b>                         | 0x00000000 |
| 0014                          | <a href="#">XLWideString</a> - <b>stFldName</b> | Quantity   |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**stFldName:** Quantity specifies the name of this cache field (section [2.2.5.2.2](#)).

### 3.8.17 PivotTable: BrtBeginPCDFAtbl 2

The next **BrtBeginPCDFAtbl** (section [2.4.125](#)) record specifies properties of the "Quantity" cache field (section [2.2.5.2.2](#)) and begins the collection of cache item (section [2.2.5.2.3](#)) records shared by the cache field in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtBeginPCDFAtbl |  |       |
|-------------------------------|--|-------|
| Size                          | Structure                                  | Value |
| 0016                          | BrtBeginPCDFAtbl - <b>BrtBeginPCDFAtbl</b> |       |
| 1 bit                         | WORD - <b>fTextEtcField</b>                | 0x0   |
| 1 bit                         | WORD - <b>fNonDates</b>                    | 0x1   |
| 1 bit                         | WORD - <b>fDateInField</b>                 | 0x0   |
| 1 bit                         | WORD - <b>fHasTextItem</b>                 | 0x0   |

| Structure of BrtBeginPCDFAtbl |   |                    |
|-------------------------------|---|--------------------|
| 1 bit                         | WORD - <b>fHasBlankItem</b>             | 0x0                |
| 1 bit                         | WORD - <b>fMixedTypesIgnoringBlanks</b> | 0x0                |
| 1 bit                         | WORD - <b>fNumField</b>                 | 0x1                |
| 1 bit                         | WORD - <b>fIntField</b>                 | 0x1                |
| 1 bit                         | WORD - <b>fNumMinMaxValid</b>           | 0x1                |
| 1 bit                         | WORD - <b>fHasLongTextItem</b>          | 0x0                |
| 6 bits                        | WORD - <b>reserved</b>                  | 0x00               |
| 0004                          | DWORD - <b>citems</b>                   | 0x00000000         |
| 0008                          | Xnum - <b>xnumMin</b>                   | 0x4008000000000000 |
| 0008                          | Xnum - <b>xnumMax</b>                   | 0x404C000000000000 |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**fNumField:** 0x1 specifies that this cache field (section [2.2.5.2.2](#)) contains a cache item (section [2.2.5.2.3](#)) that is a numeric value.

**fIntField:** 0x1 specifies that this cache field contains a cache item that is an integer value.

**citems:** 0x00000000 specifies that the number of cache items in this collection is 0.

**xnumMin:** 0x4008000000000000 specifies that the minimum value in this cache field is 3.

**xnumMax:** 0x404C000000000000 specifies that the maximum value in this cache field is 56.

### 3.8.18 PivotTable: BrtBeginPivotCacheRecords

The next record in this example, **BrtBeginPivotCacheRecords** (section [2.4.165](#)), specifies the beginning of the collection of cache records (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtBeginPivotCacheRecords |  |            |
|--|--|------------|
| Size                                   | Structure  | Value      |
| 0004                                   | BrtBeginPivotCacheRecords - <b>BrtBeginPivotCacheRecords</b> |            |
| 0004                                   | DWORD - <b>crecords</b>                                      | 0x0000002C |

**crecords:** 0x0000002C specifies that there are 44 cache records in the **PivotCache**.

### 3.8.19 PivotTable: BrtPCRRecord 1

The next record in this example, **BrtPCRRecord** (section [2.4.704](#)), specifies the first cache record (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCRRecord |                                      |                    |
|---------------------------|--------------------------------------|--------------------|
| Size                      | Structure                            | Value              |
| 001C                      | BrtPCRRecord - <b>BrtPCRRecord</b>   |                    |
| 001C                      | rgb - <b>rgb</b>                     |                    |
| 0004                      | ULONG - <b>rgb[0]</b>                | 0x00000000         |
| 0004                      | ULONG - <b>rgb[1]</b>                | 0x00000000         |
| 0004                      | ULONG - <b>rgb[2]</b>                | 0x00000000         |
| 0008                      | <a href="#">Xnum</a> - <b>rgb[3]</b> | 0x4004000000000000 |
| 0008                      | Xnum - <b>rgb[4]</b>                 | 0x4020000000000000 |

**rgb:** Specifies a cache record (section [2.2.5.2.10](#)) that consists of cache item (section [2.2.5.2.3](#)) from the "CustomerName", "OrderDate", "ProductName", "UnitPrice", and "Quantity" cache field (section [2.2.5.2.2](#)).

These records consist of five sequential parts:

1. A 4-byte, zero-based cache item (section [2.2.5.2.3](#)) index into the "CustomerName" cache field.
2. A 4-byte, zero-based cache item index into the "OrderDate" cache field.
3. A 4-byte, zero-based cache item index into the "ProductName" cache field.
4. An 8-byte, 64-bit floating point number specifying the value of the "UnitPrice" cache field.
5. An 8-byte, 64-bit floating point number specifying the value of the "Quantity" cache field.

This particular record would evaluate as follows:

**rgb.rgb[0]:** 0x00000000 specifies the index of the first cache item (section [2.2.5.2.3](#)) in the "CustomerName" cache field (section [2.2.5.2.2](#)), which is "Great Lakes Food Market".

**rgb.rgb[1]:** 0x00000000 specifies the index of the first cache item in the "OrderDate" cache field, which is 5/6/1997.

**rgb.rgb[2]:** 0x00000000 specifies the index of the first cache item in the "ProductName" cache field, which is "Geitost".

**rgb.rgb[3]:** 0x4004000000000000 specifies the 64-bit floating point value 2.50 in the "UnitPrice" cache field.

**rgb.rgb[4]:** 0x4020000000000000 specifies the 64-bit floating point value 8 in the "Quantity" cache field.

### 3.8.20 PivotTable: BrtPCRRecord 2

This **BrpPCRRecord** (section [2.4.704](#)) specifies the next cache record (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCRRecord |                                      |                    |
|---------------------------|--------------------------------------|--------------------|
| Size                      | Structure                            | Value              |
| 001C                      | BrPCRRecord - <b>BrPCRRecord</b>     |                    |
| 001C                      | rgb - <b>rgb</b>                     |                    |
| 0004                      | ULONG - <b>rgb[0]</b>                | 0x00000002         |
| 0004                      | ULONG - <b>rgb[1]</b>                | 0x00000010         |
| 0004                      | ULONG - <b>rgb[2]</b>                | 0x00000004         |
| 0008                      | <a href="#">Xnum</a> - <b>rgb[3]</b> | 0x4043000000000000 |
| 0008                      | Xnum - <b>rgb[4]</b>                 | 0x4026000000000000 |

**rgb:** Specifies a cache record (section [2.2.5.2.10](#)) that consists of cache items (section [2.2.5.2.3](#)) from the "CustomerName", "OrderDate", "ProductName", "UnitPrice", and "Quantity" cache fields (section [2.2.5.2.2](#)).

**rgb.rgb[0]:** 0x00000002 specifies the index of the third cache item (section [2.2.5.2.3](#)) in the "CustomerName" cache field (section [2.2.5.2.2](#)), which is "Richter Supermarkt".

**rgb.rgb[1]:** 0x00000010 specifies the index of the 17th cache item in the "OrderDate" cache field, which is 12/23/1997.

**rgb.rgb[2]:** 0x00000004 specifies the index of the fifth cache item in the "ProductName" cache field, which is "Gnocchi di nonna Alice".

**rgb.rgb[3]:** 0x4043000000000000 specifies the 64-bit floating point value 38.00 in the "UnitPrice" cache field.

**rgb.rgb[4]:** 0x4026000000000000 specifies the 64-bit floating point value 11 in the "Quantity" cache field.

### 3.8.21 PivotTable: BrtPCRRecord 3

This **BrPCRRecord** (section [2.4.704](#)) specifies the next cache record (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCRRecord |                                      |                    |
|---------------------------|--------------------------------------|--------------------|
| Size                      | Structure                            | Value              |
| 001C                      | BrPCRRecord - <b>BrPCRRecord</b>     |                    |
| 001C                      | rgb - <b>rgb</b>                     |                    |
| 0004                      | ULONG - <b>rgb[0]</b>                | 0x00000002         |
| 0004                      | ULONG - <b>rgb[1]</b>                | 0x00000010         |
| 0004                      | ULONG - <b>rgb[2]</b>                | 0x00000003         |
| 0008                      | <a href="#">Xnum</a> - <b>rgb[3]</b> | 0x4047000000000000 |

| Structure of BrtPCRRecord |                      |                    |
|---------------------------|----------------------|--------------------|
| 0008                      | Xnum - <b>rgb[4]</b> | 0x4010000000000000 |

**rgb:** Specifies a cache record (section [2.2.5.2.10](#)) that consists of cache item (section [2.2.5.2.3](#)) from the "CustomerName", "OrderDate", "ProductName", "UnitPrice", and "Quantity" cache field (section [2.2.5.2.2](#)).

**rgb.rgb[0]:** 0x00000002 specifies the index of the third cache item (section [2.2.5.2.3](#)) in the "CustomerName" cache field (section [2.2.5.2.2](#)), which is "Richter Supermarkt".

**rgb.rgb[1]:** 0x00000010 specifies the index of the 17th cache item in the "OrderDate" cache field, which is 12/23/1997.

**rgb.rgb[2]:** 0x00000003 specifies the index of the fourth cache item in the "ProductName" cache field, which is "Ipoh Coffee".

**rgb.rgb[3]:** 0x4047000000000000 specifies the 64-bit floating point value 46.00 in the "UnitPrice" cache field.

**rgb.rgb[4]:** 0x4010000000000000 specifies the 64-bit floating point value 4 in the "Quantity" cache field.

### 3.8.22 PivotTable: BrtPCRRecord 4

This **BrtPCRRecord** (section [2.4.704](#)) specifies the next cache record (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCRRecord |                                      |                    |
|---------------------------|--------------------------------------|--------------------|
| Size                      | Structure                            | Value              |
| 001C                      | BrtPCRRecord - <b>BrtPCRRecord</b>   |                    |
| 001C                      | rgb - <b>rgb</b>                     |                    |
| 0004                      | ULONG - <b>rgb[0]</b>                | 0x00000002         |
| 0004                      | ULONG - <b>rgb[1]</b>                | 0x00000010         |
| 0004                      | ULONG - <b>rgb[2]</b>                | 0x00000005         |
| 0008                      | <a href="#">Xnum</a> - <b>rgb[3]</b> | 0x4022666666666666 |
| 0008                      | Xnum - <b>rgb[4]</b>                 | 0x4030000000000000 |

**rgb:** Specifies a cache record (section [2.2.5.2.10](#)) that consists of cache items (section [2.2.5.2.3](#)) from the "CustomerName", "OrderDate", "ProductName", "UnitPrice", and "Quantity" cache fields (section [2.2.5.2.2](#)).

**rgb.rgb[0]:** 0x00000002 specifies the index of the third cache item (section [2.2.5.2.3](#)) in the "CustomerName" cache field (section [2.2.5.2.2](#)), which is "Richter Supermarkt".

**rgb.rgb[1]:** 0x00000010 specifies the index of the 17th cache item in the "OrderDate" cache field, which is 12/23/1997.

**rgb.rgb[2]:** 0x00000005 specifies the index of the sixth cache item in the "ProductName" cache field, which is "Teatime Chocolate Biscuits".

**rgb.rgb[3]:** 0x4022666666666666 specifies the 64-bit floating point value 9.20 in the "UnitPrice" cache field.

**rgb.rgb[4]:** 0x4030000000000000 specifies the 64-bit floating point value 16 in the "Quantity" cache field.

### 3.8.23 PivotTable: BrtPCRRecord 5

This **BrtPCRRecord** (section [2.4.704](#)) specifies the next cache record (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCRRecord |                                      |                    |
|---------------------------|--------------------------------------|--------------------|
| Size                      | Structure                            | Value              |
| 001C                      | BrtPCRRecord - <b>BrtPCRRecord</b>   |                    |
| 001C                      | rgb - <b>rgb</b>                     |                    |
| 0004                      | ULONG - <b>rgb[0]</b>                | 0x00000004         |
| 0004                      | ULONG - <b>rgb[1]</b>                | 0x00000011         |
| 0004                      | ULONG - <b>rgb[2]</b>                | 0x00000000         |
| 0008                      | <a href="#">Xnum</a> - <b>rgb[3]</b> | 0x4004000000000000 |
| 0008                      | Xnum - <b>rgb[4]</b>                 | 0x4037000000000000 |

**rgb:** Specifies a cache record that consists of cache items (section [2.2.5.2.3](#)) from the "CustomerName", "OrderDate", "ProductName", "UnitPrice", and "Quantity" cache fields (section [2.2.5.2.2](#)).

**rgb.rgb[0]:** 0x00000004 specifies the index of the fifth cache item in the "CustomerName" cache field, which is "Königlich Essen".

**rgb.rgb[1]:** 0x00000011 specifies the index of the 18th cache item in the "OrderDate" cache field, which is 12/26/1997.

**rgb.rgb[2]:** 0x00000000 specifies the index of the first cache item in the "ProductName" cache field, which is "Geitost".

**rgb.rgb[3]:** 0x4004000000000000 specifies the 64-bit floating point value 2.50 in the "UnitPrice" cache field.

**rgb.rgb[4]:** 0x4037000000000000 specifies the 64-bit floating point value 23 in the "Quantity" cache field.

### 3.8.24 PivotTable: BrtPCRRecord 6

This **BrtPCRRecord** (section [2.4.704](#)) specifies the next cache record (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCRRecord |                                      |                    |
|---------------------------|--------------------------------------|--------------------|
| Size                      | Structure                            | Value              |
| 001C                      | BrPCRRecord - <b>BrtPCRRecord</b>    |                    |
| 001C                      | rgb - <b>rgb</b>                     |                    |
| 0004                      | ULONG - <b>rgb[0]</b>                | 0x00000003         |
| 0004                      | ULONG - <b>rgb[1]</b>                | 0x00000011         |
| 0004                      | ULONG - <b>rgb[2]</b>                | 0x00000003         |
| 0008                      | <a href="#">Xnum</a> - <b>rgb[3]</b> | 0x4047000000000000 |
| 0008                      | Xnum - <b>rgb[4]</b>                 | 0x404B800000000000 |

**rgb:** Specifies a cache record that consists of cache items (section [2.2.5.2.3](#)) from the "CustomerName", "OrderDate", "ProductName", "UnitPrice", and "Quantity" cache fields (section [2.2.5.2.2](#)).

**rgb.rgb[0]:** 0x00000003 specifies the index of the fourth cache item in the "CustomerName" cache field, which is "Island Trading".

**rgb.rgb[1]:** 0x00000011 specifies the index of the 18th cache item in the "OrderDate" cache field, which is 12/26/1997.

**rgb.rgb[2]:** 0x00000003 specifies the index of the fourth cache item in the "ProductName" cache field, which is "Ipoh Coffee".

**rgb.rgb[3]:** 0x4047000000000000 specifies the 64-bit floating point value 46 in the "UnitPrice" cache field.

**rgb.rgb[4]:** 0x404B800000000000 specifies the 64-bit floating point value 55 in the "Quantity" cache field.

### 3.8.25 PivotTable: BrtPCRRecord 7

This **BrPCRRecord** (section [2.4.704](#)) specifies the next cache record (section [2.2.5.2.10](#)) in the **PivotCache** (section [2.2.5.2](#)), as specified in the following table.

| Structure of BrtPCRRecord |                                      |                    |
|---------------------------|--------------------------------------|--------------------|
| Size                      | Structure                            | Value              |
| 001C                      | BrPCRRecord - <b>BrtPCRRecord</b>    |                    |
| 001C                      | rgb - <b>rgb</b>                     |                    |
| 0004                      | ULONG - <b>rgb[0]</b>                | 0x00000004         |
| 0004                      | ULONG - <b>rgb[1]</b>                | 0x00000011         |
| 0004                      | ULONG - <b>rgb[2]</b>                | 0x00000002         |
| 0008                      | <a href="#">Xnum</a> - <b>rgb[3]</b> | 0x404B800000000000 |

| Structure of BrtPCRRecord |                      |                    |
|---------------------------|----------------------|--------------------|
| 0008                      | Xnum - <b>rgb[4]</b> | 0x4048000000000000 |

**rgb:** Specifies a cache record that consists of cache items (section [2.2.5.2.3](#)) from the "CustomerName", "OrderDate", "ProductName", "UnitPrice", and "Quantity" cache fields (section [2.2.5.2.2](#)).

**rgb.rgb[0]:** 0x00000004 specifies the index of the fifth cache item (section [2.2.5.2.3](#)) in the "CustomerName" cache field, which is "Königlich Essen".

**rgb.rgb[1]:** 0x00000011 specifies the index of the 18th cache item in the "OrderDate" cache field, which is 12/26/1997.

**rgb.rgb[2]:** 0x00000002 specifies the index of the third cache item in the "ProductName" cache field, which is "Perth Pasties".

**rgb.rgb[3]:** 0x404B800000000000 specifies the 64-bit floating point value 55.00 in the "UnitPrice" cache field.

**rgb.rgb[4]:** 0x4048000000000000 specifies the 64-bit floating point value 48 in the "Quantity" cache field.

The remaining 37 **BrtPCRRecord** records have been omitted for brevity.

### 3.8.26 PivotTable: BrtBeginSXView

The **BrtBeginSXView** (section [2.4.264](#)) record begins a collection of records that specify the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXView |   |       |
|-----------------------------|---|-------|
| Size                        | Structure                               | Value |
| 0054                        | BrtBeginSXView - <b>BrtBeginSXView</b>  |       |
| 0001                        | AppVersion - <b>bVerSxMacro</b>         | 0x03  |
| 1 bit                       | BYTE - <b>fDisplayImmediateItems</b>    | 0x1   |
| 1 bit                       | BYTE - <b>fEnableDataEd</b>             | 0x0   |
| 1 bit                       | BYTE - <b>fDisableFList</b>             | 0x0   |
| 1 bit                       | BYTE - <b>fReenterOnLoadOnce</b>        | 0x0   |
| 1 bit                       | BYTE - <b>fNotViewCalculatedMembers</b> | 0x1   |
| 1 bit                       | BYTE - <b>fNotVisualTotals</b>          | 0x0   |
| 1 bit                       | BYTE - <b>fPageMultipleItemLabel</b>    | 0x1   |
| 1 bit                       | BYTE - <b>reserved1</b>                 | 0x0   |
| 1 bit                       | WORD - <b>fHideDDDData</b>              | 0x0   |
| 3 bits                      | WORD - <b>reserved2</b>                 | 0x0   |



| <b>Structure of BrtBeginSXView</b> |  |      |
|------------------------------------|--|------|
| 1 bit                              | WORD - <b>fHideDrillIndicators</b>           | 0x0  |
| 1 bit                              | WORD - <b>fPrintDrillIndicators</b>          | 0x0  |
| 1 bit                              | WORD - <b>fMemPropsInTips</b>                | 0x1  |
| 1 bit                              | WORD - <b>fNoPivotTips</b>                   | 0x0  |
| 7 bits                             | WORD - <b>cIndentInc</b>                     | 0x00 |
| 1 bit                              | WORD - <b>fNoHeaders</b>                     | 0x0  |
| 1 bit                              | DWORD - <b>fNoStencil</b>                    | 0x0  |
| 1 bit                              | DWORD - <b>fHideTotAnnotation</b>            | 0x0  |
| 1 bit                              | DWORD - <b>fIncludeEmptyRw</b>               | 0x0  |
| 1 bit                              | DWORD - <b>fIncludeEmptyCol</b>              | 0x0  |
| 1 bit                              | DWORD - <b>fEnableWizard</b>                 | 0x1  |
| 1 bit                              | DWORD - <b>fEnableDrilldown</b>              | 0x1  |
| 1 bit                              | DWORD - <b>fEnableFieldDialog</b>            | 0x1  |
| 1 bit                              | DWORD - <b>fPreserveFormatting</b>           | 0x1  |
| 1 bit                              | DWORD - <b>fAutoFormat</b>                   | 0x1  |
| 1 bit                              | DWORD - <b>fDisplayErrorString</b>           | 0x0  |
| 1 bit                              | DWORD - <b>fDisplayNullString</b>            | 0x1  |
| 1 bit                              | DWORD - <b>fAcrossPageLay</b>                | 0x0  |
| 1 bit                              | DWORD - <b>fSubtotalHiddenPageItems</b>      | 0x0  |
| 1 bit                              | DWORD - <b>fRwGrand</b>                      | 0x1  |
| 1 bit                              | DWORD - <b>fColGrand</b>                     | 0x1  |
| 1 bit                              | DWORD - <b>fPrintTitles</b>                  | 0x0  |
| 1 bit                              | DWORD - <b>unused</b>                        | 0x1  |
| 1 bit                              | DWORD - <b>fRepeatItemsOnEachPrintedPage</b> | 0x1  |
| 1 bit                              | DWORD - <b>fMergeLabels</b>                  | 0x0  |
| 1 bit                              | DWORD - <b>fDisplayData</b>                  | 0x1  |
| 1 bit                              | DWORD - <b>fDisplayGrand</b>                 | 0x0  |
| 1 bit                              | DWORD - <b>fDisplayPageFieldStyle</b>        | 0x0  |
| 1 bit                              | DWORD - <b>fDisplayTableStyle</b>            | 0x0  |
| 1 bit                              | DWORD - <b>fDisplayVacateStyle</b>           | 0x0  |

| <b>Structure of BrtBeginSXView</b> |   |            |
|------------------------------------|---|------------|
| 1 bit                              | DWORD - <b>ibitAtrNum</b>               | 0x0        |
| 1 bit                              | DWORD - <b>ibitAtrFnt</b>               | 0x0        |
| 1 bit                              | DWORD - <b>ibitAtrAlc</b>               | 0x0        |
| 1 bit                              | DWORD - <b>ibitAtrBdr</b>               | 0x0        |
| 1 bit                              | DWORD - <b>ibitAtrPat</b>               | 0x0        |
| 1 bit                              | DWORD - <b>ibitAtrProt</b>              | 0x1        |
| 1 bit                              | DWORD - <b>fDisplayTag</b>              | 0x0        |
| 1 bit                              | DWORD - <b>reserved3</b>                | 0x0        |
| 1 bit                              | DWORD - <b>fDefaultCompact</b>          | 0x1        |
| 1 bit                              | DWORD - <b>fDefaultOutline</b>          | 0x1        |
| 1 bit                              | DWORD - <b>fOutlineData</b>             | 0x1        |
| 1 bit                              | DWORD - <b>fCompactData</b>             | 0x1        |
| 1 bit                              | DWORD - <b>fNewDropZones</b>            | 0x1        |
| 1 bit                              | DWORD - <b>fPublished</b>               | 0x0        |
| 1 bit                              | DWORD - <b>fEmptyDisplayErrorString</b> | 0x1        |
| 1 bit                              | DWORD - <b>fEmptyDisplayNullString</b>  | 0x1        |
| 1 bit                              | DWORD - <b>fTurnOffImmersive</b>        | 0x0        |
| 1 bit                              | DWORD - <b>fSingleFilterPerField</b>    | 0x1        |
| 1 bit                              | DWORD - <b>fUseRwHdrName</b>            | 0x0        |
| 1 bit                              | DWORD - <b>fUseColHdrName</b>           | 0x0        |
| 1 bit                              | DWORD - <b>fNonDefaultSortInFlist</b>   | 0x0        |
| 1 bit                              | DWORD - <b>reserved4</b>                | 0x0        |
| 1 bit                              | DWORD - <b>fDontUseCustomLists</b>      | 0x0        |
| 17 bits                            | DWORD - <b>reserved5</b>                | 0x00000    |
| 0001                               | DWORD - <b>sxaxis4Data</b>              | 0x02       |
| 0001                               | BYTE - <b>cWrapPage</b>                 | 0x00       |
| 0001                               | AppVersion - <b>bVerSxLastUpdated</b>   | 0x03       |
| 0001                               | AppVersion - <b>bVerSxUpdateableMin</b> | 0x03       |
| 0004                               | LONG - <b>ipos4Data</b>                 | 0xFFFFFFFF |
| 0002                               | USHORT - <b>itblAutoFmt</b>             | 0x0001     |

| Structure of BrtBeginSXView |  |                  |
|-----------------------------|--|------------------|
| 0002                        | WORD - <b>reserved6</b>                        | 0x0000           |
| 0004                        | DWORD - <b>dwCrtFmtId</b>                      | 0x00000000       |
| 0004                        | DWORD - <b>idCache</b>                         | 0x00000041       |
| 0024                        | <a href="#">XLWideString</a> - <b>irstName</b> | OrdersPivotTable |
| 0010                        | XLWideString - <b>irstData</b>                 | Values           |

Fields in this record that are ignored because they apply to OLAP source data (section [2.2.5.2.1](#)) or are not applicable in compact axis mode are omitted for brevity.

**bVerSxMacro:** 0x03 specifies the application version [<70>](#) that created this **PivotTable** (section [2.1.7.40](#)).

**fDisplayImmediateItems:** 0x1 specifies that pivot item (section [2.2.5.3.3](#)) labels displayed on the row (2) axis and the column (2) axis when there are no data items (section [2.2.5.3.7.5.1](#)) in this PivotTable view.

**fEnableDataEd:** 0x0 specifies that cells displaying values for data items cannot be edited.

**fDisableFList:** 0x0 specifies that the PivotTable field list is displayed.

**fReenterOnLoadOnce:** 0x0 specifies that the PivotTable view is not automatically updated on load.

**fPageMultipleItemLabel:** 0x1 specifies that a pivot fields (section [2.2.5.3.2](#)) on the page axis (section [2.2.5.3.7.1](#)) with multiple pivot items selected displays "(multiple items)".

**fHideDDDData:** 0x0 specifies that a drop-down button for the data field (section [2.2.5.3.7.5.2](#)) in the PivotTable view is not hidden.

**fHideDrillIndicators:** 0x0 specifies that expand/collapse buttons are displayed.

**fPrintDrillIndicators:** 0x0 specifies that expand/collapse buttons are not displayed when printed.

**fMemPropsInTips:** 0x1 specifies that member (3) property information is shown in PivotTable view ToolTips.

**fNoPivotTips:** 0x0 specifies that ToolTips are displayed for PivotTable view cells.

**cIndentInc:** 0x00 specifies that the indentation increment that will be used for pivot fields in compact axis mode will be 1.

**fNoStencil:** 0x0 specifies that the PivotTable view displays large drop zones when there are no data items (section [2.2.5.3.7.5.1](#)) in the PivotTable view.

**fEnableWizard:** 0x1 specifies that the user is able to use a wizard UI to work with the **PivotTable** (section [2.1.7.40](#)).

**fEnableDrilldown:** 0x1 specifies that the user is able to show details for a cell displaying the value for a data item.

**fEnableFieldDialog:** 0x1 specifies that the user is allowed to display pivot fields properties.

**fPreserveFormatting:** 0x1 specifies that formatting applied by the user to PivotTable view cells is preserved on refresh.

**fAutoFormat:** 0x1 specifies that an AutoFormat has been applied to the PivotTable view.

**fDisplayErrorString:** 0x0 specifies that if there are errors, the error strings to display in the cells are determined by the application.

**fDisplayNullString:** 0x1 specifies that if a cell is empty, the string as specified by the **irstNullString** field is displayed in the cell.

**fAcrossPageLay:** 0x0 specifies that if the page area (section [2.2.5.3.8.1.3](#)) has another field added, pivot fields are displayed down, then over.

**fSubtotalHiddenPageItems:** 0x0 specifies page-filtering behavior that is not applicable for this example because the application version that created this **PivotTable** (section [2.1.7.40](#)) is Microsoft Office Excel 2007.

**fRwGrand:** 0x1 specifies that grand totals are displayed for the row (2) axis.

**fColGrand:** 0x1 specifies that grand totals are displayed for the column (2) axis.

**fPrintTitles:** 0x0 specifies that pivot field captions and pivot item (section [2.2.5.3.3](#)) captions on the row (2) axis and the column (2) axis from this PivotTable view do not appear on every page when printed.

**fRepeatItemsOnEachPrintedPage:** 0x1 specifies that pivot item captions on the row (2) axis are repeated at the top of each printed page for pivot fields in tabular form.

**fMergeLabels:** 0x0 specifies that pivot item captions on the row (2) area and column (2) area that span multiple cells are not merged into a single cell.

**fDisplayData:** 0x1 specifies that there is an **irstData** field after the fixed part of this record, that specifies the caption for the data field (section [2.2.5.3.7.5.2](#)) in the PivotTable view.

**fDisplayGrand:** 0x0 specifies that there is not an **irstGrand** field after the fixed part of this record, that specifies a user-defined caption to display for grand totals when the **PivotTable** (section [2.1.7.40](#)) is recalculated.

**fDisplayPageFieldStyle:** 0x0 specifies that there is not an **irstPageFieldStyle** field after the fixed part of this record, that specifies the cell style (section [2.2.6.1.2](#)) to apply to each cell that contains data for pivot fields on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view.

**fDisplayTableStyle:** 0x0 specifies that there is not an **irstTableStyle** field after the fixed part of this record, that specifies the cell style (section [2.2.6.1.2](#)) to apply to this PivotTable view.

**fDisplayVacateStyle:** 0x0 specifies that there is not an **irstVacateStyle** field after the fixed part of this record, that specifies the cell style (section [2.2.6.1.2](#)) to apply to the cells left blank when a PivotTable view shrinks during a refresh operation.

**ibitAtrNum:** 0x0 specifies that AutoFormat number format properties are not applied.

**ibitAtrFmt:** 0x0 specifies that AutoFormat font format properties are not applied.

**ibitAtrAlc:** 0x0 specifies that AutoFormat alignment format properties are not applied.

**ibitAtrBdr:** 0x0 specifies that AutoFormat border format properties are not applied.

**ibitAtrPat:** 0x0 specifies that AutoFormat pattern format properties are not applied.

**ibitAtrProt:** 0x1 specifies that the AutoFormat style is protected.

**fDisplayTag:** 0x0 specifies that there is not an **irstTag** field after the fixed part of this record, that specifies a user-defined string that is associated with this PivotTable view.

**fDefaultCompact:** 0x1 specifies that new pivot fields (section [2.2.5.3.2](#)) are created in compact axis mode.

**fDefaultOutline:** 0x1 specifies that new pivot fields are created in outline mode.

**fOutlineData:** 0x1 specifies that the data field in the PivotTable view is displayed in outline mode.

**fCompactData:** 0x1 specifies that the data field in the PivotTable view is displayed in compact axis mode.

**fNewDropZones:** 0x1 specifies that in-grid drop zones is disabled. Fields cannot be dragged and dropped within the PivotTable view.

**fPublished:** 0x0 specifies that this PivotTable view is not included in the version of the workbook that is published to or rendered on a web or application server.

**fEmptyDisplayErrorString:** 0x1 specifies that the **irstErrorString** field does not exist after the fixed part of this record, that specifies the string to display in cells that contain values for data items (section [2.2.5.3.7.5.1](#)) when an error occurs.

**fEmptyDisplayNullString:** 0x1 specifies that the **irstNullString** field does not exist after the fixed part of this record, that specifies the string to display in cells that contain values for data items that are empty.

**fTurnOffImmersive:** 0x0 specifies that the **PivotTable** (section [2.2.5](#)) contextual tab, a user interface for manipulating **PivotTable** options, is displayed.

**fSingleFilterPerField:** 0x1 specifies that the pivot fields in the PivotTable view can have only one filter each.

**fUseRwHdrName:** 0x0 specifies that there is not an **irstRwHdrName** field after the fixed part of this record, that specifies the user-defined string to display in the row (2) header when one or more pivot fields in the PivotTable view are in compact axis mode.

**fUseColHdrName:** 0x0 specifies that there is not an **irstColHdrName** field after the fixed part of this record, that specifies the user-defined string to display in the column (2) header when one or more pivot fields in the PivotTable view are in compact axis mode.

**fNonDefaultSortInFlist:** 0x0 specifies that pivot fields (section [2.2.5.3.2](#)) in the PivotTable field list are displayed in source data (section [2.2.5.2.1](#)) order.

**fDontUseCustomLists:** 0x0 specifies that custom lists are used when sorting the pivot items (section [2.2.5.3.3](#)) in the PivotTable view.

**saxis4Data:** 0x02 specifies that the data field is displayed on the column (2) axis.

**cWrapPage:** 0x00 specifies that no wrapping occurs when starting another row (2) or column (2).

**bVerSxLastUpdated:** 0x03 specifies that the last application version to update this PivotTable view is Office Excel 2007.

**bVerSxUpdateableMin:** 0x03 specifies that the earliest application version that can update this PivotTable view is Office Excel 2007.

**ipos4Data:** 0xFFFFFFFF specifies the position of the data field and specifies that the data field is displayed as the last field on the column (2) axis.

**itblAutoFmt:** 0x0001 specifies an **AutoFormatID** (section 2.5.3) that specifies which AutoFormat is applied.

**dwCrtFmtId:** 0x00000000 specifies the next available chart identifier to use when creating a **PivotChart** (section 2.2.3.2) for this **PivotTable** (section 2.2.5).

**idCache:** 0x00000041 specifies the **PivotCache** (section 2.2.5.2) identifier of the **PivotCache** used by this PivotTable view. This value equals the **idSx** field of the **BrtBeginPivotCacheID** (section 2.4.163) record.

**irstName:** Specifies that the unique name for this PivotTable view is "OrdersPivotTable".

**irstData:** Specifies that the caption of the data field in the PivotTable view is "Values".

### 3.8.27 PivotTable: BrtBeginSxLocation

The **BrtBeginSXLocation** (section 2.4.243) record specifies the position of the PivotTable view (section 2.2.5.3) in the sheet, as specified in the following table.

| Structure of BrtBeginSxlocation |  |            |
|---------------------------------|--|------------|
| Size                            | Structure                                      | Value      |
| 0024                            | BrtBeginSXLocation - <b>BrtBeginSxlocation</b> |            |
| 0010                            | <a href="#">UncheckedRfX</a> - <b>rfxGeom</b>  |            |
| 0004                            | LONG - <b>rwFirst</b>                          | 0x00000004 |
| 0004                            | LONG - <b>rwLast</b>                           | 0x0000000B |
| 0004                            | LONG - <b>colFirst</b>                         | 0x00000001 |
| 0004                            | LONG - <b>colLast</b>                          | 0x00000002 |
| 0004                            | LONG - <b>rwFirstHead</b>                      | 0x00000005 |
| 0004                            | LONG - <b>rwFirstData</b>                      | 0x00000005 |
| 0004                            | LONG - <b>colFirstData</b>                     | 0x00000002 |
| 0004                            | LONG - <b>crwPage</b>                          | 0x00000001 |
| 0004                            | LONG - <b>ccolPage</b>                         | 0x00000001 |

**rfxGeom:** Specifies the location of the PivotTable view in the sheet as follows:

**rfxGeom.rwFirst:** 0x00000004 specifies that the first row (2) of the range specified by the PivotTable view is row (2) 5.

**rfxGeom.rwLast:** 0x0000000B specifies that the last row (2) of the range specified by the PivotTable view is row (2) 12.

**rfxGeom.colFirst:** 0x00000001 specifies that the first column (2) of the range specified by the PivotTable view is column (2) B.

**rfxGeom.colLast:** 0x00000002 specifies that the last column (2) of the range specified by the PivotTable view is column (2) C.

**rwFirstHead:** 0x00000005 specifies that the location of the topmost row (2) in the PivotTable view body is row (2) 6.

**rwFirstData:** 0x00000005 specifies that the location of the topmost row (2) of the PivotTable view body where cells containing values of data items (section [2.2.5.3.7.5.1](#)) are displayed is row (2) 6.

**colFirstData:** 0x00000002 specifies that the location of the first column (2) of the PivotTable view body where cells containing values of data items (section [2.2.5.3.7.5.1](#)) are displayed is column (2) C.

**crwPage:** 0x00000001 specifies that there is one row (2) with cells containing data for pivot fields (section [2.2.5.3.2](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view.

**ccolPage:** 0x00000001 specifies that there is one column (2) with cells containing data for pivot fields (section [2.2.5.3.2](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view.

### 3.8.28 PivotTable: BrtBeginSXVDs

The next record in this example, **BrtBeginSXVDs** (section [2.4.262](#)), begins a collection of records that specify the pivot field (section [2.2.5.3.2](#)) of the **PivotTable** view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVDs |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginSXVDs - <b>BrtBeginSXVDs</b> |            |
| 0004                       | DWORD - <b>csxvds</b>                | 0x00000005 |

**csxvds:** 0x00000005 specifies that there are five pivot fields in the PivotTable view.

### 3.8.29 PivotTable: BrtBeginSXVD 1

The first **BrtBeginSXVD** (section [2.4.261](#)) record specifies the "CustomerName" pivot field (section [2.2.5.3.2](#)) in the **PivotTable** view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVD |  |       |
|---------------------------|--|-------|
| Size                      | Structure                              | Value |
| 0014                      | BrtBeginSXVD - <b>BrtBeginSXVD</b>     |       |
| 0001                      | <a href="#">SXAxis</a> - <b>sxaxis</b> |       |
| 1 bit                     | BYTE - <b>sxaxisRw</b>                 | 0x1   |

| Structure of BrtBeginSXVD |                                    |        |
|---------------------------|------------------------------------|--------|
| 1 bit                     | BYTE - <b>sxaxisCol</b>            | 0x0    |
| 1 bit                     | BYTE - <b>sxaxisPage</b>           | 0x0    |
| 1 bit                     | BYTE - <b>sxaxisData</b>           | 0x0    |
| 4 bits                    | BYTE - <b>reserved</b>             | 0x0    |
| 1 bit                     | WORD - <b>fDefault</b>             | 0x1    |
| 1 bit                     | WORD - <b>fSum</b>                 | 0x0    |
| 1 bit                     | WORD - <b>fCounta</b>              | 0x0    |
| 1 bit                     | WORD - <b>fAverage</b>             | 0x0    |
| 1 bit                     | WORD - <b>fMax</b>                 | 0x0    |
| 1 bit                     | WORD - <b>fMin</b>                 | 0x0    |
| 1 bit                     | WORD - <b>fProduct</b>             | 0x0    |
| 1 bit                     | WORD - <b>fCount</b>               | 0x0    |
| 1 bit                     | WORD - <b>fStdev</b>               | 0x0    |
| 1 bit                     | WORD - <b>fStdevp</b>              | 0x0    |
| 1 bit                     | WORD - <b>fVar</b>                 | 0x0    |
| 1 bit                     | WORD - <b>fVarp</b>                | 0x0    |
| 4 bits                    | WORD - <b>reserved1</b>            | 0x0    |
| 1 bit                     | BYTE - <b>fDrilledLevel</b>        | 0x0    |
| 1 bit                     | BYTE - <b>fHideDD</b>              | 0x0    |
| 1 bit                     | BYTE - <b>fHiddenLvl</b>           | 0x0    |
| 1 bit                     | BYTE - <b>fUseMemPropCaption</b>   | 0x0    |
| 1 bit                     | BYTE - <b>fCompact</b>             | 0x1    |
| 1 bit                     | BYTE - <b>fDisplayName</b>         | 0x0    |
| 1 bit                     | BYTE - <b>fDisplaySub</b>          | 0x0    |
| 1 bit                     | BYTE - <b>fTensorSort</b>          | 0x0    |
| 0004                      | <a href="#">PivotNumFmt</a> - ifmt |        |
| 0002                      | <a href="#">Ifmt</a> - ifmt        |        |
| 0002                      | WORD - ifmt                        | 0x0000 |
| 0002                      | WORD - reserved                    | 0x0000 |
| 1 bit                     | DWORD - <b>fDragToRow</b>          | 0x1    |



| Structure of BrtBeginSXVD |  |            |
|---------------------------|--|------------|
| 1 bit                     | DWORD - <b>fDragToColumn</b>                 | 0x1        |
| 1 bit                     | DWORD - <b>fDragToPage</b>                   | 0x1        |
| 1 bit                     | DWORD - <b>fDragToHide</b>                   | 0x1        |
| 1 bit                     | DWORD - <b>fDragToData</b>                   | 0x1        |
| 1 bit                     | DWORD - <b>fShowAllItems</b>                 | 0x0        |
| 1 bit                     | DWORD - <b>fOutline</b>                      | 0x1        |
| 1 bit                     | DWORD - <b>fInsertBlankRow</b>               | 0x0        |
| 1 bit                     | DWORD - <b>fSubtotalAtTop</b>                | 0x1        |
| 1 bit                     | DWORD - <b>fServerBased</b>                  | 0x0        |
| 1 bit                     | DWORD - <b>reserved2</b>                     | 0x0        |
| 1 bit                     | DWORD - <b>fPageBreaksBetweenItems</b>       | 0x0        |
| 1 bit                     | DWORD - <b>fAutoSort</b>                     | 0x0        |
| 1 bit                     | DWORD - <b>fAscendSort</b>                   | 0x1        |
| 1 bit                     | DWORD - <b>fAutoShow</b>                     | 0x0        |
| 1 bit                     | DWORD - <b>fTopAutoShow</b>                  | 0x1        |
| 1 bit                     | DWORD - <b>fHideNewItems</b>                 | 0x0        |
| 1 bit                     | DWORD - <b>fHasAdvFilter</b>                 | 0x0        |
| 1 bit                     | DWORD - <b>fFilterInclusive</b>              | 0x1        |
| 1 bit                     | DWORD - <b>fEnableMultiplePageItems</b>      | 0x0        |
| 1 bit                     | DWORD - <b>fNotAutoSortDft</b>               | 0x0        |
| 1 bit                     | DWORD - <b>fMemPropDisplayInReport</b>       | 0x0        |
| 1 bit                     | DWORD - <b>fMemPropDisplayInTip</b>          | 0x0        |
| 1 bit                     | DWORD - <b>fMemPropDisplayInCaption</b>      | 0x0        |
| 1 bit                     | DWORD - <b>fItemsDrilledByDefault</b>        | 0x0        |
| 7 bits                    | DWORD - <b>unused2</b>                       | 0x00       |
| 0004                      | DWORD - <b>citmAutoShow</b>                  | 0x0000000A |
| 0004                      | <a href="#">ISXDI</a> - <b>isxdiAutoShow</b> | 0xFFFFFFFF |

Fields in this record that are ignored because they apply only to OLAP or ODBC data sources (1) are omitted for brevity.

**sxaxis:** Specifies the axis or axes this pivot field (section [2.2.5.3.2](#)) is placed on as follows:

**sxaxis.sxaxisRw:** 0x01 specifies that this pivot field is on the row (2) axis.

**sxaxis.sxaxisCol:** 0x00 specifies that this pivot field is not on the column (2) axis.

**sxaxis.sxaxisPage:** 0x00 specifies that this pivot field is not on the page axis (section [2.2.5.3.7.1](#)).

**sxaxis.sxaxisData:** 0x00 specifies that this pivot field is not on the data axis (section [2.2.5.3.7.5](#)).

**fDefault:** 0x1 specifies that the default subtotal (section [2.2.5.3.7.4.2](#)) is displayed for this pivot field.

**fSum:** 0x0 specifies that subtotals using the sum aggregate function are not displayed for this pivot field.

**fCounta:** 0x0 specifies that subtotals using the count aggregate function are not displayed for this pivot field (section [2.2.5.3.2](#)).

**fAverage:** 0x0 specifies that subtotals using the average aggregate function are not displayed for this pivot field.

**fMax:** 0x0 specifies that subtotals using the maximum aggregate function are not displayed for this pivot field.

**fMin:** 0x0 specifies that subtotals (section [2.2.5.3.7.4.2](#)) using the minimum aggregate function are not displayed for this pivot field.

**fProduct:** 0x0 specifies that subtotals using the product aggregate function are not displayed for this pivot field.

**fCount:** 0x0 specifies that subtotals using the count number aggregate function are not displayed for this pivot field.

**fStdev:** 0x0 specifies that subtotals using the standard deviation aggregate function are not displayed for this pivot field.

**fStdevp:** 0x0 specifies that subtotals using the standard deviation population aggregate function are not displayed for this pivot field (section [2.2.5.3.2](#)).

**fVar:** 0x0 specifies that subtotals using the variance aggregate function are not displayed for this pivot field.

**fVarp:** 0x0 specifies that subtotal (section [2.2.5.3.7.4.2](#)) using the variance population aggregate function are not displayed for this pivot field.

**fHideDD:** 0x0 specifies that drop-down buttons are not shown in cells where pivot field labels are displayed.

**fCompact:** 0x1 specifies that this pivot field is in compact axis mode.

**fDisplayName:** 0x0 specifies that the **irstName** field, which specifies the name of the pivot field, does not exist after the fixed-size portion of the record.

**fDisplaySub:** 0x0 specifies that the **irstSub** field, which specifies custom text displayed for a subtotals label, does not exist after the fixed-size portion of the record.

**fDragToRow:** 0x1 specifies that this pivot field can be placed on the row (2) axis.

**fDragToColumn:** 0x1 specifies that this pivot field can be placed on the column (2) axis.

**fDragToPage:** 0x1 specifies that this pivot field (section [2.2.5.3.2](#)) can be placed on the page axis (section [2.2.5.3.7.1](#)).

**fDragToHide:** 0x1 specifies that this pivot field can be removed from the PivotTable view (section [2.2.5.3](#)).

**fDragToData:** 0x1 specifies that this pivot field can be placed on the data axis (section [2.2.5.3.7.5](#)).

**fShowAllItems:** 0x0 specifies that all pivot items (section [2.2.5.3.3](#)) for this pivot field are not displayed.

**fOutline:** 0x1 specifies that this pivot field is in outline mode.

**fInsertBlankRow:** 0x0 specifies that a blank row (2) is not inserted after each pivot item (section [2.2.5.3.3](#)).

**fSubtotalAtTop:** 0x1 specifies that subtotals (section [2.2.5.3.7.4.2](#)) are displayed at the top.

**fPageBreaksBetweenItems:** 0x0 specifies that a page break (2) will not be inserted after each pivot item when the **PivotTable** (section [2.2.5](#)) is printed.

**fAutoSort:** 0x0 specifies that autosort (see section [2.2.5.3.2.1](#)) is not applied to this pivot field.

**fAscendSort:** 0x1 specifies that any autosort (see section [2.2.5.3.2.1](#)) applied to this pivot field will sort in **ascending order**.

**fAutoShow:** 0x0 specifies that an AutoShow filter is not applied to this pivot field (section [2.2.5.3.2](#)).

**fTopAutoShow:** 0x1 specifies that any AutoShow filter applied to this pivot field shows the top ranked values.

**fHideNewItems:** 0x0 specifies that new pivot items (section [2.2.5.3.3](#)) that are added after a refresh are shown by default.

**fHasAdvFilter:** 0x0 specifies that this pivot field does not have a value filter (section [2.2.5.3.6.1.3](#)) applied to it.

**fFilterInclusive:** 0x1 specifies that new pivot items of this pivot field are excluded in manual filtering (section [2.2.5.3.5](#)) by default.

**fEnableMultiplePageItems:** 0x0 specifies that this pivot field cannot have multiple pivot items selected when it is on the page axis (section [2.2.5.3.7.1](#)).

**fNotAutoSortDft:** 0x0 specifies that any sort operation applied to this pivot field (section [2.2.5.3.2](#)) is an autosort (see section [2.2.5.3.2.1](#)).

**citmAutoShow:** 0x0000000A specifies the number of pivot items (section [2.2.5.3.3](#)) to show when AutoShow is applied.

**isxdiAutoShow:** 0xFFFFFFFF specifies that no data item (section [2.2.5.3.7.5.1](#)) is set for the AutoShow.

### 3.8.30 PivotTable: BrtBeginSXVIs 1

The next record in this example, **BrtBeginSXVIs** (section [2.4.266](#)), begins the collection of records that specify the pivot items (section [2.2.5.3.3](#)) of the "CustomerName" pivot field (section [2.2.5.3.2](#)) in this PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVIs |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginSXVIs - <b>BrtBeginSXVIs</b> |            |
| 0004                       | DWORD - <b>csxvis</b>                | 0x00000006 |

**csxvis:** 0x00000006 specifies that the count of pivot items in this collection is 6.

### 3.8.31 PivotTable: BrtBeginSXVI 1

This **BrtBeginSXVI** (section [2.4.263](#)) record specifies the "Antonio Moreno Taquería" pivot item (section [2.2.5.3.3](#)) in the **BrtBeginSXVIs** (section [2.4.266](#)) collection. This pivot item (section [2.2.5.3.3](#)) is filtered out of the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrtBeginSXVI - <b>BrtBeginSXVI</b>             |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x0        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x0        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0x00000001 |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x00 specifies that this pivot item (section [2.2.5.3.3](#)) is not a subtotal (section [2.2.5.3.7.4.2](#)), grand total, or blank line.

**fHidden:** 0x0 specifies that this pivot item is not hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x0 specifies that this pivot item is not collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0x00000001 specifies the index to the cache item (section [2.2.5.2.3](#)) in the cache field (section [2.2.5.2.2](#)) for the "CustomerName" pivot field (section [2.2.5.3.2](#)).

The next record in this collection, the **BrtBeginSXVI** (section [2.4.263](#)) for "Great Lakes Food Market", is omitted for brevity.

### 3.8.32 PivotTable: BrtBeginSXVI 2

The next **BrtBeginSXVI** (section [2.4.263](#)) record is the "Island Trading" pivot item (section [2.2.5.3.3](#)) in the **BrtBeginSXVIs** (section [2.4.266](#)) collection and in the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrtBeginSXVI - <b>BrtBeginSXVI</b>             |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x0        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x0        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0x00000003 |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x00 specifies that this pivot item (section [2.2.5.3.3](#)) is not a subtotal (section [2.2.5.3.7.4.2](#)), grand total, or blank line.

**fHidden:** 0x0 specifies that this pivot item is not hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x0 specifies that this pivot item is not collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0x00000003 specifies the index to the cache item (section [2.2.5.2.3](#)) in the cache field (section [2.2.5.2.2](#)) for the "CustomerName" pivot field (section [2.2.5.3.2](#)).

### 3.8.33 PivotTable: BrtBeginSXVI 3

The next **BrtBeginSXVI** (section [2.4.263](#)) record is the "Königlich Essen" pivot item (section [2.2.5.3.3](#)) in the **BrtBeginSXVIs** (section [2.4.266](#)) collection and in the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrtBeginSXVI - <b>BrtBeginSXVI</b>             |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x0        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x0        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0x00000004 |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x00 specifies that this pivot item (section [2.2.5.3.3](#)) is not a subtotal (section [2.2.5.3.7.4.2](#)), grand total, or blank line.

**fHidden:** 0x0 specifies that this pivot item is not hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x0 specifies that this pivot item is not collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0x00000004 specifies the index to the cache item (section [2.2.5.2.3](#)) in the cache field (section [2.2.5.2.2](#)) for the "CustomerName" pivot field (section [2.2.5.3.2](#)).

### 3.8.34 PivotTable: BrtBeginSXVI 4

The next **BrtBeginSXVI** (section [2.4.263](#)) record in this example is the "Richter Supermarkt" pivot item (section [2.2.5.3.3](#)) in the **BrtBeginSXVIs** (section [2.4.266](#)) collection and in the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrtBeginSXVI - <b>BrtBeginSXVI</b>             |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x0        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x1        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0x00000002 |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x00 specifies that this pivot item (section [2.2.5.3.3](#)) is not a subtotal (section [2.2.5.3.7.4.2](#)), grand total, or blank line.

**fHidden:** 0x0 specifies that this pivot item is not hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x1 specifies that this pivot item is collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0x00000002 specifies the index to the cache item (section [2.2.5.2.3](#)) in the cache field (section [2.2.5.2.2](#)) for the "CustomerName" pivot field (section [2.2.5.3.2](#)).

### 3.8.35 PivotTable: BrtBeginSXVI 5

The next **BrtBeginSXVI** (section [2.4.263](#)) record in this example specifies the grand total pivot item (section [2.2.5.3.3](#)) in the **BrtBeginSXVIs** (section [2.4.266](#)) collection and in the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrtBeginSXVI - <b>BrtBeginSXVI</b>             |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x01       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x0        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x0        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0xFFFFFFFF |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x01 specifies that this pivot item (section [2.2.5.3.3](#)) is a subtotal (section [2.2.5.3.7.4.2](#)) that uses the aggregation function specified by the data items (section [2.2.5.3.7.5.1](#)) included in this subtotal.

**fHidden:** 0x0 specifies that this pivot item (section [2.2.5.3.3](#)) is not hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x0 specifies that this pivot item is not collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0xFFFFFFFF specifies that an index to a cache item (section [2.2.5.2.3](#)) is not specified.



### 3.8.36 PivotTable: BrtBeginSXVD 2

The next record in this example, **BrtBeginSXVD** (section [2.4.261](#)), specifies the "OrderDate" pivot field (section [2.2.5.3.2](#)) displayed on the page axis (section [2.2.5.3.7.1](#)) in the example, as specified in the following table.

| Structure of BrtBeginSXVD |  |       |
|---------------------------|--|-------|
| Size                      | Structure                              | Value |
| 0014                      | BrBeginSXVD - <b>BrBeginSXVD</b>       |       |
| 0001                      | <a href="#">SXAxis</a> - <b>sxaxis</b> |       |
| 1 bit                     | BYTE - <b>sxaxisRw</b>                 | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisCol</b>                | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisPage</b>               | 0x1   |
| 1 bit                     | BYTE - <b>sxaxisData</b>               | 0x0   |
| 4 bits                    | BYTE - <b>reserved</b>                 | 0x0   |
| 1 bit                     | WORD - <b>fDefault</b>                 | 0x1   |
| 1 bit                     | WORD - <b>fSum</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fCounta</b>                  | 0x0   |
| 1 bit                     | WORD - <b>fAverage</b>                 | 0x0   |
| 1 bit                     | WORD - <b>fMax</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fMin</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fProduct</b>                 | 0x0   |
| 1 bit                     | WORD - <b>fCount</b>                   | 0x0   |
| 1 bit                     | WORD - <b>fStdev</b>                   | 0x0   |
| 1 bit                     | WORD - <b>fStdevp</b>                  | 0x0   |
| 1 bit                     | WORD - <b>fVar</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fVarp</b>                    | 0x0   |
| 4 bits                    | WORD - <b>reserved1</b>                | 0x0   |
| 1 bit                     | BYTE - <b>fDrilledLevel</b>            | 0x0   |
| 1 bit                     | BYTE - <b>fHideDD</b>                  | 0x0   |
| 1 bit                     | BYTE - <b>fHiddenLvl</b>               | 0x0   |
| 1 bit                     | BYTE - <b>fUseMemPropCaption</b>       | 0x0   |
| 1 bit                     | BYTE - <b>fCompact</b>                 | 0x1   |
| 1 bit                     | BYTE - <b>fDisplayName</b>             | 0x0   |

| Structure of BrtBeginSXVD |   |        |
|---------------------------|---|--------|
| 1 bit                     | BYTE - <b>fDisplaySub</b>                 | 0x0    |
| 1 bit                     | BYTE - <b>fTensorSort</b>                 | 0x0    |
| 0004                      | <a href="#">PivotNumFmt</a> - <b>ifmt</b> |        |
| 0002                      | <a href="#">Ifmt</a> - <b>ifmt</b>        |        |
| 0002                      | WORD - <b>ifmt</b>                        | 0x000E |
| 0002                      | WORD - <b>reserved</b>                    | 0x0000 |
| 1 bit                     | DWORD - <b>fDragToRow</b>                 | 0x1    |
| 1 bit                     | DWORD - <b>fDragToColumn</b>              | 0x1    |
| 1 bit                     | DWORD - <b>fDragToPage</b>                | 0x1    |
| 1 bit                     | DWORD - <b>fDragToHide</b>                | 0x1    |
| 1 bit                     | DWORD - <b>fDragToData</b>                | 0x1    |
| 1 bit                     | DWORD - <b>fShowAllItems</b>              | 0x0    |
| 1 bit                     | DWORD - <b>fOutline</b>                   | 0x1    |
| 1 bit                     | DWORD - <b>fInsertBlankRow</b>            | 0x0    |
| 1 bit                     | DWORD - <b>fSubtotalAtTop</b>             | 0x1    |
| 1 bit                     | DWORD - <b>fServerBased</b>               | 0x0    |
| 1 bit                     | DWORD - <b>reserved2</b>                  | 0x0    |
| 1 bit                     | DWORD - <b>fPageBreaksBetweenItems</b>    | 0x0    |
| 1 bit                     | DWORD - <b>fAutoSort</b>                  | 0x0    |
| 1 bit                     | DWORD - <b>fAscendSort</b>                | 0x1    |
| 1 bit                     | DWORD - <b>fAutoShow</b>                  | 0x0    |
| 1 bit                     | DWORD - <b>fTopAutoShow</b>               | 0x1    |
| 1 bit                     | DWORD - <b>fHideNewItems</b>              | 0x0    |
| 1 bit                     | DWORD - <b>fHasAdvFilter</b>              | 0x0    |
| 1 bit                     | DWORD - <b>fFilterInclusive</b>           | 0x1    |
| 1 bit                     | DWORD - <b>fEnableMultiplePageItems</b>   | 0x1    |
| 1 bit                     | DWORD - <b>fNotAutoSortDft</b>            | 0x0    |
| 1 bit                     | DWORD - <b>fMemPropDisplayInReport</b>    | 0x0    |
| 1 bit                     | DWORD - <b>fMemPropDisplayInTip</b>       | 0x0    |
| 1 bit                     | DWORD - <b>fMemPropDisplayInCaption</b>   | 0x0    |

| Structure of BrtBeginSXVD |  |            |
|---------------------------|--|------------|
| 1 bit                     | DWORD - <b>fItemsDrilledByDefault</b>        | 0x0        |
| 7 bits                    | DWORD - <b>unused</b>                        | 0x00       |
| 0004                      | DWORD - <b>citmAutoShow</b>                  | 0x0000000A |
| 0004                      | <a href="#">ISXDI</a> - <b>isxdiAutoShow</b> | 0xFFFFFFFF |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**sxaxis:** Specifies the axis or axes this pivot field (section [2.2.5.3.2](#)) is placed on as follows:

**sxaxis.sxaxisRw:** 0x00 specifies that this pivot field is not on the row (2) axis.

**sxaxis.sxaxisCol:** 0x00 specifies that this pivot field is not on the column (2) axis.

**sxaxis.sxaxisPage:** 0x01 specifies that this pivot field is on the page axis (section [2.2.5.3.7.1](#)).

**sxaxis.sxaxisData:** 0x00 specifies that this pivot field is not on the data axis (section [2.2.5.3.7.5](#)).

**ifmt:** Specifies the number format used in PivotTables (section [2.2.5](#)) and PivotCaches (section [2.2.5.2](#)) as follows:

**ifmt.ifmt:** Specifies the identifier of a number format.

**ifmt.ifmt.ifmt:** 0x000E specifies that the number format used to display this value is "mm-dd-yy".

**fEnableMultiplePageItems:** 0x1 specifies that this pivot field can have multiple pivot items (section [2.2.5.3.3](#)) selected when it is on the page axis.

### 3.8.37 PivotTable: BrtBeginSXVIs 2

The next record in this example, **BrtBeginSXVIs** (section [2.4.266](#)), begins the collection of pivot item (section [2.2.5.3.3](#)) records for the "OrderDate" pivot field (section [2.2.5.3.2](#)), as specified in the following table.

| Structure of BrtBeginSXVIs |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginSXVIs - <b>BrtBeginSXVIs</b> |            |
| 0004                       | DWORD - <b>csxvis</b>                | 0x00000015 |

**csxvis:** 0x00000015 specifies that the count of pivot items in this collection is 21.

### 3.8.38 PivotTable: BrtBeginSXVI 6

The first **BrtBeginSXVI** (section [2.4.263](#)) record specifies the 5/6/1997 pivot item (section [2.2.5.3.3](#)) of the "OrderDate" pivot field (section [2.2.5.3.2](#)), which is filtered out of the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrtBeginSXVI - <b>BrtBeginSXVI</b>             |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x1        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x0        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0x00000000 |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x00 specifies that this pivot item (section [2.2.5.3.3](#)) is not a subtotal (section [2.2.5.3.7.4.2](#)), grand total, or blank line.

**fHidden:** 0x1 specifies that this pivot item is hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x0 specifies that this pivot item is not collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0x00000000 specifies the index to the cache item (section [2.2.5.2.3](#)) in the cache field (section [2.2.5.2.2](#)) for the "OrderDate" pivot field (section [2.2.5.3.2](#)).

The second through the 16<sup>th</sup> **BrtBeginSXVI** (section [2.4.263](#)) records are omitted for brevity.

### 3.8.39 PivotTable: BrtBeginSXVI 7

The 17th **BrtBeginSXVI** (section [2.4.263](#)) record specifies the 12/23/1997 pivot item (section [2.2.5.3.3](#)) of the "OrderDate" pivot field (section [2.2.5.3.2](#)), which is included in the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrBeginSXVI - <b>BrBeginSXVI</b>               |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x0        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x0        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0x00000010 |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x00 specifies that this pivot item (section [2.2.5.3.3](#)) is not a subtotal (section [2.2.5.3.7.4.2](#)), grand total, or blank line.

**fHidden:** 0x0 specifies that this pivot item is not hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x0 specifies that this pivot item is not collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0x00000010 specifies the index to the cache item (section [2.2.5.2.3](#)) in the cache field (section [2.2.5.2.2](#)) for the "OrderDate" pivot field (section [2.2.5.3.2](#)).

### 3.8.40 PivotTable: BrtBeginSXVI 8

The 18th **BrBeginSXVI** (section [2.4.263](#)) record specifies the 12/26/1997 pivot item (section [2.2.5.3.3](#)) of the "OrderDate" pivot field (section [2.2.5.3.2](#)), which is included in the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 0007                      | BrBeginSXVI - <b>BrBeginSXVI</b>               |            |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 1 bit                     | WORD - <b>fHidden</b>                          | 0x0        |
| 1 bit                     | WORD - <b>fHideDetail</b>                      | 0x0        |
| 1 bit                     | WORD - <b>fFormula</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fMissing</b>                         | 0x0        |
| 1 bit                     | WORD - <b>fDisplayName</b>                     | 0x0        |
| 1 bit                     | WORD - <b>fDrilledMember</b>                   | 0x0        |
| 1 bit                     | WORD - <b>fHasChildrenEst</b>                  | 0x0        |
| 1 bit                     | WORD - <b>fCollapsedMember</b>                 | 0x0        |
| 1 bit                     | WORD - <b>fOlapFilterSelected</b>              | 0x0        |
| 7 bits                    | WORD - <b>reserved</b>                         | 0x00       |
| 0004                      | LONG - <b>iCache</b>                           | 0x00000011 |

Fields in this record that are ignored because they apply only to OLAP data sources (1) are omitted for brevity.

**itmtype:** 0x00 specifies that this pivot item (section [2.2.5.3.3](#)) is not a subtotal (section [2.2.5.3.7.4.2](#)), grand total, or blank line.

**fHidden:** 0x0 specifies that this pivot item is not hidden by a manual filter (section [2.2.5.3.5](#)).

**fHideDetail:** 0x0 specifies that this pivot item is not collapsed (section [2.2.5.3.7.4.1](#)).

**fFormula:** 0x0 specifies that this pivot item is not a calculated item (section [2.2.5.2.6](#)).

**fMissing:** 0x0 specifies that this pivot item is not missing from the source data.

**fDisplayName:** 0x0 specifies that this pivot item does not have a user-defined caption.

**iCache:** 0x00000011 specifies the index to the cache item (section [2.2.5.2.3](#)) in the cache field (section [2.2.5.2.2](#)) for the "OrderDate" pivot field (section [2.2.5.3.2](#)).

The remaining **BrBeginSXVI** (section [2.4.263](#)) records are omitted for brevity.

### 3.8.41 PivotTable: BrtBeginSXVD 3

The next **BrtBeginSXVD** (section [2.4.261](#)) record specifies the "ProductName" pivot field (section [2.2.5.3.2](#)) in the row (2) area, as specified in the following table.

| Structure of BrtBeginSXVD |   |       |
|---------------------------|---|-------|
| Size                      | Structure                                 | Value |
| 0014                      | BrBeginSXVD - <b>BrBeginSXVD</b>          |       |
| 0001                      | <a href="#">SXAxis</a> - <b>sxaxis</b>    |       |
| 1 bit                     | BYTE - <b>sxaxisRw</b>                    | 0x1   |
| 1 bit                     | BYTE - <b>sxaxisCol</b>                   | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisPage</b>                  | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisData</b>                  | 0x0   |
| 4 bits                    | BYTE - <b>reserved</b>                    | 0x0   |
| 1 bit                     | WORD - <b>fDefault</b>                    | 0x1   |
| 1 bit                     | WORD - <b>fSum</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fCounta</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fAverage</b>                    | 0x0   |
| 1 bit                     | WORD - <b>fMax</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fMin</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fProduct</b>                    | 0x0   |
| 1 bit                     | WORD - <b>fCount</b>                      | 0x0   |
| 1 bit                     | WORD - <b>fStdev</b>                      | 0x0   |
| 1 bit                     | WORD - <b>fStdevp</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fVar</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fVarp</b>                       | 0x0   |
| 4 bits                    | WORD - <b>reserved1</b>                   | 0x0   |
| 1 bit                     | BYTE - <b>fDrilledLevel</b>               | 0x0   |
| 1 bit                     | BYTE - <b>fHideDD</b>                     | 0x0   |
| 1 bit                     | BYTE - <b>fHiddenLvl</b>                  | 0x0   |
| 1 bit                     | BYTE - <b>fUseMemPropCaption</b>          | 0x0   |
| 1 bit                     | BYTE - <b>fCompact</b>                    | 0x1   |
| 1 bit                     | BYTE - <b>fDisplayName</b>                | 0x0   |
| 1 bit                     | BYTE - <b>fDisplaySub</b>                 | 0x0   |
| 1 bit                     | BYTE - <b>fTensorSort</b>                 | 0x0   |
| 0004                      | <a href="#">PivotNumFmt</a> - <b>ifmt</b> |       |

| <b>Structure of BrtBeginSXVD</b> |                                  |            |
|----------------------------------|----------------------------------|------------|
| 0002                             | <a href="#">Ifmt</a> - ifmt      |            |
| 0002                             | WORD - ifmt                      | 0x0000     |
| 0002                             | WORD - reserved                  | 0x0000     |
| 1 bit                            | DWORD - fDragToRow               | 0x1        |
| 1 bit                            | DWORD - fDragToColumn            | 0x1        |
| 1 bit                            | DWORD - fDragToPage              | 0x1        |
| 1 bit                            | DWORD - fDragToHide              | 0x1        |
| 1 bit                            | DWORD - fDragToData              | 0x1        |
| 1 bit                            | DWORD - fShowAllItems            | 0x0        |
| 1 bit                            | DWORD - fOutline                 | 0x1        |
| 1 bit                            | DWORD - fInsertBlankRow          | 0x0        |
| 1 bit                            | DWORD - fSubtotalAtTop           | 0x1        |
| 1 bit                            | DWORD - fServerBased             | 0x0        |
| 1 bit                            | DWORD - reserved2                | 0x0        |
| 1 bit                            | DWORD - fPageBreaksBetweenItems  | 0x0        |
| 1 bit                            | DWORD - fAutoSort                | 0x0        |
| 1 bit                            | DWORD - fAscendSort              | 0x1        |
| 1 bit                            | DWORD - fAutoShow                | 0x0        |
| 1 bit                            | DWORD - fTopAutoShow             | 0x1        |
| 1 bit                            | DWORD - fHideNewItems            | 0x0        |
| 1 bit                            | DWORD - fHasAdvFilter            | 0x0        |
| 1 bit                            | DWORD - fFilterInclusive         | 0x1        |
| 1 bit                            | DWORD - fEnableMultiplePageItems | 0x0        |
| 1 bit                            | DWORD - fNotAutoSortDft          | 0x0        |
| 1 bit                            | DWORD - fMemPropDisplayInReport  | 0x0        |
| 1 bit                            | DWORD - fMemPropDisplayInTip     | 0x0        |
| 1 bit                            | DWORD - fMemPropDisplayInCaption | 0x0        |
| 1 bit                            | DWORD - fItemsDrilledByDefault   | 0x0        |
| 7 bits                           | DWORD - unused                   | 0x00       |
| 0004                             | DWORD - citmAutoShow             | 0x0000000A |



| Structure of BrtBeginSXVD |                             |            |
|---------------------------|-----------------------------|------------|
| 0004                      | LONG - <b>isxdiAutoShow</b> | 0xFFFFFFFF |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**sxaxis:** Specifies the axis or axes this pivot field (section [2.2.5.3.2](#)) is placed on.

**sxaxis.sxaxisRw:** 0x01 specifies that this pivot field is on the row (2) axis.

**sxaxis.sxaxisCol:** 0x00 specifies that this pivot field is not on the column (2) axis.

**sxaxis.sxaxisPage:** 0x00 specifies that this pivot field is not on the page axis (section [2.2.5.3.7.1](#)).

**sxaxis.sxaxisData:** 0x00 specifies that this pivot field is not on the data axis (section [2.2.5.3.7.5](#)).

The seven **BrtBeginSXVI** (section [2.4.263](#)) records in this collection are omitted for brevity.

### 3.8.42 PivotTable: BrtBeginSXVD 4

The next **BrtBeginSXVD** (section [2.4.261](#)) record specifies the "UnitPrice" pivot field (section [2.2.5.3.2](#)), which is not in the **PivotTable** view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVD |  |       |
|---------------------------|--|-------|
| Size                      | Structure                              | Value |
| 0014                      | BrtBeginSXVD - <b>BrtBeginSXVD</b>     |       |
| 0001                      | <a href="#">SXAxis</a> - <b>sxaxis</b> |       |
| 1 bit                     | BYTE - <b>sxaxisRw</b>                 | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisCol</b>                | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisPage</b>               | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisData</b>               | 0x0   |
| 4 bits                    | BYTE - <b>reserved</b>                 | 0x0   |
| 1 bit                     | WORD - <b>fDefault</b>                 | 0x1   |
| 1 bit                     | WORD - <b>fSum</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fCounta</b>                  | 0x0   |
| 1 bit                     | WORD - <b>fAverage</b>                 | 0x0   |
| 1 bit                     | WORD - <b>fMax</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fMin</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fProduct</b>                 | 0x0   |
| 1 bit                     | WORD - <b>fCount</b>                   | 0x0   |

| Structure of BrtBeginSXVD |   |        |
|---------------------------|---|--------|
| 1 bit                     | WORD - <b>fStdev</b>                      | 0x0    |
| 1 bit                     | WORD - <b>fStdevp</b>                     | 0x0    |
| 1 bit                     | WORD - <b>fVar</b>                        | 0x0    |
| 1 bit                     | WORD - <b>fVarp</b>                       | 0x0    |
| 4 bits                    | WORD - <b>reserved1</b>                   | 0x0    |
| 1 bit                     | BYTE - <b>fDrilledLevel</b>               | 0x0    |
| 1 bit                     | BYTE - <b>fHideDD</b>                     | 0x0    |
| 1 bit                     | BYTE - <b>fHiddenLvl</b>                  | 0x0    |
| 1 bit                     | BYTE - <b>fUseMemPropCaption</b>          | 0x0    |
| 1 bit                     | BYTE - <b>fCompact</b>                    | 0x1    |
| 1 bit                     | BYTE - <b>fDisplayName</b>                | 0x0    |
| 1 bit                     | BYTE - <b>fDisplaySub</b>                 | 0x0    |
| 1 bit                     | BYTE - <b>fTensorSort</b>                 | 0x0    |
| 0004                      | <a href="#">PivotNumFmt</a> - <b>ifmt</b> |        |
| 0002                      | <a href="#">Ifmt</a> - <b>ifmt</b>        |        |
| 0002                      | WORD - <b>ifmt</b>                        | 0x002C |
| 0002                      | WORD - <b>reserved</b>                    | 0x0000 |
| 1 bit                     | DWORD - <b>fDragToRow</b>                 | 0x1    |
| 1 bit                     | DWORD - <b>fDragToColumn</b>              | 0x1    |
| 1 bit                     | DWORD - <b>fDragToPage</b>                | 0x1    |
| 1 bit                     | DWORD - <b>fDragToHide</b>                | 0x1    |
| 1 bit                     | DWORD - <b>fDragToData</b>                | 0x1    |
| 1 bit                     | DWORD - <b>fShowAllItems</b>              | 0x0    |
| 1 bit                     | DWORD - <b>fOutline</b>                   | 0x1    |
| 1 bit                     | DWORD - <b>fInsertBlankRow</b>            | 0x0    |
| 1 bit                     | DWORD - <b>fSubtotalAtTop</b>             | 0x1    |
| 1 bit                     | DWORD - <b>fServerBased</b>               | 0x0    |
| 1 bit                     | DWORD - <b>reserved2</b>                  | 0x0    |
| 1 bit                     | DWORD - <b>fPageBreaksBetweenItems</b>    | 0x0    |
| 1 bit                     | DWORD - <b>fAutoSort</b>                  | 0x0    |

| Structure of BrtBeginSXVD |   |            |
|---------------------------|---|------------|
| 1 bit                     | DWORD - <b>fAscendSort</b>              | 0x1        |
| 1 bit                     | DWORD - <b>fAutoShow</b>                | 0x0        |
| 1 bit                     | DWORD - <b>fTopAutoShow</b>             | 0x1        |
| 1 bit                     | DWORD - <b>fHideNewItems</b>            | 0x0        |
| 1 bit                     | DWORD - <b>fHasAdvFilter</b>            | 0x0        |
| 1 bit                     | DWORD - <b>fFilterInclusive</b>         | 0x1        |
| 1 bit                     | DWORD - <b>fEnableMultiplePageItems</b> | 0x0        |
| 1 bit                     | DWORD - <b>fNotAutoSortDft</b>          | 0x0        |
| 1 bit                     | DWORD - <b>fMemPropDisplayInReport</b>  | 0x0        |
| 1 bit                     | DWORD - <b>fMemPropDisplayInTip</b>     | 0x0        |
| 1 bit                     | DWORD - <b>fMemPropDisplayInCaption</b> | 0x0        |
| 1 bit                     | DWORD - <b>fItemsDrilledByDefault</b>   | 0x0        |
| 7 bits                    | DWORD - <b>unused</b>                   | 0x00       |
| 0004                      | DWORD - <b>citmAutoShow</b>             | 0x0000000A |
| 0004                      | LONG - <b>isxdiAutoShow</b>             | 0xFFFFFFFF |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**sxaxis:** Specifies the axis or axes this pivot field (section [2.2.5.3.2](#)) is placed on.

**sxaxis.sxaxisRw:** 0x00 specifies that this pivot field is not on the row (2) axis.

**sxaxis.sxaxisCol:** 0x00 specifies that this pivot field is not on the column (2) axis.

**sxaxis.sxaxisPage:** 0x00 specifies that this pivot field is not on the page axis (section [2.2.5.3.7.1](#)).

**sxaxis.sxaxisData:** 0x00 specifies that this pivot field is not on the data axis (section [2.2.5.3.7.5](#)).

**ifmt:** Specifies the number format used in **PivotTables** (section [2.2.5](#)) and **PivotCaches** (section [2.2.5.2](#)) as follows.

**ifmt.ifmt:** Specifies the identifier of a number format.

**ifmt.ifmt.ifmt:** 0x002C specifies that the number format used to display this value is the following currency format "\$\* #,##0.00\_);\_(\$\* (#,##0.00);\_(\$\* "-"??\_);\_(@\_)".

### 3.8.43 PivotTable: BrtBeginSXVD 5

The next **BrtBeginSXVD** (section [2.4.261](#)) record specifies the "Quantity" pivot field (section [2.2.5.3.2](#)) on the data axis (section [2.2.5.3.7.5](#)) in the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXVD |   |       |
|---------------------------|---|-------|
| Size                      | Structure                                 | Value |
| 0014                      | BrBeginSXVD - <b>BrBeginSXVD</b>          |       |
| 0001                      | <a href="#">SXAxis</a> - <b>sxaxis</b>    |       |
| 1 bit                     | BYTE - <b>sxaxisRw</b>                    | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisCol</b>                   | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisPage</b>                  | 0x0   |
| 1 bit                     | BYTE - <b>sxaxisData</b>                  | 0x1   |
| 4 bits                    | BYTE - <b>reserved</b>                    | 0x0   |
| 1 bit                     | WORD - <b>fDefault</b>                    | 0x1   |
| 1 bit                     | WORD - <b>fSum</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fCounta</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fAverage</b>                    | 0x0   |
| 1 bit                     | WORD - <b>fMax</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fMin</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fProduct</b>                    | 0x0   |
| 1 bit                     | WORD - <b>fCount</b>                      | 0x0   |
| 1 bit                     | WORD - <b>fStdev</b>                      | 0x0   |
| 1 bit                     | WORD - <b>fStdevp</b>                     | 0x0   |
| 1 bit                     | WORD - <b>fVar</b>                        | 0x0   |
| 1 bit                     | WORD - <b>fVarp</b>                       | 0x0   |
| 4 bits                    | WORD - <b>reserved1</b>                   | 0x0   |
| 1 bit                     | BYTE - <b>fDrilledLevel</b>               | 0x0   |
| 1 bit                     | BYTE - <b>fHideDD</b>                     | 0x0   |
| 1 bit                     | BYTE - <b>fHiddenLvl</b>                  | 0x0   |
| 1 bit                     | BYTE - <b>fUseMemPropCaption</b>          | 0x0   |
| 1 bit                     | BYTE - <b>fCompact</b>                    | 0x1   |
| 1 bit                     | BYTE - <b>fDisplayName</b>                | 0x0   |
| 1 bit                     | BYTE - <b>fDisplaySub</b>                 | 0x0   |
| 1 bit                     | BYTE - <b>fTensorSort</b>                 | 0x0   |
| 0004                      | <a href="#">PivotNumFmt</a> - <b>ifmt</b> |       |

| <b>Structure of BrtBeginSXVD</b> |                                  |            |
|----------------------------------|----------------------------------|------------|
| 0002                             | <a href="#">Ifmt</a> - ifmt      |            |
| 0002                             | WORD - ifmt                      | 0x0000     |
| 0002                             | WORD - reserved                  | 0x0000     |
| 1 bit                            | DWORD - fDragToRow               | 0x1        |
| 1 bit                            | DWORD - fDragToColumn            | 0x1        |
| 1 bit                            | DWORD - fDragToPage              | 0x1        |
| 1 bit                            | DWORD - fDragToHide              | 0x1        |
| 1 bit                            | DWORD - fDragToData              | 0x1        |
| 1 bit                            | DWORD - fShowAllItems            | 0x0        |
| 1 bit                            | DWORD - fOutline                 | 0x1        |
| 1 bit                            | DWORD - fInsertBlankRow          | 0x0        |
| 1 bit                            | DWORD - fSubtotalAtTop           | 0x1        |
| 1 bit                            | DWORD - fServerBased             | 0x0        |
| 1 bit                            | DWORD - reserved2                | 0x0        |
| 1 bit                            | DWORD - fPageBreaksBetweenItems  | 0x0        |
| 1 bit                            | DWORD - fAutoSort                | 0x0        |
| 1 bit                            | DWORD - fAscendSort              | 0x1        |
| 1 bit                            | DWORD - fAutoShow                | 0x0        |
| 1 bit                            | DWORD - fTopAutoShow             | 0x1        |
| 1 bit                            | DWORD - fHideNewItems            | 0x0        |
| 1 bit                            | DWORD - fHasAdvFilter            | 0x0        |
| 1 bit                            | DWORD - fFilterInclusive         | 0x1        |
| 1 bit                            | DWORD - fEnableMultiplePageItems | 0x0        |
| 1 bit                            | DWORD - fNotAutoSortDft          | 0x0        |
| 1 bit                            | DWORD - fMemPropDisplayInReport  | 0x0        |
| 1 bit                            | DWORD - fMemPropDisplayInTip     | 0x0        |
| 1 bit                            | DWORD - fMemPropDisplayInCaption | 0x0        |
| 1 bit                            | DWORD - fItemsDrilledByDefault   | 0x0        |
| 7 bits                           | DWORD - unused                   | 0x00       |
| 0004                             | DWORD - citmAutoShow             | 0x0000000A |

| Structure of BrtBeginSXVD |                             |            |
|---------------------------|-----------------------------|------------|
| 0004                      | LONG - <b>isxdiAutoShow</b> | 0xFFFFFFFF |

Fields in this record that are explained in previous records in this example are omitted for brevity.

**sxaxis:** Specifies the axis or axes this pivot field (section [2.2.5.3.2](#)) is placed on.

**sxaxis.sxaxisRw:** 0x00 specifies that this pivot field is not on the row (2) axis.

**sxaxis.sxaxisCol:** 0x00 specifies that this pivot field is not on the column (2) axis.

**sxaxis.sxaxisPage:** 0x00 specifies this pivot field does not refer to the page axis (section [2.2.5.3.7.1](#)).

**sxaxis.sxaxisData:** 0x01 specifies that this pivot field is on the data axis (section [2.2.5.3.7.5](#)).

**ifmt:** Specifies the number format used in **PivotTables** (section [2.2.5](#)) and **PivotCaches** (section [2.2.5.2](#)) as follows:

**ifmt.ifmt:** Specifies the identifier of a number format.

**ifmt.ifmt.ifmt:** 0x0000 specifies that the general number format is used to display this value.

### 3.8.44 PivotTable: BrtBeginISXVDRws

The next record in this example, **BrtBeginISXVDRws** (section [2.4.93](#)), specifies the pivot fields (section [2.2.5.3.2](#)) that are displayed on the row (2) axis of this PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginIsxvdRws |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                  | Value      |
| 000C                          | BrtBeginISXVDRws - <b>BrtBeginIsxvdRws</b> |            |
| 0004                          | DWORD - <b>cisxvd</b>                      | 0x00000002 |
| 0008                          | <a href="#">ISXVD</a> - <b>rgisxvdrws</b>  |            |
| 0004                          | LONG - <b>isxvd[0]</b>                     | 0x00000000 |
| 0004                          | LONG - <b>isxvd[1]</b>                     | 0x00000002 |

**cisxvd:** 0x00000002 specifies that the count of pivot fields (section [2.2.5.3.2](#)) in the row (2) axis is 2.

**rgisxvdrws:** An array of **ISXVD** (section [2.5.83](#)) that specifies the pivot fields that are displayed on the row (2) axis of this PivotTable view.

**rgisxvdrws.isxvd[0]:** 0x00000000 specifies the pivot field index within the collection of **BrtBeginSXVDs** (section [2.4.262](#)) records as referenced by this field. This index specifies the corresponding **BrtBeginPCDField** (section [2.4.130](#)) "CustomerName" in the **PivotCache Definition** (section [2.1.7.38](#)) part.

**rgisxvdrws.isxvd[1]:** 0x00000002 specifies the pivot field index within the collection of **BrBeginSXVDs** records as referenced by this field. This index specifies the corresponding **BrBeginPCDField** "ProductName" in the **PivotCache Definition** part.

### 3.8.45 PivotTable: BrtBeginSXLIRws

The next record in this example, **BrtBeginSXLIRws** (section [2.4.242](#)), begins a collection of records that specify the pivot lines (section [2.2.5.3.8.3](#)) that are displayed on the row (2) area of the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXLIRws |  |            |
|------------------------------|--|------------|
| Size                         | Structure                                | Value      |
| 0004                         | BrtBeginSXLIRws - <b>BrtBeginSXLIRws</b> |            |
| 0004                         | DWORD - <b>csxlis</b>                    | 0x00000007 |

**csxlis:** 0x00000007 specifies that the number of pivot lines that are displayed on the row (2) area of the PivotTable view is 7.

### 3.8.46 PivotTable: BrtBeginSXLI 1

The first **BrtBeginSXLI** (section [2.4.240](#)) record is the "Island Trading" pivot line (section [2.2.5.3.8.3](#)) in the row (2) axis of this PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXLI |   |            |
|---------------------------|---|------------|
| Size                      | Structure                                       | Value      |
| 000C                      | BrtBeginSXLI - <b>BrtBeginSXLI</b>              |            |
| 0002                      | WORD - <b>cSic</b>                              | 0x0000     |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmttype</b> | 0x00       |
| 0001                      | BYTE - <b>reserved</b>                          | 0x00       |
| 0004                      | DWORD - <b>cisxvis</b>                          | 0x00000001 |
| 0004                      | <a href="#">ISXDI</a> - <b>iData</b>            | 0x00000000 |

**cSic:** 0x0000 specifies that zero pivot line entries (section [2.2.5.3.8.4](#)) are reused from the previous pivot line (section [2.2.5.3.8.3](#)).

**itmttype:** 0x00 specifies that the type of this pivot line item is not a subtotal (section [2.2.5.3.7.4.2](#)) or grand total.

**cisxvis:** 0x00000001 specifies that the count of pivot line entries in this pivot line is 1.

### 3.8.47 PivotTable: BrtBeginISXVIs 1

The next record, **BrtBeginISXVIs** (section [2.4.94](#)), specifies the pivot line entries (section [2.2.5.3.8.4](#)) that occur on pivot line (section [2.2.5.3.8.3](#)), as specified in the following table.

| Structure of BrtBeginIsxvis |                                      |            |
|-----------------------------|--------------------------------------|------------|
| Size                        | Structure                            | Value      |
| 0004                        | BrBeginISXVIs - <b>BrBeginIsxvis</b> |            |
| 0004                        | LONG - <b>rgisxvis</b>               |            |
| 0004                        | LONG - <b>isxvi[0]</b>               | 0x00000002 |

**rgisxvis:** An array of pivot line entry (section [2.2.5.3.8.4](#)) indexes.

**rgisxvis.isxvi[0]:** 0x00000002 specifies the index of a pivot item (section [2.2.5.3.3](#)) within the 1st row (2) field "CustomerName". The index 0x02 refers to the 3rd item in the pivot items collection **BrBeginSXVIs** (section [2.4.266](#)) of **BrBeginSXVD** (section [2.4.261](#)) pivot field (section [2.2.5.3.2](#)) "CustomerName". This 3rd pivot item (section [2.2.5.3.3](#)) **BrBeginSXVI** (section [2.4.263](#)) contains an index that refers to the 4th item in the **BrBeginPCDIRun** (section [2.4.141](#)) "Island Trading" of the corresponding **BrBeginPCDField** (section [2.4.130](#)) in the **PivotCache Definition** (section [2.1.7.38](#)).

### 3.8.48 PivotTable: BrtBeginSXLI 2

The next **BrtBeginSXLI** (section [2.4.240](#)) record is the "Ipoh Coffee" pivot line (section [2.2.5.3.8.3](#)) in the row (2) axis of this PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXLI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 000C                      | BrtBeginSXLI - <b>BrtBeginSXLI</b>             |            |
| 0002                      | WORD - <b>cSic</b>                             | 0x0001     |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x00       |
| 0001                      | BYTE - <b>reserved</b>                         | 0x00       |
| 0004                      | DWORD - <b>cisxvis</b>                         | 0x00000001 |
| 0004                      | <a href="#">ISXDI</a> - <b>iData</b>           | 0x00000000 |

**cSic:** 0x0001 specifies that the number of pivot line entries (section [2.2.5.3.8.4](#)) to reuse from the previous pivot line (section [2.2.5.3.8.3](#)) is 1.

**itmtype:** 0x00 specifies that the type of this pivot line item is not a subtotal (section [2.2.5.3.7.4.2](#)) or grand total.

**cisxvis:** 0x00000001 specifies that the count of pivot line entries in this pivot line is 1.

### 3.8.49 PivotTable: BrtBeginISXVIs 2

The next **BrtBeginISXVIs** (section [2.4.94](#)) record specifies the pivot line entries (section [2.2.5.3.8.4](#)) that occur on the second pivot line (section [2.2.5.3.8.3](#)), as specified in the following table.



| Structure of BrtBeginIsxvis |                                      |            |
|-----------------------------|--------------------------------------|------------|
| Size                        | Structure                            | Value      |
| 0004                        | BrBeginISXVIs - <b>BrBeginIsxvis</b> |            |
| 0004                        | LONG - <b>rgisxvis</b>               |            |
| 0004                        | LONG - <b>isxvi[0]</b>               | 0x00000002 |

**rgisxvis:** An array of pivot line entry indexes.

**rgisxvis.isxvi[0]:** 0x00000002 specifies the index of the pivot item (section [2.2.5.3.3](#)) within the 2nd row (2) field "ProductName". The index 0x02 refers to the 3rd item in the pivot items collection **BrBeginSXVIs** (section [2.4.266](#)) of **BrBeginSXVD** (section [2.4.261](#)) pivot field (section [2.2.5.3.2](#)) "ProductName". This 3rd pivot item **BrBeginSXVI** (section [2.4.263](#)) contains an index that refers to the 4th item in the **BrBeginPCDIRun** (section [2.4.141](#)) "Ipoh Coffee" of the corresponding **BrBeginPCDField** (section [2.4.130](#)) in the **PivotCache Definition** (section [2.1.7.38](#)).

Records following this record, until the next **BrBeginSXLI** (section [2.4.240](#)) record, are omitted for brevity.

### 3.8.50 PivotTable: BrtBeginSXLI 3

The next **BrtBeginSXLI** (section [2.4.240](#)) record is the grand total pivot line (section [2.2.5.3.8.3](#)) in the row (2) axis of this PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXLI |  |            |
|---------------------------|--|------------|
| Size                      | Structure                                      | Value      |
| 000C                      | BrBeginSXLI - <b>BrtBeginSXLI</b>              |            |
| 0002                      | WORD - <b>cSic</b>                             | 0x0000     |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmtype</b> | 0x0D       |
| 0001                      | BYTE - <b>reserved</b>                         | 0x00       |
| 0004                      | DWORD - <b>cisxvis</b>                         | 0x00000001 |
| 0004                      | <a href="#">ISXDI</a> - <b>iData</b>           | 0x00000000 |

**cSic:** 0x0000 specifies that the number of pivot line entries (section [2.2.5.3.8.4](#)) to reuse from the previous pivot line (section [2.2.5.3.8.3](#)) is 0.

**itmtype:** 0x0D specifies that the type of this pivot line item is grand total.

**cisxvis:** 0x00000001 specifies that the count of pivot line entries (section [2.2.5.3.8.4](#)) in this pivot line is 1.

### 3.8.51 PivotTable: BrtBeginISXVIs 3

The next **BrtBeginISXVIs** (section [2.4.94](#)) record specifies the pivot line entries (section [2.2.5.3.8.4](#)) for the grand total pivot line (section [2.2.5.3.8.3](#)), as specified in the following table.

| Structure of BrtBeginIsxvis |                                      |            |
|-----------------------------|--------------------------------------|------------|
| Size                        | Structure                            | Value      |
| 0004                        | BrBeginISXVIs - <b>BrBeginIsxvis</b> |            |
| 0004                        | LONG - <b>rgisxvis</b>               |            |
| 0004                        | LONG - <b>isxvi[0]</b>               | 0x00000000 |

**rgisxvis:** An array of pivot line entry indexes.

**rgisxvis.isxvi[0]:** 0x00000000 specifies the index of the pivot item (section [2.2.5.3.3](#)) within the last row (2) field "Grand Total".

### 3.8.52 PivotTable: BrtBeginSXLICols

The next record in this example, **BrBeginSXLICols** (section [2.4.241](#)), specifies the pivot line (section [2.2.5.3.8.3](#)) that are displayed on the column (2) axis of the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXLICols |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                | Value      |
| 0004                          | BrBeginSXLICols - <b>BrBeginSXLICols</b> |            |
| 0004                          | DWORD - <b>csxlis</b>                    | 0x00000001 |

**csxlis:** 0x00000001 specifies that the number of pivot lines that are displayed on the column (2) area of the PivotTable view is 1.

### 3.8.53 PivotTable: BrtBeginSXLI 4

The next record in this example, **BrBeginSXLI** (section [2.4.240](#)), is the "Sum of Quantity" pivot line (section [2.2.5.3.8.3](#)) in the column (2) axis of this PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXLI |   |            |
|---------------------------|---|------------|
| Size                      | Structure                                       | Value      |
| 000C                      | BrBeginSXLI - <b>BrtBeginSXLI</b>               |            |
| 0002                      | WORD - <b>cSic</b>                              | 0x0000     |
| 0001                      | <a href="#">PivotItemType</a> - <b>itmttype</b> | 0x00       |
| 0001                      | BYTE - <b>reserved</b>                          | 0x00       |
| 0004                      | DWORD - <b>cisxvis</b>                          | 0x00000000 |
| 0004                      | <a href="#">ISXDI</a> - <b>iData</b>            | 0x00000000 |

**cSic:** 0x0000 specifies the number of pivot line entries (section [2.2.5.3.8.4](#)) to reuse from the previous pivot line (section [2.2.5.3.8.3](#)).

**itmtype:** 0x00 specifies that the type of this pivot line item is not a subtotal (section [2.2.5.3.7.4.2](#)) or grand total.

**cisxvis:** 0x00000000 specifies that the count of pivot line entries in this pivot line is 0.

### 3.8.54 PivotTable: BrtBeginSXPIs

The next record in this example, **BrtBeginSXPIs** (section [2.4.245](#)), begins the collection of records that specify the pivot fields (section [2.2.5.3.2](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXPIs |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginSXPIs - <b>BrtBeginSXPIs</b> |            |
| 0004                       | DWORD - <b>csxpis</b>                | 0x00000001 |

**csxpis:** 0x00000001 specifies that the count of pivot fields on the page axis is 1.

### 3.8.55 PivotTable: BrtBeginSXPI

The next record in this example, **BrtBeginSXPI** (section [2.4.244](#)), specifies the properties of a pivot field (section [2.2.5.3.2](#)) on the page axis (section [2.2.5.3.7.1](#)) of the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXPI |                                      |            |
|---------------------------|--------------------------------------|------------|
| Size                      | Structure                            | Value      |
| 000D                      | BrtBeginSXPI - <b>BrtBeginSXPI</b>   |            |
| 0004                      | <a href="#">ISXVD</a> - <b>isxvd</b> | 0x00000001 |
| 0004                      | DWORD - <b>isxvi</b>                 | 0x001000FE |
| 0004                      | LONG - <b>isxth</b>                  | 0xFFFFFFFF |
| 1 bit                     | BYTE - <b>fUnique</b>                | 0x0        |
| 1 bit                     | BYTE - <b>fDisplay</b>               | 0x0        |
| 6 bits                    | BYTE - <b>reserved</b>               | 0x00       |

**isxvd:** 0x00000001 specifies a pivot field (section [2.2.5.3.2](#)) index that refers to a pivot field in the **BrtBeginSXVDs** (section [2.4.262](#)) collection.

**isxvi:** 0x001000FE specifies that this field is ignored, as specified in section [2.2.5.3.7.1.1](#).

**isxth:** 0xFFFFFFFF specifies a value that is ignored because this **PivotTable** (section [2.2.5](#)) is not an OLAP **PivotTable**.

**fUnique:** 0x0 specifies that the **irstUnique** field, which applies only to OLAP **PivotTables**, is not present after the fixed-size portion of this record.

**fDisplay:** 0x0 specifies that the **irstDisplay** field, which applies only to OLAP **PivotTables**, is not present after the fixed-size portion of this record.

### 3.8.56 PivotTable: BrtBeginSXDI

The next record, **BrtBeginSXDI** (section [2.4.233](#)), begins the collection of records that specify the data items (section [2.2.5.3.7.5.1](#)) on the data axis (section [2.2.5.3.7.5](#)) of the PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXDI |                                    |            |
|---------------------------|------------------------------------|------------|
| Size                      | Structure                          | Value      |
| 0004                      | BrtBeginSXDI - <b>BrtBeginSXDI</b> |            |
| 0004                      | DWORD - <b>csxdis</b>              | 0x00000001 |

**csxdis:** 0x00000001 specifies that the number of data items on the data axis in this PivotTable view is 1.

### 3.8.57 PivotTable: BrtBeginSXDI

The next record, **BrtBeginSXDI** (section [2.4.232](#)), specifies the "Sum of Quantity" data item (section [2.2.5.3.7.5.1](#)) that summarizes data in this PivotTable view (section [2.2.5.3](#)), as specified in the following table.

| Structure of BrtBeginSXDI |   |                 |
|---------------------------|---|-----------------|
| Size                      | Structure   | Value           |
| 003B                      | BrtBeginSXDI - <b>BrtBeginSXDI</b>                        |                 |
| 0004                      | <a href="#">ISXVD</a> - <b>isxvdData</b>                  | 0x00000004      |
| 0004                      | <a href="#">DataConsolidationFunction</a> - <b>iiftab</b> | 0x00000000      |
| 0004                      | <a href="#">ShowDataAs</a> - <b>df</b>                    | 0x00000000      |
| 0004                      | ISXVD - <b>isxvd</b>                                      | 0x00000000      |
| 0004                      | DWORD - <b>isxvi</b>                                      | 0x00000000      |
| 0004                      | <a href="#">PivotNumFmt</a> - <b>ifmt</b>                 |                 |
| 0002                      | <a href="#">Ifmt</a> - <b>ifmt</b>                        |                 |
| 0002                      | WORD - <b>ifmt</b>  | 0x0000          |
| 0002                      | WORD - <b>reserved</b>                                    | 0x0000          |
| 0001                      | BYTE - <b>fLoadDisplayName</b>                            | 0x01            |
| 0022                      | <a href="#">XLWideString</a> - <b>stDisplayName</b>       | Sum of Quantity |

The **isxvd** and **isxvi** fields are not described here because they are ignored in this example.

**isxvdData:** 0x00000004 specifies the index of the pivot field (section [2.2.5.3.2](#)) in the **BrBeginSXVDs** (section [2.4.262](#)) collection that the pivot field that this data item (section [2.2.5.3.7.5.1](#)) summarizes.

**iiftab:** 0x00000000 specifies the SUM aggregation data consolidation function that applies to this data item (section [2.2.5.3.7.5.1](#)).

**df:** 0x00000000 specifies that the data format for this data item is normal.

**ifmt:** Specifies the format applied to this data item.

**ifmt.ifmt.ifmt:** 0x0000 specifies this data item has the General number format.

**fLoadDisplayName:** 0x01 specifies that the name of the data item is present.

**stDisplayName:** Specifies that the name of the data item is "Sum of Quantity".

### 3.9 Metadata

This example shows metadata (section [2.2.4](#)) for cube functions and the external connection (section [2.2.8](#)) used with them.

This example uses a sample workbook with cell values as specified in the following table.

| Cell | Formula  | Result         |
|------|--|----------------|
| B2   | =CUBESET("Sales", "[Product].[All Products].Children", "Products") | Products       |
| C2   | =CUBEMEMBER("Sales", "[Measures].[Profit]")                        | Profit         |
| B3   | =CUBERANKEDMEMBER("Sales", \$B\$2, 1)                              | Drink          |
| C3   | =CUBEVALUE("Sales", \$B3, C\$2)                                    | 29358.9754     |
| B4   | =CUBERANKEDMEMBER("Sales", \$B\$2, 2)                              | Food           |
| C4   | =CUBEVALUE("Sales", \$B4, C\$2)                                    | 245764.8665    |
| B5   | =CUBERANKEDMEMBER("Sales", \$B\$2, 3)                              | Non-Consumable |
| C5   | =CUBEVALUE("Sales", \$B5, C\$2)                                    | 64487.0545     |
| B6   | Grand Total  | Grand Total    |
| C6   | =CUBEVALUE("Sales", \$B\$2,C\$2)                                   | 339610.8964    |

This example's sample workbook is illustrated by the following figure.

|    | A | B               | C             | D | E | F | G |
|----|---|-----------------|---------------|---|---|---|---|
| 1  |   |                 |               |   |   |   |   |
| 2  |   | <b>Products</b> | <b>Profit</b> |   |   |   |   |
| 3  |   | Drink           | 29358.9754    |   |   |   |   |
| 4  |   | Food            | 245764.8665   |   |   |   |   |
| 5  |   | Non-Consumable  | 64487.0545    |   |   |   |   |
| 6  |   | Grand Total     | 339610.8964   |   |   |   |   |
| 7  |   |                 |               |   |   |   |   |
| 8  |   |                 |               |   |   |   |   |
| 9  |   |                 |               |   |   |   |   |
| 10 |   |                 |               |   |   |   |   |
| 11 |   |                 |               |   |   |   |   |
| 12 |   |                 |               |   |   |   |   |
| 13 |   |                 |               |   |   |   |   |
| 14 |   |                 |               |   |   |   |   |
| 15 |   |                 |               |   |   |   |   |

**Figure 29: Metadata example workbook**

This example includes all of the records in the external data connections part (section [2.1.7.24](#)) and in the metadata (section [2.1.7.34](#)) part except for **BrtEnd\*** records, which have been omitted for brevity. Additionally, certain records which occur multiple times in the file are documented a fewer number of times in this example, again for brevity.

The records in the external data connections (section [2.1.7.24](#)) part are **BrtBeginExtConnections** (section [2.4.77](#)), **BrtBeginExtConnection** (section [2.4.76](#)), **BrtBeginECDbProps** (section [2.4.57](#)), and **BrtBeginECOLapProps** (section [2.4.58](#)). Together, these records specify a connection to an OLAP data source (1).

The rest of the records in this example are in the metadata part.

**BrtBeginMetadata** (section [2.4.108](#)), **BrtBeginEsmdtinfo** (section [2.4.71](#)), **BrtBeginEsstr** (section [2.4.73](#)), and **BrtBeginEsmdx** (section [2.4.72](#)) specify the beginning of collections as specified in their respective section 2 specifications.

**BrtMdtinfo** (section [2.4.674](#)) specifies the name and properties of the value metadata type for MDX Metadata (section [2.2.4.8](#)) which is the metadata type (section [2.2.4.1](#)) used in this example.

Four of the six **BrtStr** (section [2.4.754](#)) records in the file are shown in this example. These records specify shared text strings used by other records in this example.

Next, four of the nine sequences of records that conform to the **MDX** rule (defined in section [2.1.7.34](#)) are shown in this example. In each, the **BrtBeginMdx** (section [2.4.102](#)) record specifies

the data connection name and the type of cube function that generated the metadata (section [2.2.4](#)).

- The first example of a sequence of records that conforms to the **MDX** rule specifies the metadata associated with cell B2 in the example and includes one **BrtBeginMdx** (section [2.4.102](#)) record and one **BrtBeginMdxSet** (section [2.4.105](#)) record.
- The second example of a sequence of records that conforms to the **MDX** rule specifies the metadata associated with cell B3 in the example and includes one **BrtBeginMdx** record, one **BrtBeginMdxTuple** (section [2.4.106](#)) record and one **BrtMdxMbrIstr** (section [2.4.675](#)) record.
- The third example of a sequence of records that conforms to the **MDX** rule specifies the metadata associated with cell C2 in the example and includes one **BrtBeginMdx** record, one **BrtBeginMdxTuple** record and one **BrtMdxMbrIstr** record.
- The fourth example of a sequence of records that conforms to the **MDX** rule specifies the metadata associated with cell C6 in the example and includes one **BrtBeginMdx** record, one **BrtBeginMdxTuple** record and two **BrtMdxMbrIstr** records.

Finally, the **BrtBeginEsmdb** (section [2.4.70](#)) and **BrtMdb** (section [2.4.673](#)) records specify the association between the **BrtBeginMdx** records and the **BrtMdtinfo** (section [2.4.674](#)) record which specifies the metadata type (section [2.2.4.1](#)).

### 3.9.1 MetaData: BrtBeginExtConnections

The first record in this example is **BrtBeginExtConnections** (section [2.4.77](#)) from the external data connections (section [2.1.7.24](#)) part, which specifies the beginning of the collection of external connections (section [2.2.8](#)), as specified in the following table. In this example, there is only one external connection in this collection, specified by **BrtBeginExtConnection** (section [2.4.77](#)).

| Structure of BrtBeginExtConnections |  |
|-------------------------------------|--|
| Size                                | Structure  |
| 0000                                | BrtBeginExtConnections - <b>BrtBeginExtConnections</b> |

### 3.9.2 MetaData: BrtBeginExtConnection

The **BrtBeginExtConnection** (section [2.4.76](#)) record specifies the external connection (section [2.2.8](#)) used with the cube functions in this workbook, as specified in the following table.

| Structure of BrtBeginExtConnection |   |        |
|------------------------------------|---|--------|
| Size                               | Structure   | Value  |
| 00DF                               | BrtBeginExtConnection - <b>BrtBeginExtConnection</b>          |        |
| 0001                               | <a href="#">DataFunctionalityLevel</a> - <b>bVerRefreshed</b> | 0x03   |
| 0001                               | DataFunctionalityLevel - <b>bVerRefreshableMin</b>            | 0x00   |
| 8 bits                             | WORD - <b>pc</b>  | 0x02   |
| 8 bits                             | WORD - <b>reserved1</b>                                       | 0x00   |
| 16 bits                            | DWORD - <b>wInterval</b>                                      | 0x0000 |

| Structure of BrtBeginExtConnection |  |                                  |
|------------------------------------|--|----------------------------------|
| 1 bit                              | DWORD - <b>fMaintain</b>                               | 0x1                              |
| 1 bit                              | DWORD - <b>fNewQuery</b>                               | 0x0                              |
| 1 bit                              | DWORD - <b>fDeleted</b>                                | 0x0                              |
| 1 bit                              | DWORD - <b>fAlwaysUseConnectionFile</b>                | 0x0                              |
| 1 bit                              | DWORD - <b>fBackgroundQuery</b>                        | 0x1                              |
| 1 bit                              | DWORD - <b>fRefreshOnLoad</b>                          | 0x0                              |
| 1 bit                              | DWORD - <b>fSaveData</b>                               | 0x1                              |
| 9 bits                             | DWORD - <b>reserved2</b>                               | 0x000                            |
| 1 bit                              | WORD - <b>fLoadSourceDataFile</b>                      | 0x0                              |
| 1 bit                              | WORD - <b>fLoadSourceConnectionFile</b>                | 0x1                              |
| 1 bit                              | WORD - <b>fLoadConnectionDesc</b>                      | 0x1                              |
| 1 bit                              | WORD - <b>reserved3</b>                                | 0x1                              |
| 1 bit                              | WORD - <b>fLoadSSOApplicationID</b>                    | 0x0                              |
| 11 bits                            | WORD - <b>reserved4</b>                                | 0x000                            |
| 0004                               | <a href="#">DBType</a> - <b>idbtype</b>                | 0x00000005                       |
| 0004                               | DWORD - <b>irecontype</b>                              | 0x00000001                       |
| 0004                               | DWORD - <b>dwConnID</b>                                | 0x00000001                       |
| 0001                               | BYTE - <b>iCredMethod</b>                              | 0x00                             |
| 0098                               | <a href="#">XLWideString</a> - <b>stConnectionFile</b> | C:\Documents and Settings\joh... |
| 0022                               | XLWideString - <b>stConnDesc</b>                       | Sales Reporting                  |
| 000E                               | XLWideString - <b>stConnName</b>                       | Sales                            |

**bVerRefreshed:** 0x03 specifies that the application that last refreshed this external connection had a data functionality level (section [2.2.5.1](#)) of greater than or equal to 3.

**bVerRefreshableMin:** 0x00 specifies that the minimum data functionality level that the application is required to support to correctly refresh the external connection is less than 3.

**pc:** 0x02 specifies that the password is not saved as part of the connection string. Note that this field is not relevant in this example because the connection string specifies integrated security as the authentication method.

**wInterval:** 0x0000 specifies that this external connection is not refreshed automatically.

**fMaintain:** 0x1 specifies that the application keeps this external connection open after a refresh.

**fNewQuery:** 0x0 specifies that this external connection has been refreshed.



**fDeleted:** 0x0 specifies that this external connection has not been deleted.

**fAlwaysUseConnectionFile:** 0x0 specifies that the application follows the procedure specified by the **irecontype** field when refreshing this external connection.

**fBackgroundQuery:** 0x1 specifies that the preferred usage of this external connection is to refresh asynchronously in the background.

**fRefreshOnLoad:** 0x0 specifies that this external connection is not refreshed when the workbook is opened.

**fSaveData:** 0x1 specifies that the data retrieved from this external connection is saved within the workbook.

**fLoadSourceDataFile:** 0x0 specifies that **stDataFile** does not exist after the fixed-size portion of this record.

**fLoadSourceConnectionFile:** 0x1 specifies that **stConnectionFile** exists after the fixed-size portion of this record.

**fLoadConnectionDesc:** 0x1 specifies that **stConnDesc** exists after the fixed-size portion of this record.

**fLoadSSOApplicationID:** 0x0 specifies that **stSso** does not exist after the fixed-size portion of this record.

**idbtype:** 0x00000005 specifies that the data source (1) type of this external connection is OLE DB.

**irecontype:** 0x00000001 specifies that this external connection is refreshed using the existing external connection information first. If the refresh fails, then updated connection information is retrieved, if available, from the external connection file associated with this external connection.

**dwConnID:** 0x00000001 specifies that the unique identifier of this external connection is 1.

**iCredMethod:** 0x00 specifies that integrated authentication is the authentication method used when establishing or re-establishing this external connection.

**stConnectionFile:** "C:\Documents and Settings\johnsmith\My Documents\My Data Sources\Sales.odc" specifies the path to the external connection file (section [2.2.8.2](#)) from which this external connection was created.

**stConnDesc:** "Sales Reporting" specifies the user description for this external connection.

**stConnName:** "Sales" specifies the name of this external connection.

### 3.9.3 MetaData: BrtBeginECDBProps

The **BrtBeginECDBProps** (section [2.4.57](#)) record specifies properties associated with this external connection (section [2.2.8](#)), as specified in the following table.

| Structure of BrtBeginECDBProps |  |       |
|--------------------------------|--|-------|
| Size                           | Structure                                    | Value |
| 0191                           | BrtBeginECDBProps - <b>BrtBeginECDBProps</b> |       |

| Structure of BrtBeginECdbProps |  |  |
|--------------------------------|--|--|
| 0004                           | <a href="#">CmdType</a> - <b>icmdtype</b>    | 0x00000001                                     |
| 1 bit                          | BYTE - <b>fLoadCmdSvr</b>                    | 0x0  |
| 1 bit                          | BYTE - <b>fLoadCmd</b>                       | 0x1  |
| 6 bits                         | BYTE - <b>reserved</b>                       | 0x00   |
| 017E                           | <a href="#">XLWideString</a> - <b>stConn</b> | Provider=MSOLAP.3;Integrated Security=SSPI;... |
| 000E                           | XLWideString - <b>stCmd</b>                  | Sales  |

**icmdtype:** 0x00000001 specifies that the command type for this connection is CMDCUBE. This means that **stCmd** specifies the name of a cube within an OLAP database.

**fLoadCmdSvr:** 0x0 specifies that **stCmdSvr** does not exist after the fixed-size portion of this record.

**fLoadCmd:** 0x1 specifies that **stCmd** exists after the fixed-size portion of this record.

**stConn:** "Provider=MSOLAP.3;Integrated Security=SSPI;Persist Security Info=True;Initial Catalog=FoodMart 2000;Data Source=olapserver;MDX Compatibility=1;Safety Options=2;MDX Missing Member Mode=Error" specifies the connection string used to connect to the data source (1).

**stCmd:** "Sales" specifies the name of the cube within the OLAP database (FoodMart 2000) specified in the connection string.

### 3.9.4 MetaData: BrtBeginECOlapProps

The **BrtBeginECOlapProps** (section [2.4.58](#)) record specifies properties specific to OLAP external connections (section [2.2.8](#)), as specified in the following table.

| Structure of BrtBeginECOlapProps |  |            |
|----------------------------------|--|------------|
| Size                             | Structure  | Value      |
| 0006                             | BrtBeginECOlapProps - <b>BrtBeginECOlapProps</b> |            |
| 1 bit                            | BYTE - <b>fLocalConn</b>                         | 0x0        |
| 1 bit                            | BYTE - <b>fNoRefreshCube</b>                     | 0x0        |
| 1 bit                            | BYTE - <b>fSrvFmtBack</b>                        | 0x1        |
| 1 bit                            | BYTE - <b>fSrvFmtFore</b>                        | 0x1        |
| 1 bit                            | BYTE - <b>fSrvFmtFlags</b>                       | 0x1        |
| 1 bit                            | BYTE - <b>fSrvFmtNum</b>                         | 0x1        |
| 1 bit                            | BYTE - <b>fUseOfficeLcid</b>                     | 0x1        |
| 1 bit                            | BYTE - <b>reserved1</b>                          | 0x0        |
| 0004                             | <a href="#">DRw</a> - <b>nDrillthroughRows</b>   | 0x000003E8 |

| Structure of BrtBeginECOLapProps |                              |      |
|----------------------------------|------------------------------|------|
| 1 bit                            | BYTE - <b>bLoadConnLocal</b> | 0x0  |
| 7 bits                           | BYTE - <b>reserved2</b>      | 0x00 |

**fLocalConn:** 0x0 specifies that data is retrieved using the connection string specified by the **stConn** field of the **BrtBeginECDBProps** (section [2.4.57](#)) record preceding this record.

**fNoRefreshCube:** 0x0 specifies that the local cube file is rebuilt from the original OLAP data source (1) on refresh.

**fSrvFmtBack:** 0x1 specifies that the fill colors retrieved from the OLAP source are used for cell formatting.

**fSrvFmtFore:** 0x1 specifies that the font face color retrieved from the OLAP source is used for cell formatting.

**fSrvFmtFlags:** 0x1 specifies that the font family name retrieved from the OLAP source is used for cell formatting.

**fSrvFmtNum:** 0x1 specifies that the format string retrieved from the OLAP source is used for cell formatting.

**fUseOfficeLcid:** 0x1 specifies that the application sends a language code identifier (LCID) to the OLAP provider to retrieve localized data.

**nDrillthroughRows:** 0x000003E8 specifies that a maximum of 1000 rows (2) are returned when the user drills through an aggregate value in a **PivotTable** (section [2.2.5](#)).

**bLoadConnLocal:** 0x0 specifies that **stConnLocal** does not exist after the fixed-size portion of this record and therefore, no local cube is associated with this external connection.

### 3.9.5 MetaData: BrtBeginMetadata

The **BrtBeginMetadata** (section [2.4.108](#)) record specifies the beginning of a collection of records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF. The collection of records specifies the metadata section [2.2.4](#)) associated with the book, as specified in the following table.

| Structure of BrtBeginMetadata |  |
|-------------------------------|--|
| Size                          | Structure                                  |
| 0000                          | BrtBeginMetadata - <b>BrtBeginMetadata</b> |

### 3.9.6 MetaData: BrtBeginEsmdtinfo

The **BrtBeginEsmdtinfo** (section [2.4.71](#)) record specifies the beginning of the collection of **BrtMdtinfo** (section [2.4.674](#)) records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF, as specified in the following table. The collection of records specifies the list of metadata types (section [2.2.4.1](#)).

| Structure of BrtBeginEsmdinfo |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                  | Value      |
| 0004                          | BrtBeginEsmdinfo - <b>BrtBeginEsmdinfo</b> |            |
| 0004                          | LONG - <b>cMdtinfo</b>                     | 0x00000001 |

**cMdtinfo:** 0x00000001 specifies that there is one record in this collection.

### 3.9.7 MetaData: BrtMdtinfo

The **BrtMdtinfo** (section [2.4.674](#)) record specifies the name and properties of the value metadata type for MDX metadata, as specified in the following table. The values for the fields in this record are fixed for cube functions, and are specified in section [2.2.4.8](#). Refer to the **BrtMdtinfo** definition for the descriptions of these fields.

| Structure of BrtMdtinfo |   |       |
|-------------------------|---|-------|
| Size                    | Structure                               | Value |
| 0016                    | BrtMdtinfo - <b>BrtMdtinfo</b>          |       |
| 0004                    | <a href="#">MdtFlags</a> - <b>grbit</b> |       |
| 1 bit                   | DWORD - <b>fGhostRw</b>                 | 0x0   |
| 1 bit                   | DWORD - <b>fGhostCol</b>                | 0x0   |
| 1 bit                   | DWORD - <b>fEdit</b>                    | 0x0   |
| 1 bit                   | DWORD - <b>fDelete</b>                  | 0x0   |
| 1 bit                   | DWORD - <b>fCopy</b>                    | 0x1   |
| 1 bit                   | DWORD - <b>fPasteAll</b>                | 0x1   |
| 1 bit                   | DWORD - <b>fPasteFmlas</b>              | 0x0   |
| 1 bit                   | DWORD - <b>fPasteValues</b>             | 0x1   |
| 1 bit                   | DWORD - <b>fPasteFmts</b>               | 0x0   |
| 1 bit                   | DWORD - <b>fPasteComments</b>           | 0x0   |
| 1 bit                   | DWORD - <b>fPasteDv</b>                 | 0x0   |
| 1 bit                   | DWORD - <b>fPasteBorders</b>            | 0x0   |
| 1 bit                   | DWORD - <b>fPasteColWidths</b>          | 0x0   |
| 1 bit                   | DWORD - <b>fPasteNumFmts</b>            | 0x0   |
| 1 bit                   | DWORD - <b>fMerge</b>                   | 0x1   |
| 1 bit                   | DWORD - <b>fSplitFirst</b>              | 0x1   |
| 1 bit                   | DWORD - <b>fSplitAll</b>                | 0x0   |

| Structure of BrtMdtinfo |  |            |
|-------------------------|--|------------|
| 1 bit                   | DWORD - <b>fRwColShift</b>                   | 0x1        |
| 1 bit                   | DWORD - <b>fClearAll</b>                     | 0x0        |
| 1 bit                   | DWORD - <b>fClearFmts</b>                    | 0x1        |
| 1 bit                   | DWORD - <b>fClearContents</b>                | 0x0        |
| 1 bit                   | DWORD - <b>fClearComments</b>                | 0x1        |
| 1 bit                   | DWORD - <b>fAssign</b>                       | 0x1        |
| 4 bits                  | DWORD - <b>reserved1</b>                     | 0x0        |
| 1 bit                   | DWORD - <b>reserved2</b>                     | 0x1        |
| 1 bit                   | DWORD - <b>fCanCoerce</b>                    | 0x1        |
| 1 bit                   | DWORD - <b>fAdjust</b>                       | 0x0        |
| 1 bit                   | DWORD - <b>fCellMeta</b>                     | 0x0        |
| 1 bit                   | DWORD - <b>reserved3</b>                     | 0x1        |
| 0004                    | DWORD - <b>metadataID</b>                    | 0x0001D4C0 |
| 000E                    | <a href="#">XLWideString</a> - <b>stName</b> | XLMDX      |

### 3.9.8 MetaData: BrtBeginEsstr

The **BrtBeginEsstr** (section [2.4.73](#)) record specifies the beginning of a collection of **BrtStr** (section [2.4.754](#)) records, as specified in the following table.

| Structure of BrtBeginEsstr |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginEsstr - <b>BrtBeginEsstr</b> |            |
| 0004                       | LONG - <b>cStr</b>                   | 0x00000006 |

**cStr:** 0x00000006 specifies that there are 6 **BrtStr** records in this collection.

### 3.9.9 MetaData: BrtStr 1

This **BrtStr** (section [2.4.754](#)) record specifies the first shared text string in the collection, as specified in the following table.

| Structure of BrtStr |  |                                   |
|---------------------|--|-----------------------------------|
| Size                | Structure                                    | Value                             |
| 0046                | BrtStr - <b>BrtStr</b>                       |                                   |
| 0046                | <a href="#">XLWideString</a> - <b>stText</b> | [Product].[All Products].Children |

**stText:** "[Product].[All Products].Children" specifies the MDX expression that defines an OLAP named set.

### 3.9.10 MetaData: BrtStr 2

This **BrtStr** (section [2.4.754](#)) record specifies the second shared text string in the collection, as specified in the following table.

| Structure of BrtStr |  |                                  |
|---------------------|--|----------------------------------|
| Size                | Structure                                    | Value                            |
| 0044                | BrtStr - <b>BrtStr</b>                       |                                  |
| 0044                | <a href="#">XLWideString</a> - <b>stText</b> | [Product].[All Products].[Drink] |

**stText:** "[Product].[All Products].[Drink]" specifies the MDX expression that represents one of the members (3) of the OLAP named set used in this example.

The next two **BrtStr** records that have been omitted specify the MDX expression of the other two members (3) of the OLAP named set used in this example.

### 3.9.11 MetaData: BrtStr 3

This **BrtStr** (section [2.4.754](#)) record specifies the fifth shared text string in the collection, as specified in the following table.

| Structure of BrtStr |  |                     |
|---------------------|--|---------------------|
| Size                | Structure                                    | Value               |
| 002A                | BrtStr - <b>BrtStr</b>                       |                     |
| 002A                | <a href="#">XLWideString</a> - <b>stText</b> | [Measures].[Profit] |

**stText:** "[Measures].[Profit]" specifies an MDX expression that represents an OLAP measure.

### 3.9.12 MetaData: BrtStr 4

This **BrtStr** (section [2.4.754](#)) record specifies the sixth shared text string in the collection, as specified in the following table.

| Structure of BrtStr |  |       |
|---------------------|--|-------|
| Size                | Structure                                    | Value |
| 000E                | BrtStr - <b>BrtStr</b>                       |       |
| 000E                | <a href="#">XLWideString</a> - <b>stText</b> | Sales |

**stText:** "Sales" specifies the name of the external connection (section [2.2.8](#)) used by the cube functions in this workbook. It matches the **stConnName** field of the **BrtBeginExtConnections** (section [2.4.77](#)) record in this example.

### 3.9.13 MetaData: BrtBeginEsmdx

The **BrtBeginEsmdx** (section [2.4.72](#)) record specifies the beginning of the collection of records that specify the MDX metadata store (section [2.2.4.4](#)), as specified in the following table.

| Structure of BrtBeginEsmdx |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0004                       | BrtBeginEsmdx - <b>BrtBeginEsmdx</b> |            |
| 0004                       | LONG - <b>cMdx</b>                   | 0x00000009 |

**cMdx:** 0x00000009 specifies that there are 9 MDX metadata (section [2.2.4.8](#)) records in this collection.

Note that only the first, second, fifth, and ninth **BrtBeginMdx** (section [2.4.102](#)) records are described following this record because they reference the shared strings specified earlier in this example and are used by different cube functions. The others are omitted for brevity.

### 3.9.14 MetaData: BrtBeginMdx 1

This is the first **BrtBeginMdx** (section [2.4.102](#)) record in this example, as specified in the following table. This record specifies properties of the MDX metadata (section [2.2.4.8](#)) used in cell B2.

| Structure of BrtBeginMdx |  |            |
|--------------------------|--|------------|
| Size                     | Structure                                  | Value      |
| 0008                     | BrtBeginMdx - <b>BrtBeginMdx</b>           |            |
| 0004                     | <a href="#">Istr</a> - <b>istrConnName</b> | 0x00000005 |
| 0004                     | <a href="#">TagFnMdx</a> - <b>tfnSrc</b>   | 0x00000003 |

**istrConnName:** 0x00000005 specifies the sixth shared text string, "Sales", which represents the name of the external connection (section [2.2.8](#)) used by the function that generated this metadata.

**tfnSrc:** 0x00000003 specifies that this metadata was generated by a CUBESET cube function.

### 3.9.15 MetaData: BrtBeginMdxSet

The **BrtBeginMdxSet** (section [2.4.105](#)) record specifies properties of the MDX set metadata (section [2.2.4.8.2](#)) associated with the preceding **BrtBeginMdx** (section [2.4.102](#)) record, as specified in the following table.

| Structure of BrtBeginMdxSet |   |            |
|-----------------------------|---|------------|
| Size                        | Structure                                   | Value      |
| 000C                        | BrtBeginMdxSet - <b>BrtBeginMdxSet</b>      |            |
| 0004                        | <a href="#">Istr</a> - <b>istrSetDef</b>    | 0x00000000 |
| 0004                        | <a href="#">SdSetSortOrder</a> - <b>sso</b> | 0x00000000 |

| Structure of BrtBeginMdxSet |                           |            |
|-----------------------------|---------------------------|------------|
| 0004                        | LONG - <b>cMbrsSortBy</b> | 0x00000000 |

**istrSetDef:** 0x00000000 specifies the first shared text string, "[Product].[All Products].Children", which specifies the MDX expression that defines this set.

**sso:** 0x00000000 specifies that this set is not sorted.

**cMbrsSortBy:** 0x00000000 specifies that the number of coordinates in the OLAP cube to sort the set on is 0.

### 3.9.16 MetaData: BrtBeginMdx 2

This is the second **BrtBeginMdx** (section [2.4.102](#)) record in this example, as specified in the following table. This record specifies properties of the MDX metadata (section [2.2.4.8](#)) used in cell B3.

| Structure of BrtBeginMdx |  |            |
|--------------------------|--|------------|
| Size                     | Structure                                  | Value      |
| 0008                     | BrtBeginMdx - <b>BrtBeginMdx</b>           |            |
| 0004                     | <a href="#">Istr</a> - <b>istrConnName</b> | 0x00000005 |
| 0004                     | <a href="#">TagFnMdx</a> - <b>tfnSrc</b>   | 0x00000005 |

**istrConnName:** 0x00000005 specifies the sixth shared text string, "Sales", which represents the name of the external connection (section [2.2.8](#)) used by the function that generated this metadata.

**tfnSrc:** 0x00000005 specifies that this metadata was generated by a CUBERANKEDMEMBER cube function.

### 3.9.17 MetaData: BrtBeginMdxTuple 1

The **BrtBeginMdxTuple** (section [2.4.106](#)) record specifies formatting properties for MDX tuple metadata (section [2.2.4.8.1](#)) associated with the preceding MDX metadata record and specifies the beginning of a collection of **BrtMdxMbrIstr** (section [2.4.675](#)) records that specify MDX unique names, as specified in the following table.

| Structure of BrtBeginMdxTuple |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                      | Value      |
| 000E                          | BrtBeginMdxTuple - <b>BrtBeginMdxTuple</b>     |            |
| 0004                          | LONG - <b>cMbrs</b>                            | 0x00000001 |
| 0004                          | <a href="#">SrvFmtCV</a> - <b>dwSrvFmtBack</b> |            |
| 0001                          | BYTE - <b>ciRed</b>                            | 0x00       |
| 0001                          | BYTE - <b>ciGreen</b>                          | 0x00       |



| Structure of BrtBeginMdxTuple |  |      |
|-------------------------------|--|------|
| 0001                          | BYTE - <b>ciBlue</b>                     | 0x00 |
| 0001                          | BYTE - <b>unused</b>                     | 0x00 |
| 0004                          | SrvFmtCV - <b>dwSrvFmtFore</b>           |      |
| 0001                          | BYTE - <b>ciRed</b>                      | 0x00 |
| 0001                          | BYTE - <b>ciGreen</b>                    | 0x00 |
| 0001                          | BYTE - <b>ciBlue</b>                     | 0x00 |
| 0001                          | BYTE - <b>unused</b>                     | 0x00 |
| 0002                          | <a href="#">SrvFmtFlags</a> - <b>sff</b> |      |
| 1 bit                         | WORD - <b>fSrvFmtNum</b>                 | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtNumCurrency</b>         | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtNumStr</b>              | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtBack</b>                | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtFore</b>                | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtItalic</b>              | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtUnderline</b>           | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtBold</b>                | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtStrikethrough</b>       | 0x0  |
| 7 bits                        | WORD - <b>unused</b>                     | 0x00 |

The descriptions for the fields related to formatting have been omitted as they are not relevant to this example.

**cMbrs:** 0x00000001 specifies that there is one member (3) expression in the tuple.

### 3.9.18 MetaData: BrtMdxMbrIstr

The **BrtMdxMbrIstr** (section [2.4.675](#)) record specifies an MDX unique name and its properties, as specified in the following table.

| Structure of BrtMdxMbrIstr |  |            |
|----------------------------|--|------------|
| Size                       | Structure                                      | Value      |
| 0005                       | BrtMdxMbrIstr - <b>BrtMdxMbrIstr</b>           |            |
| 0004                       | <a href="#">Istr</a> - <b>istr</b>             | 0x00000001 |
| 0001                       | <a href="#">MdxMbrIstrFlags</a> - <b>grbit</b> |            |
| 1 bit                      | BYTE - <b>fCubeSet</b>                         | 0x0        |

| Structure of BrtMdxMbrIstr |                      |      |
|----------------------------|----------------------|------|
| 7 bits                     | BYTE - <b>unused</b> | 0x00 |

**istr:** 0x00000001 specifies the second shared text string, "[Product].[All Products].[Drink]", which specifies the MDX unique name.

**grbit.fCubeSet:** 0x00 specifies that **istr** does not specify an OLAP named set.

### 3.9.19 MetaData: BrtBeginMdx 3

This is the fifth **BrtBeginMdx** (section [2.4.102](#)) record in this example, as specified in the following table. This record specifies properties of the MDX metadata (section [2.2.4.8](#)) used in cell C2.

| Structure of BrtBeginMdx |  |            |
|--------------------------|--|------------|
| Size                     | Structure                                  | Value      |
| 0008                     | BrtBeginMdx - <b>BrtBeginMdx</b>           |            |
| 0004                     | <a href="#">Istr</a> - <b>istrConnName</b> | 0x00000005 |
| 0004                     | <a href="#">TagFnMdx</a> - <b>tfnSrc</b>   | 0x00000001 |

**istrConnName:** 0x00000005 specifies the sixth shared text string, "Sales", which represents the name of the external connection (section [2.2.8](#)) used by the function that generated this metadata.

**tfnSrc:** 0x00000001 specifies that this metadata was generated by a CUBEMEMBER cube function.

### 3.9.20 MetaData: BrtBeginMdxTuple 2

This **BrtBeginMdxTuple** (section [2.4.106](#)) record specifies formatting properties for MDX tuple metadata (section [2.2.4.8.1](#)) associated with the preceding MDX metadata record and specifies the beginning of a collection of **BrtMdxMbrIstr** (section [2.4.675](#)) records that specify MDX unique names, as specified in the following table.

| Structure of BrtBeginMdxTuple |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                      | Value      |
| 000E                          | BrtBeginMdxTuple - <b>BrtBeginMdxTuple</b>     |            |
| 0004                          | LONG - <b>cMbrs</b>                            | 0x00000001 |
| 0004                          | <a href="#">SrvFmtCV</a> - <b>dwSrvFmtBack</b> |            |
| 0001                          | BYTE - <b>ciRed</b>                            | 0x00       |
| 0001                          | BYTE - <b>ciGreen</b>                          | 0x00       |
| 0001                          | BYTE - <b>ciBlue</b>                           | 0x00       |
| 0001                          | BYTE - <b>unused</b>                           | 0x00       |
| 0004                          | <a href="#">SrvFmtCV</a> - <b>dwSrvFmtFore</b> |            |

| Structure of BrtBeginMdxTuple |  |      |
|-------------------------------|--|------|
| 0001                          | BYTE - <b>ciRed</b>                      | 0x00 |
| 0001                          | BYTE - <b>ciGreen</b>                    | 0x00 |
| 0001                          | BYTE - <b>ciBlue</b>                     | 0x00 |
| 0001                          | BYTE - <b>unused</b>                     | 0x00 |
| 0002                          | <a href="#">SrvFmtFlags</a> - <b>sff</b> |      |
| 1 bit                         | WORD - <b>fSrvFmtNum</b>                 | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtNumCurrency</b>         | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtNumStr</b>              | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtBack</b>                | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtFore</b>                | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtItalic</b>              | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtUnderline</b>           | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtBold</b>                | 0x0  |
| 1 bit                         | WORD - <b>fSrvFmtStrikethrough</b>       | 0x0  |
| 7 bits                        | WORD - <b>unused</b>                     | 0x00 |

The descriptions for the fields related to formatting have been omitted as they are not relevant to this example.

**cMbrs:** 0x00000001 specifies that there is one member (3) expression in the tuple.

### 3.9.21 MetaData: BrtMdxMbrIstr 1

The **BrtMdxMbrIstr** (section [2.4.675](#)) record specifies an MDX unique name and its properties, as specified in the following table.

| Structure of BrtMdxMbrIstr |  |            |
|----------------------------|--|------------|
| Size                       | Structure                                      | Value      |
| 0005                       | BrtMdxMbrIstr - <b>BrtMdxMbrIstr</b>           |            |
| 0004                       | <a href="#">Istr</a> - <b>istr</b>             | 0x00000004 |
| 0001                       | <a href="#">MdxMbrIstrFlags</a> - <b>grbit</b> |            |
| 1 bit                      | BYTE - <b>fCubeSet</b>                         | 0x0        |
| 7 bits                     | BYTE - <b>unused</b>                           | 0x00       |

**istr:** 0x00000004 specifies the fifth shared text string, "[Measures].[Profit]", which specifies the MDX unique name.

**grbit.fCubeSet:** 0x00 specifies that **istr** does not specify an OLAP named set.

### 3.9.22 MetaData: BrtBeginMdx 4

This is the ninth **BrtBeginMdx** (section [2.4.102](#)) record in this example, as specified in the following table. This record specifies properties of the MDX metadata (section [2.2.4.8](#)) used in cell C6.

| Structure of BrtBeginMdx |  |            |
|--------------------------|--|------------|
| Size                     | Structure                                  | Value      |
| 0008                     | BrtBeginMdx - <b>BrtBeginMdx</b>           |            |
| 0004                     | <a href="#">Istr</a> - <b>istrConnName</b> | 0x00000005 |
| 0004                     | <a href="#">TagFnMdx</a> - <b>tfnSrc</b>   | 0x00000002 |

**istrConnName:** 0x00000005 specifies the sixth shared text string, "Sales", which represents the name of the external connection (section [2.2.8](#)) used by the function that generated this metadata.

**tfnSrc:** 0x00000002 specifies that this metadata was generated by a CUBEVALUE cube function.

### 3.9.23 MetaData: BrtBeginMdxTuple 3

The **BrtBeginMdxTuple** (section [2.4.106](#)) record specifies formatting properties for MDX tuple metadata (section [2.2.4.8.1](#)) associated with the preceding MDX metadata record and specifies the beginning of a collection of **BrtMdxMbrIstr** (section [2.4.675](#)) records that specify MDX unique names, as specified in the following table.

| Structure of BrtBeginMdxTuple |  |            |
|-------------------------------|--|------------|
| Size                          | Structure                                      | Value      |
| 0016                          | BrtBeginMdxTuple - <b>BrtBeginMdxTuple</b>     |            |
| 0004                          | LONG - <b>cMbrs</b>                            | 0x00000002 |
| 0004                          | <a href="#">SrvFmtCV</a> - <b>dwSrvFmtBack</b> |            |
| 0001                          | BYTE - <b>ciRed</b>                            | 0x00       |
| 0001                          | BYTE - <b>ciGreen</b>                          | 0x00       |
| 0001                          | BYTE - <b>ciBlue</b>                           | 0x00       |
| 0001                          | BYTE - <b>unused</b>                           | 0x00       |
| 0004                          | <a href="#">SrvFmtCV</a> - <b>dwSrvFmtFore</b> |            |
| 0001                          | BYTE - <b>ciRed</b>                            | 0x00       |
| 0001                          | BYTE - <b>ciGreen</b>                          | 0x00       |
| 0001                          | BYTE - <b>ciBlue</b>                           | 0x00       |
| 0001                          | BYTE - <b>unused</b>                           | 0x00       |

| Structure of BrtBeginMdxTuple |  |            |
|-------------------------------|--|------------|
| 0002                          | <a href="#">SrvFmtFlags</a> - <b>sff</b> |            |
| 1 bit                         | WORD - <b>fSrvFmtNum</b>                 | 0x1        |
| 1 bit                         | WORD - <b>fSrvFmtNumCurrency</b>         | 0x0        |
| 1 bit                         | WORD - <b>fSrvFmtNumStr</b>              | 0x0        |
| 1 bit                         | WORD - <b>fSrvFmtBack</b>                | 0x0        |
| 1 bit                         | WORD - <b>fSrvFmtFore</b>                | 0x0        |
| 1 bit                         | WORD - <b>fSrvFmtItalic</b>              | 0x0        |
| 1 bit                         | WORD - <b>fSrvFmtUnderline</b>           | 0x0        |
| 1 bit                         | WORD - <b>fSrvFmtBold</b>                | 0x0        |
| 1 bit                         | WORD - <b>fSrvFmtStrikethrough</b>       | 0x0        |
| 7 bits                        | WORD - <b>unused</b>                     | 0x00       |
| 0008                          | <a href="#">SrvFmtNum</a> - <b>sfnum</b> |            |
| 0008                          | <a href="#">SrvFmtData</a> - <b>data</b> |            |
| 0004                          | ULONG - <b>cb</b>                        | 0x00000004 |
| 0004                          | DWORD - <b>dwSrvFmtNum</b>               | 0x00000000 |

The descriptions for the fields related to formatting have been omitted as they are not relevant to this example.

**cMbrs:** 0x00000002 specifies that there are two member (3) expressions in the tuple.

### 3.9.24 MetaData: BrtMdxMbrIstr 2

The **BrtMdxMbrIstr** (section [2.4.675](#)) record specifies an MDX unique name and its properties, as specified in the following table.

| Structure of BrtMdxMbrIstr |  |            |
|----------------------------|--|------------|
| Size                       | Structure                                      | Value      |
| 0005                       | BrtMdxMbrIstr - <b>BrtMdxMbrIstr</b>           |            |
| 0004                       | <a href="#">Istr</a> - <b>istr</b>             | 0x00000000 |
| 0001                       | <a href="#">MdxMbrIstrFlags</a> - <b>grbit</b> |            |
| 1 bit                      | BYTE - <b>fCubeSet</b>                         | 0x1        |
| 7 bits                     | BYTE - <b>unused</b>                           | 0x00       |

**istr:** 0x00000000 specifies the first shared text string, "[Product].[All Products].Children", which specifies the MDX unique name.

**grbit.fCubeSet:** 0x01 specifies that **istr** does not specify an OLAP named set.

### 3.9.25 MetaData: BrtMdxMbrIstr 3

The **BrtMdxMbrIstr** (section [2.4.675](#)) record specifies an MDX unique name and its properties, as specified in the following table.

| Structure of BrtMdxMbrIstr |  |            |
|----------------------------|--|------------|
| Size                       | Structure                                      | Value      |
| 0005                       | BrtMdxMbrIstr - <b>BrtMdxMbrIstr</b>           |            |
| 0004                       | <a href="#">Istr</a> - <b>istr</b>             | 0x00000004 |
| 0001                       | <a href="#">MdxMbrIstrFlags</a> - <b>grbit</b> |            |
| 1 bit                      | BYTE - <b>fCubeSet</b>                         | 0x0        |
| 7 bits                     | BYTE - <b>unused</b>                           | 0x00       |

**istr:** 0x00000004 specifies the fifth shared text string, "[Measures].[Profit]", which specifies the MDX unique name.

**grbit.fCubeSet:** 0x00 specifies that **istr** does not specify an OLAP named set.

### 3.9.26 MetaData: BrtBeginEsmdb

The **BrtBeginEsmdb** (section [2.4.70](#)) record specifies the type of metadata block (section [2.2.4.5](#)) records and specifies the beginning of a collection of **BrtMdb** (section [2.4.673](#)) records as defined by the **Metadata** (section [2.1.7.34](#)) part ABNF, as specified in the following table

| Structure of BrtBeginEsmdb |                                      |            |
|----------------------------|--------------------------------------|------------|
| Size                       | Structure                            | Value      |
| 0008                       | BrtBeginEsmdb - <b>BrtBeginEsmdb</b> |            |
| 0004                       | LONG - <b>cMdb</b>                   | 0x00000009 |
| 0004                       | DWORD - <b>fCellMeta</b>             | 0x00000000 |

**cMdb:** 0x00000009 specifies that there are nine metadata blocks in this collection.

**fCellMeta:** 0x00000000 specifies that this collection contains value metadata (section [2.2.4.3](#)) records.

### 3.9.27 MetaData: BrtMdb

This **BrtMdb** (section [2.4.673](#)) record specifies an array of **Mdir** (section [2.5.93](#)) structures and is the first metadata block (section [2.2.4.5](#)) in the collection, as specified in the following table.

| Structure of BrtMdb |                        |            |
|---------------------|------------------------|------------|
| Size                | Structure              | Value      |
| 000C                | BrtMdb - <b>BrtMdb</b> |            |
| 0004                | LONG - <b>cMdir</b>    | 0x00000001 |
| 0008                | RgMdir - <b>rgMdir</b> |            |
| 0008                | Mdir - <b>Mdir[0]</b>  |            |
| 0004                | LONG - <b>iMdt</b>     | 0x00000001 |
| 0004                | DWORD - <b>mdd</b>     | 0x00000000 |

**cMdir:** 0x00000001 specifies that there is one **Mdir** in the following array of **Mdir** structures. An **Mdir** structure specifies a reference to a metadata type and a corresponding metadata record.

**rgMdir:** This is the array of **Mdir** structures.

**rgMdir.Mdir[0]:** This is the first and only **Mdir** structure in the array.


**rgMdir.Mdir[0].iMdt:** 0x00000001 specifies the first **BrtMdtinfo** (section [2.4.674](#)) in **BrtBeginEsmdtinfo** (section [2.4.71](#)).

**rgMdir.Mdir[0].mdd:** 0x00000000 specifies the first **BrtBeginMdx** (section [2.4.102](#)) in **BrtBeginEsmdx** (section [2.4.72](#)) because **BrtMdtinfo.stName** is "XLMDX".

The next eight **BrtMdb** records, which have been omitted, specify the mappings between the same **BrtMdtinfo** referenced in this record and the other eight **BrtBeginMdx** records.

### 3.10 Slicer

This example shows a slicer (section [2.2.14](#)) attached to a native **PivotTable** (section [2.2.5](#)) and its associated slicer cache (section [2.2.14.1](#)). The **PivotTable** has the "State" and "City" fields added to the row (2) area and the "Population" field added to the data area (section [2.2.5.3.8.1.4](#)). The slicer is based on the "State" field, and is currently filtering on "Washington", as illustrated by the following figure.

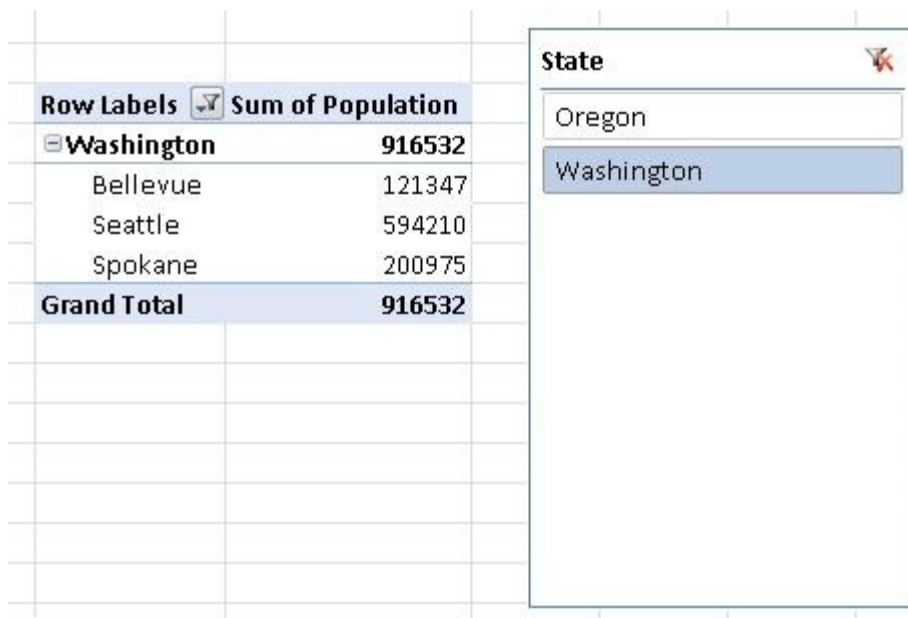

**Figure 30: PivotTable and Slicer**

The following figure illustrates the example source data for the **PivotTable** (section 2.2.5) that the slicer (section 2.2.14) is filtering.

|   | A          | B           | C          |
|---|------------|-------------|------------|
| 1 | State      | City        | Population |
| 2 | Washington | Seattle     | 594210     |
| 3 | Washington | Spokane     | 200975     |
| 4 | Washington | Bellevue    | 121347     |
| 5 | Oregon     | Portland    | 550396     |
| 6 | Oregon     | Springfield | 56666      |

**Figure 31: Source data for the PivotTable**

This example includes all the records in the **Slicer** (section 2.1.7.48) and **SlicerCache** (section 2.1.7.47) part that are used in the specification of a non-OLAP slicer.

The records in the **Slicer** (section 2.1.7.48) part are **BrtBeginSlicers** (section 2.4.206), **BrtBeginSlicer** (section 2.4.191), **BrtEndSlicer** (section 2.4.526), and **BrtEndSlicers** (section 2.4.541). Together these records specify a slicer (section 2.2.14) used to filter a native **PivotTable** (section 2.2.5) on the worksheet.

The rest of the records in the example are in the **SlicerCache** (section 2.1.7.47) part. Together these records specify the cached subset of slicer source data (section 2.2.14.1.1) used in the slicer view (section 2.2.14.2).

The **BrtBeginSlicers** (section 2.4.206), **BrtBeginSlicerCache** (section 2.4.192), **BrtBeginSlicerCacheDef** (section 2.4.193), and **BrtBeginSlicerCacheNative** (section 2.4.198) records specify the beginning of collections as specified by their respective definitions.



The **BrtBeginSlicer** (section [2.4.191](#)) record specifies the slicer view used on this worksheet. In this example, the slicer (section [2.2.14](#)) filters the native **PivotTable** (section [2.2.5](#)) based on the "State" field.

The **BrtSlicerCachePivotTables** (section [2.4.748](#)) record specifies the **PivotTable** with which the slicer is associated.

In this workbook the **BrtSlicerCacheNativeItem** (section [2.4.746](#)) record specifies the array of cached non-OLAP slicer items (section [2.2.14.1.4.1](#)). "Washington" and "Oregon" are the cached non-OLAP slicer items in this example.

The **BrtEndSlicerCacheNative** (section [2.4.533](#)), **BrtEndSlicerCacheDef** (section [2.4.528](#)), **BrtEndSlicerCache** (section [2.4.527](#)), **BrtEndSlicer** (section [2.4.526](#)), and **BrtEndSlicers** (section [2.4.541](#)) records specify the end of their respective collections.

### 3.10.1 Slicer: BrtBeginSlicerCache

The **BrtBeginSlicerCache** (section [2.4.192](#)) record specifies the beginning of the slicer cache (section [2.2.14.1](#)) in the worksheet, as specified in the following table.

| Structure of BrtBeginSlicerCache |  |
|----------------------------------|--|
| Size                             | Structure  |
| 0000                             | BrtBeginSlicerCache - <b>BrtBeginSlicerCache</b> |

### 3.10.2 Slicer: BrtBeginSlicerCacheDef

The **BrtBeginSlicerCacheDef** (section [2.4.193](#)) record specifies the beginning of a slicer cache (section [2.2.14.1](#)) definition, as specified in the following table.

| Structure of BrtBeginSlicerCacheDef |  |              |
|-------------------------------------|--|--------------|
| Size                                | Structure  | Value        |
| 002A                                | BrtBeginSlicerCacheDef - <b>BrtBeginSlicerCacheDef</b> |              |
| 001C                                | <a href="#">XLNameWideString</a> - <b>stName</b>       | Slicer_State |
| 000E                                | <a href="#">XLWideString</a> - <b>stHierarchy</b>      | State        |

**stName:** "Slicer\_State" specifies the unique name of the slicer cache.

**stHierarchy:** "State" specifies the **PivotCache** (section [2.2.5.2](#)) field name. Because this slicer (section [2.2.14](#)) is connected to a native **PivotTable** (section [2.2.5](#)), "State" refers to the **stFldName** field of the **BrtBeginPCDFld** (section [2.4.130](#)) record in the only **PivotCache** in this workbook.

### 3.10.3 Slicer: BrtSlicerCachePivotTables

The **BrtSlicerCachePivotTables** (section [2.4.748](#)) record specifies which PivotTable views (section [2.2.5.3](#)) are filtered by the slicer cache (section [2.2.14.1](#)), as specified in the following table.

| Structure of BrtSlicerCachePivotTables |  |             |
|--|--|-------------|
| Size                                   | Structure  | Value       |
| 0022                                   | BrtSlicerCachePivotTables - <b>BrtSlicerCachePivotTables</b>         |             |
| 0004                                   | DWORD - <b>cpivotTables</b>  | 0x00000001  |
| 001E                                   | RGSLICERCACHEPIVOTTABLE - <b>pivotTables</b>                         |             |
| 001E                                   | <a href="#">SlicerCachePivotTable</a> - <b>slicerCachePivotTable</b> |             |
| 0004                                   | DWORD - <b>iTabId</b>  | 0x00000001  |
| 001A                                   | <a href="#">XLWideString</a> - <b>stPivotTable</b>                   | PivotTable1 |

**cpivotTables:** 0x00000001 specifies that the count of PivotTable views associated with this slicer cache is one.

**pivotTables:** This specifies the array of PivotTable views associated with this slicer cache.

**pivotTables.slicerCachePivotTable:** This begins the one and only PivotTable view associated with this slicer cache.

**pivotTables.slicerCachePivotTable.iTabId:** 0x00000001 specifies that the PivotTable view resides on the first worksheet tab.

**pivotTables.slicerCachePivotTable.stPivotTable:** "PivotTable1" specifies the name of the PivotTable view associated with this slicer cache.

### 3.10.4 Slicer: BrtBeginSlicerCacheNative

The **BrtBeginSlicerCacheNative** (section [2.4.198](#)) record specifies the start of a collection of records that specifies the non-OLAP slicer items (section [2.2.14.1.4.1](#)) that are used by this slicer cache (section [2.2.14.1](#)), as specified in the following table.

| Structure of BrtBeginSlicerCacheNative |  |            |
|--|--|------------|
| Size                                   | Structure  | Value      |
| 0005                                   | BrtBeginSlicerCacheNative - <b>BrtBeginSlicerCacheNative</b> |            |
| 0004                                   | DWORD - <b>dwcacheId</b>                                     | 0x00000005 |
| 2 bits                                 | SLICERCACHESORTORDERNATIVE - <b>fSortOrder</b>               | 0x1        |
| 2 bits                                 | SLICERCACHECROSSFILTER - <b>fCrossFilter</b>                 | 0x1        |
| 1 bit                                  | BYTE - <b>fSortUsingCustomLists</b>                          | 0x1        |
| 1 bit                                  | BYTE - <b>fShowAllItems</b>                                  | 0x1        |
| 2 bits                                 | BYTE - <b>reserved</b>                                       | 0x0        |

**dwcacheId:** 0x00000005 specifies the native **PivotCache** (section [2.2.5.2](#)) index from the [BrtBeginPCD14](#) (section [2.4.117](#)) of the **PivotCache**.

**fSortOrder:** 0x01 specifies that the non-OLAP slicer items (section [2.2.14.1.4.1](#)) are sorted in ascending order.

**fCrossFilter:** 0x01 specifies that the table style element (section [2.2.6.2.2](#)) of the slicer style (section [2.2.6.3.1](#)) for non-OLAP slicer items (section [2.2.14.1.4.1](#)) without data is applied to non-OLAP slicer items without data, and non-OLAP slicer items without data are sorted at the bottom in the list of non-OLAP slicer items in the display.

**fSortUsingCustomLists:** 0x01 specifies that a custom list is used for sorting.

**fShowAllItems:** 0x01 specifies that unused non-OLAP Cache Items (section [2.2.5.2.3](#)) in the associated **PivotCache** (section [2.2.5.2](#)) are displayed.

### 3.10.5 Slicer: BrtSlicerCacheNativeItem

The **BrtSlicerCacheNativeItem** (section [2.4.746](#)) record specifies the array of non-OLAP slicer items (section [2.2.14.1.4.1](#)) that are used by this slicer cache (section [2.2.14.1](#)), as specified in the following table.

| Structure of BrtSlicerCacheNativeItem |  |            |
|---------------------------------------|--|------------|
| Size                                  | Structure  | Value      |
| 000E                                  | BrtSlicerCacheNativeItem - <b>BrtSlicerCacheNativeItem</b>   |            |
| 0004                                  | DWORD - <b>cItems</b>  | 0x00000002 |
| 000A                                  | RGSLICERCACHENATIVEITEM - <b>rgItems</b>                     |            |
| 0005                                  | <a href="#">SlicerCacheNativeItem</a> - <b>nativeItem[0]</b> |            |
| 0004                                  | DWORD - <b>dwcacheId</b>                                     | 0x00000001 |
| 1 bit                                 | BYTE - <b>fSelected</b>                                      | 0x0        |
| 1 bit                                 | BYTE - <b>fNoData</b>  | 0x0        |
| 6 bits                                | BYTE - <b>reserved</b>                                       | 0x00       |
| 0005                                  | SlicerCacheNativeItem - <b>nativeItem[1]</b>                 |            |
| 0004                                  | DWORD - <b>dwcacheId</b>                                     | 0x00000000 |
| 1 bit                                 | BYTE - <b>fSelected</b>                                      | 0x1        |
| 1 bit                                 | BYTE - <b>fNoData</b>  | 0x0        |
| 6 bits                                | BYTE - <b>reserved</b>                                       | 0x00       |

**cItems:** 0x00000002 specifies that there are two non-OLAP slicer items (section [2.2.14.1.4.1](#)) for this slicer cache (section [2.2.14.1](#)).

**rgItems:** This specifies the array of **SlicerCacheNativeItem** (section [2.5.135](#)) records, one per non-OLAP slicer item (section [2.2.14.1.4.1](#)).

**rgItems.nativeItem[0]:** This is the first item displayed in the slicer view (section [2.2.14.2](#)) (Oregon).

**rgItems.nativeItem[0].dwcacheId:** 0x00000001 specifies that this item points to the second cached record in the associated **PivotCache** (section [2.2.5.2](#)).

**rgItems.nativeItem[0].fSelected:** 0x00 specifies that this item is not selected for filtering.

**rgItems.nativeItem[0].fNoData:** 0x00 specifies that data exists for this item, as defined in Slicer Cross Filtering (section [2.2.14.1.5](#)).

**rgItems.nativeItem[1]:** This is the second item displayed in the slicer view (Washington).

**rgItems.nativeItem[1].dwcacheId:** 0x00000000 specifies that this item points to the first cached record in the associated **PivotCache** (section [2.2.5.2](#)).

**rgItems.nativeItem[1].fSelected:** 0x01 specifies that this item is selected for filtering.

**rgItems.nativeItem[1].fNoData:** 0x00 specifies that data exists for this item, as defined in Slicer Cross Filtering (section [2.2.14.1.5](#)).

### 3.10.6 Slicer: BrtEndSlicerCacheNative

The **BrtEndSlicerCacheNative** (section [2.4.533](#)) record specifies the end of a collection of records that specifies the non-OLAP slicer items (section [2.2.14.1.4.1](#)) that are used by this slicer cache (section [2.2.14.1](#)), as specified in the following table.

| Structure of BrtEndSlicerCacheNative |  |
|--------------------------------------|--|
| Size                                 | Structure  |
| 0000                                 | BrtEndSlicerCacheNative - <b>BrtEndSlicerCacheNative</b> |

### 3.10.7 Slicer: BrtEndSlicerCacheDef

The **BrtEndSlicerCacheDef** (section [2.4.528](#)) record specifies the end of the slicer cache (section [2.2.14.1](#)) definition, as specified in the following table.

| Structure of BrtEndSlicerCacheDef |  |
|-----------------------------------|--|
| Size                              | Structure  |
| 0000                              | BrtEndSlicerCacheDef - <b>BrtEndSlicerCacheDef</b> |

### 3.10.8 Slicer: BrtEndSlicerCache

The **BrtEndSlicerCache** (section [2.4.527](#)) record specifies the end of the slicer cache (section [2.2.14.1](#)) in the worksheet, as specified in the following table.

| Structure of BrtEndSlicerCache |  |
|--------------------------------|--|
| Size                           | Structure                                    |
| 0000                           | BrtEndSlicerCache - <b>BrtEndSlicerCache</b> |

### 3.10.9 Slicer: BrtBeginSlicers

The **BrtBeginSlicers** (section [2.4.206](#)) record specifies the beginning of the collection of slicer views (section [2.2.14.2](#)) in the worksheet, as specified in the following table.

| Structure of BrtBeginSlicers |  |
|------------------------------|--|
| Size                         | Structure                                |
| 0000                         | BrtBeginSlicers - <b>BrtBeginSlicers</b> |

### 3.10.10 Slicer: BrtBeginSlicer

The **BrtBeginSlicer** (section [2.4.191](#)) record specifies the beginning of a slicer view (section [2.2.14.2](#)) in the worksheet, as specified in the following table.

| Structure of BrtBeginSlicer |  |              |
|-----------------------------|--|--------------|
| Size                        | Structure                                    | Value        |
| 0049                        | BrtBeginSlicer - <b>BrtBeginSlicer</b>       |              |
| 1 bit                       | BYTE - <b>fCaptionVisible</b>                | 0x1          |
| 1 bit                       | BYTE - <b>fHasCaption</b>                    | 0x1          |
| 1 bit                       | BYTE - <b>fHasStyle</b>                      | 0x0          |
| 1 bit                       | BYTE - <b>fLockedPosition</b>                | 0x0          |
| 4 bits                      | BYTE - <b>unused</b>                         | 0x0          |
| 0004                        | DWORD - <b>dwStartSlicerItem</b>             | 0x00000000   |
| 0004                        | DWORD - <b>dwColumnCount</b>                 | 0x00000001   |
| 0004                        | DWORD - <b>dwLevel</b>                       | 0x00000000   |
| 0004                        | DWORD - <b>dxRowHeight</b>                   | 0x00037CF8   |
| 000E                        | <a href="#">XLWideString</a> - <b>stName</b> | State        |
| 001C                        | XLWideString - <b>stSlicerCacheName</b>      | Slicer_State |
| 000E                        | XLWideString - <b>stCaption</b>              | State        |

**fCaptionVisible:** 0x01 specifies that the caption is displayed.

**fHasCaption:** 0x01 specifies that the slicer (section [2.2.14](#)) has a caption.

**fHasStyle:** 0x00 specifies that there is no slicer style (section [2.2.6.3.1](#)) applied.

**fLockedPosition:** 0x00 specifies that the position of the slicer view is not locked.

**dwStartSlicerItem:** 0x00000000 specifies that the first element in the slicer cache (section [2.2.14.1](#)) is the first element visible in the slicer view.

**dwColumnCount:** 0x00000001 specifies that there is a single column (2) of slicer items (section [2.2.14.1.4](#)) in the slicer view.

**dwLevel:** This property is set to 0x00000000 because this is a non-OLAP slicer (section [2.1.7.48](#)).

**dxRowHeight:** 0x00037CF8 specifies that the height of each slicer item (section [2.2.14.1.4](#)) is 228600 EMUs high or ¼ of an inch.

**stName:** "State" specifies the name of the slicer view.

**stSlicerCacheName:** "Slicer\_State" specifies the name of the slicer cache (section [2.2.14.1](#)).

**stCaption:** "State" specifies the caption displayed at the top of the slicer view.

### 3.10.11 Slicer: BrtEndSlicer

The **BrtEndSlicer** (section [2.4.526](#)) record specifies the end of a slicer view (section [2.2.14.2](#)) in the worksheet, as specified in the following table.

| Structure of BrtEndSlicer |                                    |
|---------------------------|------------------------------------|
| Size                      | Structure                          |
| 0000                      | BrtEndSlicer - <b>BrtEndSlicer</b> |

### 3.10.12 Slicer: BrtEndSlicers

The **BrtEndSlicers** (section [2.4.541](#)) record specifies the end of the collection of slicer views (section [2.2.14.2](#)) in the worksheet, as specified in the following table.

| Structure of BrtEndSlicers |                                      |
|----------------------------|--------------------------------------|
| Size                       | Structure                            |
| 0000                       | BrtEndSlicers - <b>BrtEndSlicers</b> |

## 4 Security Considerations

The password verifier features available in the file format (see section [2.2.9](#) and section [2.2.10](#)) are used to prevent accidental modification, rather than being used as security features. It is possible to remove the passwords by removing the records containing the verifier values.

The translation of passwords from a double-byte Unicode string to a new character string in the ANSI codepage of the current system converts any Unicode character that cannot be mapped to the ANSI codepage of the current system to the 0x3F character in that codepage ([\[ISO/IEC29500-1:2011\]](#), section 18.2.29). Replacing these characters with 0x3F when the **hash** is verified will generate positive hash value matches. In certain locales this can be a significant portion of the everyday character set (1).[<71>](#)

Further security considerations regarding the file encryption algorithms (section [2.2.11](#)) are described in [\[MS-OFFCRYPTO\]](#) section 4.1.3.

## 5 Appendix A: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include released service packs:

- Microsoft Office Excel 2007
- Microsoft Excel 2010
- Microsoft Excel 2013

Exceptions, if any, are noted below. If a service pack or Quick Fix Engineering (QFE) number appears with the product version, behavior changed in that service pack or QFE. The new behavior also applies to subsequent service packs of the product unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms SHOULD or SHOULD NOT implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that the product does not follow the prescription.

<1> [Section 2.1.7.4:](#) Office Excel 2007, Excel 2010 and Excel 2013 write out this part on save.

<2> [Section 2.1.7.47:](#) Office Excel 2007 preserves but does not support this part.

<3> [Section 2.2.7.4.3.1:](#) Office Excel 2007 does not save cached values for OLE data items.

<4> [Section 2.3:](#) Excel 2010 added support for record types that have record type values greater than or equal to 1024.

<5> [Section 2.4.16:](#) Excel 2010 and Excel 2013 do not save this record.

<6> [Section 2.4.17:](#) Excel 2010 and Excel 2013 does not save this record.

<7> [Section 2.4.22:](#) Excel 2010 saves out a DXFId instead.

<8> [Section 2.4.67:](#) If this Web connection was created in Excel 97 this field is always 1. Otherwise, this field is always 0.

<9> [Section 2.4.67:](#) If this Web connection was refreshed using Excel 2000, Excel 2002, Office Excel 2003, Office Excel 2007, Excel 2010 or Excel 2013, this field is always 1. Otherwise, this field is always 0.

<10> [Section 2.4.74:](#) Office Excel 2007, Excel 2010, and Excel 2013 do not load a file in which this field contains a value that it does not recognize, or that is not recognized by the underlying operating system. Office Excel 2007 and Excel 2010 recognize the language tags in the following table.

| Language  | Locale       | Language tag |
|-----------|--------------|--------------|
| Afrikaans | South Africa | af-ZA        |
| Albanian  | Albanian     | sq-AL        |
| Alsatian  | France       | gsw-FR       |
| Amharic   | Ethiopia     | am-ET        |



| <b>Language</b>        | <b>Locale</b>          | <b>Language tag</b> |
|------------------------|------------------------|---------------------|
| Arabic                 | Algeria                | ar-DZ               |
| Arabic                 | Bahrain                | ar-BH               |
| Arabic                 | Egypt                  | ar-EG               |
| Arabic                 | Iraq                   | ar-IQ               |
| Arabic                 | Jordan                 | ar-JO               |
| Arabic                 | Kuwait                 | ar-KW               |
| Arabic                 | Lebanon                | ar-LB               |
| Arabic                 | Libya                  | ar-LY               |
| Arabic                 | Morocco                | ar-MA               |
| Arabic                 | Oman                   | ar-OM               |
| Arabic                 | Qatar                  | ar-QA               |
| Arabic                 | Saudi Arabia           | ar-SA               |
| Arabic                 | Syria                  | ar-SY               |
| Arabic                 | Tunisia                | ar-TN               |
| Arabic                 | U.A.E.                 | ar-AE               |
| Arabic                 | Yemen                  | ar-YE               |
| Armenian               | Armenia                | hy-AM               |
| Assamese               | India                  | as-IN               |
| Azerbaijani (Cyrillic) | Azerbaijan             | az-AZ-Cyrl          |
| Azerbaijani (Latin)    | Azerbaijan             | az-AZ-Latn          |
| Bashkir                | Russia                 | ba-RU               |
| Basque                 | Basque (Basque)        | eu-ES               |
| Belarusian             | Belarus                | be-BY               |
| Bangla                 | Bangladesh             | bn-BD               |
| Bangla (Bangla Script) | India                  | bn-IN               |
| Bosnian (Cyrillic)     | Bosnia and Herzegovina | bs-BA-Cyrl          |
| Bosnian (Latin)        | Bosnia and Herzegovina | bs-BA-Latn          |
| Breton                 | France                 | br-FR               |
| Bulgarian              | Bulgaria               | bg-BG               |
| Catalan                | Catalan                | ca-ES               |

| <b>Language</b>  | <b>Locale</b>          | <b>Language tag</b> |
|------------------|------------------------|---------------------|
| Chinese          | Hong Kong SAR          | zh-HK               |
| Chinese          | Macao SAR              | zh-MO               |
| Chinese          | PRC                    | zh-CN               |
| Chinese          | Singapore              | zh-SG               |
| Chinese          | Taiwan                 | zh-TW               |
| Corsican         | France                 | co-FR               |
| Croatian         | Croatia                | hr-HR               |
| Croatian (Latin) | Bosnia and Herzegovina | hr-BA-Latn          |
| Czech            | Czech Republic         | cs-CZ               |
| Danish           | Denmark                | da-DK               |
| Dari             | Afghanistan            | prs-AF              |
| Divehi           | Maldives               | div-MV              |
| Dutch            | Belgium                | nl-BE               |
| Dutch            | Netherlands            | nl-NL               |
| English          | Australia              | en-AU               |
| English          | Belize                 | en-BZ               |
| English          | Canada                 | en-CA               |
| English          | Caribbean              | en-CB               |
| English          | India                  | en-IN               |
| English          | Ireland                | en-IE               |
| English          | Jamaica                | en-JM               |
| English          | Malaysia               | en-MY               |
| English          | New Zealand            | en-NZ               |
| English          | Philippines            | en-PH               |
| English          | South Africa           | en-ZA               |
| English          | Trinidad               | en-TT               |
| English          | United Kingdom         | en-GB               |
| English          | United States          | en-US               |
| English          | Zimbabwe               | en-ZW               |
| Estonian         | Estonia                | et-EE               |

| <b>Language</b>            | <b>Locale</b> | <b>Language tag</b> |
|----------------------------|---------------|---------------------|
| Faroese                    | Faroe Islands | fo-FO               |
| Filipino                   | Philippines   | fil-PH              |
| Finnish                    | Finland       | fi-FI               |
| French                     | Belgium       | fr-BE               |
| French                     | Canada        | fr-CA               |
| French                     | France        | fr-FR               |
| French                     | Luxembourg    | fr-LU               |
| French                     | Monaco        | fr-MC               |
| French                     | Switzerland   | fr-CH               |
| Frisian                    | Netherlands   | fy-NL               |
| Galician                   | Galician      | gl-ES               |
| Georgian                   | Georgia       | ka-GE               |
| German                     | Austria       | de-AT               |
| German                     | Germany       | de-DE               |
| German                     | Liechtenstein | de-LI               |
| German                     | Luxembourg    | de-LU               |
| German                     | Switzerland   | de-CH               |
| Greek                      | Greece        | el-GR               |
| Greenlandic                | Greenland     | kl-GL               |
| Gujarati (Gujarati Script) | India         | gu-IN               |
| Hausa (Latin)              | Nigeria       | ha-NG-Latn          |
| Hebrew                     | Israel        | he-IL               |
| Hindi                      | India         | hi-IN               |
| Hungarian                  | Hungary       | hu-HU               |
| Icelandic                  | Iceland       | is-IS               |
| Igbo                       | Nigeria       | ig-NG               |
| Inari Sami                 | Finland       | smn-FI              |
| Indonesian                 | Indonesia     | id-ID               |
| Inuktitut (Latin)          | Canada        | iu-CA-Latn          |
| Inuktitut (Syllabics)      | Canada        | iu-CA-Cans          |

| <b>Language</b>              | <b>Locale</b>                         | <b>Language tag</b> |
|------------------------------|---------------------------------------|---------------------|
| Irish                        | Ireland                               | ga-IE               |
| isiXhosa / Xhosa             | South Africa                          | xh-ZA               |
| isiZulu / Zulu               | South Africa                          | zu-ZA               |
| Italian                      | Italy                                 | it-IT               |
| Italian                      | Switzerland                           | it-CH               |
| Japanese                     | Japan                                 | ja-JP               |
| Kannada (Kannada Script)     | India                                 | kn-IN               |
| Kazakh                       | Kazakhstan                            | kk-KZ               |
| Khmer                        | Cambodia                              | kh-KH               |
| K'iche                       | Guatemala                             | qut-GT              |
| Kinyarwanda                  | Rwanda                                | rw-RW               |
| Konkani                      | India                                 | kok-IN              |
| Korean                       | Korea                                 | ko-KR               |
| Kyrgyz                       | Kyrgyzstan                            | ky-KG               |
| Lao                          | Lao PDR                               | lo-LA               |
| Latvian                      | Latvia                                | lv-LV               |
| Lithuanian                   | Lithuania                             | lt-LT               |
| Lower Sorbian                | Germany                               | wee-DE              |
| Lule Sami                    | Norway                                | smj-NO              |
| Lule Sami                    | Sweden                                | smj-SE              |
| Luxembourgish                | Luxembourg                            | lb-LU               |
| Macedonian                   | Former Yugoslav Republic of Macedonia | mk-MK               |
| Malay                        | Brunei                                | ms-BN               |
| Malay                        | Malaysia                              | ms-MY               |
| Malayalam (Malayalam Script) | India                                 | ml-IN               |
| Maltese                      | Malta                                 | mt-MT               |
| Maori                        | New Zealand                           | mi-NZ               |
| Mapudungun                   | Chile                                 | arn-CL              |
| Marathi                      | India                                 | mr-IN               |
| Mohawk                       | Mohawk                                | moh-CA              |

| <b>Language</b>                   | <b>Locale</b>          | <b>Language tag</b> |
|-----------------------------------|------------------------|---------------------|
| Mongolian (Cyrillic)              | Mongolia               | mn-MN               |
| Mongolian (Mongolian)             | PRC                    | mn-CN-Mong          |
| Nepali                            | Nepal                  | ne-NP               |
| Northern Sami                     | Finland                | se-FI               |
| Northern Sami                     | Norway                 | se-NO               |
| Northern Sami                     | Sweden                 | se-SE               |
| Norwegian (Bokmål)                | Norway                 | nb-NO               |
| Norwegian (Nynorsk)               | Norway                 | nn-NO               |
| Occitan                           | France                 | oc-FR               |
| Odia                              | India                  | or-IN               |
| Pashto                            | Afghanistan            | ps-AF               |
| Persian                           | Iran                   | fa-IR               |
| Polish                            | Poland                 | pl-PL               |
| Portuguese                        | Brazil                 | pt-BR               |
| Portuguese                        | Portugal               | pt-PT               |
| Punjabi (Gurumukhi Script)        | India                  | pa-IN               |
| Quechua                           | Bolivia                | quz-BO              |
| Quechua                           | Ecuador                | quz-EC              |
| Quechua                           | Peru                   | quz-PE              |
| Romanian                          | Romania                | ro-RO               |
| Romansh                           | Switzerland            | rm-CH               |
| Russian                           | Russia                 | ru-RU               |
| Sanskrit                          | India                  | sa-IN               |
| Serbian (Cyrillic)                | Bosnia and Herzegovina | sr-BA-Cyrl          |
| Serbian (Cyrillic)                | Serbia                 | sr-SP-Cyrl          |
| Serbian (Latin)                   | Bosnia and Herzegovina | sr-BA-Latn          |
| Serbian (Latin)                   | Serbia                 | sr-SP-Latn          |
| Sesotho sa Leboa / Northern Sotho | South Africa           | ns-ZA               |
| Setswana / Tswana                 | South Africa           | tn-ZA               |
| Sinhala                           | Sri Lanka              | si-LK               |

| <b>Language</b>  | <b>Locale</b>      | <b>Language tag</b> |
|------------------|--------------------|---------------------|
| Skolt Sami       | Finland            | sms-FI              |
| Slovak           | Slovakia           | sk-SK               |
| Slovenian        | Slovenia           | sl-SI               |
| Southern Sami    | Norway             | sma-NO              |
| Southern Sami    | Sweden             | sma-SE              |
| Spanish          | Argentina          | es-AR               |
| Spanish          | Bolivia            | es-BO               |
| Spanish          | Chile              | es-CL               |
| Spanish          | Columbia           | es-CO               |
| Spanish          | Costa Rica         | es-CR               |
| Spanish          | Dominican Republic | es-DO               |
| Spanish          | Ecuador            | es-EC               |
| Spanish          | El Salvador        | es-SV               |
| Spanish          | Guatemala          | es-GT               |
| Spanish          | Honduras           | es-HN               |
| Spanish          | Mexico             | es-MX               |
| Spanish          | Nicaragua          | es-NI               |
| Spanish          | Panama             | es-PA               |
| Spanish          | Paraguay           | es-PY               |
| Spanish          | Peru               | es-PE               |
| Spanish          | Puerto Rico        | es-PR               |
| Spanish          | Spain              | es-ES               |
| Spanish          | United States      | es-US               |
| Spanish          | Uruguay            | es-UY               |
| Spanish          | Venezuela          | es-VE               |
| Swahili          | Kenya              | sw-KE               |
| Swedish          | Finland            | sv-FI               |
| Swedish          | Sweden             | sv-SE               |
| Syriac           | Syria              | syr-SY              |
| Tajik (Cyrillic) | Tajikistan         | tg-TJ-Cyrl          |

| Language               | Locale        | Language tag |
|------------------------|---------------|--------------|
| Tamazight (Latin)      | Algeria       | tmz-DZ-Latn  |
| Tamil                  | India         | ta-IN        |
| Tatar                  | Russia        | tt-RU        |
| Telugu (Telugu Script) | India         | te-IN        |
| Thai                   | Thailand      | th-TH        |
| Bhutanese              | Bhutan        | bo-BT        |
| Tibetan                | PRC           | bo-CN        |
| Turkish                | Turkey        | tr-TR        |
| Turkmen                | Turkmenistan  | tk-TM        |
| Uighur                 | PRC           | ug-CN        |
| Ukrainian              | Ukraine       | uk-UA        |
| Upper Sorbian          | Germany       | wen-DE       |
| Urdu                   | Pakistan      | ur-PK        |
| Uzbek (Cyrillic)       | Uzbekistan    | uz-UZ-Cyrl   |
| Uzbek (Latin)          | Uzbekistan    | uz-UZ-Latn   |
| Vietnamese             | Viet Nam      | vi-VN        |
| Welsh                  | Great Britain | cy-GB        |
| Wolof                  | Senegal       | wo-SN        |
| Sakha                  | Russia        | sah-RU       |
| Yi                     | PRC           | ii-CN        |
| Yoruba                 | Nigeria       | yo-NG        |

<11> [Section 2.4.83](#): In certain scenarios, Office Excel 2007, Excel 2010, and Excel 2013 write out more than 0x000000CE **BrtFmt** records.

<12> [Section 2.4.97](#): When the file is saved, the value of the **stStyleAgg** becomes NULL and the old value is written to the **stStyleInsertRow**. When the file is re-opened, these new styles will be applied.

<13> [Section 2.4.103](#): Office Excel 2007, Excel 2010, and Excel 2013 will not load a file if **kpirop** is equal to 0x00000005 or 0x00000006.

<14> [Section 2.4.128](#): If this value is greater than 0x00 and the **fMixedTypesIgnoringBlanks** field of the **BrtBeginPCDFatbl** (section [2.4.125](#)) record of the enclosing **BrtBeginPCDField** (section [2.4.130](#)) record is 1, Office Excel 2007 will report a valid file as corrupt.

<15> [Section 2.4.142](#): Office Excel 2007, Excel 2010, and Excel 2013 will only load a file if the MDX expression specified by **stWeight** corresponds to a measure (section [2.2.5.2.7.1](#)) in the OLAP cube.

<16> [Section 2.4.142](#): Office Excel 2007 will not load a file with this string specified.

<17> [Section 2.4.161](#): The value of **fLoadSheet** can be 0 if **fName** is 0 and the specified external workbook has one sheet and that sheet has the same name as that external workbook, not including the **file extension**.

<18> [Section 2.4.187](#): Office Excel 2007, Excel 2010, and Excel 2013 allow the **Comment** field of a **BrtBeginSct** record to be a NULL string after converting an Excel Binary File Format (.xls) document to an Excel 2007 Binary File Format (.xlsb) document.

<19> [Section 2.4.211](#): Excel 2010 and Excel 2013 do not save this record.

<20> [Section 2.4.212](#): Excel 2010 and Excel 2013 do not save this record.

<21> [Section 2.4.249](#): Office Excel 2007, Excel 2010, and Excel 2013 save the **PNN** value of Top-left pane as Bottom-right pane and Bottom-right pane as Top-left pane.

<22> [Section 2.4.249](#): Office Excel 2007 will not load a file if the pivot selection belongs to the page area.

<23> [Section 2.4.264](#): Office Excel 2007, Excel 2010, and Excel 2013 do not always save a value of 1 for OLAP [PivotTables](#).

<24> [Section 2.4.296](#): If the value of the **protpwdBook** field of the **BrtBookProtection** (section [2.4.296](#)) record is not 0x0000, Office Excel 2007 encrypts the document as described in [\[MS-OFFCRYPTO\]](#), section 2.3.4, ECMA-376 Document Encryption. If an encryption password is not specified the document is encrypted with the default password of "\x56\x65\x6C\x76\x65\x74\x53\x77\x65\x61\x74\x73\x68\x6F\x70".

<25> [Section 2.4.296](#): If the value of the **protpwdRev** field of the **BrtBookProtection** (section [2.4.296](#)) record is not 0x0000, Office Excel 2007 encrypts the document as described in [\[MS-OFFCRYPTO\]](#), section 2.3.4, ECMA-376 Document Encryption. If an encryption password is not specified the document is encrypted with the default password of "\x56\x65\x6C\x76\x65\x74\x53\x77\x65\x61\x74\x73\x68\x6F\x70".

<26> [Section 2.4.297](#): If the size of the **rgbHash** member of the **ipdBookPasswordData** field of the **BrtBookProtectionIso** (section [2.4.297](#)) record is nonzero, Office Excel 2007 encrypts the document as described in [\[MS-OFFCRYPTO\]](#), section 2.3.4, ECMA-376 Document Encryption. If an encryption password is not specified the document is encrypted with the default password of "\x56\x65\x6C\x76\x65\x74\x53\x77\x65\x61\x74\x73\x68\x6F\x70".

<27> [Section 2.4.297](#): If the size of the **rgbHash** member of the **ipdRevPasswordData** field of the **BrtBookProtectionIso** (section [2.4.297](#)) record is nonzero, Office Excel 2007 encrypts the document as described in [\[MS-OFFCRYPTO\]](#), section 2.3.4, ECMA-376 Document Encryption. If an encryption password is not specified the document is encrypted with the default password of "\x56\x65\x6C\x76\x65\x74\x53\x77\x65\x61\x74\x73\x68\x6F\x70".

<28> [Section 2.4.313](#): Excel 2010 and Excel 2013 do not save this record.

<29> [Section 2.4.313](#): Office Excel 2007 will not correctly load files with a **val** greater than or equal to 256.

<30> [Section 2.4.355](#): Excel 2010 and Excel 2013 do not save this record.



<31> [Section 2.4.356](#): Excel 2010 and Excel 2013 do not save this record.

<32> [Section 2.4.546](#): Excel 2010 and Excel 2013 do not save this record.

<33> [Section 2.4.547](#): Excel 2010 and Excel 2013 do not save this record.

<34> [Section 2.4.643](#): Office Excel 2007, Excel 2010 and Excel 2013 use this GUID as described in [\[MS-DTYP\]](#) section 2.3.2 to determine whether the VBA project needs to be recompiled on load by comparing the GUID in the file to the GUID built into the application. If the value is 0x0, the VBA project needs to be recompiled on load.

<35> [Section 2.4.643](#): Value "xl" for **stAppName** is used by Office Excel 2007, Excel 2010, and Excel 2013. When **stAppName** is equal to "xl", Office Excel 2007, Excel 2010, and Excel 2013 expect each of **stLastEdited**, **stLowestEdited**, and **stRupBuild** to be a text representation of an unsigned integer that is less than or equal to 32767. When **stAppName** is not equal to "xl", Office Excel 2007, Excel 2010, and Excel 2013 ignore values of **stLastEdited**, **stLowestEdited**, and **stRupBuild**.

<36> [Section 2.4.687](#): Office Excel 2007 does not ignore the preceding **BrtBeginPCDField** (section [2.4.130](#)) of this record.

<37> [Section 2.4.688](#): Office Excel 2007 does not support multiple uses of the same OLAP measure in one cache hierarchy (section [2.2.5.2.7](#)) as specified by the **PCDHIERARCHY** rule, and does not ignore the associated cache hierarchy when the **BrtPCDH14.fIgnorable** bit is 1.

<38> [Section 2.4.703](#): Office Excel 2007, Excel 2010, and Excel 2013 do not load a file in which this field contains a value that it does not recognize, or that is not recognized by the underlying operating system. Office Excel 2007, Excel 2010, and Excel 2013 recognize the following language tags:

| Language  | Locale       | Language Tag |
|-----------|--------------|--------------|
| Afrikaans | South Africa | af-ZA        |
| Albanian  | Albanian     | sq-AL        |
| Alsatian  | France       | gsw-FR       |
| Amharic   | Ethiopia     | am-ET        |
| Arabic    | Algeria      | ar-DZ        |
| Arabic    | Bahrain      | ar-BH        |
| Arabic    | Egypt        | ar-EG        |
| Arabic    | Iraq         | ar-IQ        |
| Arabic    | Jordan       | ar-JO        |
| Arabic    | Kuwait       | ar-KW        |
| Arabic    | Lebanon      | ar-LB        |
| Arabic    | Libya        | ar-LY        |
| Arabic    | Morocco      | ar-MA        |
| Arabic    | Oman         | ar-OM        |

| <b>Language</b>        | <b>Locale</b>          | <b>Language Tag</b> |
|------------------------|------------------------|---------------------|
| Arabic                 | Qatar                  | ar-QA               |
| Arabic                 | Saudi Arabia           | ar-SA               |
| Arabic                 | Syria                  | ar-SY               |
| Arabic                 | Tunisia                | ar-TN               |
| Arabic                 | U.A.E.                 | ar-AE               |
| Arabic                 | Yemen                  | ar-YE               |
| Armenian               | Armenia                | hy-AM               |
| Assamese               | India                  | as-IN               |
| Azerbaijani (Cyrillic) | Azerbaijan             | az-AZ-Cyrl          |
| Azerbaijani (Latin)    | Azerbaijan             | az-AZ-Latn          |
| Bashkir                | Russia                 | ba-RU               |
| Basque                 | Basque (Basque)        | eu-ES               |
| Belarusian             | Belarus                | be-BY               |
| Bangla                 | Bangladesh             | bn-BD               |
| Bangla (Bangla Script) | India                  | bn-IN               |
| Bosnian (Cyrillic)     | Bosnia and Herzegovina | bs-BA-Cyrl          |
| Bosnian (Latin)        | Bosnia and Herzegovina | bs-BA-Latn          |
| Breton                 | France                 | br-FR               |
| Bulgarian              | Bulgaria               | bg-BG               |
| Catalan                | Catalan                | ca-ES               |
| Chinese                | Hong Kong SAR          | zh-HK               |
| Chinese                | Macao SAR              | zh-MO               |
| Chinese                | PRC                    | zh-CN               |
| Chinese                | Singapore              | zh-SG               |
| Chinese                | Taiwan                 | zh-TW               |
| Corsican               | France                 | co-FR               |
| Croatian               | Croatia                | hr-HR               |
| Croatian (Latin)       | Bosnia and Herzegovina | hr-BA-Latn          |
| Czech                  | Czech Republic         | cs-CZ               |
| Danish                 | Denmark                | da-DK               |

| <b>Language</b> | <b>Locale</b>  | <b>Language Tag</b> |
|-----------------|----------------|---------------------|
| Dari            | Afghanistan    | prs-AF              |
| Divehi          | Maldives       | div-MV              |
| Dutch           | Belgium        | nl-BE               |
| Dutch           | Netherlands    | nl-NL               |
| English         | Australia      | en-AU               |
| English         | Belize         | en-BZ               |
| English         | Canada         | en-CA               |
| English         | Caribbean      | en-CB               |
| English         | India          | en-IN               |
| English         | Ireland        | en-IE               |
| English         | Jamaica        | en-JM               |
| English         | Malaysia       | en-MY               |
| English         | New Zealand    | en-NZ               |
| English         | Philippines    | en-PH               |
| English         | South Africa   | en-ZA               |
| English         | Trinidad       | en-TT               |
| English         | United Kingdom | en-GB               |
| English         | United States  | en-US               |
| English         | Zimbabwe       | en-ZW               |
| Estonian        | Estonia        | et-EE               |
| Faroese         | Faroe Islands  | fo-FO               |
| Filipino        | Philippines    | fil-PH              |
| Finnish         | Finland        | fi-FI               |
| French          | Belgium        | fr-BE               |
| French          | Canada         | fr-CA               |
| French          | France         | fr-FR               |
| French          | Luxembourg     | fr-LU               |
| French          | Monaco         | fr-MC               |
| French          | Switzerland    | fr-CH               |
| Frisian         | Netherlands    | fy-NL               |

| <b>Language</b>            | <b>Locale</b> | <b>Language Tag</b> |
|----------------------------|---------------|---------------------|
| Galician                   | Galician      | gl-ES               |
| Georgian                   | Georgia       | ka-GE               |
| German                     | Austria       | de-AT               |
| German                     | Germany       | de-DE               |
| German                     | Liechtenstein | de-LI               |
| German                     | Luxembourg    | de-LU               |
| German                     | Switzerland   | de-CH               |
| Greek                      | Greece        | el-GR               |
| Greenlandic                | Greenland     | kl-GL               |
| Gujarati (Gujarati Script) | India         | gu-IN               |
| Hausa (Latin)              | Nigeria       | ha-NG-Latn          |
| Hebrew                     | Israel        | he-IL               |
| Hindi                      | India         | hi-IN               |
| Hungarian                  | Hungary       | hu-HU               |
| Icelandic                  | Iceland       | is-IS               |
| Igbo                       | Nigeria       | ig-NG               |
| Inari Sami                 | Finland       | smn-FI              |
| Indonesian                 | Indonesia     | id-ID               |
| Inuktitut (Latin)          | Canada        | iu-CA-Latn          |
| Inuktitut (Syllabics)      | Canada        | iu-CA-Cans          |
| Irish                      | Ireland       | ga-IE               |
| isiXhosa / Xhosa           | South Africa  | xh-ZA               |
| isiZulu / Zulu             | South Africa  | zu-ZA               |
| Italian                    | Italy         | it-IT               |
| Italian                    | Switzerland   | it-CH               |
| Japanese                   | Japan         | ja-JP               |
| Kannada (Kannada Script)   | India         | kn-IN               |
| Kazakh                     | Kazakhstan    | kk-KZ               |
| Khmer                      | Cambodia      | kh-KH               |
| K'iche                     | Guatemala     | qut-GT              |

| <b>Language</b>              | <b>Locale</b>                         | <b>Language Tag</b> |
|------------------------------|---------------------------------------|---------------------|
| Kinyarwanda                  | Rwanda                                | rw-RW               |
| Konkani                      | India                                 | kok-IN              |
| Korean                       | Korea                                 | ko-KR               |
| Kyrgyz                       | Kyrgyzstan                            | ky-KG               |
| Lao                          | Lao PDR                               | lo-LA               |
| Latvian                      | Latvia                                | lv-LV               |
| Lithuanian                   | Lithuania                             | lt-LT               |
| Lower Sorbian                | Germany                               | wee-DE              |
| Lule Sami                    | Norway                                | smj-NO              |
| Lule Sami                    | Sweden                                | smj-SE              |
| Luxembourgish                | Luxembourg                            | lb-LU               |
| Macedonian                   | Former Yugoslav Republic of Macedonia | mk-MK               |
| Malay                        | Brunei                                | ms-BN               |
| Malay                        | Malaysia                              | ms-MY               |
| Malayalam (Malayalam Script) | India                                 | ml-IN               |
| Maltese                      | Malta                                 | mt-MT               |
| Maori                        | New Zealand                           | mi-NZ               |
| Mapudungun                   | Chile                                 | arn-CL              |
| Marathi                      | India                                 | mr-IN               |
| Mohawk                       | Mohawk                                | moh-CA              |
| Mongolian (Cyrillic)         | Mongolia                              | mn-MN               |
| Mongolian (Mongolian)        | PRC                                   | mn-CN-Mong          |
| Nepali                       | Nepal                                 | ne-NP               |
| Northern Sami                | Finland                               | se-FI               |
| Northern Sami                | Norway                                | se-NO               |
| Northern Sami                | Sweden                                | se-SE               |
| Norwegian (Bokmål)           | Norway                                | nb-NO               |
| Norwegian (Nynorsk)          | Norway                                | nn-NO               |
| Occitan                      | France                                | oc-FR               |
| Odia                         | India                                 | or-IN               |

| <b>Language</b>                   | <b>Locale</b>          | <b>Language Tag</b> |
|-----------------------------------|------------------------|---------------------|
| Pashto                            | Afghanistan            | ps-AF               |
| Persian                           | Iran                   | fa-IR               |
| Polish                            | Poland                 | pl-PL               |
| Portuguese                        | Brazil                 | pt-BR               |
| Portuguese                        | Portugal               | pt-PT               |
| Punjabi (Gurumukhi Script)        | India                  | pa-IN               |
| Quechua                           | Bolivia                | quz-BO              |
| Quechua                           | Ecuador                | quz-EC              |
| Quechua                           | Peru                   | quz-PE              |
| Romanian                          | Romania                | ro-RO               |
| Romansh                           | Switzerland            | rm-CH               |
| Russian                           | Russia                 | ru-RU               |
| Sanskrit                          | India                  | sa-IN               |
| Serbian (Cyrillic)                | Bosnia and Herzegovina | sr-BA-Cyrl          |
| Serbian (Cyrillic)                | Serbia                 | sr-SP-Cyrl          |
| Serbian (Latin)                   | Bosnia and Herzegovina | sr-BA-Latn          |
| Serbian (Latin)                   | Serbia                 | sr-SP-Latn          |
| Sesotho sa Leboa / Northern Sotho | South Africa           | ns-ZA               |
| Setswana / Tswana                 | South Africa           | tn-ZA               |
| Sinhala                           | Sri Lanka              | si-LK               |
| Skolt Sami                        | Finland                | sms-FI              |
| Slovak                            | Slovakia               | sk-SK               |
| Slovenian                         | Slovenia               | sl-SI               |
| Southern Sami                     | Norway                 | sma-NO              |
| Southern Sami                     | Sweden                 | sma-SE              |
| Spanish                           | Argentina              | es-AR               |
| Spanish                           | Bolivia                | es-BO               |
| Spanish                           | Chile                  | es-CL               |
| Spanish                           | Columbia               | es-CO               |
| Spanish                           | Costa Rica             | es-CR               |

| <b>Language</b>        | <b>Locale</b>      | <b>Language Tag</b> |
|------------------------|--------------------|---------------------|
| Spanish                | Dominican Republic | es-DO               |
| Spanish                | Ecuador            | es-EC               |
| Spanish                | El Salvador        | es-SV               |
| Spanish                | Guatemala          | es-GT               |
| Spanish                | Honduras           | es-HN               |
| Spanish                | Mexico             | es-MX               |
| Spanish                | Nicaragua          | es-NI               |
| Spanish                | Panama             | es-PA               |
| Spanish                | Paraguay           | es-PY               |
| Spanish                | Peru               | es-PE               |
| Spanish                | Puerto Rico        | es-PR               |
| Spanish                | Spain              | es-ES               |
| Spanish                | United States      | es-US               |
| Spanish                | Uruguay            | es-UY               |
| Spanish                | Venezuela          | es-VE               |
| Swahili                | Kenya              | sw-KE               |
| Swedish                | Finland            | sv-FI               |
| Swedish                | Sweden             | sv-SE               |
| Syriac                 | Syria              | syr-SY              |
| Tajik (Cyrillic)       | Tajikistan         | tg-TJ-Cyrl          |
| Tamazight (Latin)      | Algeria            | tmz-DZ-Latn         |
| Tamil                  | India              | ta-IN               |
| Tatar                  | Russia             | tt-RU               |
| Telugu (Telugu Script) | India              | te-IN               |
| Thai                   | Thailand           | th-TH               |
| Bhutanese              | Bhutan             | bo-BT               |
| Tibetan                | PRC                | bo-CN               |
| Turkish                | Turkey             | tr-TR               |
| Turkmen                | Turkmenistan       | tk-TM               |
| Uighur                 | PRC                | ug-CN               |

| Language         | Locale        | Language Tag |
|------------------|---------------|--------------|
| Ukrainian        | Ukraine       | uk-UA        |
| Upper Sorbian    | Germany       | wen-DE       |
| Urdu             | Pakistan      | ur-PK        |
| Uzbek (Cyrillic) | Uzbekistan    | uz-UZ-Cyrl   |
| Uzbek (Latin)    | Uzbekistan    | uz-UZ-Latn   |
| Vietnamese       | Viet Nam      | vi-VN        |
| Welsh            | Great Britain | cy-GB        |
| Wolof            | Senegal       | wo-SN        |
| Sakha            | Russia        | sah-RU       |
| Yi               | PRC           | ii-CN        |
| Yoruba           | Nigeria       | yo-NG        |

<39> [Section 2.4.718](#): Office Excel 2007, Excel 2010, and Excel 2013 ignore this value on load and always write out 0.

<40> [Section 2.4.721](#): Office Excel 2007, Excel 2010, and Excel 2013 always write the value of **fAccepted** as 0 when converting from an [\[ISO/IEC29500-1:2011\]](#) document to this persistence format and the other revision whose **rrd.revid** value matches the **rrd.revid** value of this revision is in a different [revision log](#).

<41> [Section 2.4.727](#): In Office Excel 2007, Excel 2010, and Excel 2013, the value **BrtRRFormat.ich** can also be 0 because the effect was not calculated. The **ich** value can be correctly determined from the **cch** value.

<42> [Section 2.4.751](#): Excel 2010 and Excel 2013 do not save this record.

<43> [Section 2.4.768](#): Office Excel 2007 does not save cached values for OLE Data Items (section [2.2.7.4.3.1](#)).

<44> [Section 2.4.772](#): Office Excel 2007 will not ignore the **isxvdData** field of the immediately preceding **BrtBeginSXDI** (section [2.4.232](#)) record.

<45> [Section 2.4.776](#): Office Excel 2007 will not ignore the **BrtBeginSXTH** record preceding this record.

<46> [Section 2.4.786](#): Office Excel 2007 does not support multiple uses of the same OLAP measure in one [PivotTable view](#) as specified by the **PivotTable** rule (section [2.2.5.3.9](#)), and does not ignore the associated pivot field when **BrtSXVD14** (section [2.4.786](#)).**fIgnorable** is 0x01.

<47> [Section 2.4.806](#): Excel 2010 and Excel 2013 do not save this record.

<48> [Section 2.4.807](#): Office Excel 2007, Excel 2010, and Excel 2013 treat this as 0x0 for security considerations.

<49> [Section 2.4.807](#): If the workbook doesn't contain a [VBA project](#), Office Excel 2007, Excel 2010, and Excel 2013 will reset the **strName** to a default value when the project is created.



<50> [Section 2.4.808](#): The following table shows the different versions of function accuracy Microsoft Excel supports.

| Value | Meaning   |
|-------|---|
| 0     | Functions are calculated using the current application's algorithms.        |
| 1     | Functions are calculated using algorithms implemented in Office Excel 2007. |
| 2     | Functions are calculated using algorithms implemented in Excel 2010.        |

<51> [Section 2.5.1](#): Excel 2010, and Excel 2013 writes out 0x0E02 for this field.

<52> [Section 2.5.1](#): Excel 2010, and Excel 2013 writes out 0x0000 for this field.

<53> [Section 2.5.3](#): In some cases, Office Excel 2007, Excel 2010, and Excel 2013 will save the formats associated with 0x0011 through 0x0014 as 0x0000 through 0x0003. In this case, the formats associated with 0x0000 through 0x0010 will be saved as 0x0004 through 0x0014.

<54> [Section 2.5.5](#): Office Excel 2007, Excel 2010, and Excel 2013 can also write out 0.

<55> [Section 2.5.28](#): The following table shows the maximum data functionality levels (section [2.2.5.1](#)) that different versions of spreadsheet software support.

| Value | Maximum data functionality level for |
|-------|--------------------------------------|
| 0     | Excel 97 and Excel 2000              |
| 1     | Excel 2002 and Office Excel 2003     |
| 3     | Office Excel 2007                    |
| 4     | Excel 2010                           |
| 5     | Excel 2013                           |

<56> [Section 2.5.29](#): Office Excel 2007, Excel 2010, and Excel 2013 treat this value as the non-existent date February 29, 1900.

<57> [Section 2.5.35](#): Office Excel 2007, Excel 2010, and Excel 2013 do not always write out the correct value in this field. Although the value of this field is validated on load, it is not used at run time.

<58> [Section 2.5.35](#): Office Excel 2007, Excel 2010, and Excel 2013 do not always write out the correct value in this field. Although the value of this field is validated on load, it is not used at run time.

<59> [Section 2.5.40](#): Office Excel 2007, Excel 2010, and Excel 2013 can write 0 for **fPromptForFile**.

<60> [Section 2.5.50](#): Office Excel 2007, Excel 2010, and Excel 2013 can sometimes write out values 0x13 through 0x24.

<61> [Section 2.5.61](#): Office Excel 2007 writes 0x0000 for this field. Excel 2010 writes 0x0E02 for this field.

<62> [Section 2.5.61](#): Office Excel 2007, Excel 2010, and Excel 2013 write 0x0000 for this field.

<63> [Section 2.5.94](#): Office Excel 2007, Excel 2010, and Excel 2013 use fixed values for some of the **MdtFlags** (section [2.5.94](#)) flags regardless of the values specified in the structure. The specified values are preserved when the file is saved. The following table specifies the affected flags and their respective fixed values.

| <b>MdtFlags properties</b> | <b>Value</b> |
|----------------------------|--------------|
| <b>fGhostRw</b>            | 0            |
| <b>fGhostCol</b>           | 0            |
| <b>fDelete</b>             | 0            |
| <b>fPasteAll</b>           | 1            |
| <b>fPasteFmlas</b>         | 1            |
| <b>fPasteValues</b>        | 1            |
| <b>fPasteFmts</b>          | 0            |
| <b>fPasteComments</b>      | 0            |
| <b>fPasteDv</b>            | 0            |
| <b>fPasteBorders</b>       | 1            |
| <b>fPasteColWidths</b>     | 0            |
| <b>fPasteNumFmts</b>       | 0            |
| <b>fMerge</b>              | 1            |
| <b>fSplitFirst</b>         | 1            |
| <b>fSplitAll</b>           | 0            |
| <b>fRwColShift</b>         | 1            |
| <b>fClearAll</b>           | 0            |
| <b>fClearContents</b>      | 0            |
| <b>fClearComments</b>      | 1            |
| <b>fCanCoerce</b>          | 1            |
| <b>fAdjust</b>             | 0            |

<64> [Section 2.5.94](#): In Office Excel 2007, Excel 2010, and Excel 2013, examples of such functions are: **IF**, **CHOOSE**, **VLOOKUP**, and **HLOOKUP**.

<65> [Section 2.5.94](#): Office Excel 2007, Excel 2010, and Excel 2013 write the **reserved2** value as 1 for the MDX Metadata (section [2.2.4.8](#)) metadata type (section [2.2.4.1](#)).

<66> [Section 2.5.97.14](#): Office Excel 2007, Excel 2010, and Excel 2013 can sometimes write out an **rgce** that contains **PtgArray** (section [2.5.97.23](#)).

<67> [Section 2.5.141](#): Office Excel 2007, Excel 2010, and Excel 2013 do not load a file in which this field contains a value that it does not recognize, or that is not recognized by the underlying

operating system. Office Excel 2007, Excel 2010, and Excel 2013 recognize the following language tags:

| Language               | Locale          | Language Tag |
|------------------------|-----------------|--------------|
| Afrikaans              | South Africa    | af-ZA        |
| Albanian               | Albanian        | sq-AL        |
| Alsatian               | France          | gsw-FR       |
| Amharic                | Ethiopia        | am-ET        |
| Arabic                 | Algeria         | ar-DZ        |
| Arabic                 | Bahrain         | ar-BH        |
| Arabic                 | Egypt           | ar-EG        |
| Arabic                 | Iraq            | ar-IQ        |
| Arabic                 | Jordan          | ar-JO        |
| Arabic                 | Kuwait          | ar-KW        |
| Arabic                 | Lebanon         | ar-LB        |
| Arabic                 | Libya           | ar-LY        |
| Arabic                 | Morocco         | ar-MA        |
| Arabic                 | Oman            | ar-OM        |
| Arabic                 | Qatar           | ar-QA        |
| Arabic                 | Saudi Arabia    | ar-SA        |
| Arabic                 | Syria           | ar-SY        |
| Arabic                 | Tunisia         | ar-TN        |
| Arabic                 | U.A.E.          | ar-AE        |
| Arabic                 | Yemen           | ar-YE        |
| Armenian               | Armenia         | hy-AM        |
| Assamese               | India           | as-IN        |
| Azerbaijani (Cyrillic) | Azerbaijan      | az-AZ-Cyrl   |
| Azerbaijani (Latin)    | Azerbaijan      | az-AZ-Latn   |
| Bashkir                | Russia          | ba-RU        |
| Basque                 | Basque (Basque) | eu-ES        |
| Belarusian             | Belarus         | be-BY        |
| Bangla                 | Bangladesh      | bn-BD        |

| <b>Language</b>        | <b>Locale</b>          | <b>Language Tag</b> |
|------------------------|------------------------|---------------------|
| Bangla (Bangla Script) | India                  | bn-IN               |
| Bosnian (Cyrillic)     | Bosnia and Herzegovina | bs-BA-Cyrl          |
| Bosnian (Latin)        | Bosnia and Herzegovina | bs-BA-Latn          |
| Breton                 | France                 | br-FR               |
| Bulgarian              | Bulgaria               | bg-BG               |
| Catalan                | Catalan                | ca-ES               |
| Chinese                | Hong Kong SAR          | zh-HK               |
| Chinese                | Macao SAR              | zh-MO               |
| Chinese                | PRC                    | zh-CN               |
| Chinese                | Singapore              | zh-SG               |
| Chinese                | Taiwan                 | zh-TW               |
| Corsican               | France                 | co-FR               |
| Croatian               | Croatia                | hr-HR               |
| Croatian (Latin)       | Bosnia and Herzegovina | hr-BA-Latn          |
| Czech                  | Czech Republic         | cs-CZ               |
| Danish                 | Denmark                | da-DK               |
| Dari                   | Afghanistan            | prs-AF              |
| Divehi                 | Maldives               | div-MV              |
| Dutch                  | Belgium                | nl-BE               |
| Dutch                  | Netherlands            | nl-NL               |
| English                | Australia              | en-AU               |
| English                | Belize                 | en-BZ               |
| English                | Canada                 | en-CA               |
| English                | Caribbean              | en-CB               |
| English                | India                  | en-IN               |
| English                | Ireland                | en-IE               |
| English                | Jamaica                | en-JM               |
| English                | Malaysia               | en-MY               |
| English                | New Zealand            | en-NZ               |
| English                | Philippines            | en-PH               |

| <b>Language</b>            | <b>Locale</b>  | <b>Language Tag</b> |
|----------------------------|----------------|---------------------|
| English                    | South Africa   | en-ZA               |
| English                    | Trinidad       | en-TT               |
| English                    | United Kingdom | en-GB               |
| English                    | United States  | en-US               |
| English                    | Zimbabwe       | en-ZW               |
| Estonian                   | Estonia        | et-EE               |
| Faroese                    | Faroe Islands  | fo-FO               |
| Filipino                   | Philippines    | fil-PH              |
| Finnish                    | Finland        | fi-FI               |
| French                     | Belgium        | fr-BE               |
| French                     | Canada         | fr-CA               |
| French                     | France         | fr-FR               |
| French                     | Luxembourg     | fr-LU               |
| French                     | Monaco         | fr-MC               |
| French                     | Switzerland    | fr-CH               |
| Frisian                    | Netherlands    | fy-NL               |
| Galician                   | Galician       | gl-ES               |
| Georgian                   | Georgia        | ka-GE               |
| German                     | Austria        | de-AT               |
| German                     | Germany        | de-DE               |
| German                     | Liechtenstein  | de-LI               |
| German                     | Luxembourg     | de-LU               |
| German                     | Switzerland    | de-CH               |
| Greek                      | Greece         | el-GR               |
| Greenlandic                | Greenland      | kl-GL               |
| Gujarati (Gujarati Script) | India          | gu-IN               |
| Hausa (Latin)              | Nigeria        | ha-NG-Latn          |
| Hebrew                     | Israel         | he-IL               |
| Hindi                      | India          | hi-IN               |
| Hungarian                  | Hungary        | hu-HU               |

| <b>Language</b>          | <b>Locale</b>                         | <b>Language Tag</b> |
|--------------------------|---------------------------------------|---------------------|
| Icelandic                | Iceland                               | is-IS               |
| Igbo                     | Nigeria                               | ig-NG               |
| Inari Sami               | Finland                               | smn-FI              |
| Indonesian               | Indonesia                             | id-ID               |
| Inuktitut (Latin)        | Canada                                | iu-CA-Latn          |
| Inuktitut (Syllabics)    | Canada                                | iu-CA-Cans          |
| Irish                    | Ireland                               | ga-IE               |
| isiXhosa / Xhosa         | South Africa                          | xh-ZA               |
| isiZulu / Zulu           | South Africa                          | zu-ZA               |
| Italian                  | Italy                                 | it-IT               |
| Italian                  | Switzerland                           | it-CH               |
| Japanese                 | Japan                                 | ja-JP               |
| Kannada (Kannada Script) | India                                 | kn-IN               |
| Kazakh                   | Kazakhstan                            | kk-KZ               |
| Khmer                    | Cambodia                              | kh-KH               |
| K'iche                   | Guatemala                             | qut-GT              |
| Kinyarwanda              | Rwanda                                | rw-RW               |
| Konkani                  | India                                 | kok-IN              |
| Korean                   | Korea                                 | ko-KR               |
| Kyrgyz                   | Kyrgyzstan                            | ky-KG               |
| Lao                      | Lao PDR                               | lo-LA               |
| Latvian                  | Latvia                                | lv-LV               |
| Lithuanian               | Lithuania                             | lt-LT               |
| Lower Sorbian            | Germany                               | wee-DE              |
| Lule Sami                | Norway                                | smj-NO              |
| Lule Sami                | Sweden                                | smj-SE              |
| Luxembourgish            | Luxembourg                            | lb-LU               |
| Macedonian               | Former Yugoslav Republic of Macedonia | mk-MK               |
| Malay                    | Brunei                                | ms-BN               |
| Malay                    | Malaysia                              | ms-MY               |

| <b>Language</b>              | <b>Locale</b>          | <b>Language Tag</b> |
|------------------------------|------------------------|---------------------|
| Malayalam (Malayalam Script) | India                  | ml-IN               |
| Maltese                      | Malta                  | mt-MT               |
| Maori                        | New Zealand            | mi-NZ               |
| Mapudungun                   | Chile                  | arn-CL              |
| Marathi                      | India                  | mr-IN               |
| Mohawk                       | Mohawk                 | moh-CA              |
| Mongolian (Cyrillic)         | Mongolia               | mn-MN               |
| Mongolian (Mongolian)        | PRC                    | mn-CN-Mong          |
| Nepali                       | Nepal                  | ne-NP               |
| Northern Sami                | Finland                | se-FI               |
| Northern Sami                | Norway                 | se-NO               |
| Northern Sami                | Sweden                 | se-SE               |
| Norwegian (Bokmål)           | Norway                 | nb-NO               |
| Norwegian (Nynorsk)          | Norway                 | nn-NO               |
| Occitan                      | France                 | oc-FR               |
| Odia                         | India                  | or-IN               |
| Pashto                       | Afghanistan            | ps-AF               |
| Persian                      | Iran                   | fa-IR               |
| Polish                       | Poland                 | pl-PL               |
| Portuguese                   | Brazil                 | pt-BR               |
| Portuguese                   | Portugal               | pt-PT               |
| Punjabi (Gurumukhi Script)   | India                  | pa-IN               |
| Quechua                      | Bolivia                | quz-BO              |
| Quechua                      | Ecuador                | quz-EC              |
| Quechua                      | Peru                   | quz-PE              |
| Romanian                     | Romania                | ro-RO               |
| Romansh                      | Switzerland            | rm-CH               |
| Russian                      | Russia                 | ru-RU               |
| Sanskrit                     | India                  | sa-IN               |
| Serbian (Cyrillic)           | Bosnia and Herzegovina | sr-BA-Cyrl          |

| <b>Language</b>                   | <b>Locale</b>          | <b>Language Tag</b> |
|-----------------------------------|------------------------|---------------------|
| Serbian (Cyrillic)                | Serbia                 | sr-SP-Cyrl          |
| Serbian (Latin)                   | Bosnia and Herzegovina | sr-BA-Latn          |
| Serbian (Latin)                   | Serbia                 | sr-SP-Latn          |
| Sesotho sa Leboa / Northern Sotho | South Africa           | ns-ZA               |
| Setswana / Tswana                 | South Africa           | tn-ZA               |
| Sinhala                           | Sri Lanka              | si-LK               |
| Skolt Sami                        | Finland                | sms-FI              |
| Slovak                            | Slovakia               | sk-SK               |
| Slovenian                         | Slovenia               | sl-SI               |
| Southern Sami                     | Norway                 | sma-NO              |
| Southern Sami                     | Sweden                 | sma-SE              |
| Spanish                           | Argentina              | es-AR               |
| Spanish                           | Bolivia                | es-BO               |
| Spanish                           | Chile                  | es-CL               |
| Spanish                           | Columbia               | es-CO               |
| Spanish                           | Costa Rica             | es-CR               |
| Spanish                           | Dominican Republic     | es-DO               |
| Spanish                           | Ecuador                | es-EC               |
| Spanish                           | El Salvador            | es-SV               |
| Spanish                           | Guatemala              | es-GT               |
| Spanish                           | Honduras               | es-HN               |
| Spanish                           | Mexico                 | es-MX               |
| Spanish                           | Nicaragua              | es-NI               |
| Spanish                           | Panama                 | es-PA               |
| Spanish                           | Paraguay               | es-PY               |
| Spanish                           | Peru                   | es-PE               |
| Spanish                           | Puerto Rico            | es-PR               |
| Spanish                           | Spain                  | es-ES               |
| Spanish                           | United States          | es-US               |
| Spanish                           | Uruguay                | es-UY               |



| Language               | Locale         | Language Tag |
|------------------------|----------------|--------------|
| Spanish                | Venezuela      | es-VE        |
| Swahili                | Kenya          | sw-KE        |
| Swedish                | Finland        | sv-FI        |
| Swedish                | Sweden         | sv-SE        |
| Syriac                 | Syria          | syr-SY       |
| Tajik (Cyrillic)       | Tajikistan     | tg-TJ-Cyrl   |
| Tamazight (Latin)      | Algeria        | tmz-DZ-Latn  |
| Tamil                  | India          | ta-IN        |
| Tatar                  | Russia         | tt-RU        |
| Telugu (Telugu Script) | India          | te-IN        |
| Thai                   | Thailand       | th-TH        |
| Bhutanese              | Bhutan         | bo-BT        |
| Tibetan                | PRC            | bo-CN        |
| Turkish                | Turkey         | tr-TR        |
| Turkmen                | Turkmenistan   | tk-TM        |
| Uighur                 | PRC            | ug-CN        |
| Ukrainian              | Ukraine        | uk-UA        |
| Upper Sorbian          | Germany        | wen-DE       |
| Urdu                   | Pakistan       | ur-PK        |
| Uzbek (Cyrillic)       | Uzbekistan     | uz-UZ-Cyrl   |
| Uzbek (Latin)          | Uzbekistan     | uz-UZ-Latn   |
| Vietnamese             | Viet Nam       | vi-VN        |
| Welsh                  | United Kingdom | cy-GB        |
| Wolof                  | Senegal        | wo-SN        |
| Sakha                  | Russia         | sah-RU       |
| Yi                     | PRC            | ii-CN        |
| Yoruba                 | Nigeria        | yo-NG        |

<68> [Section 2.5.171:](#) Under certain circumstances, Office Excel 2007, Excel 2010, and Excel 2013 persist these values.

<69> [Section 2.5.172:](#) Office Excel 2007, Excel 2010, and Excel 2013 can sometimes save a value of -1 on the **lastSheet** field for either a top-level or a sheet-level reference to an external book if an

**Information Rights Management (IRM)** authorization failure occurred during a refresh of that book's data.

[<70> Section 3.8.26:](#) This version is Office Excel 2007.

[<71> Section 4:](#) Office Excel 2007, Excel 2010, and Excel 2013 warn the user when they enter passwords that contain characters other than alphanumeric characters or punctuation symbols.

## 6 Change Tracking

This section identifies changes that were made to the [MS-XLSB] protocol document between the October 2012 and February 2013 releases. Changes are classified as New, Major, Minor, Editorial, or No change.

The revision class **New** means that a new document is being released.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- The removal of a document from the documentation set.
- Changes made for template compliance.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **Editorial** means that the language and formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.

The revision class **No change** means that no new technical or language changes were introduced. The technical content of the document is identical to the last released version, but minor editorial and formatting changes, as well as updates to the header and footer information, and to the revision summary, may have been made.

Major and minor changes can be described further using the following change types:

- New content added.
- Content updated.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.

- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.
- Content removed for template compliance.
- Obsolete document removed.

Editorial changes are always classified with the change type **Editorially updated**.

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact [protocol@microsoft.com](mailto:protocol@microsoft.com).

| Section   | Tracking number (if applicable) and description  | Major change (Y or N) | Change type      |
|---|--|-----------------------|------------------|
| <a href="#">2.1.6.2 Alternate Content Mechanism</a> | Changed "RgACVer.ACProductVersion.product" to "RgACVer.ACProductVersion.fileproduct" and "RgACVer.ACProductVersion.version" to "RgACVer.ACProductVersion.fileproduct" for clarity. | N                     | Content updated. |
| <a href="#">2.1.7 Part Enumeration</a>              | Added Control Properties, Timeline Cache, and Timelines to the list of parts and their relationships.  | N                     | Content updated. |
| <a href="#">2.1.7.2 ActiveX Binary</a>              | Changed "any other part" to "any part" for clarity.  | N                     | Content updated. |
| <a href="#">2.1.7.4 Calculation Chain</a>           | Changed "any other part" to "any part" for clarity.  | N                     | Content updated. |
| <a href="#">2.1.7.11 Custom Data Properties</a>     | Updated reference for content associated with this part.   | N                     | Content updated. |
| <a href="#">2.1.7.39 PivotCache Records</a>         | Changed "any other part" to "any part" for clarity.  | N                     | Content updated. |
| <a href="#">2.1.7.53 Timeline Cache</a>             | Updated the content type to include "+xml".  | N                     | Content updated. |
| <a href="#">2.1.7.54 Timelines</a>                  | Updated the content type to include "+xml".  | N                     | Content updated. |
| <a href="#">2.2.5.5</a>                             | Changed "BrBeginConditionalFormattings"  | N                     | Content          |

| Section   | Tracking number (if applicable) and description  | Major change (Y or N) | Change type      |
|---|--|-----------------------|------------------|
| <a href="#">Non-Worksheet PivotTables</a>                                 | to "BrBeginSXCondFmts" and "BrEndConditionalFormattings" to "BrEdnSxCondFmts".                                   |                       | updated.         |
| <a href="#">2.2.5.6 PivotValues</a>                                       | Changed "of the BrBeginSXView record" to "and the BrEndSXLocation record", and updated the associated reference. | N                     | Content updated. |
| <a href="#">2.2.6.3.2 Timeline Styles</a>                                 | Updated the reference for "BrBeginTimelineStyle".  | N                     | Content updated. |
| <a href="#">2.2.8.9 Model Data Source Connections</a>                     | Added reference to [MS-XLDM] for "Spreadsheet Data Model".   | N                     | Content updated. |
| <a href="#">2.2.8.9.4 Model Data Source Text import Connections</a>       | Added reference for "BrBeginExtConnection".  | N                     | Content updated. |
| <a href="#">2.2.15 Timelines</a>  | Added a definition number for the term "attribute".  | N                     | Content updated. |
| <a href="#">2.2.15.1 Timeline Cache</a>                                   | Added a definition number for the term "attribute".  | N                     | Content updated. |
| <a href="#">2.2.15.1.2 Timeline Cache Relationship to PivotCache</a>      | Updated the reference for "CT_TimelinePivotCacheDefinition".   | N                     | Content updated. |
| <a href="#">2.2.15.1.3 Timeline Cache Relationship to PivotTable View</a> | Added a definition number for the term "dimension".  | N                     | Content updated. |
| <a href="#">2.2.15.1.3 Timeline Cache Relationship to PivotTable View</a> | Updated the reference for "CT_TimelineCacheDefinition".  | N                     | Content updated. |
| <a href="#">2.2.15.2.1 Timeline View Relationship to Timeline Cache</a>   | Updated the reference for "CT_TimelineCacheDefinition".  | N                     | Content updated. |
| <a href="#">2.2.15.3 Timelines and Cube Functions</a>                     | Updated the reference for "CT_TimelineCacheDefinition".  | N                     | Content updated. |
| <a href="#">2.4.74 BrBeginExtConn14</a>                                   | Updated the reference for the datastoreItem element in the description for the firstClientCubeUrn field.         | N                     | Content updated. |
| <a href="#">2.4.75 BrBeginExtConn15</a>                                   | Added reference to [MS-XLDM] for "Spreadsheet Data Model" to description of firstId field.                       | N                     | Content updated. |
| <a href="#">2.4.95 BrBeginItemUniqueNames</a>                             | Changed "...fSandbox of brtExtConn15..." to "...fSandbox of BrBeginExtConn15 (section 2.4.75)...".               | N                     | Content updated. |
| <a href="#">2.4.194</a>   | Changed "FRTHHeader.fRelID" to "FRTHHeader.relID" in the description of the                                      | N                     | Content          |

| Section   | Tracking number (if applicable) and description   | Major change (Y or N) | Change type      |
|---|---|-----------------------|------------------|
| <a href="#">BrtBeginSlicerCacheID</a>                                       | FRTHeader field.  |                       | updated.         |
| <a href="#">2.4.203</a><br><a href="#">BrtBeginSlicerCachesPivotCacheID</a> | Changed "FRTHeader.fRelID" to "FRTHeader.relID" in the description of the FRTHeader field.                    | N                     | Content updated. |
| <a href="#">2.4.205</a><br><a href="#">BrtBeginSlicerEx</a>                 | Changed "FRTHeader.fRelID" to "FRTHeader.relID" in the description of the FRTHeader field.                    | N                     | Content updated. |
| <a href="#">2.4.216</a><br><a href="#">BrtBeginSparklineGroup</a>           | Added a definition number for the term "data point".  | N                     | Content updated. |
| <a href="#">2.4.230</a><br><a href="#">BrtBeginSXCrtFormat</a>              | Added a definition number for the term "data point".  | N                     | Content updated. |
| <a href="#">2.4.260</a><br><a href="#">BrtBeginSxvcells</a>                 | Changed "before" to "between" in the descriptions for the cRw and cCol fields.                                | N                     | Content updated. |
| <a href="#">2.4.270</a><br><a href="#">BrtBeginTimelineCacheID</a>          | Changed "FRTHeader.fRelID" to "FRTHeader.relID" in the description of the FRTHeader field.                    | N                     | Content updated. |
| <a href="#">2.4.273</a><br><a href="#">BrtBeginTimelineEx</a>               | Changed "FRTHeader.fRelID" to "FRTHeader.relID" in the description of the FRTHeader field.                    | N                     | Content updated. |
| <a href="#">2.4.336</a><br><a href="#">BrtDecoupledPivotCacheID</a>         | Changed "FRTHeader.fRelID" to "FRTHeader.relID" in the description of the FRTHeader field.                    | N                     | Content updated. |
| <a href="#">2.4.344</a><br><a href="#">BrtDXF15</a>                         | Changed "XFProps" to "xfprops" in the description for the A - fNewBorder field.                               | N                     | Content updated. |
| <a href="#">2.4.502</a><br><a href="#">BrtEndPivotTableUISettings</a>       | Changed "PivotCache Definition (section 2.1.7.38) part ABNF" to "PivotTable (section 2.1.7.40) part ABNF".    | N                     | Content updated. |
| <a href="#">2.4.639</a><br><a href="#">BrtFieldListActiveItem</a>           | Added reference to [MS-XLDM] for "Spreadsheet Data Model" to the table in the description for the type field. | N                     | Content updated. |
| <a href="#">2.4.659</a><br><a href="#">BrtIndexBlock</a>                    | Removed the reference for "formula" in the description of the unused3 field.                                  | N                     | Content updated. |
| <a href="#">2.4.662</a><br><a href="#">BrtIndexRowBlock</a>                 | Removed the reference for "formula" in the description of the arraySubBaseOffset field.                       | N                     | Content updated. |
| <a href="#">2.4.677</a><br><a href="#">brtModelRelationship</a>             | Added reference to [MS-XLDM] for "Spreadsheet Data Model" to multiple field descriptions.                     | N                     | Content updated. |
| <a href="#">2.4.678</a><br><a href="#">BrtModelTable</a>                    | Added reference to [MS-XLDM] for "Spreadsheet Data Model" to the description for the firstConnection field.   | N                     | Content updated. |

| Section  | Tracking number (if applicable) and description  | Major change (Y or N) | Change type        |
|--|--|-----------------------|--------------------|
| <a href="#">2.4.689</a><br><a href="#">BrtPCDH15</a>             | Updated reference for "BrtBeginPCDHierarchy".  | N                     | Content updated.   |
| <a href="#">2.4.709</a><br><a href="#">BrtPivotTableRef</a>      | Changed "FRTHHeader.fRelID" to "FRTHHeader.relID" in the description of the FRTHHeader field.                                    | N                     | Content updated.   |
| <a href="#">2.4.710</a><br><a href="#">BrtPlaceholderName</a>    | Added a definition number for the term "object".   | N                     | Content updated.   |
| <a href="#">2.4.720</a><br><a href="#">BrtRRChgCell</a>          | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.721</a><br><a href="#">BrtRRConflict</a>         | Changed "rrd.fRedoAction" to "rrd.reserved1" and "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field. | N                     | Content updated.   |
| <a href="#">2.4.722</a><br><a href="#">BrtRRDefName</a>          | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.727</a><br><a href="#">BrtRRFormat</a>           | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.730</a><br><a href="#">BrtRRInsertSh</a>         | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.731</a><br><a href="#">BrtRRMove</a>             | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.733</a><br><a href="#">BrtRRRenSheet</a>         | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.735</a><br><a href="#">BrtRRTQSIF</a>            | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.736</a><br><a href="#">BrtRRUserView</a>         | Changed "rrd.fDelAtEdgeOfSort" to "rrd.reserved2" in the description for the rrd field.  | N                     | Content updated.   |
| <a href="#">2.4.782</a><br><a href="#">BrtSxvcellErr</a>         | Clarified the meanings given for the error values in the description for the err field.  | N                     | New content added. |
| <a href="#">2.4.788</a><br><a href="#">BrtTableSlicerCacheID</a> | Changed "FRTHHeader.fRelID" to "FRTHHeader.relID" in the description of the FRTHHeader field.                                    | N                     | Content updated.   |
| <a href="#">2.4.793</a>  | Changed "FRTHHeader.fRelID" to   | N                     | Content            |

| <b>Section</b>  | <b>Tracking number (if applicable) and description</b>                                  | <b>Major change (Y or N)</b> | <b>Change type</b>               |
|---|---|------------------------------|----------------------------------|
| <a href="#">BrtTimelineCachePivotCacheID</a>                            | "FRTHHeader.RelID" in the description of the FRTHHeader field.                          |                              | updated.                         |
| <a href="#">2.4.811</a><br><a href="#">BrtWorkBookPr15</a>              | Added a definition number for the term "data point".                                    | N                            | Content updated.                 |
| <a href="#">2.5.97.2</a><br><a href="#">BErr</a>                        | Updated the meaning of the err value in BErr.   | N                            | Content updated.                 |
| <a href="#">2.5.166</a><br><a href="#">XLNullableWideString</a>         | Removed the reference for "formula" in the description of the rgchData field.           | N                            | Content updated.                 |
| <a href="#">2.5.168</a><br><a href="#">XLWideString</a>                 | Removed the reference for "formula" in the description of the rgchData field.           | N                            | Content updated.                 |
| <a href="#">3.5.1</a><br><a href="#">External References: BrtRowHdr</a> | Added a definition number for the term "outline level" in the description of iOutLevel. | N                            | Content updated.                 |
| <a href="#">3.8.26</a><br><a href="#">PivotTable: BrtBeginSXView</a>    | Added a product behavior note for the description of bVerSxMacro.                       | N                            | New product behavior note added. |



## 7 Index

### A

[ACProductVersion](#) 676  
[ActiveX](#) 52  
[ActiveX binary](#) 56  
[ADO recordset connections](#) 157  
[alternate content mechanism](#) 49  
[Applicability](#) 44  
[ArgDesc](#) 676  
[ArrayParsedFormula](#) 742  
[Attached toolbars](#) 57  
[AutoFormatID](#) 677

### B

[BErr](#) 743  
[Blxf](#) 683  
[Bold](#) 684  
[BookProtectionFlags](#) 684  
[Boolean](#) 743  
[BorderStyle](#) 684  
[BrtAbsPath15](#) 225  
[BrtACBegin](#) 226  
[BrtACEnd](#) 226  
[BrtActiveX](#) 226  
[BrtAFilterDateGroupItem](#) 227  
[BrtArrFmla](#) 228  
[BrtBeginActiveXControls](#) 229  
[BrtBeginAFilter](#) 229  
[BrtBeginAutoSortScope](#) 229  
[BrtBeginBook](#) 230  
[BrtBeginBookViews](#) 230  
[BrtBeginBorders](#) 230  
[BrtBeginBundleShs](#) 230  
[BrtBeginCellIgnoreECs](#) 231  
[BrtBeginCellIgnoreECs14](#) 231  
[BrtBeginCellSmartTag](#) 231  
[BrtBeginCellSmartTags](#) 231  
[BrtBeginCellStyleXFfs](#) 232  
[BrtBeginCellWatches](#) 232  
[BrtBeginCellXFfs](#) 232  
[BrtBeginCFRule](#) 232  
[BrtBeginCFRule14](#) 238  
[BrtBeginColBrk](#) 246  
[BrtBeginColInfos](#) 246  
[BrtBeginColorPalette](#) 246  
[BrtBeginColorScale](#) 246  
[BrtBeginColorScale14](#) 247  
[BrtBeginComment](#) 247  
[BrtBeginCommentAuthors](#) 248  
[BrtBeginCommentList](#) 248  
[BrtBeginComments](#) 248  
[BrtBeginConditionalFormatting](#) 248  
[BrtBeginConditionalFormatting14](#) 249  
[BrtBeginConditionalFormattings](#) 250  
[BrtBeginCRerrs](#) 250  
[BrtBeginCsView](#) 251  
[BrtBeginCsViews](#) 251

[BrtBeginCustomFilters](#) 252  
[BrtBeginCustomFilters14](#) 252  
[BrtBeginDatabar](#) 252  
[BrtBeginDatabar14](#) 253  
[BrtBeginDataFeedPr15](#) 255  
[BrtBeginDataModel](#) 256  
[BrtBeginDbTables15](#) 256  
[BrtBeginDCon](#) 256  
[BrtBeginDecoupledPivotCacheIDs](#) 257  
[BrtBeginDeletedName](#) 258  
[BrtBeginDeletedNames](#) 258  
[BrtBeginDim](#) 258  
[BrtBeginDims](#) 259  
[BrtBeginDRefs](#) 259  
[BrtBeginDVals](#) 260  
[BrtBeginDVals14](#) 260  
[BrtBeginDXF14s](#) 260  
[BrtBeginDXFs](#) 261  
[BrtBeginDXFs15](#) 261  
[BrtBeginECdbProps](#) 262  
[BrtBeginECOlapProps](#) 263  
[BrtBeginECParam](#) 264  
[BrtBeginECParams](#) 267  
[BrtBeginECTwFldInfo](#) 267  
[BrtBeginECTwFldInfo15](#) 267  
[BrtBeginECTWFldInfoLst](#) 268  
[BrtBeginECTWFldInfoLst15](#) 268  
[BrtBeginECTxtWiz](#) 268  
[BrtBeginECTxtWiz15](#) 269  
[BrtBeginECWebProps](#) 269  
[BrtBeginEcWpTables](#) 272  
[BrtBeginEsfmd](#) 272  
[BrtBeginEsmdb](#) 273  
[BrtBeginEsmdinfo](#) 273  
[BrtBeginEsmx](#) 274  
[BrtBeginEsstr](#) 274  
[BrtBeginExtConn14](#) 274  
[BrtBeginExtConn15](#) 275  
[BrtBeginExtConnection](#) 276  
[BrtBeginExtConnections](#) 280  
[BrtBeginExternals](#) 280  
[BrtBeginFills](#) 280  
[BrtBeginFilterColumn](#) 280  
[BrtBeginFilters](#) 281  
[BrtBeginFmd](#) 281  
[BrtBeginFmts](#) 281  
[BrtBeginFnGroup](#) 282  
[BrtBeginFonts](#) 282  
[BrtBeginHeaderFooter](#) 282  
[BrtBeginIconSet](#) 284  
[BrtBeginIconSet14](#) 285  
[BrtBeginIndexedColors](#) 286  
[BrtBeginISXTHCols](#) 286  
[BrtBeginISXTHRws](#) 287  
[BrtBeginISXVDCols](#) 287  
[BrtBeginISXVDRws](#) 288  
[BrtBeginISXVIs](#) 288  
[BrtBeginItemUniqueNames](#) 289

[BrtBeginList](#) 289  
[BrtBeginListCol](#) 292  
[BrtBeginListCols](#) 294  
[BrtBeginListParts](#) 294  
[BrtBeginListXmlCPr](#) 295  
[BrtBeginMap](#) 296  
[BrtBeginMdx](#) 296  
[BrtBeginMdxKPI](#) 296  
[BrtBeginMdxMbrProp](#) 297  
[BrtBeginMdxSet](#) 297  
[BrtBeginMdxTuple](#) 298  
[BrtBeginMergeCells](#) 299  
[BrtBeginMetadata](#) 299  
[BrtBeginMG](#) 299  
[BrtBeginMGMaps](#) 299  
[BrtBeginMqs](#) 300  
[brtBeginModelRelationships](#) 300  
[BrtBeginModelTables](#) 300  
[BrtBeginMRUColors](#) 300  
[BrtBeginOleDbPr15](#) 300  
[BrtBeginOleObjects](#) 301  
[BrtBeginPCD14](#) 301  
[BrtBeginPCDCalcItem](#) 302  
[BrtBeginPCDCalcItems](#) 302  
[BrtBeginPCDCalcMem](#) 303  
[BrtBeginPCDCalcMem14](#) 303  
[BrtBeginPCDCalcMemExt](#) 304  
[BrtBeginPCDCalcMems](#) 305  
[BrtBeginPCDCalcMemsExt](#) 305  
[BrtBeginPCDFATbl](#) 306  
[BrtBeginPCDFGDiscrete](#) 308  
[BrtBeginPCDFGItems](#) 308  
[BrtBeginPCDFGRange](#) 309  
[BrtBeginPCDFGroup](#) 310  
[BrtBeginPCDField](#) 312  
[BrtBeginPCDFields](#) 315  
[BrtBeginPCDHFIELDSUsage](#) 315  
[BrtBeginPCDHGLLevel](#) 316  
[BrtBeginPCDHGLLevels](#) 317  
[BrtBeginPCDHGLGMember](#) 317  
[BrtBeginPCDHGLGMembers](#) 318  
[BrtBeginPCDHGLGroup](#) 318  
[BrtBeginPCDHGLGroups](#) 319  
[BrtBeginPCDHHierarchies](#) 320  
[BrtBeginPCDHierarchy](#) 320  
[BrtBeginPCDIRun](#) 324  
[BrtBeginPCDKPI](#) 325  
[BrtBeginPCDKPIs](#) 328  
[BrtBeginPCDSConsole](#) 329  
[BrtBeginPCDSCPage](#) 329  
[BrtBeginPCDSCPages](#) 330  
[BrtBeginPCDSCPItem](#) 330  
[BrtBeginPCDSCSet](#) 330  
[BrtBeginPCDSCSets](#) 332  
[BrtBeginPCSDTCEMember](#) 333  
[BrtBeginPCSDTCEMembers](#) 334  
[BrtBeginPCSDTCEMembersSortBy](#) 334  
[BrtBeginPCSDTCEEntries](#) 335  
[BrtBeginPCSDTCCQueries](#) 335  
[BrtBeginPCSDTCCQuery](#) 335  
[BrtBeginPCSDTCCSet](#) 336  
[BrtBeginPCSDTCCSets](#) 337  
[BrtBeginPCSDTCTupleCache](#) 337  
[BrtBeginPcdSFCIEntries](#) 337  
[BrtBeginPCDSOURCE](#) 337  
[BrtBeginPCDSRange](#) 338  
[BrtBeginPivotCacheDef](#) 339  
[BrtBeginPivotCacheID](#) 341  
[BrtBeginPivotCacheIDs](#) 342  
[BrtBeginPivotCacheRecords](#) 342  
[BrtBeginPivotTableRefs](#) 342  
[BrtBeginPivotTableUISettings](#) 342  
[BrtBeginPName](#) 343  
[BrtBeginPNames](#) 344  
[BrtBeginPNPair](#) 344  
[BrtBeginPNPairs](#) 346  
[BrtBeginPRFilter](#) 346  
[BrtBeginPRFilter14](#) 347  
[BrtBeginPRFilters](#) 347  
[BrtBeginPRFilters14](#) 348  
[BrtBeginPRFItem](#) 348  
[BrtBeginPRFItem14](#) 348  
[BrtBeginPRRule](#) 349  
[BrtBeginPRRule14](#) 349  
[BrtBeginQSI](#) 350  
[BrtBeginQSIF](#) 352  
[BrtBeginQSIFs](#) 353  
[BrtBeginQSIR](#) 354  
[BrtBeginRRSort](#) 355  
[BrtBeginRwBrk](#) 355  
[BrtBeginScenMan](#) 356  
[BrtBeginSct](#) 356  
[BrtBeginSheet](#) 358  
[BrtBeginSheetData](#) 358  
[BrtBeginSingleCells](#) 358  
[BrtBeginSlicer](#) 358  
[BrtBeginSlicerCache](#) 360  
[BrtBeginSlicerCacheDef](#) 360  
[BrtBeginSlicerCacheID](#) 361  
[BrtBeginSlicerCacheIDs](#) 361  
[BrtBeginSlicerCacheLevelData](#) 362  
[BrtBeginSlicerCacheLevelsData](#) 363  
[BrtBeginSlicerCacheNative](#) 363  
[BrtBeginSlicerCacheOlapImpl](#) 364  
[BrtBeginSlicerCacheSelections](#) 365  
[BrtBeginSlicerCacheSiRange](#) 365  
[BrtBeginSlicerCacheSiRanges](#) 365  
[BrtBeginSlicerCachesPivotCacheID](#) 366  
[BrtBeginSlicerCachesPivotCacheIDs](#) 366  
[BrtBeginSlicerEx \(section 2.4.205 366, section 2.4.273 429\)](#)  
[BrtBeginSlicers](#) 367  
[BrtBeginSlicersEx](#) 367  
[BrtBeginSlicerStyle](#) 367  
[BrtBeginSlicerStyleElements](#) 368  
[BrtBeginSlicerStyles](#) 368  
[BrtBeginSmartTags](#) 368  
[BrtBeginSmartTagTypes](#) 368  
[BrtBeginSortCond](#) 369  
[BrtBeginSortCond14](#) 370  
[BrtBeginSortState](#) 372  
[BrtBeginSparklineGroup](#) 373

[BrtBeginSparklineGroups](#) 377  
[BrtBeginSparklines](#) 377  
[BrtBeginSst](#) 377  
[BrtBeginStyles](#) 377  
[BrtBeginStyleSheet](#) 378  
[BrtBeginStyleSheetExt14](#) 378  
[BrtBeginSupBook](#) 378  
[BrtBeginSXChange](#) 379  
[BrtBeginSXChanges](#) 380  
[BrtBeginSXCondFmt](#) 380  
[BrtBeginSXCondFmt14](#) 381  
[BrtBeginSXCondFmts](#) 382  
[BrtBeginSXCondFmts14](#) 383  
[BrtBeginSXCrtFormat](#) 383  
[BrtBeginSXCrtFormats](#) 384  
[BrtBeginSXDI](#) 384  
[BrtBeginSXDIIs](#) 386  
[BrtBeginSXEdit](#) 386  
[BrtBeginSXEdits](#) 388  
[BrtBeginSXFILTER](#) 388  
[BrtBeginSXFilters](#) 390  
[BrtBeginSXFormat](#) 390  
[BrtBeginSXFormats](#) 390  
[BrtBeginSXTLI](#) 391  
[BrtBeginSXTLICols](#) 391  
[BrtBeginSXTLIRws](#) 392  
[BrtBeginSXLocation](#) 392  
[BrtBeginSXPI](#) 393  
[BrtBeginSXPIs](#) 395  
[BrtBeginSxRow](#) 395  
[BrtBeginSXRules](#) 396  
[BrtBeginSXRules14](#) 396  
[BrtBeginSxSelect](#) 396  
[BrtBeginSXTDMP](#) 399  
[BrtBeginSXTDMPS](#) 400  
[BrtBeginSXTH](#) 401  
[BrtBeginSXTHItem](#) 403  
[BrtBeginSXTHItems](#) 403  
[BrtBeginSXTHs](#) 404  
[BrtBeginSXTupleSet](#) 404  
[BrtBeginSXTupleSetData](#) 405  
[BrtBeginSXTupleSetHeader](#) 405  
[BrtBeginSXTupleSetRow](#) 405  
[BrtBeginSxvcells](#) 405  
[BrtBeginSXVD](#) 406  
[BrtBeginSXVDs](#) 413  
[BrtBeginSXVI](#) 414  
[BrtBeginSXView](#) 416  
[BrtBeginSXView14](#) 424  
[BrtBeginSXVIs](#) 425  
[BrtBeginTableSlicerCache](#) 425  
[BrtBeginTableStyle](#) 427  
[BrtBeginTableStyles](#) 427  
[BrtBeginTimelineCacheID](#) 428  
[BrtBeginTimelineCacheIDs](#) 428  
[BrtBeginTimelineCachePivotCacheIDs](#) 428  
[BrtBeginTimelineEx](#) 429  
[BrtBeginTimelinesEx](#) 429  
[BrtBeginTimelineStyle](#) 429  
[BrtBeginTimelineStyleElements](#) 430  
[BrtBeginTimelineStyles](#) 430  
[BrtBeginTimelineStyleSheetExt15](#) 430  
[BrtBeginUserCsView](#) 431  
[BrtBeginUserCsViews](#) 431  
[BrtBeginUsers](#) 431  
[BrtBeginUserShView](#) 432  
[BrtBeginUserShViews](#) 435  
[BrtBeginVolDeps](#) 435  
[BrtBeginVolMain](#) 435  
[BrtBeginVolTopic](#) 436  
[BrtBeginVolType](#) 436  
[BrtBeginWebExtensions](#) 436  
[BrtBeginWebPubItem](#) 436  
[BrtBeginWebPubItems](#) 438  
[BrtBeginWsSortMap](#) 439  
[BrtBeginWsView](#) 439  
[BrtBeginWsViews](#) 441  
[BrtBigName](#) 441  
[BrtBkHim](#) 441  
[BrtBookProtection](#) 442  
[BrtBookProtectionIso](#) 442  
[BrtBookView](#) 444  
[BrtBorder](#) 445  
[BrtBrk](#) 446  
[BrtBundleSh](#) 447  
[BrtCalcProp](#) 448  
[BrtCellBlank](#) 450  
[BrtCellBool](#) 451  
[BrtCellError](#) 451  
[BrtCellIgnoreEC](#) 452  
[BrtCellIgnoreEC14](#) 452  
[BrtCellIsst](#) 454  
[BrtCellMeta](#) 454  
[BrtCellReal](#) 455  
[BrtCellRk](#) 455  
[BrtCellRString](#) 455  
[BrtCellSmartTagProperty](#) 456  
[BrtCellSt](#) 456  
[BrtCellWatch](#) 457  
[BrtCFIcon](#) 457  
[BrtCFRuleExt](#) 458  
[BrtCFVO](#) 458  
[BrtCFVO14](#) 460  
[BrtColInfo](#) 462  
[BrtColor](#) 463  
[BrtColor14](#) 464  
[BrtColorFilter](#) 465  
[BrtColSpan](#) 685  
[BrtCommentAuthor](#) 465  
[BrtCommentText](#) 466  
[BrtCrashRecErr](#) 466  
[BrtCsPageSetup](#) 466  
[BrtCsProp](#) 472  
[BrtCsProtection](#) 472  
[BrtCsProtectionIso](#) 473  
[BrtCUsr](#) 474  
[BrtCustomFilter](#) 475  
[BrtCustomFilter14](#) 476  
[BrtDbCommand15](#) 477  
[BrtDbTable15](#) 478  
[BrtDecoupledPivotCacheID](#) 478  
[BrtDrawing](#) 479

[BrtDRef](#) 479  
[BrtDVal](#) 481  
[BrtDVal14](#) 484  
[BrtDValList](#) 487  
[BrtDXF](#) 488  
[BrtDXF14](#) 488  
[BrtDXF15](#) 489  
[BrtDynamicFilter](#) 490  
[BrtEndActiveXControls](#) 492  
[BrtEndAFilter](#) 492  
[BrtEndAutoSortScope](#) 492  
[BrtEndBook](#) 492  
[BrtEndBookViews](#) 492  
[BrtEndBorders](#) 493  
[BrtEndBundleShs](#) 493  
[BrtEndCellIgnoreECs](#) 493  
[BrtEndCellIgnoreECs14](#) 493  
[BrtEndCellSmartTag](#) 493  
[BrtEndCellSmartTags](#) 493  
[BrtEndCellStyleXfs](#) 493  
[BrtEndCellWatches](#) 493  
[BrtEndCellXfs](#) 494  
[BrtEndCFRule](#) 494  
[BrtEndCFRule14](#) 494  
[BrtEndColBrk](#) 494  
[BrtEndColInfos](#) 494  
[BrtEndColorPalette](#) 494  
[BrtEndColorScale](#) 494  
[BrtEndColorScale14](#) 494  
[BrtEndComment](#) 495  
[BrtEndCommentAuthors](#) 495  
[BrtEndCommentList](#) 495  
[BrtEndComments](#) 495  
[BrtEndConditionalFormatting](#) 495  
[BrtEndConditionalFormatting14](#) 495  
[BrtEndConditionalFormattings](#) 495  
[BrtEndCERrs](#) 495  
[BrtEndCsView](#) 495  
[BrtEndCsViews](#) 496  
[BrtEndCustomFilters](#) 496  
[BrtEndDatabar](#) 496  
[BrtEndDatabar14](#) 496  
[BrtEndDataFeedPr15](#) 496  
[BrtEndDataModel](#) 496  
[BrtEndDbTables15](#) 496  
[BrtEndDCon](#) 496  
[BrtEndDecoupledPivotCacheIDs](#) 497  
[BrtEndDeletedName](#) 497  
[BrtEndDeletedNames](#) 497  
[BrtEndDim](#) 497  
[BrtEndDims](#) 497  
[BrtEndDRefs](#) 497  
[BrtEndDVals](#) 497  
[BrtEndDVals14](#) 497  
[BrtEndDXF14s](#) 497  
[BrtEndDXFs](#) 498  
[BrtEndDxf15](#) 498  
[BrtEndECdbProps](#) 498  
[BrtEndECOlapprops](#) 498  
[BrtEndECParam](#) 498  
[BrtEndECParams](#) 498  
[BrtEndECTWfldInfoLst](#) 498  
[BrtEndECTWfldInfoLst15](#) 498  
[BrtEndECTxtWiz](#) 498  
[BrtEndECWebProps](#) 499  
[BrtEndECWPTables](#) 499  
[BrtEndEsfmd](#) 499  
[BrtEndEsmdb](#) 499  
[BrtEndEsmdtinfo](#) 499  
[BrtEndEsmdx](#) 499  
[BrtEndEsstr](#) 499  
[BrtEndExtConn14](#) 499  
[BrtEndExtConn15](#) 500  
[BrtEndExtConnection](#) 500  
[BrtEndExtConnections](#) 500  
[BrtEndExternals](#) 500  
[BrtEndFills](#) 500  
[BrtEndFilterColumn](#) 500  
[BrtEndFilters](#) 500  
[BrtEndFmd](#) 500  
[BrtEndFmts](#) 500  
[BrtEndFnGroup](#) 501  
[BrtEndFonts](#) 501  
[BrtEndHeaderFooter](#) 501  
[BrtEndIconSet](#) 501  
[BrtEndIconSet14](#) 501  
[BrtEndIndexedColors](#) 501  
[BrtEndISXTHCols](#) 501  
[BrtEndISXTHRws](#) 501  
[BrtEndISXVDCols](#) 502  
[BrtEndISXVDRws](#) 502  
[BrtEndISXVIs](#) 502  
[BrtEndItemUniqueNames](#) 502  
[BrtEndList](#) 502  
[BrtEndListCol](#) 502  
[BrtEndListCols](#) 502  
[BrtEndListParts](#) 502  
[BrtEndListXmlCPr](#) 502  
[BrtEndMap](#) 503  
[BrtEndMdx](#) 503  
[BrtEndMdxKPI](#) 503  
[BrtEndMdxMbrProp](#) 503  
[BrtEndMdxSet](#) 503  
[BrtEndMdxTuple](#) 503  
[BrtEndMergeCells](#) 503  
[BrtEndMetadata](#) 503  
[BrtEndMG](#) 503  
[BrtEndMGMaps](#) 504  
[BrtEndMGs](#) 504  
[BrtEndModelRelationships](#) 504  
[BrtEndModelTables](#) 504  
[BrtEndMRUColors](#) 504  
[BrtEndOleDbPr15](#) 504  
[BrtEndOleObjects](#) 504  
[BrtEndPCD14](#) 504  
[BrtEndPCDCalcItem](#) 504  
[BrtEndPCDCalcItems](#) 505  
[BrtEndPCDCalcMem](#) 505  
[BrtEndPCDCalcMem14](#) 505  
[BrtEndPCDCalcMemExt](#) 505  
[BrtEndPCDCalcMems](#) 505  
[BrtEndPCDCalcMemsExt](#) 505

[BrtEndPCDFAtbl](#) 505  
[BrtEndPCDFGDiscrete](#) 505  
[BrtEndPCDFGItems](#) 506  
[BrtEndPCDFGRange](#) 506  
[BrtEndPCDFGroup](#) 506  
[BrtEndPCDFField](#) 506  
[BrtEndPCDFFields](#) 506  
[BrtEndPCDHFieldsUsage](#) 506  
[BrtEndPCDHGLLevel](#) 506  
[BrtEndPCDHGLLevels](#) 506  
[BrtEndPCDHGLGMember](#) 507  
[BrtEndPCDHGLGMembers](#) 507  
[BrtEndPCDHGLGroup](#) 507  
[BrtEndPCDHGLGroups](#) 507  
[BrtEndPCDHHierarchies](#) 507  
[BrtEndPCDHierarchy](#) 507  
[BrtEndPCDIRun](#) 507  
[BrtEndPCDKPI](#) 507  
[BrtEndPCDKPIs](#) 507  
[BrtEndPCDSConsole](#) 508  
[BrtEndPCDSCPage](#) 508  
[BrtEndPCDSCPages](#) 508  
[BrtEndPCDSCPItem](#) 508  
[BrtEndPCDSCSet](#) 508  
[BrtEndPCDSCSets](#) 508  
[BrtEndPCDSDTCEMember](#) 508  
[BrtEndPCDSDTCEMembers](#) 508  
[BrtEndPCDSDTCEntries](#) 509  
[BrtEndPCDSDTCQueries](#) 509  
[BrtEndPCDSDTCQuery](#) 509  
[BrtEndPCDSDTCSets](#) 509  
[BrtEndPCDSDTCSets](#) 509  
[BrtEndPCDSDTtupleCache](#) 509  
[BrtEndPCDSFCIEntries](#) 509  
[BrtEndPCDSources](#) 509  
[BrtEndPCDSRange](#) 509  
[BrtEndPivotCacheDef](#) 510  
[BrtEndPivotCacheID](#) 510  
[BrtEndPivotCacheIDs](#) 510  
[BrtEndPivotCacheRecords](#) 510  
[BrtEndPivotTableRefs](#) 510  
[BrtEndPivotTableUISettings](#) ([section 2.4.167](#) 342,  
[section 2.4.502](#) 510)  
[BrtEndPName](#) 510  
[BrtEndPNames](#) 510  
[BrtEndPNPair](#) 511  
[BrtEndPNPairs](#) 511  
[BrtEndPRFilter](#) 511  
[BrtEndPRFilter14](#) 511  
[BrtEndPRFilters](#) 511  
[BrtEndPRFilters14](#) 511  
[BrtEndPRFItem](#) 511  
[BrtEndPRFItem14](#) 512  
[BrtEndPRRule](#) 512  
[BrtEndPRRule14](#) 512  
[BrtEndQSI](#) 512  
[BrtEndQSIF](#) 512  
[BrtEndQSIFs](#) 512  
[BrtEndQSIR](#) 512  
[BrtEndRRSort](#) 512  
[BrtEndRwBrk](#) 512  
[BrtEndScenMan](#) 513  
[BrtEndSct](#) 513  
[BrtEndSheet](#) 513  
[BrtEndSheetData](#) 513  
[BrtEndSingleCells](#) 513  
[BrtEndSlicer](#) 513  
[BrtEndSlicerCache](#) 513  
[BrtEndSlicerCacheDef](#) 513  
[BrtEndSlicerCacheID](#) 513  
[BrtEndSlicerCacheIDs](#) 514  
[BrtEndSlicerCacheLevelData](#) 514  
[BrtEndSlicerCacheLevelsData](#) 514  
[BrtEndSlicerCacheNative](#) 514  
[BrtEndSlicerCacheOlapImpl](#) 514  
[BrtEndSlicerCacheSelections](#) 514  
[BrtEndSlicerCacheSiRange](#) 514  
[BrtEndSlicerCacheSiRanges](#) 514  
[BrtEndSlicerCachesPivotCacheID](#) 515  
[BrtEndSlicerCachesPivotCacheIDs](#) 515  
[BrtEndSlicerEx](#) 515  
[BrtEndSlicers](#) 515  
[BrtEndSlicersEx](#) 515  
[BrtEndSlicerStyle](#) 515  
[BrtEndSlicerStyleElements](#) 515  
[BrtEndSlicerStyles](#) 515  
[BrtEndSmartTags](#) 516  
[BrtEndSmartTagTypes](#) 516  
[BrtEndSortCond](#) 516  
[BrtEndSortCond14](#) 516  
[BrtEndSortState](#) 516  
[BrtEndSparklineGroup](#) 516  
[BrtEndSparklineGroups](#) 516  
[BrtEndSparklines](#) 516  
[BrtEndSst](#) 517  
[BrtEndStyles](#) 517  
[BrtEndStyleSheet](#) 517  
[BrtEndStyleSheetExt14](#) 517  
[BrtEndSupBook](#) 517  
[BrtEndSXChange](#) 517  
[BrtEndSXChanges](#) 517  
[BrtEndSXCondFmt](#) 517  
[BrtEndSXCondFmt14](#) 518  
[BrtEndSXCondFmts](#) 518  
[BrtEndSXCondFmts14](#) 518  
[BrtEndSXCrtFormat](#) 518  
[BrtEndSXCrtFormats](#) 518  
[BrtEndSXDI](#) 518  
[BrtEndSXDIIs](#) 518  
[BrtEndSXEdit](#) 518  
[BrtEndSXEdits](#) 519  
[BrtEndSXFilter](#) 519  
[BrtEndSXFilters](#) 519  
[BrtEndSXFormat](#) 519  
[BrtEndSxFormats](#) 519  
[BrtEndSxLI](#) 519  
[BrtEndSxLICols](#) 519  
[BrtEndSxLIRws](#) 519  
[BrtEndSXLocation](#) 520  
[BrtEndSXPI](#) 520  
[BrtEndSXPIs](#) 520  
[BrtEndSXRow](#) 520

[BrtEndSxRules](#) 520  
[BrtEndSXRules14](#) 520  
[BrtEndSxSelect](#) 520  
[BrtEndSXTDMP](#) 520  
[BrtEndSXTDMPs](#) 520  
[BrtEndSXTH](#) 521  
[BrtEndSXTHItem](#) 521  
[BrtEndSXTHItems](#) 521  
[BrtEndSXTHTs](#) 521  
[BrtEndSXTupleSet](#) 521  
[BrtEndSXTupleSetData](#) 521  
[BrtEndSXTupleSetHeader](#) 521  
[BrtEndSXTupleSetRow](#) 521  
[BrtEndSxvcells](#) 522  
[BrtEndSXVD](#) 522  
[BrtEndSXVDs](#) 522  
[BrtEndSXVI](#) 522  
[BrtEndSXView](#) 522  
[BrtEndSXView14](#) 522  
[BrtEndSXVIs](#) 522  
[BrtEndTableSlicerCache](#) 522  
[BrtEndTableStyle](#) 522  
[BrtEndTableStyles](#) 523  
[BrtEndTimelineCacheID](#) 523  
[BrtEndTimelineCacheIDs](#) 523  
[BrtEndTimelineCachePivotCacheIDs](#) 523  
[BrtEndTimelineEx](#) 523  
[BrtEndTimelinesEx](#) 523  
[BrtEndTimelineStyle](#) 523  
[BrtEndTimelineStyleElements](#) 523  
[BrtEndTimelineStyles](#) 523  
[BrtEndTimelineStyleSheetExt15](#) 524  
[BrtEndUserCsView](#) 524  
[BrtEndUserCsViews](#) 524  
[BrtEndUserShView](#) 524  
[BrtEndUserShViews](#) 524  
[BrtEndVolDeps](#) 524  
[BrtEndVolMain](#) 524  
[BrtEndVolTopic](#) 524  
[BrtEndVolType](#) 525  
[BrtEndWebExtensions](#) 525  
[BrtEndWebPubItem](#) 525  
[BrtEndWebPubItems](#) 525  
[BrtEndWsSortMap](#) 525  
[BrtEndWsView](#) 525  
[BrtEndWsViews](#) 525  
[BrtEOF](#) 525  
[BrtExternCellBlank](#) 526  
[BrtExternCellBool](#) 526  
[BrtExternCellError](#) 526  
[BrtExternCellReal](#) 526  
[BrtExternCellString](#) 527  
[BrtExternRowHdr](#) 527  
[BrtExternSheet](#) 528  
[BrtExternTableEnd](#) 528  
[BrtExternTableStart](#) 528  
[BrtExternValueMeta](#) 528  
[BrtFieldListActiveItem](#) 529  
[BrtFileRecover](#) 530  
[BrtFileSharing](#) 530  
[BrtFileSharingIso](#) 531  
[BrtFileVersion](#) 531  
[BrtFill](#) 532  
[BrtFilter](#) 538  
[BrtFilter14](#) 539  
[BrtFmlaBool](#) 539  
[BrtFmlaError](#) 540  
[BrtFmlaNum](#) 540  
[BrtFmlaString](#) 541  
[BrtFmt](#) 541  
[BrtFnGroup](#) 542  
[BrtFont](#) 542  
[BrtFRTEBegin](#) 545  
[BrtFRTEnd](#) 545  
[BrtHLink](#) 545  
[BrtIconFilter](#) 546  
[BrtIconFilter14](#) 547  
[BrtIndexBlock](#) 547  
[BrtIndexedColor](#) 548  
[BrtIndexPartEnd](#) 548  
[BrtIndexRowBlock](#) 548  
[BrtInfo](#) 549  
[BrtItemUniqueName](#) 551  
[BrtKnownFonts](#) 551  
[BrtLegacyDrawing](#) 551  
[BrtLegacyDrawingHF](#) 552  
[BrtList14](#) 552  
[BrtListCCFmla](#) 552  
[BrtListPart](#) 553  
[BrtListTrFmla](#) 553  
[BrtMargins](#) 553  
[BrtMdb](#) 554  
[BrtMdtinfo](#) 555  
[BrtMdxMbrIstr](#) 555  
[BrtMergeCell](#) 556  
[brtModelRelationship](#) 556  
[BrtModelTable](#) 557  
[BrtMRUColor](#) 558  
[BrtName](#) 558  
[BrtNameExt](#) 560  
[BrtOleObject](#) 561  
[BrtOleSize](#) 563  
[BrtPageSetup](#) 563  
[BrtPane](#) 570  
[BrtPCDCalcMem15](#) 571  
[BrtPCDField14](#) 572  
[BrtPCDH14](#) 573  
[BrtPCDH15](#) 576  
[BrtPCDIABoolean](#) 576  
[BrtPCDIADatetime](#) 576  
[BrtPCDIAError](#) 577  
[BrtPCDIAMissing](#) 577  
[BrtPCDIANumber](#) 578  
[BrtPCDIAStrng](#) 578  
[BrtPCDIBoolean](#) 578  
[BrtPCDIDatetime](#) 579  
[BrtPCDIError](#) 579  
[BrtPCDIIndex](#) 579  
[BrtPCDIMissing](#) 580  
[BrtPCDINumber](#) 580  
[BrtPCDIString](#) 580  
[BrtPCDSFCIEntry](#) 581

[BrtPCRRecord](#) 582  
[BrtPCRRecordDt](#) 582  
[BrtPhoneticInfo](#) 583  
[BrtPivotCacheConnectionName](#) 583  
[BrtPivotCacheIdVersion](#) 584  
[BrtPivotTableRef](#) 584  
[BrtPlaceholderName](#) 585  
[BrtPrintOptions](#) 586  
[BrtQsi15](#) 586  
[BrtRangePr15](#) 587  
[BrtRangeProtection](#) 587  
[BrtRangeProtection14](#) 588  
[BrtRangeProtectionIso](#) 588  
[BrtRangeProtectionIso14](#) 589  
[BrtRowHdr](#) 591  
[BrtRRAutoFmt](#) 592  
[BrtRRChgCell](#) 593  
[BrtRRConflict](#) 595  
[BrtRRDefName](#) 596  
[BrtRREndChgCell](#) 599  
[BrtRREndFormat](#) 599  
[BrtRREndInsDel](#) 599  
[BrtRREndMove](#) 599  
[BrtRRFormat](#) 599  
[BrtRRHeader](#) 601  
[BrtRRInsDel](#) 603  
[BrtRRInsertSh](#) 604  
[BrtRRMove](#) 605  
[BrtRRNote](#) 606  
[BrtRRRenSheet](#) 607  
[BrtRRSortItem](#) 608  
[BrtRRTOSIF](#) 608  
[BrtRRUserView](#) 609  
[BrtRwDescent](#) 610  
[BrtSel](#) 610  
[BrtSheetCalcProp](#) 611  
[BrtSheetProtection](#) 611  
[BrtSheetProtectionIso](#) 616  
[BrtShrFmla](#) 622  
[BrtSlc](#) 622  
[BrtSlicerCacheBookPivotTables](#) 623  
[BrtSlicerCacheHideItemsWithNoData](#) 624  
[BrtSlicerCacheNativeItem](#) 625  
[BrtSlicerCacheOlapItem](#) 625  
[BrtSlicerCachePivotTables](#) 626  
[BrtSlicerCacheSelection](#) 626  
[BrtSlicerStyleElement](#) 627  
[BrtSmartTagType](#) 628  
[BrtSparkline](#) 628  
[BrtSSTItem](#) 629  
[BrtStr](#) 629  
[BrtStyle](#) 630  
[BrtSupAddin](#) 631  
[BrtSupBookSrc](#) 631  
[BrtSupNameBits](#) 631  
[BrtSupNameBool](#) 631  
[BrtSupNameEnd](#) 632  
[BrtSupNameErr](#) 632  
[BrtSupNameFmla](#) 632  
[BrtSupNameNil](#) 633  
[BrtSupNameNum](#) 633  
[BrtSupNameSt](#) 633  
[BrtSupNameStart](#) 633  
[BrtSupNameValueEnd](#) 634  
[BrtSupNameValueStart](#) 634  
[BrtSupSame](#) 634  
[BrtSupSelf](#) 634  
[BrtSupTabs](#) 635  
[BrtSXDI14](#) ([section 2.4.772](#) 635, [section 2.4.773](#) 636)  
[BrtSxFilter15](#) 637  
[BrtSXTDMPOrder](#) 639  
[BrtSXTH14](#) 639  
[BrtSXTupleItems](#) 640  
[BrtSXTupleSetHeaderItem](#) 640  
[BrtSXTupleSetRowItem](#) 641  
[BrtSxvcellBool](#) 642  
[BrtSxvcellDate](#) 642  
[BrtSxvcellErr](#) 643  
[BrtSxvcellNil](#) 644  
[BrtSxvcellNum](#) 644  
[BrtSxvcellStr](#) 645  
[BrtSXVD14](#) 645  
[BrtTable](#) 646  
[BrtTableSlicerCacheID](#) 648  
[BrtTableSlicerCacheIDs](#) 648  
[BrtTableStyleClient](#) 648  
[BrtTableStyleElement](#) 649  
[BrtTextPr15](#) 650  
[BrtTimelineCachePivotCacheID](#) 650  
[BrtTimelineStyleElement](#) 651  
[BrtTop10Filter](#) 651  
[BrtUCR](#) 653  
[BrtUserBookView](#) 655  
[BrtUsr](#) 660  
[BrtValueMeta](#) 660  
[BrtVolBool](#) 661  
[BrtVolErr](#) 661  
[BrtVolNum](#) 661  
[BrtVolRef](#) 661  
[BrtVolStr](#) 662  
[BrtVolSubtopic](#) 662  
[BrtWbFactoid](#) 662  
[BrtWbProp](#) 663  
[BrtWbProp14](#) 665  
[BrtWebExtension](#) 666  
[BrtWebOpt](#) 666  
[BrtWorkBookPr15](#) 667  
[BrtWsDim](#) 668  
[BrtWsFmtInfo](#) 668  
[BrtWsFmtInfoEx14](#) 669  
[BrtWsProp](#) 670  
[BrtXF](#) 672

**C**

[Cached returned values](#) 164  
[Calculation chain](#) 57  
[Cell](#) 686  
[Cell metadata](#) 98  
[Cell table](#) 92  
[CellParsedFormula](#) 744  
[CellStyleName](#) 686



[Cetab](#) 744  
[CFDateOper](#) 687  
[CFFlag](#) 687  
[CFFlag14](#) 688  
[CFOper](#) 688  
[CFParsedFormula](#) 775  
[CFTemp](#) 689  
[CFTextOper](#) 691  
[CFType](#) 691  
[CFVOParsedFormula](#) 776  
[CFVOType](#) 692  
[CFVOType14](#) 692  
[Change cells revision](#) 162  
[Change tracking](#) 1133  
[Chart](#) 57  
[Chart drawing](#) 57  
[Chart part](#) 96  
[Chart sheet](#) 58  
[Charts](#)  
     [chart part](#) 96  
     [pivot chart](#) 96  
[CmdType](#) 693  
[CodeName](#) 693  
[Col](#) 694  
[Collection of records](#) 48  
[ColNullable](#) 694  
[ColRel](#) 694  
[ColRelShort](#) 694  
[ColShort](#) 695  
[Comments](#) 58  
[Common productions](#) 89  
[Conceptual overview](#) 92  
     [ADO recordset connections](#) 157  
     [cached returned values](#) 164  
     [cell metadata](#) 98  
     [cell table](#) 92  
     [change cells revision](#) 162  
     [chart part](#) 96  
     [connection name](#) 156  
     [control tokens](#) 95  
     [DAO recordset connections](#) 157  
     [data functionality level](#) 102  
     [differential formatting \(DXFs\)](#) 149  
     [display tokens](#) 95  
     [encryption \(password to open\)](#) 159  
     [external connection files](#) 156  
     [external connections](#) 155  
     [external link](#) 153  
     [external reference consumers](#) 152  
     [external references](#) 151  
     [format conflicts](#) 151  
     [format revision](#) 162  
     [formula elements](#) 95  
     [formulas](#) 94  
     [future metadata](#) 101  
     [insertion / deletion of rows / columns revision](#) 162  
     [main topic](#) 163  
     [MDX metadata](#) 99  
     [mem tokens](#) 95  
     [metadata](#) 96  
     [metadata block](#) 98  
     [metadata block stores](#) 98  
     [metadata stores](#) 98  
     [metadata string store](#) 98  
     [metadata types](#) 97  
     [model data source connections](#) 157  
     [move cells revision](#) 162  
     [non-worksheet pivot tables](#) 146  
     [ODBC connections](#) 156  
     [OLAP data model](#) 146  
     OLE DB connections ([section 2.2.8.3](#) 156, [section 2.2.8.9.1](#) 157, [section 2.2.8.9.2](#) 157)  
     [operand tokens](#) 95  
     [operator tokens](#) 94  
     [password verifier algorithm](#) 158  
     [pivot chart](#) 96  
     [PivotCache](#) 102  
     [PivotTable view](#) 124  
     [PivotTables](#) 101  
     [pivotvalues](#) 147  
     [retrieval of last-calculated cell values without loading cell table](#) 93  
     [revision headers log](#) 161  
     [revision logs](#) 161  
     [revision records](#) 161  
     [shared workbooks](#) 159  
      [slicer cache](#) 164  
      [slicer view](#) ([section 2.2.14.2](#) 168, [section 2.2.15.2](#) 170)  
      [slicers](#) ([section 2.2.14](#) 164, [section 2.2.15](#) 168)  
      [slicers and cube functions](#) ([section 2.2.14.3](#) 168, [section 2.2.15.3](#) 171)  
      [sort map](#) 163  
      [strong password verifier algorithm](#) 158  
      [styles](#) 148  
      [subtopic sequences](#) 163  
      [supporting link](#) 153  
      [supporting link record](#) 153  
      [table styles](#) 150  
      [text import connections](#) ([section 2.2.8.6](#) 156, [section 2.2.8.9.4](#) 158)  
      [timeline cache](#) 169  
      [timeline view](#) 170  
      [timelines](#) 168  
      [timelines and cube functions](#) 171  
      [types](#) 163  
      [undo chain](#) 163  
      [user log](#) 160  
      [value metadata](#) 98  
      [volatile dependencies](#) 163  
      [Web connections](#) 156  
      [XFs](#) 148  
      [Conditional formatting example](#) 932  
      [Conditional formatting: BrtBeginCFRule example](#) 934  
      [Conditional formatting:](#)  
          [BrtBeginConditionalFormatting example](#) 933  
      [Conditional formatting: BrtEndCFRule example](#) 936  
      [Conditional formatting:](#)  
          [BrtEndConditionalFormatting example](#) 937  
      [Connection name](#) 156



[Control properties](#) 59  
[Control tokens](#) 95  
[Core file properties](#) 64  
[Custom data](#) 59  
[Custom data properties](#) 59  
[Custom file properties](#) 64  
[Custom property](#) 59  
[Custom XML data storage](#) 59  
[Custom XML data storage properties](#) 59  
[Custom XML maps](#) 59

## D

[DAO recordset connections](#) 157  
[Data functionality level](#) 102  
[DataConsolidationFunction](#) 695  
[DataFunctionalityLevel](#) 696  
[DateAsXnum](#) 696  
[DBType](#) 696  
[DCol](#) 697  
[DColShort](#) 697  
[DDEItemProperties](#) 697  
[Defined name example](#) 939  
[Defined name: BrtBeginExternals example](#) 941  
[Defined name: BrtEndExternals example](#) 942  
[Defined name: BrtExternSheet example](#) 942  
[Defined name: BrtName example](#) 939  
[Defined name: BrtSupSelf example](#) 942

### Details

[ACProductVersion structure](#) 676  
[ActiveX](#) 52  
[ActiveX binary](#) 56  
[ADO recordset connections](#) 157  
[alternate content mechanism](#) 49  
[ArgDesc structure](#) 676  
[ArrayParsedFormula structure](#) 742  
[attached toolbars](#) 57  
[AutoFormatID structure](#) 677  
[BErr structure](#) 743  
[Blxf structure](#) 683  
[Bold structure](#) 684  
[BookProtectionFlags structure](#) 684  
[Boolean structure](#) 743  
[BorderStyle structure](#) 684  
[BrtAbsPath15 record](#) 225  
[BrtACBegin record](#) 226  
[BrtACEnd record](#) 226  
[BrtActiveX record](#) 226  
[BrtAFilterDateGroupItem record](#) 227  
[BrtArrFmla record](#) 228  
[BrtBeginActiveXControls record](#) 229  
[BrtBeginAFilter record](#) 229  
[BrtBeginAutoSortScope record](#) 229  
[BrtBeginBook record](#) 230  
[BrtBeginBookViews record](#) 230  
[BrtBeginBorders record](#) 230  
[BrtBeginBundleShs record](#) 230  
[BrtBeginCellIgnoreECs record](#) 231  
[BrtBeginCellIgnoreECs14 record](#) 231  
[BrtBeginCellSmartTag record](#) 231  
[BrtBeginCellSmartTags record](#) 231  
[BrtBeginCellStyleXFs record](#) 232

[BrtBeginCellWatches record](#) 232  
[BrtBeginCellXFs record](#) 232  
[BrtBeginCFRule record](#) 232  
[BrtBeginCFRule14 record](#) 238  
[BrtBeginColBrk record](#) 246  
[BrtBeginColInfos record](#) 246  
[BrtBeginColorPalette record](#) 246  
[BrtBeginColorScale record](#) 246  
[BrtBeginColorScale14 record](#) 247  
[BrtBeginComment record](#) 247  
[BrtBeginCommentAuthors record](#) 248  
[BrtBeginCommentList record](#) 248  
[BrtBeginComments record](#) 248  
[BrtBeginConditionalFormatting record](#) 248  
[BrtBeginConditionalFormatting14 record](#) 249  
[BrtBeginConditionalFormattings record](#) 250  
[BrtBeginCRErrs record](#) 250  
[BrtBeginCsView record](#) 251  
[BrtBeginCsViews record](#) 251  
[BrtBeginCustomFilters record](#) 252  
[BrtBeginCustomFilters14 record](#) 252  
[BrtBeginDatabar record](#) 252  
[BrtBeginDatabar14 record](#) 253  
[BrtBeginDataFeedPr15 record](#) 255  
[BrtBeginDataModel record](#) 256  
[BrtBeginDbTables15 record](#) 256  
[BrtBeginDCon record](#) 256  
[BrtBeginDecoupledPivotCacheIDs record](#) 257  
[BrtBeginDeletedName record](#) 258  
[BrtBeginDeletedNames record](#) 258  
[BrtBeginDim record](#) 258  
[BrtBeginDims record](#) 259  
[BrtBeginDRefs record](#) 259  
[BrtBeginDVals record](#) 260  
[BrtBeginDVals14 record](#) 260  
[BrtBeginDXF14s record](#) 260  
[BrtBeginDXFs record](#) 261  
[BrtBeginDXFs15 record](#) 261  
[BrtBeginECDbProps record](#) 262  
[BrtBeginECOlapprops record](#) 263  
[BrtBeginECParam record](#) 264  
[BrtBeginECParams record](#) 267  
[BrtBeginECTwFldInfo record](#) 267  
[BrtBeginECTwFldInfo15 record](#) 267  
[BrtBeginECTWFldInfoLst record](#) 268  
[BrtBeginECTWFldInfoLst15 record](#) 268  
[BrtBeginECTxtWiz record](#) 268  
[BrtBeginECTxtWiz15 record](#) 269  
[BrtBeginECWebProps record](#) 269  
[BrtBeginEcWpTables record](#) 272  
[BrtBeginEsfmd record](#) 272  
[BrtBeginEsmdb record](#) 273  
[BrtBeginEsmdtinfo record](#) 273  
[BrtBeginEsmx record](#) 274  
[BrtBeginEsstr record](#) 274  
[BrtBeginExtConn14 record](#) 274  
[BrtBeginExtConn15 record](#) 275  
[BrtBeginExtConnection record](#) 276  
[BrtBeginExtConnections record](#) 280  
[BrtBeginExternals record](#) 280  
[BrtBeginFills record](#) 280

|   |     |  |     |
|---|-----|--|-----|
| <a href="#">BrtBeginFilterColumn record</a>       | 280 | <a href="#">BrtBeginPCDIRun record</a>               | 324 |
| <a href="#">BrtBeginFilters record</a>            | 281 | <a href="#">BrtBeginPCDKPI record</a>                | 325 |
| <a href="#">BrtBeginFmd record</a>                | 281 | <a href="#">BrtBeginPCDKPIs record</a>               | 328 |
| <a href="#">BrtBeginFmts record</a>               | 281 | <a href="#">BrtBeginPCDSConsole record</a>           | 329 |
| <a href="#">BrtBeginFnGroup record</a>            | 282 | <a href="#">BrtBeginPCDSCPage record</a>             | 329 |
| <a href="#">BrtBeginFonts record</a>              | 282 | <a href="#">BrtBeginPCDSCPages record</a>            | 330 |
| <a href="#">BrtBeginHeaderFooter record</a>       | 282 | <a href="#">BrtBeginPCDSCPIItem record</a>           | 330 |
| <a href="#">BrtBeginIconSet record</a>            | 284 | <a href="#">BrtBeginPCDSCSet record</a>              | 330 |
| <a href="#">BrtBeginIconSet14 record</a>          | 285 | <a href="#">BrtBeginPCDSCSets record</a>             | 332 |
| <a href="#">BrtBeginIndexedColors record</a>      | 286 | <a href="#">BrtBeginPCDSDTCMember record</a>         | 333 |
| <a href="#">BrtBeginISXTHCols record</a>          | 286 | <a href="#">BrtBeginPCDSDTCMembers record</a>        | 334 |
| <a href="#">BrtBeginISXTHRws record</a>           | 287 | <a href="#">BrtBeginPCDSDTCMembersSortBy record</a>  | 334 |
| <a href="#">BrtBeginISXVDCols record</a>          | 287 | <a href="#">BrtBeginPCDSDTCEntries record</a>        | 335 |
| <a href="#">BrtBeginISXVDRws record</a>           | 288 | <a href="#">BrtBeginPCDSDTCQueries record</a>        | 335 |
| <a href="#">BrtBeginISXVIs record</a>             | 288 | <a href="#">BrtBeginPCDSDTCQuery record</a>          | 335 |
| <a href="#">BrtBeginItemUniqueNames record</a>    | 289 | <a href="#">BrtBeginPCDSDTCSet record</a>            | 336 |
| <a href="#">BrtBeginList record</a>               | 289 | <a href="#">BrtBeginPCDSDTCSets record</a>           | 337 |
| <a href="#">BrtBeginListCol record</a>            | 292 | <a href="#">BrtBeginPCDSDTtupleCache record</a>      | 337 |
| <a href="#">BrtBeginListCols record</a>           | 294 | <a href="#">BrtBeginPcdSFCIEntries record</a>        | 337 |
| <a href="#">BrtBeginListParts record</a>          | 294 | <a href="#">BrtBeginPCDSsource record</a>            | 337 |
| <a href="#">BrtBeginListXmlCPr record</a>         | 295 | <a href="#">BrtBeginPCDSRange record</a>             | 338 |
| <a href="#">BrtBeginMap record</a>                | 296 | <a href="#">BrtBeginPivotCacheDef record</a>         | 339 |
| <a href="#">BrtBeginMdx record</a>                | 296 | <a href="#">BrtBeginPivotCacheID record</a>          | 341 |
| <a href="#">BrtBeginMdxKPI record</a>             | 296 | <a href="#">BrtBeginPivotCacheIDs record</a>         | 342 |
| <a href="#">BrtBeginMdxMbrProp record</a>         | 297 | <a href="#">BrtBeginPivotCacheRecords record</a>     | 342 |
| <a href="#">BrtBeginMdxSet record</a>             | 297 | <a href="#">BrtBeginPivotTableRefs record</a>        | 342 |
| <a href="#">BrtBeginMdxTuple record</a>           | 298 | <a href="#">BrtBeginPivotTableUISettings record</a>  | 342 |
| <a href="#">BrtBeginMergeCells record</a>         | 299 | <a href="#">BrtBeginPName record</a>                 | 343 |
| <a href="#">BrtBeginMetadata record</a>           | 299 | <a href="#">BrtBeginPNames record</a>                | 344 |
| <a href="#">BrtBeginMG record</a>                 | 299 | <a href="#">BrtBeginPNPair record</a>                | 344 |
| <a href="#">BrtBeginMGMaps record</a>             | 299 | <a href="#">BrtBeginPNPairs record</a>               | 346 |
| <a href="#">BrtBeginMgs record</a>                | 300 | <a href="#">BrtBeginPRFilter record</a>              | 346 |
| <a href="#">brtBeginModelRelationships record</a> | 300 | <a href="#">BrtBeginPRFilter14 record</a>            | 347 |
| <a href="#">BrtBeginModelTables record</a>        | 300 | <a href="#">BrtBeginPRFilters record</a>             | 347 |
| <a href="#">BrtBeginMRUColors record</a>          | 300 | <a href="#">BrtBeginPRFilters14 record</a>           | 348 |
| <a href="#">BrtBeginOledbPr15 record</a>          | 300 | <a href="#">BrtBeginPRFItem record</a>               | 348 |
| <a href="#">BrtBeginOleObjects record</a>         | 301 | <a href="#">BrtBeginPRFItem14 record</a>             | 348 |
| <a href="#">BrtBeginPCD14 record</a>              | 301 | <a href="#">BrtBeginPRule record</a>                 | 349 |
| <a href="#">BrtBeginPCDCalcItem record</a>        | 302 | <a href="#">BrtBeginPRule14 record</a>               | 349 |
| <a href="#">BrtBeginPCDCalcItems record</a>       | 302 | <a href="#">BrtBeginQSI record</a>                   | 350 |
| <a href="#">BrtBeginPCDCalcMem record</a>         | 303 | <a href="#">BrtBeginQSIF record</a>                  | 352 |
| <a href="#">BrtBeginPCDCalcMem14 record</a>       | 303 | <a href="#">BrtBeginQSIFs record</a>                 | 353 |
| <a href="#">BrtBeginPCDCalcMemExt record</a>      | 304 | <a href="#">BrtBeginQSIR record</a>                  | 354 |
| <a href="#">BrtBeginPCDCalcMems record</a>        | 305 | <a href="#">BrtBeginRRSort record</a>                | 355 |
| <a href="#">BrtBeginPCDCalcMemsExt record</a>     | 305 | <a href="#">BrtBeginRwBrk record</a>                 | 355 |
| <a href="#">BrtBeginPCDFAtbl record</a>           | 306 | <a href="#">BrtBeginScenMan record</a>               | 356 |
| <a href="#">BrtBeginPCDFGDiscrete record</a>      | 308 | <a href="#">BrtBeginSct record</a>                   | 356 |
| <a href="#">BrtBeginPCDFGItems record</a>         | 308 | <a href="#">BrtBeginSheet record</a>                 | 358 |
| <a href="#">BrtBeginPCDFGRange record</a>         | 309 | <a href="#">BrtBeginSheetData record</a>             | 358 |
| <a href="#">BrtBeginPCDFGroup record</a>          | 310 | <a href="#">BrtBeginSingleCells record</a>           | 358 |
| <a href="#">BrtBeginPCDField record</a>           | 312 | <a href="#">BrtBeginSlicer record</a>                | 358 |
| <a href="#">BrtBeginPCDFields record</a>          | 315 | <a href="#">BrtBeginSlicerCache record</a>           | 360 |
| <a href="#">BrtBeginPCDHFieldsUsage record</a>    | 315 | <a href="#">BrtBeginSlicerCacheDef record</a>        | 360 |
| <a href="#">BrtBeginPCDHGLLevel record</a>        | 316 | <a href="#">BrtBeginSlicerCacheID record</a>         | 361 |
| <a href="#">BrtBeginPCDHGLLevels record</a>       | 317 | <a href="#">BrtBeginSlicerCacheIDs record</a>        | 361 |
| <a href="#">BrtBeginPCDHGLGMember record</a>      | 317 | <a href="#">BrtBeginSlicerCacheLevelData record</a>  | 362 |
| <a href="#">BrtBeginPCDHGLGMembers record</a>     | 318 | <a href="#">BrtBeginSlicerCacheLevelsData record</a> | 363 |
| <a href="#">BrtBeginPCDHGLGroup record</a>        | 318 | <a href="#">BrtBeginSlicerCacheNative record</a>     | 363 |
| <a href="#">BrtBeginPCDHGLGroups record</a>       | 319 | <a href="#">BrtBeginSlicerCacheOlapImpl record</a>   | 364 |
| <a href="#">BrtBeginPCDHierarchies record</a>     | 320 | <a href="#">BrtBeginSlicerCacheSelections record</a> | 365 |
| <a href="#">BrtBeginPCDHierarchy record</a>       | 320 | <a href="#">BrtBeginSlicerCacheSiRange record</a>    | 365 |

[BrtBeginSlicerCacheSiRanges record](#) 365  
[BrtBeginSlicerCachesPivotCacheID record](#) 366  
[BrtBeginSlicerCachesPivotCacheIDs record](#) 366  
[BrtBeginSlicerEx record \(section 2.4.205](#) 366,  
[section 2.4.273](#) 429)  
[BrtBeginSlicers record](#) 367  
[BrtBeginSlicersEx record](#) 367  
[BrtBeginSlicerStyle record](#) 367  
[BrtBeginSlicerStyleElements record](#) 368  
[BrtBeginSlicerStyles record](#) 368  
[BrtBeginSmartTags record](#) 368  
[BrtBeginSmartTagTypes record](#) 368  
[BrtBeginSortCond record](#) 369  
[BrtBeginSortCond14 record](#) 370  
[BrtBeginSortState record](#) 372  
[BrtBeginSparklineGroup record](#) 373  
[BrtBeginSparklineGroups record](#) 377  
[BrtBeginSparklines record](#) 377  
[BrtBeginSst record](#) 377  
[BrtBeginStyles record](#) 377  
[BrtBeginStyleSheet record](#) 378  
[BrtBeginStyleSheetExt14 record](#) 378  
[BrtBeginSupBook record](#) 378  
[BrtBeginSXChange record](#) 379  
[BrtBeginSXChanges record](#) 380  
[BrtBeginSXCondFmt record](#) 380  
[BrtBeginSXCondFmt14 record](#) 381  
[BrtBeginSXCondFmts record](#) 382  
[BrtBeginSXCondFmts14 record](#) 383  
[BrtBeginSXCrtFormat record](#) 383  
[BrtBeginSXCrtFormats record](#) 384  
[BrtBeginSXDI record](#) 384  
[BrtBeginSXDIIs record](#) 386  
[BrtBeginSXEdit record](#) 386  
[BrtBeginSXEdits record](#) 388  
[BrtBeginSXFILTER record](#) 388  
[BrtBeginSXFilters record](#) 390  
[BrtBeginSXFormat record](#) 390  
[BrtBeginSXFormats record](#) 390  
[BrtBeginSXXLI record](#) 391  
[BrtBeginSXXLICols record](#) 391  
[BrtBeginSXXLIRws record](#) 392  
[BrtBeginSXLocation record](#) 392  
[BrtBeginSXPI record](#) 393  
[BrtBeginSXPIs record](#) 395  
[BrtBeginSxRow record](#) 395  
[BrtBeginSXRules record](#) 396  
[BrtBeginSXRules14 record](#) 396  
[BrtBeginSxSelect record](#) 396  
[BrtBeginSXTDMP record](#) 399  
[BrtBeginSXTDMPs record](#) 400  
[BrtBeginSXTH record](#) 401  
[BrtBeginSXTHItem record](#) 403  
[BrtBeginSXTHItems record](#) 403  
[BrtBeginSXTHs record](#) 404  
[BrtBeginSXTupleSet record](#) 404  
[BrtBeginSXTupleSetData record](#) 405  
[BrtBeginSXTupleSetHeader record](#) 405  
[BrtBeginSXTupleSetRow record](#) 405  
[BrtBeginSxvcells record](#) 405  
[BrtBeginSXVD record](#) 406  
[BrtBeginSXVDs record](#) 413  
[BrtBeginSXVI record](#) 414  
[BrtBeginSXView record](#) 416  
[BrtBeginSXView14 record](#) 424  
[BrtBeginSXVIs record](#) 425  
[BrtBeginTableSlicerCache record](#) 425  
[BrtBeginTableStyle record](#) 427  
[BrtBeginTableStyles record](#) 427  
[BrtBeginTimelineCacheID record](#) 428  
[BrtBeginTimelineCacheIDs record](#) 428  
[BrtBeginTimelineCachePivotCacheIDs record](#) 428  
[BrtBeginTimelineEx record](#) 429  
[BrtBeginTimelinesEx record](#) 429  
[BrtBeginTimelineStyle record](#) 429  
[BrtBeginTimelineStyleElements record](#) 430  
[BrtBeginTimelineStyles record](#) 430  
[BrtBeginTimelineStylesheetExt15 record](#) 430  
[BrtBeginUserCsView record](#) 431  
[BrtBeginUserCsViews record](#) 431  
[BrtBeginUsers record](#) 431  
[BrtBeginUserShView record](#) 432  
[BrtBeginUserShViews record](#) 435  
[BrtBeginVolDeps record](#) 435  
[BrtBeginVolMain record](#) 435  
[BrtBeginVolTopic record](#) 436  
[BrtBeginVolType record](#) 436  
[BrtBeginWebExtensions record](#) 436  
[BrtBeginWebPubItem record](#) 436  
[BrtBeginWebPubItems record](#) 438  
[BrtBeginWsSortMap record](#) 439  
[BrtBeginWsView record](#) 439  
[BrtBeginWsViews record](#) 441  
[BrtBigName record](#) 441  
[BrtBkHim record](#) 441  
[BrtBookProtection record](#) 442  
[BrtBookProtectionIso record](#) 442  
[BrtBookView record](#) 444  
[BrtBorder record](#) 445  
[BrtBrk record](#) 446  
[BrtBundleSh record](#) 447  
[BrtCalcProp record](#) 448  
[BrtCellBlank record](#) 450  
[BrtCellBool record](#) 451  
[BrtCellError record](#) 451  
[BrtCellIgnoreEC record](#) 452  
[BrtCellIgnoreEC14 record](#) 452  
[BrtCellIsst record](#) 454  
[BrtCellMeta record](#) 454  
[BrtCellReal record](#) 455  
[BrtCellRk record](#) 455  
[BrtCellRString record](#) 455  
[BrtCellSmartTagProperty record](#) 456  
[BrtCellSt record](#) 456  
[BrtCellWatch record](#) 457  
[BrtCFIcon record](#) 457  
[BrtCFRuleExt record](#) 458  
[BrtCFVO record](#) 458  
[BrtCFVO14 record](#) 460  
[BrtColInfo record](#) 462  
[BrtColor record](#) 463  
[BrtColor14 record](#) 464

[BrtColorFilter record](#) 465  
[BrtColSpan structure](#) 685  
[BrtCommentAuthor record](#) 465  
[BrtCommentText record](#) 466  
[BrtCrashRecErr record](#) 466  
[BrtCsPageSetup record](#) 466  
[BrtCsProp record](#) 472  
[BrtCsProtection record](#) 472  
[BrtCsProtectionIso record](#) 473  
[BrtCUsr record](#) 474  
[BrtCustomFilter record](#) 475  
[BrtCustomFilter14 record](#) 476  
[BrtDbCommand15 record](#) 477  
[BrtDbTable15 record](#) 478  
[BrtDecoupledPivotCacheID record](#) 478  
[BrtDrawing record](#) 479  
[BrtDRef record](#) 479  
[BrtDVal record](#) 481  
[BrtDVal14 record](#) 484  
[BrtDValList record](#) 487  
[BrtDXF record](#) 488  
[BrtDXF14 record](#) 488  
[BrtDXF15 record](#) 489  
[BrtDynamicFilter record](#) 490  
[BrtEndActiveXControls record](#) 492  
[BrtEndAFilter record](#) 492  
[BrtEndAutoSortScope record](#) 492  
[BrtEndBook record](#) 492  
[BrtEndBookViews record](#) 492  
[BrtEndBorders record](#) 493  
[BrtEndBundleShs record](#) 493  
[BrtEndCellIgnoreECs record](#) 493  
[BrtEndCellIgnoreECs14 record](#) 493  
[BrtEndCellSmartTag record](#) 493  
[BrtEndCellSmartTags record](#) 493  
[BrtEndCellStyleXFs record](#) 493  
[BrtEndCellWatches record](#) 493  
[BrtEndCellXFs record](#) 494  
[BrtEndCFRule record](#) 494  
[BrtEndCFRule14 record](#) 494  
[BrtEndColBrk record](#) 494  
[BrtEndColInfos record](#) 494  
[BrtEndColorPalette record](#) 494  
[BrtEndColorScale record](#) 494  
[BrtEndColorScale14 record](#) 494  
[BrtEndComment record](#) 495  
[BrtEndCommentAuthors record](#) 495  
[BrtEndCommentList record](#) 495  
[BrtEndComments record](#) 495  
[BrtEndConditionalFormatting record](#) 495  
[BrtEndConditionalFormatting14 record](#) 495  
[BrtEndConditionalFormattings record](#) 495  
[BrtEndCReErrs record](#) 495  
[BrtEndCsView record](#) 495  
[BrtEndCsViews record](#) 496  
[BrtEndCustomFilters record](#) 496  
[BrtEndDatabar record](#) 496  
[BrtEndDatabar14 record](#) 496  
[BrtEndDataFeedPr15 record](#) 496  
[BrtEndDataModel record](#) 496  
[BrtEndDbTables15 record](#) 496  
[BrtEndDCon record](#) 496  
[BrtEndDecoupledPivotCacheIDs record](#) 497  
[BrtEndDeletedName record](#) 497  
[BrtEndDeletedNames record](#) 497  
[BrtEndDim record](#) 497  
[BrtEndDims record](#) 497  
[BrtEndDRefs record](#) 497  
[BrtEndDVals record](#) 497  
[BrtEndDVals14 record](#) 497  
[BrtEndDXF14s record](#) 497  
[BrtEndDXFs record](#) 498  
[BrtEndDxf15 record](#) 498  
[BrtEndECdbProps record](#) 498  
[BrtEndECOLapProps record](#) 498  
[BrtEndECParam record](#) 498  
[BrtEndECParams record](#) 498  
[BrtEndECTWFldInfoLst record](#) 498  
[BrtEndECTWFldInfoLst15 record](#) 498  
[BrtEndECTxtWiz record](#) 498  
[BrtEndECWebProps record](#) 499  
[BrtEndECWPTables record](#) 499  
[BrtEndEsfmd record](#) 499  
[BrtEndEsmdb record](#) 499  
[BrtEndEsmdtinfo record](#) 499  
[BrtEndEsmdx record](#) 499  
[BrtEndEsstr record](#) 499  
[BrtEndExtConn14 record](#) 499  
[BrtEndExtConn15 record](#) 500  
[BrtEndExtConnection record](#) 500  
[BrtEndExtConnections record](#) 500  
[BrtEndExternals record](#) 500  
[BrtEndFills record](#) 500  
[BrtEndFilterColumn record](#) 500  
[BrtEndFilters record](#) 500  
[BrtEndFmd record](#) 500  
[BrtEndFmts record](#) 500  
[BrtEndFnGroup record](#) 501  
[BrtEndFonts record](#) 501  
[BrtEndHeaderFooter record](#) 501  
[BrtEndIconSet record](#) 501  
[BrtEndIconSet14 record](#) 501  
[BrtEndIndexedColors record](#) 501  
[BrtEndISXTHCols record](#) 501  
[BrtEndISXTHRws record](#) 501  
[BrtEndISXVDCols record](#) 502  
[BrtEndISXVDRws record](#) 502  
[BrtEndISXVIs record](#) 502  
[BrtEndItemUniqueNames record](#) 502  
[BrtEndList record](#) 502  
[BrtEndListCol record](#) 502  
[BrtEndListCols record](#) 502  
[BrtEndListParts record](#) 502  
[BrtEndListXmlCPr record](#) 502  
[BrtEndMap record](#) 503  
[BrtEndMdx record](#) 503  
[BrtEndMdxKPI record](#) 503  
[BrtEndMdxMbrProp record](#) 503  
[BrtEndMdxSet record](#) 503  
[BrtEndMdxTuple record](#) 503  
[BrtEndMergeCells record](#) 503  
[BrtEndMetadata record](#) 503

[BrtEndMG record](#) 503  
[BrtEndMGMaps record](#) 504  
[BrtEndMGs record](#) 504  
[brtEndModelRelationships record](#) 504  
[BrtEndModelTables record](#) 504  
[BrtEndMRUColors record](#) 504  
[BrtEndOleDbPr15 record](#) 504  
[BrtEndOleObjects record](#) 504  
[BrtEndPCD14 record](#) 504  
[BrtEndPCDCalcItem record](#) 504  
[BrtEndPCDCalcItems record](#) 505  
[BrtEndPCDCalcMem record](#) 505  
[BrtEndPCDCalcMem14 record](#) 505  
[BrtEndPCDCalcMemExt record](#) 505  
[BrtEndPCDCalcMems record](#) 505  
[BrtEndPCDCalcMemsExt record](#) 505  
[BrtEndPCDFatbl record](#) 505  
[BrtEndPCDFGDiscrete record](#) 505  
[BrtEndPCDFGItems record](#) 506  
[BrtEndPCDFGRange record](#) 506  
[BrtEndPCDFGroup record](#) 506  
[BrtEndPCDField record](#) 506  
[BrtEndPCDFields record](#) 506  
[BrtEndPCDHFieldsUsage record](#) 506  
[BrtEndPCDHGLLevel record](#) 506  
[BrtEndPCDHGLLevels record](#) 506  
[BrtEndPCDHGLGMember record](#) 507  
[BrtEndPCDHGLGMembers record](#) 507  
[BrtEndPCDHGLGroup record](#) 507  
[BrtEndPCDHGLGroups record](#) 507  
[BrtEndPCDHierarchies record](#) 507  
[BrtEndPCDHierarchy record](#) 507  
[BrtEndPCDIRun record](#) 507  
[BrtEndPCDKPI record](#) 507  
[BrtEndPCDKPIs record](#) 507  
[BrtEndPCDSConsole record](#) 508  
[BrtEndPCDSCPage record](#) 508  
[BrtEndPCDSCPages record](#) 508  
[BrtEndPCDSCPItem record](#) 508  
[BrtEndPCDSCSet record](#) 508  
[BrtEndPCDSCSets record](#) 508  
[BrtEndPCDSDTCMember record](#) 508  
[BrtEndPCDSDTCMembers record](#) 508  
[BrtEndPCDSDTCEntries record](#) 509  
[BrtEndPCDSDTCQueries record](#) 509  
[BrtEndPCDSDTCQuery record](#) 509  
[BrtEndPCDSDTCSet record](#) 509  
[BrtEndPCDSDTCSets record](#) 509  
[BrtEndPCDSDTtupleCache record](#) 509  
[BrtEndPCDSDTCIEntries record](#) 509  
[BrtEndPCDSource record](#) 509  
[BrtEndPCDSRange record](#) 509  
[BrtEndPivotCacheDef record](#) 510  
[BrtEndPivotCacheID record](#) 510  
[BrtEndPivotCacheIDs record](#) 510  
[BrtEndPivotCacheRecords record](#) 510  
[BrtEndPivotTableRefs record](#) 510  
[BrtEndPivotTableUISettings record](#) ([section 2.4.167](#) 342, [section 2.4.502](#) 510)  
[BrtEndPName record](#) 510  
[BrtEndPNames record](#) 510  
[BrtEndPNPair record](#) 511  
[BrtEndPNPairs record](#) 511  
[BrtEndPRFilter record](#) 511  
[BrtEndPRFilter14 record](#) 511  
[BrtEndPRFilters record](#) 511  
[BrtEndPRFilters14 record](#) 511  
[BrtEndPRFItem record](#) 511  
[BrtEndPRFItem14 record](#) 512  
[BrtEndPRRule record](#) 512  
[BrtEndPRRule14 record](#) 512  
[BrtEndQSI record](#) 512  
[BrtEndQSIIF record](#) 512  
[BrtEndQSIIFs record](#) 512  
[BrtEndQSIR record](#) 512  
[BrtEndRRSort record](#) 512  
[BrtEndRwBrk record](#) 512  
[BrtEndScenMan record](#) 513  
[BrtEndSct record](#) 513  
[BrtEndSheet record](#) 513  
[BrtEndSheetData record](#) 513  
[BrtEndSingleCells record](#) 513  
[BrtEndSlicer record](#) 513  
[BrtEndSlicerCache record](#) 513  
[BrtEndSlicerCacheDef record](#) 513  
[BrtEndSlicerCacheID record](#) 513  
[BrtEndSlicerCacheIDs record](#) 514  
[BrtEndSlicerCacheLevelData record](#) 514  
[BrtEndSlicerCacheLevelsData record](#) 514  
[BrtEndSlicerCacheNative record](#) 514  
[BrtEndSlicerCacheOlapImpl record](#) 514  
[BrtEndSlicerCacheSelections record](#) 514  
[BrtEndSlicerCacheSiRange record](#) 514  
[BrtEndSlicerCachesSiRanges record](#) 514  
[BrtEndSlicerCachesPivotCacheID record](#) 515  
[BrtEndSlicerCachesPivotCacheIDs record](#) 515  
[BrtEndSlicerEx record](#) 515  
[BrtEndSlicers record](#) 515  
[BrtEndSlicersEx record](#) 515  
[BrtEndSlicerStyle record](#) 515  
[BrtEndSlicerStyleElements record](#) 515  
[BrtEndSlicerStyles record](#) 515  
[BrtEndSmartTags record](#) 516  
[BrtEndSmartTagTypes record](#) 516  
[BrtEndSortCond record](#) 516  
[BrtEndSortCond14 record](#) 516  
[BrtEndSortState record](#) 516  
[BrtEndSparklineGroup record](#) 516  
[BrtEndSparklineGroups record](#) 516  
[BrtEndSparklines record](#) 516  
[BrtEndSst record](#) 517  
[BrtEndStyles record](#) 517  
[BrtEndStyleSheet record](#) 517  
[BrtEndStyleSheetExt14 record](#) 517  
[BrtEndSupBook record](#) 517  
[BrtEndSXChange record](#) 517  
[BrtEndSXChanges record](#) 517  
[BrtEndSXCondFmt record](#) 517  
[BrtEndSXCondFmt14 record](#) 518  
[BrtEndSXCondFmts record](#) 518  
[BrtEndSXCondFmts14 record](#) 518  
[BrtEndSXCrtFormat record](#) 518

[BrtEndSXCrtFormats record](#) 518  
[BrtEndSXDI record](#) 518  
[BrtEndSXDIIs record](#) 518  
[BrtEndSXEdit record](#) 518  
[BrtEndSXEdits record](#) 519  
[BrtEndSXFilter record](#) 519  
[BrtEndSXFilters record](#) 519  
[BrtEndSXFormat record](#) 519  
[BrtEndSxFormats record](#) 519  
[BrtEndSxLI record](#) 519  
[BrtEndSxLIcols record](#) 519  
[BrtEndSxLIRws record](#) 519  
[BrtEndSxLocation record](#) 520  
[BrtEndSXPI record](#) 520  
[BrtEndSXPIs record](#) 520  
[BRTEndSXRow record](#) 520  
[BrtEndSxRules record](#) 520  
[BrtEndSxRules14 record](#) 520  
[BrtEndSxSelect record](#) 520  
[BrtEndSXTDMP record](#) 520  
[BrtEndSXTDMPs record](#) 520  
[BrtEndSXTH record](#) 521  
[BrtEndSXTHItem record](#) 521  
[BrtEndSXTHItems record](#) 521  
[BrtEndSXTHs record](#) 521  
[BrtEndSXTupleSet record](#) 521  
[BrtEndSXTupleSetData record](#) 521  
[BrtEndSXTupleSetHeader record](#) 521  
[BrtEndSXTupleSetRow record](#) 521  
[BrtEndSxvcells record](#) 522  
[BrtEndSXVD record](#) 522  
[BrtEndSXVDs record](#) 522  
[BrtEndSXVI record](#) 522  
[BrtEndSXView record](#) 522  
[BrtEndSXView14 record](#) 522  
[BrtEndSXVIs record](#) 522  
[BrtEndTableSlicerCache record](#) 522  
[BrtEndTableStyle record](#) 522  
[BrtEndTableStyles record](#) 523  
[BrtEndTimelineCacheID record](#) 523  
[BrtEndTimelineCacheIDs record](#) 523  
[BrtEndTimelineCachePivotCacheIDs record](#) 523  
[BrtEndTimelineEx record](#) 523  
[BrtEndTimelinesEx record](#) 523  
[BrtEndTimelineStyle record](#) 523  
[BrtEndTimelineStyleElements record](#) 523  
[BrtEndTimelineStyles record](#) 523  
[BrtEndTimelineStyleSheetExt15 record](#) 524  
[BrtEndUserCsView record](#) 524  
[BrtEndUserCsViews record](#) 524  
[BrtEndUserShView record](#) 524  
[BrtEndUserShViews record](#) 524  
[BrtEndVolDeps record](#) 524  
[BrtEndVolMain record](#) 524  
[BrtEndVolTopic record](#) 524  
[BrtEndVolType record](#) 525  
[BrtEndWebExtensions record](#) 525  
[BrtEndWebPubItem record](#) 525  
[BrtEndWebPubItems record](#) 525  
[BrtEndWsSortMap record](#) 525  
[BrtEndWsView record](#) 525  
[BrtEndWsViews record](#) 525  
[BrtEOF record](#) 525  
[BrtExternCellBlank record](#) 526  
[BrtExternCellBool record](#) 526  
[BrtExternCellError record](#) 526  
[BrtExternCellReal record](#) 526  
[BrtExternCellString record](#) 527  
[BrtExternRowHdr record](#) 527  
[BrtExternSheet record](#) 528  
[BrtExternTableEnd record](#) 528  
[BrtExternTableStart record](#) 528  
[BrtExternValueMeta record](#) 528  
[BrtFieldListActiveItem record](#) 529  
[BrtFileRecover record](#) 530  
[BrtFileSharing record](#) 530  
[BrtFileSharingIso record](#) 531  
[BrtFileVersion record](#) 531  
[BrtFill record](#) 532  
[BrtFilter record](#) 538  
[BrtFilter14 record](#) 539  
[BrtFmlaBool record](#) 539  
[BrtFmlaError record](#) 540  
[BrtFmlaNum record](#) 540  
[BrtFmlaString record](#) 541  
[BrtFmt record](#) 541  
[BrtFnGroup record](#) 542  
[BrtFont record](#) 542  
[BrtFRTBegin record](#) 545  
[BrtFRTEnd record](#) 545  
[BrtHLink record](#) 545  
[BrtIconFilter record](#) 546  
[BrtIconFilter14 record](#) 547  
[BrtIndexBlock record](#) 547  
[BrtIndexedColor record](#) 548  
[BrtIndexPartEnd record](#) 548  
[BrtIndexRowBlock record](#) 548  
[BrtInfo record](#) 549  
[BrtItemUniqueName record](#) 551  
[BrtKnownFonts record](#) 551  
[BrtLegacyDrawing record](#) 551  
[BrtLegacyDrawingHF record](#) 552  
[BrtList14 record](#) 552  
[BrtListCCFmla record](#) 552  
[BrtListPart record](#) 553  
[BrtListTrFmla record](#) 553  
[BrtMargins record](#) 553  
[BrtMdb record](#) 554  
[BrtMdtinfo record](#) 555  
[BrtMdxMbrIstr record](#) 555  
[BrtMergeCell record](#) 556  
[brtModelRelationship record](#) 556  
[BrtModelTable record](#) 557  
[BrtMRUColor record](#) 558  
[BrtName record](#) 558  
[BrtNameExt record](#) 560  
[BrtOleObject record](#) 561  
[BrtOleSize record](#) 563  
[BrtPageSetup record](#) 563  
[BrtPane record](#) 570  
[BrtPCDCalcMem15 record](#) 571  
[BrtPCDField14 record](#) 572



[BrtPCDH14 record](#) 573  
[BrtPCDH15 record](#) 576  
[BrtPCDIABoolean record](#) 576  
[BrtPCDIADatetime record](#) 576  
[BrtPCDIAError record](#) 577  
[BrtPCDIAMissing record](#) 577  
[BrtPCDIANumber record](#) 578  
[BrtPCDIAStrng record](#) 578  
[BrtPCDIBoolean record](#) 578  
[BrtPCDIADatetime record](#) 579  
[BrtPCDIError record](#) 579  
[BrtPCDIIndex record](#) 579  
[BrtPCDIMissing record](#) 580  
[BrtPCDINumber record](#) 580  
[BrtPCDIString record](#) 580  
[BrtPCDSFCIEntry record](#) 581  
[BrtPCRRecord record](#) 582  
[BrtPCRRecordDt record](#) 582  
[BrtPhoneticInfo record](#) 583  
[BrtPivotCacheConnectionName record](#) 583  
[BrtPivotCacheIdVersion record](#) 584  
[BrtPivotTableRef record](#) 584  
[BrtPlaceholderName record](#) 585  
[BrtPrintOptions record](#) 586  
[BrtQsi15 record](#) 586  
[BrtRangePr15 record](#) 587  
[BrtRangeProtection record](#) 587  
[BrtRangeProtection14 record](#) 588  
[BrtRangeProtectionIso record](#) 588  
[BrtRangeProtectionIso14 record](#) 589  
[BrtRowHdr record](#) 591  
[BrtRRAutoFmt record](#) 592  
[BrtRRChgCell record](#) 593  
[BrtRRConflict record](#) 595  
[BrtRRDefName record](#) 596  
[BrtRREndChgCell record](#) 599  
[BrtRREndFormat record](#) 599  
[BrtRREndInsDel record](#) 599  
[BrtRREndMove record](#) 599  
[BrtRRFormat record](#) 599  
[BrtRRHeader record](#) 601  
[BrtRRInsDel record](#) 603  
[BrtRRInsertSh record](#) 604  
[BrtRRMove record](#) 605  
[BrtRRNote record](#) 606  
[BrtRRRenSheet record](#) 607  
[BrtRRSortItem record](#) 608  
[BrtRRTOSIF record](#) 608  
[BrtRRUserView record](#) 609  
[BrtRwDescent record](#) 610  
[BrtSel record](#) 610  
[BrtSheetCalcProp record](#) 611  
[BrtSheetProtection record](#) 611  
[BrtSheetProtectionIso record](#) 616  
[BrtShrFmla record](#) 622  
[BrtSlc record](#) 622  
[BrtSlicerCacheBookPivotTables record](#) 623  
[BrtSlicerCacheHideItemsWithNoData record](#) 624  
[BrtSlicerCacheNativeItem record](#) 625  
[BrtSlicerCacheOlapItem record](#) 625  
[BrtSlicerCachePivotTables record](#) 626  
[BrtSlicerCacheSelection record](#) 626  
[BrtSlicerStyleElement record](#) 627  
[BrtSmartTagType record](#) 628  
[BrtSparkline record](#) 628  
[BrtSSTItem record](#) 629  
[BrtStr record](#) 629  
[BrtStyle record](#) 630  
[BrtSupAddin record](#) 631  
[BrtSupBookSrc record](#) 631  
[BrtSupNameBits record](#) 631  
[BrtSupNameBool record](#) 631  
[BrtSupNameEnd record](#) 632  
[BrtSupNameErr record](#) 632  
[BrtSupNameFmla record](#) 632  
[BrtSupNameNil record](#) 633  
[BrtSupNameNum record](#) 633  
[BrtSupNameSt record](#) 633  
[BrtSupNameStart record](#) 633  
[BrtSupNameValueEnd record](#) 634  
[BrtSupNameValueStart record](#) 634  
[BrtSupSame record](#) 634  
[BrtSupSelf record](#) 634  
[BrtSupTabs record](#) 635  
[BrtSXDI14 record](#) ([section 2.4.772](#) 635, [section 2.4.773](#) 636)  
[BrtSxFilter15 record](#) 637  
[BrtSXTDMPOrder record](#) 639  
[BrtSxTH14 record](#) 639  
[BrtSXTupleItems record](#) 640  
[BrtSXTupleSetHeaderItem record](#) 640  
[BrtSXTupleSetRowItem record](#) 641  
[BrtSxvcellBool record](#) 642  
[BrtSxvcellDate record](#) 642  
[BrtSxvcellErr record](#) 643  
[BrtSxvcellNil record](#) 644  
[BrtSxvcellNum record](#) 644  
[BrtSxvcellStr record](#) 645  
[BrtSXVD14 record](#) 645  
[BrtTable record](#) 646  
[BrtTableSlicerCacheID record](#) 648  
[BrtTableSlicerCacheIDs record](#) 648  
[BrtTableStyleClient record](#) 648  
[BrtTableStyleElement record](#) 649  
[BrtTextPr15 record](#) 650  
[BrtTimelineCachePivotCacheID record](#) 650  
[BrtTimelineStyleElement record](#) 651  
[BrtTop10Filter record](#) 651  
[BrtUCR record](#) 653  
[BrtUserBookView record](#) 655  
[BrtUsr record](#) 660  
[BrtValueMeta record](#) 660  
[BrtVolBool record](#) 661  
[BrtVolErr record](#) 661  
[BrtVolNum record](#) 661  
[BrtVolRef record](#) 661  
[BrtVolStr record](#) 662  
[BrtVolSubtopic record](#) 662  
[BrtWbFactoid record](#) 662  
[BrtWbProp record](#) 663  
[BrtWbProp14 record](#) 665  
[BrtWebExtension record](#) 666

[BrtWebOpt record](#) 666  
[BrtWorkBookPr15 record](#) 667  
[BrtWsDim record](#) 668  
[BrtWsFmtInfo record](#) 668  
[BrtWsFmtInfoEx14 record](#) 669  
[BrtWsProp record](#) 670  
[BrtXF record](#) 672  
[cached returned values](#) 164  
[calculation chain](#) 57  
[cell metadata](#) 98  
[Cell structure](#) 686  
[cell table](#) 92  
[CellParsedFormula structure](#) 744  
[CellStyleName structure](#) 686  
[Cetab structure](#) 744  
[CFDateOper structure](#) 687  
[CFFlag structure](#) 687  
[CFFlag14 structure](#) 688  
[CFOper structure](#) 688  
[CFParsedFormula structure](#) 775  
[CFTemp structure](#) 689  
[CFTextOper structure](#) 691  
[CFType structure](#) 691  
[CFVOParsedFormula structure](#) 776  
[CFVOType structure](#) 692  
[CFVOType14 structure](#) 692  
[change cells revision](#) 162  
[chart](#) 57  
[chart drawing](#) 57  
[chart part](#) 96  
[chart sheet](#) 58  
[CmdType structure](#) 693  
[CodeName structure](#) 693  
[Col structure](#) 694  
[collection of records](#) 48  
[ColNullable structure](#) 694  
[ColRel structure](#) 694  
[ColRelShort structure](#) 694  
[ColShort structure](#) 695  
[comments](#) 58  
[common productions](#) 89  
[conceptual overview](#) 92  
[connection name](#) 156  
[control properties](#) 59  
[control tokens](#) 95  
[core file properties](#) 64  
[custom data](#) 59  
[custom data properties](#) 59  
[custom file properties](#) 64  
[custom property](#) 59  
[custom XML data storage](#) 59  
[custom XML data storage properties](#) 59  
[custom XML maps](#) 59  
[DAO recordset connections](#) 157  
[data functionality level](#) 102  
[DataConsolidationFunction structure](#) 695  
[DataFunctionalityLevel structure](#) 696  
[DateAsXnum structure](#) 696  
[DBType structure](#) 696  
[DCol structure](#) 697  
[DColShort structure](#) 697  
[DDEItemProperties structure](#) 697  
[diagram colors](#) 60  
[diagram data](#) 60  
[diagram layout definition](#) 60  
[diagram styles](#) 60  
[dialog sheet](#) 60  
[differential formatting \(DXFs\)](#) 149  
[digital signature origin](#) 61  
[digital signature XML signature](#) 61  
[display tokens](#) 95  
[drawings](#) 61  
[DRw structure](#) 698  
[DVals structure](#) 698  
[DValStrings structure](#) 699  
[DVParsedFormula structure](#) 777  
[DXFid structure](#) 699  
[DXFid14 structure](#) 700  
[ECTwFldInfoData structure](#) 700  
[ECTxtWizData structure](#) 700  
[encryption \(password to open\)](#) 159  
[Etxp structure](#) 702  
[extended file properties](#) 64  
[external connection files](#) 156  
[external connections](#) 155  
[external data connections](#) 62  
[external link \(\[section 2.1.7.25\]\(#\) 63, \[section 2.2.7.4\]\(#\) 153\)](#)  
[external reference consumers](#) 152  
[external references](#) 151  
[external workbook base paths](#) 91  
[external workbooks](#) 91  
[ExternalNameProperties structure](#) 705  
[ExternalReferenceType structure](#) 706  
[ExtPtgArea3D structure](#) 706  
[ExtPtgAreaErr3D structure](#) 707  
[ExtPtgErr structure](#) 707  
[ExtPtgRef3D structure](#) 708  
[ExtPtgRefErr3D structure](#) 708  
[ExtSheetPair structure](#) 709  
[file structure](#) 46  
[FillPattern structure](#) 709  
[FnGroupID structure](#) 710  
[FontFlags structure](#) 711  
[FontScheme structure](#) 712  
[format conflicts](#) 151  
[format revision](#) 162  
[formula elements](#) 95  
[formulas](#) 94  
[FRTBlank structure](#) 712  
[FRTCFParsedFormula14 structure](#) 712  
[FRTCFVOParsedFormula14 structure](#) 713  
[FRTDVParsedFormula14 structure](#) 714  
[FRTFormula structure](#) 715  
[FRTFormulas structure](#) 715  
[FRTHeader structure](#) 716  
[FRTParsedFormula structure](#) 778  
[FRTProductVersion structure](#) 717  
[FRTRef structure](#) 717  
[FRTRefs structure](#) 718  
[FRTRelID structure](#) 719  
[FRTSqref structure](#) 719



[FRTSrefs structure](#) 720  
[Ftab structure](#) 778  
[future metadata](#) 101  
[future record](#) 48  
[future record mechanism](#) 48  
[GradientStop structure](#) 720  
[GrbitBeginSlicer structure](#) 720  
[GrbitFmla structure](#) 721  
[GrbitSXTupleSetHeaderItem structure](#) 721  
[GrbitSXTupleSetRowItem structure](#) 722  
[HeaderFooterString structure](#) 722  
[HorizAlign structure](#) 725  
[hyperlinks](#) 91  
[Icon structure](#) 725  
[Icv structure](#) 725  
[Ifmt structure](#) 730  
[IHDB structure](#) 731  
[IIFtab structure](#) 731  
[images](#) 65  
[insertion / deletion of rows / columns revision](#)  
 162  
[international macro sheet](#) 65  
[IsoPasswordData structure](#) 731  
[Istr structure](#) 732  
[ISXDI structure](#) 732  
[ISXTH structure](#) 732  
[ISXVD structure](#) 733  
[KPIProp structure](#) 733  
[KPISets structure](#) 733  
[KPISets14 structure](#) 734  
[ListParsedFormula structure](#) 825  
[ListTotalRowFunction structure](#) 736  
[ListType structure](#) 737  
[LongRGBA structure](#) 737  
[LPByteBuf structure](#) 738  
[LPWideString structure](#) 738  
[macro sheet](#) 65  
[macro sheet binary index](#) 66  
[main topic](#) 163  
[Margin structure](#) 738  
[Mdir structure](#) 739  
[MdtFlags structure](#) 739  
[MDX metadata](#) 99  
[MdxMbrIstrFlags structure](#) 741  
[mem tokens](#) 95  
[metadata](#) ([section 2.1.7.34](#) 66, [section 2.2.4](#) 96)  
[metadata block](#) 98  
[metadata block stores](#) 98  
[metadata stores](#) 98  
[metadata string store](#) 98  
[metadata types](#) 97  
[model](#) 67  
[model data source connections](#) 157  
[move cells revision](#) 162  
[NameParsedFormula structure](#) 825  
[non-worksheet pivot tables](#) 146  
[ObjectParsedFormula structure](#) 826  
[ODBC connections](#) 156  
[OLAP data model](#) 146  
[OLE DB connections](#) ([section 2.2.8.3](#) 156, [section 2.2.8.9.1](#) 157, [section 2.2.8.9.2](#) 157)  
[OLE object](#) 67  
[OLE package](#) 68  
[OLEItemProperties structure](#) 742  
[operand tokens](#) 95  
[operator tokens](#) 94  
[package](#) 46  
[ParameterParsedFormula structure](#) 827  
[part](#) 46  
[part enumeration](#) 49  
[password verifier algorithm](#) 158  
[PCDCalcMemCommon structure](#) 879  
[PCDIAddInfo structure](#) 880  
[PCDIDateTime structure](#) 881  
[PCDISrvFmt structure](#) 882  
[PhRun structure](#) 883  
[pivot chart](#) 96  
[PivotCache](#) 102  
[PivotCache definition](#) 68  
[PivotCache records](#) 71  
[PivotFilterType structure](#) 884  
[PivotItemType structure](#) 886  
[PivotNumFmt structure](#) 887  
[PivotNumFmtExt structure](#) 887  
[PivotParsedFormula structure](#) 827  
[PivotTable](#) 71  
[PivotTable view](#) 124  
[PivotTables](#) 101  
[pivotvalues](#) 147  
[Pnn structure](#) 888  
[PRFilter structure](#) 888  
[printer settings](#) 74  
[PrintErrorsAs structure](#) 890  
[PRuleHeaderData structure](#) 890  
[Ptg structure](#) 828  
[PtgAdd structure](#) 834  
[PtgArea structure](#) 834  
[PtgArea3d structure](#) 834  
[PtgAreaErr structure](#) 835  
[PtgAreaErr3d structure](#) 836  
[PtgAreaN structure](#) 836  
[PtgArray structure](#) 837  
[PtgAttrBaxcel structure](#) 838  
[PtgAttrChoose structure](#) 838  
[PtgAttrGoTo structure](#) 839  
[PtgAttrIf structure](#) 839  
[PtgAttrIfError structure](#) 839  
[PtgAttrSemi structure](#) 840  
[PtgAttrSpace structure](#) 840  
[PtgAttrSpaceSemi structure](#) 840  
[PtgAttrSpaceType structure](#) 841  
[PtgAttrSum structure](#) 841  
[PtgBool structure](#) 842  
[PtgConcat structure](#) 842  
[PtgDataType structure](#) 842  
[PtgDiv structure](#) 843  
[PtgEq structure](#) 843  
[PtgErr structure](#) 843  
[PtgExp structure](#) 844  
[PtgExtraArray structure](#) 844  
[PtgExtraCol structure](#) 845  
[PtgExtraList structure](#) 845

[PtgExtraMem structure](#) 846  
[PtgFunc structure](#) 846  
[PtgFuncVar structure](#) 847  
[PtgGe structure](#) 847  
[PtgGt structure](#) 848  
[PtgInt structure](#) 848  
[PtgIssect structure](#) 848  
[PtgLe structure](#) 848  
[PtgList structure](#) 849  
[PtgLt structure](#) 850  
[PtgMemArea structure](#) 851  
[PtgMemErr structure](#) 851  
[PtgMemFunc structure](#) 852  
[PtgMemNoMem structure](#) 852  
[PtgMissArg structure](#) 853  
[PtgMul structure](#) 853  
[PtgName structure](#) 853  
[PtgNameX structure](#) 854  
[PtgNe structure](#) 854  
[PtgNum structure](#) 855  
[PtgParen structure](#) 855  
[PtgPercent structure](#) 855  
[PtgPower structure](#) 856  
[PtgRange structure](#) 856  
[PtgRef structure](#) 856  
[PtgRef3d structure](#) 857  
[PtgRefErr structure](#) 857  
[PtgRefErr3d structure](#) 858  
[PtgRefN structure](#) 858  
[PtgRowType structure](#) 859  
[PtgStr structure](#) 859  
[PtgSub structure](#) 860  
[PtgSxName structure](#) 860  
[PtgUMinus structure](#) 860  
[PtgUnion structure](#) 861  
[PtgUPlus structure](#) 861  
[QsiFieldId structure](#) 893  
[query table](#) 74  
[RangeProtectionTitleSDRel structure](#) 893  
[ReadingOrder structure](#) 894  
[record](#) 47  
[record enumeration](#) 171  
[relationship](#) 46  
[RelID structure](#) 894  
[RevExtern structure](#) 861  
[revision headers](#) 75  
[revision headers log](#) 161  
[revision log](#) 75  
[revision logs](#) 161  
[revision records](#) 161  
[RevisionLogSheetName structure](#) 894  
[RevisionType structure](#) 895  
[RevItab structure](#) 862  
[RevLblName structure](#) 862  
[RevName structure](#) 863  
[RevNamePly structure](#) 864  
[RevNameTabid structure](#) 865  
[RevSheetName structure](#) 865  
[RfX structure](#) 895  
[RfXRel structure](#) 896  
[RgbExtra structure](#) 866  
[Rgce structure](#) 867  
[RgceArea structure](#) 870  
[RgceAreaRel structure](#) 871  
[RgceAreaSmall structure](#) 897  
[RgceLoc structure](#) 871  
[RgceLocRel structure](#) 872  
[RgceLocSmall structure](#) 897  
[RichStr structure](#) 897  
[RkNumber structure](#) 899  
[RRd structure](#) 899  
[RRdDnGbit structure](#) 900  
[Rw structure](#) 901  
[Rw\\_Col structure](#) 901  
[RwNullable structure](#) 901  
[RwRelNeg structure](#) 901  
[RwShort structure](#) 901  
[Script structure](#) 902  
[SdSetSortOrder structure](#) 902  
[SerAr structure](#) 872  
[SerBool structure](#) 873  
[SerErr structure](#) 873  
[SerNum structure](#) 873  
[SerStr structure](#) 874  
[shared strings](#) 76  
[shared workbooks](#) 159  
[SharedParsedFormula structure](#) 874  
[ShortDtr structure](#) 902  
[ShowDataAs structure](#) 903  
[single cell tables](#) 77  
[slicer cache](#) ([section 2.1.7.47](#) 77, [section 2.2.14.1](#) 164)  
[slicer view](#) ([section 2.2.14.2](#) 168, [section 2.2.15.2](#) 170)  
[SlicerCacheLevelData structure](#) 904  
[SlicerCacheNativeItem structure](#) 904  
[SlicerCachePivotTable structure](#) 905  
[slicers](#) ([section 2.1.7.48](#) 78, [section 2.2.14](#) 164, [section 2.2.15](#) 168)  
[slicers and cube functions](#) ([section 2.2.14.3](#) 168, [section 2.2.15.3](#) 171)  
[sort map](#) ([section 2.1.7.49](#) 79, [section 2.2.12.10](#) 163)  
[SqEtxp structure](#) 905  
[SrvFmtCV structure](#) 906  
[SrvFmtData structure](#) 906  
[SrvFmtFlags structure](#) 907  
[SrvFmtNum structure](#) 907  
[ST\\_SheetState structure](#) 908  
[strong password verifier algorithm](#) 158  
[StrRun structure](#) 908  
[StyleFlags structure](#) 909  
[styles](#) ([section 2.1.7.50](#) 79, [section 2.2.6](#) 148)  
[subtopic sequences](#) 163  
[supporting link](#) 153  
[supporting link record](#) 153  
[SXAxis structure](#) 909  
[SXET structure](#) 909  
[SXMA structure](#) 910  
[SxOs structure](#) 875  
[SxSu structure](#) 875  
[table](#) 80

[table styles](#) 150  
[TagFnMdx structure](#) 910  
text import connections ([section 2.2.8.6](#) 156, [section 2.2.8.9.4](#) 158)  
[theme](#) 81  
[thumbnail file properties](#) 65  
timeline cache ([section 2.1.7.53](#) 81, [section 2.2.15.1](#) 169)  
[timeline view](#) 170  
timelines ([section 2.1.7.54](#) 81, [section 2.2.15](#) 168)  
[timelines and cube functions](#) 171  
[TSEType structure](#) 910  
[Tws structure](#) 915  
[types](#) 163  
[TypeSql structure](#) 916  
[UncheckedCol structure](#) 916  
[UncheckedRfX structure](#) 916  
[UncheckedRw structure](#) 917  
[UncheckedSqRfX structure](#) 917  
[Underline structure](#) 917  
[undo chain](#) 163  
[user log](#) 160  
[user names](#) 82  
[value metadata](#) 98  
[VBA project](#) 82  
[VBA project signature](#) 82  
[VertAlign structure](#) 918  
[VirtualPath structure](#) 876  
[VML drawings](#) 83  
volatile dependencies ([section 2.1.7.59](#) 83, [section 2.2.13](#) 163)  
[Web connections](#) 156  
[workbook](#) 84  
[worksheet](#) 86  
[worksheet binary index](#) 88  
[XFProp structure](#) 918  
[XFPropBorder structure](#) 921  
[XFPropColor structure](#) 921  
[XFPropGradient structure](#) 923  
[XFPropGradientStop structure](#) 924  
[XFProps structure](#) 924  
[XFPropTextRotation structure](#) 925  
[XFs](#) 148  
[XLNameWideString structure](#) 925  
[XLNullableWideString structure](#) 927  
[XLUnicodeString structure](#) 878  
[XLView structure](#) 927  
[XLWideString structure](#) 927  
[XmlDataType structure](#) 928  
[XmlMappedXPath structure](#) 929  
[Xnum structure](#) 930  
[Xti structure](#) 930  
[XtiIndex structure](#) 879  
[Diagram colors](#) 60  
[Diagram data](#) 60  
[Diagram layout definition](#) 60  
[Diagram styles](#) 60  
[Dialog sheet](#) 60  
[Differential formatting \(DXFs\)](#) 149  
[Digital signature origin](#) 61

[Digital signature XML signature](#) 61  
[Display tokens](#) 95  
[Drawings](#) 61  
[DRw](#) 698  
[DVals](#) 698  
[DValStrings](#) 699  
[DVParsedFormula](#) 777  
[DXFId](#) 699  
[DXFId14](#) 700  
[DXFs \(differential formatting\)](#) 149

## E

[ECTwFldInfoData](#) 700  
[ECTxtWizData](#) 700  
[Encryption \(password to open\)](#) 159  
[Etxp](#) 702  
[Example](#) 932  
Examples  
[conditional formatting](#) 932  
[conditional formatting - BrtBeginCFRule](#) 934  
[conditional formatting - BrtBeginConditionalFormatting](#) 933  
[conditional formatting - BrtEndCFRule](#) 936  
[conditional formatting - BrtEndConditionalFormatting](#) 937  
[defined name](#) 939  
[defined name - BrtBeginExternals](#) 941  
[defined name - BrtEndExternals](#) 942  
[defined name - BrtExternSheet](#) 942  
[defined name - BrtName](#) 939  
[defined name - BrtSupSelf](#) 942  
[external references](#) 957  
[external references - BrtBeginSupBook](#) 962  
[external references - BrtEndSupBook](#) 965  
[external references - BrtExternCellString](#) 963  
[external references - BrtExternRowHdr](#) 963  
[external references - BrtExternTableEnd 1](#) 964  
[external references - BrtExternTableEnd 2](#) 965  
[external references - BrtExternTableEnd 3](#) 965  
[external references - BrtExternTableStart 1](#) 963  
[external references - BrtExternTableStart 2](#) 964  
[external references - BrtExternTableStart 3](#) 965  
[external references - BrtFmlaString](#) 960  
[external references - BrtRowHdr](#) 958  
[external references - BrtSupTabs](#) 962  
[filters](#) 954  
[filters - BrtBeginAFilter](#) 955  
[filters - BrtBeginCustomFilters](#) 956  
[filters - BrtBeginFilterColumn](#) 956  
[filters - BrtCustomFilters](#) 956  
[filters - BrtEndAFilter](#) 957  
[filters - BrtEndCustomFilters](#) 957  
[filters - BrtEndFilterColumn](#) 957  
[formatting](#) 966  
[formatting - BrtBeginCellStyleXFs](#) 977  
[formatting - BrtBeginCellXFs](#) 980  
[formatting - BrtBeginFills](#) 973  
[formatting - BrtBeginFmts](#) 968  
[formatting - BrtBeginFonts](#) 969  
[formatting - BrtCellReal 1](#) 966  
[formatting - BrtCellReal 2](#) 967

[formatting - BrtCellReal 3](#) 968  
[formatting - BrtEndCellStyleXFfs](#) 979  
[formatting - BrtEndCellXFfs](#) 985  
[formatting - BrtEndFmts](#) 969  
[formatting - BrtEndFonts](#) 973  
[formatting - BrtFill 1](#) 973  
[formatting - BrtFill 2](#) 975  
[formatting - BrtFmt](#) 968  
[formatting - BrtFont 1](#) 969  
[formatting - BrtFont 2](#) 971  
[formatting - BrtXF 1](#) 977  
[formatting - BrtXF 2](#) 980  
[formatting - BrtXF 3](#) 981  
[formatting - BrtXF 4](#) 983  
[formatting - BrtXF 5](#) 984  
[formatting - BrtEndFills](#) 977  
[metadata](#) 1079  
[metadata - BrtBeginECDBProps](#) 1083  
[metadata - BrtBeginECOLapProps](#) 1084  
[metadata - BrtBeginEsmdb](#) 1096  
[metadata - BrtBeginEsmdtinfo](#) 1085  
[metadata - BrtBeginEsmdx](#) 1089  
[metadata - BrtBeginEsstr](#) 1087  
[metadata - BrtBeginExtConnections](#) 1081  
[metadata - BrtBeginMdx 1](#) 1089  
[metadata - BrtBeginMdx 2](#) 1090  
[metadata - BrtBeginMdx 3](#) 1092  
[metadata - BrtBeginMdx 4](#) 1094  
[metadata - BrtBeginMdxSet](#) 1089  
[metadata - BrtBeginMdxTuple 1](#) 1090  
[metadata - BrtBeginMdxTuple 2](#) 1092  
[metadata - BrtBeginMdxTuple 3](#) 1094  
[metadata - BrtBeginMetadata](#) 1085  
[metadata - BrtMdb](#) 1096  
[metadata - BrtMdtinfo](#) 1086  
[metadata - BrtMdxMbrIstr 1](#) 1093  
[metadata - BrtMdxMbrIstr 2](#) 1095  
[metadata - BrtMdxMbrIstr 3](#) 1096  
[metadata - BrtStr 1](#) 1087  
[metadata - BrtStr 2](#) 1088  
[metadata - BrtStr 3](#) 1088  
[metadata - BrtStr 4](#) 1088  
[metadata - BrtMdxMbrIstr](#) 1091  
[metadata: BrtBeginExtConnection](#) 1081  
[overview](#) 932  
[PivotTable](#) 1017  
[PivotTable - BrtBeginISXVDRws](#) 1072  
[PivotTable - BrtBeginISXVIs 1](#) 1073  
[PivotTable - BrtBeginISXVIs 2](#) 1074  
[PivotTable - BrtBeginISXVIs 3](#) 1075  
[PivotTable - BrtBeginPCDFAtbl](#) 1023  
[PivotTable - BrtBeginPCDFAtbl 1](#) 1025  
[PivotTable - BrtBeginPCDFAtbl 2](#) 1035  
[PivotTable - BrtBeginPCDFField 1](#) 1022  
[PivotTable - BrtBeginPCDFField 2](#) 1025  
[PivotTable - BrtBeginPCDFField 3](#) 1032  
[PivotTable - BrtBeginPCDFField 4](#) 1033  
[PivotTable - BrtBeginPCDFField 5](#) 1034  
[PivotTable - BrtBeginPCDFFields](#) 1021  
[PivotTable - BrtBeginPCDIRun](#) 1027  
[PivotTable - BrtBeginPCDSources](#) 1020  
[PivotTable - BrtBeginPCDSRange](#) 1020  
[PivotTable - BrtBeginPivotCacheDef](#) 1018  
[PivotTable - BrtBeginPivotCacheID](#) 1018  
[PivotTable - BrtBeginPivotCacheIDs](#) 1017  
[PivotTable - BrtBeginPivotCacheRecords](#) 1036  
[PivotTable - BrtBeginSXDI](#) 1078  
[PivotTable - BrtBeginSXDIIs](#) 1078  
[PivotTable - BrtBeginSXLI 1](#) 1073  
[PivotTable - BrtBeginSXLI 2](#) 1074  
[PivotTable - BrtBeginSXLI 3](#) 1075  
[PivotTable - BrtBeginSXLI 4](#) 1076  
[PivotTable - BrtBeginSXLICols](#) 1076  
[PivotTable - BrtBeginSXLIRws](#) 1073  
[PivotTable - BrtBeginSxLocation](#) 1048  
[PivotTable - BrtBeginSXPI](#) 1077  
[PivotTable - BrtBeginSXPIs](#) 1077  
[PivotTable - BrtBeginSXVD 1](#) 1049  
[PivotTable - BrtBeginSXVD 2](#) 1059  
[PivotTable - BrtBeginSXVD 3](#) 1064  
[PivotTable - BrtBeginSXVD 4](#) 1067  
[PivotTable - BrtBeginSXVD 5](#) 1069  
[PivotTable - BrtBeginSXVDs](#) 1049  
[PivotTable - BrtBeginSXVI 1](#) 1054  
[PivotTable - BrtBeginSXVI 2](#) 1055  
[PivotTable - BrtBeginSXVI 3](#) 1056  
[PivotTable - BrtBeginSXVI 4](#) 1057  
[PivotTable - BrtBeginSXVI 5](#) 1058  
[PivotTable - BrtBeginSXVI 6](#) 1061  
[PivotTable - BrtBeginSXVI 7](#) 1062  
[PivotTable - BrtBeginSXVI 8](#) 1063  
[PivotTable - BrtBeginSXVIs 1](#) 1054  
[PivotTable - BrtBeginSXVIs 2](#) 1061  
[PivotTable - BrtPCDIString 1](#) 1024  
[PivotTable - BrtPCDIString 2](#) 1024  
[PivotTable - BrtPCRRecord 1](#) 1036  
[PivotTable - BrtPCRRecord 2](#) 1037  
[PivotTable - BrtPCRRecord 3](#) 1038  
[PivotTable - BrtPCRRecord 4](#) 1039  
[PivotTable - BrtPCRRecord 5](#) 1040  
[PivotTable - BrtPCRRecord 6](#) 1040  
[PivotTable - BrtPCRRecord 7](#) ([section 3.8.25](#) 1041, [section 3.8.26](#) 1042)  
[slicer](#) 1097  
[slicer - BrtBeginSlicer](#) 1103  
[slicer - BrtBeginSlicerCache](#) 1099  
[slicer - BrtBeginSlicerCacheDef](#) 1099  
[slicer - BrtBeginSlicerCacheNative](#) 1100  
[slicer - BrtBeginSlicers](#) 1103  
[slicer - BrtEndSlicer](#) 1104  
[slicer - BrtEndSlicerCache](#) 1102  
[slicer - BrtEndSlicerCacheDef](#) 1102  
[slicer - BrtEndSlicerCacheNative](#) 1102  
[slicer - BrtEndSlicers](#) 1104  
[slicer - BrtSlicerCacheNativeItem](#) 1101  
[slicer - BrtSlicerCachePivotTables](#) 1099  
[table](#) 943  
[table - BrtBeginAFilter](#) 946  
[table - BrtBeginList](#) 943  
[table - BrtBeginListCol 1](#) 947  
[table - BrtBeginListCol 2](#) 948  
[table - BrtBeginListCol 3](#) 949

[table - BrtBeginListCols](#) 947  
[table - BrtEndAFilter](#) 946  
[table - BrtEndList](#) 954  
[table - BrtEndListCol 1](#) 948  
[table - BrtEndListCol 2](#) 949  
[table - BrtEndListCol 3](#) 953  
[table - BrtEndListCols](#) 953  
[table - BrtListCCFmla](#) 950  
[table - BrtListPart](#) 943  
[table - BrtTableStyleClient](#) 953  
[workbook](#) 986  
[workbook - BrtBeginBook](#) 986  
[workbook - BrtBeginBundleShs](#) 990  
[workbook - BrtBeginSheet](#) 996  
[workbook - BrtBeginSheetData](#) 1004  
[workbook - BrtBeginSst](#) 995  
[workbook - BrtBeginWsView](#) 999  
[workbook - BrtBeginWsViews](#) 999  
[workbook - BrtBookView](#) 989  
[workbook - BrtBundleSh 1](#) 991  
[workbook - BrtBundleSh 2](#) 991  
[workbook - BrtBundleSh 3](#) 992  
[workbook - BrtCalcProp](#) 992  
[workbook - BrtCellIsst 1](#) 1005  
[workbook - BrtCellIsst 2](#) 1009  
[workbook - BrtCellRk](#) 1007  
[workbook - BrtEndBook](#) 995  
[workbook - BrtEndBookViews](#) 990  
[workbook - BrtEndBundleShs](#) 992  
[workbook - BrtEndSheet](#) 1016  
[workbook - BrtEndSheetData](#) 1013  
[workbook - BrtEndSst](#) 996  
[workbook - BrtEndWsView](#) 1002  
[workbook - BrtEndWsViews](#) 1003  
[workbook - BrtFileRecover](#) 994  
[workbook - BrtFileVersion](#) 986  
[workbook - BrtFmlaNum](#) 1010  
[workbook - BrtMargins](#) 1015  
[workbook - BrtPrintOptions](#) 1015  
[workbook - BrtRowHdr 1](#) 1004  
[workbook - BrtRowHdr 2](#) 1006  
[workbook - BrtRowHdr 3](#) 1008  
[workbook - BrtRowHdr 4](#) 1009  
[workbook - BrtSel](#) 1001  
[workbook - BrtSheetProtection](#) 1013  
[workbook - BrtSSTItem 1](#) 995  
[workbook - BrtSSTItem 2](#) 995  
[workbook - BrtWbFactoid](#) 994  
[workbook - BrtWbProp](#) ([section 3.7.3](#) 987, [section 3.7.4](#) 989)  
[workbook - BrtWsDim](#) 999  
[workbook - BrtWsFmtInfo](#) 1003  
[workbook - BrtWsProp](#) 996  
[Extended file properties](#) 64  
[External connection files](#) 156  
[External connections](#) 155  
   [ADO recordset connections](#) 157  
   [connection name](#) 156  
   [DAO recordset connections](#) 157  
   [external connection files](#) 156  
   [model data source connections](#) 157  
   [ODBC connections](#) 156  
   OLE DB connections ([section 2.2.8.3](#) 156, [section 2.2.8.9.1](#) 157, [section 2.2.8.9.2](#) 157)  
   text import connections ([section 2.2.8.6](#) 156, [section 2.2.8.9.4](#) 158)  
   [Web connections](#) 156  
[External data connections](#) 62  
[External link](#) ([section 2.1.7.25](#) 63, [section 2.2.7.4](#) 153)  
[External reference consumers](#) 152  
[External references](#) 151  
   [external link](#) 153  
   [external reference consumers](#) 152  
   [supporting link](#) 153  
   [supporting link record](#) 153  
[External references example](#) 957  
[External references: BrtBeginSupBook example](#) 962  
[External references: BrtEndSupBook example](#) 965  
[External references: BrtExternCellString example](#) 963  
[External references: BrtExternRowHdr example](#) 963  
[External references: BrtExternTableEnd 1 example](#) 964  
[External references: BrtExternTableEnd 2 example](#) 965  
[External references: BrtExternTableEnd 3 example](#) 965  
[External references: BrtExternTableStart 1 example](#) 963  
[External references: BrtExternTableStart 2 example](#) 964  
[External references: BrtExternTableStart 3 example](#) 965  
[External references: BrtFmlaString example](#) 960  
[External references: BrtRowHdr example](#) 958  
[External references: BrtSupTabs example](#) 962  
[External Workbook Base Paths](#) 91  
   [external workbooks](#) 91  
   [external workbook base paths](#) 91  
[ExternalNameProperties](#) 705  
[ExternalReferenceType](#) 706  
[ExtPtgArea3D](#) 706  
[ExtPtgAreaErr3D](#) 707  
[ExtPtgErr](#) 707  
[ExtPtgRef3D](#) 708  
[ExtPtgRefErr3D](#) 708  
[ExtSheetPair](#) 709  
**F**  
 Fields  
   [vendor-extensible](#) 45  
 File properties  
   [core](#) 64  
   [custom](#) 64  
   [extended](#) 64  
   [thumbnail](#) 65  
[File structure](#) 46  
   [ActiveX](#) 52  
   [ActiveX binary](#) 56  
   [alternate content mechanism](#) 49  
   [attached toolbars](#) 57

[calculation chain](#) 57  
[chart](#) 57  
[chart drawing](#) 57  
[chart sheet](#) 58  
[collection of records](#) 48  
[comments](#) 58  
[common productions](#) 89  
[control properties](#) 59  
[core file properties](#) 64  
[custom data](#) 59  
[custom data properties](#) 59  
[custom file properties](#) 64  
[custom property](#) 59  
[custom XML data storage](#) 59  
[custom XML data storage properties](#) 59  
[custom XML maps](#) 59  
[diagram colors](#) 60  
[diagram data](#) 60  
[diagram layout definition](#) 60  
[diagram styles](#) 60  
[dialog sheet](#) 60  
[digital signature origin](#) 61  
[digital signature XML signature](#) 61  
[drawings](#) 61  
[extended file properties](#) 64  
[external data connections](#) 62  
[external link](#) 63  
[external workbook base paths](#) 91  
[external workbooks](#) 91  
[future record](#) 48  
[future record mechanism](#) 48  
[hyperlinks](#) 91  
[images](#) 65  
[international macro sheet](#) 65  
[macro sheet](#) 65  
[macro sheet binary index](#) 66  
[metadata](#) 66  
[model](#) 67  
[OLE object](#) 67  
[OLE package](#) 68  
[package](#) 46  
[part](#) 46  
[part enumeration](#) 49  
[PivotCache definition](#) 68  
[PivotCache records](#) 71  
[PivotTable](#) 71  
[printer settings](#) 74  
[query table](#) 74  
[record](#) 47  
[relationship](#) 46  
[revision headers](#) 75  
[revision log](#) 75  
[shared strings](#) 76  
[single cell tables](#) 77  
[slicer cache](#) 77  
[slicers](#) 78  
[sort map](#) 79  
[styles](#) 79  
[table](#) 80  
[theme](#) 81  
[thumbnail file properties](#) 65  
[timeline cache](#) 81  
[timelines](#) 81  
[user names](#) 82  
[VBA project](#) 82  
[VBA project signature](#) 82  
[VML drawings](#) 83  
[volatile dependencies](#) 83  
[workbook](#) 84  
[worksheet](#) 86  
[worksheet binary index](#) 88  
[FillPattern](#) 709  
[Filters example](#) 954  
[Filters: BrtBeginAFilter example](#) 955  
[Filters: BrtBeginCustomFilters example](#) 956  
[Filters: BrtBeginFilterColumn example](#) 956  
[Filters: BrtCustomFilters example](#) 956  
[Filters: BrtEndAFilter example](#) 957  
[Filters: BrtEndCustomFilters example](#) 957  
[Filters: BrtEndFilterColumn example](#) 957  
[FnGroupID](#) 710  
[FontFlags](#) 711  
[FontScheme](#) 712  
[Format conflicts](#) 151  
[Format revision](#) 162  
[Formatting - BrtBeginFills example](#) 973  
[Formatting example](#) 966  
[Formatting: BrtBeginCellStyleXFs example](#) 977  
[Formatting: BrtBeginCellXFs example](#) 980  
[Formatting: BrtBeginFmts example](#) 968  
[Formatting: BrtBeginFonts example](#) 969  
[Formatting: BrtCellReal 1 example](#) 966  
[Formatting: BrtCellReal 2 example](#) 967  
[Formatting: BrtCellReal 3 example](#) 968  
[Formatting: BrtEndCellStyleXFs example](#) 979  
[Formatting: BrtEndCellXFs example](#) 985  
[Formatting: BrtEndFills example](#) 977  
[Formatting: BrtEndFmts example](#) 969  
[Formatting: BrtEndFonts example](#) 973  
[Formatting: BrtFill 1 example](#) 973  
[Formatting: BrtFill 2 example](#) 975  
[Formatting: BrtFmt example](#) 968  
[Formatting: BrtFont 1 example](#) 969  
[Formatting: BrtFont 2 example](#) 971  
[Formatting: BrtXF 1 example](#) 977  
[Formatting: BrtXF 3 example](#) 981  
[Formatting: BrtXF 4 example](#) 983  
[Formatting: BrtXF 5 example](#) 984  
[Formatting: BrtXF 2 example](#) 980  
[Formula elements](#) 95  
[Formulas](#) 94  
[control tokens](#) 95  
[display tokens](#) 95  
[formula elements](#) 95  
[mem tokens](#) 95  
[operand tokens](#) 95  
[operator tokens](#) 94  
[FRTBlank](#) 712  
[FRTCFParsedFormula14](#) 712  
[FRTCFVOParsedFormula14](#) 713  
[FRTDVParsedFormula14](#) 714  
[FRTFormula](#) 715

[FRTFormulas](#) 715  
[FRTHeader](#) 716  
[FRTParsedFormula](#) 778  
[FRTProductVersion](#) 717  
[FRTRef](#) 717  
[FRTRefs](#) 718  
[FRTRelID](#) 719  
[FRTSqref](#) 719  
[FRTSqrefs](#) 720  
[Ftab](#) 778  
[Future metadata](#) 101  
[Future record](#) 48  
    [alternate content mechanism](#) 49  
    [future record mechanism](#) 48  
[Future record mechanism](#) 48

## G

[Glossary](#) 34  
[GradientStop](#) 720  
[GrbitBeginSlicer](#) 720  
[GrbitFmla](#) 721  
[GrbitSXTupleSetHeaderItem](#) 721  
[GrbitSXTupleSetRowItem](#) 722

## H

[HeaderFooterString](#) 722  
[HorizAlign](#) 725  
[Hyperlinks](#) 91

## I

[Icon](#) 725  
[Icy](#) 725  
[Ifmt](#) 730  
[IHDB](#) 731  
[IIFtab](#) 731  
[Images](#) 65  
[Implementer – security considerations](#) 1105  
[Informative references](#) 43  
[Insertion / deletion of rows / columns revision](#) 162  
[Introduction](#) 34  
[IsoPasswordData](#) 731  
[Istr](#) 732  
[ISXDI](#) 732  
[ISXTH](#) 732  
[ISXVD](#) 733

## K

[KPIProp](#) 733  
[KPISets](#) 733  
[KPISets14](#) 734

## L

[ListParsedFormula](#) 825  
[ListTotalRowFunction](#) 736  
[ListType](#) 737  
[Localization](#) 44  
[LongRGBA](#) 737

[LPByteBuf](#) 738  
[LPWideString](#) 738

## M

[Macro sheet](#) 65  
[Macro sheet binary index](#) 66  
[Main topic](#) 163  
[Margin](#) 738  
[Mdir](#) 739  
[MdtFlags](#) 739  
[MDX metadata](#) 99  
[MdxMbrIstrFlags](#) 741  
[Mem tokens](#) 95  
[Metadata](#) ([section 2.1.7.34](#) 66, [section 2.2.4](#) 96)  
    [cell metadata](#) 98  
    [future metadata](#) 101  
    [MDX metadata](#) 99  
    [metadata block](#) 98  
    [metadata block stores](#) 98  
    [metadata stores](#) 98  
    [metadata string store](#) 98  
    [metadata types](#) 97  
    [value metadata](#) 98  
[Metadata block](#) 98  
[Metadata block stores](#) 98  
[Metadata example](#) 1079  
[Metadata stores](#) 98  
[Metadata string store](#) 98  
[Metadata types](#) 97  
[Metadata: BrtBeginECDbProps example](#) 1083  
[Metadata: BrtBeginECOLapProps example](#) 1084  
[Metadata: BrtBeginEsmdb example](#) 1096  
[Metadata: BrtBeginEsmdtinfo example](#) 1085  
[Metadata: BrtBeginEsmdx example](#) 1089  
[Metadata: BrtBeginEsstr example](#) 1087  
[Metadata: BrtBeginExtConnection example](#) 1081  
[Metadata: BrtBeginExtConnections example](#) 1081  
[Metadata: BrtBeginMdx 1 example](#) 1089  
[Metadata: BrtBeginMdx 2 example](#) 1090  
[Metadata: BrtBeginMdx 3 example](#) 1092  
[Metadata: BrtBeginMdx 4 example](#) 1094  
[Metadata: BrtBeginMdxSet example](#) 1089  
[Metadata: BrtBeginMdxTuple 1 example](#) 1090  
[Metadata: BrtBeginMdxTuple 2 example](#) 1092  
[Metadata: BrtBeginMdxTuple 3 example](#) 1094  
[Metadata: BrtBeginMetadata example](#) 1085  
[Metadata: BrtMdb example](#) 1096  
[Metadata: BrtMdtinfo example](#) 1086  
[Metadata: BrtMdxMbrIstr 1 example](#) 1093  
[Metadata: BrtMdxMbrIstr 2 example](#) 1095  
[Metadata: BrtMdxMbrIstr 3 example](#) 1096  
[Metadata: BrtMdxMbrIstr example](#) 1091  
[Metadata: BrtStr 1 example](#) 1087  
[Metadata: BrtStr 2 example](#) 1088  
[Metadata: BrtStr 3 example](#) 1088  
[Metadata: BrtStr 4 example](#) 1088  
[Model](#) 67  
[Model Data Source Connections](#) 157  
[Move cells revision](#) 162



## N

[NameParsedFormula](#) 825  
[Non-Worksheet Pivot Tables](#) 146  
[Normative references](#) 41

## O

[ObjectParsedFormula](#) 826  
[ODBC connections](#) 156  
[OLAP data model](#) 146  
OLE DB connections ([section 2.2.8.3](#) 156, [section 2.2.8.9.1](#) 157, [section 2.2.8.9.2](#) 157)  
[OLE object](#) 67  
[OLE package](#) 68  
[OLEItemProperties](#) 742  
[Operand tokens](#) 95  
[Operator tokens](#) 94  
[Overview](#) 43  
    [synopsis](#) 43

## P

[Package](#) 46  
[ParameterParsedFormula](#) 827  
Parsed expressions  
    [ArrayParsedFormula](#) 742  
    [BErr](#) 743  
    [Boolean](#) 743  
    [CellParsedFormula](#) 744  
    [Cetab](#) 744  
    CFParsedFormula ([section 2.5.97.6](#) 775, [section 2.5.97.7](#) 776)  
    [DVParsedFormula](#) 777  
    [FRTParsedFormula](#) 778  
    [Ftab](#) 778  
    [ListParsedFormula](#) 825  
    [NameParsedFormula](#) 825  
    [ObjectParsedFormula](#) 826  
    [ParameterParsedFormula](#) 827  
    [PivotParsedFormula](#) 827  
    [Ptq](#) 828  
    [PtqAdd](#) 834  
    [PtqArea](#) 834  
    [PtqArea3d](#) 834  
    [PtqAreaErr](#) 835  
    [PtqAreaErr3d](#) 836  
    [PtqAreaN](#) 836  
    [PtqArray](#) 837  
    [PtqAttrBaxcel](#) 838  
    [PtqAttrChoose](#) 838  
    [PtqAttrGoTo](#) 839  
    [PtqAttrIf](#) 839  
    [PtqAttrIfError](#) 839  
    [PtqAttrSemi](#) 840  
    [PtqAttrSpace](#) 840  
    [PtqAttrSpaceSemi](#) 840  
    [PtqAttrSpaceType](#) 841  
    [PtqAttrSum](#) 841  
    [PtqBool](#) 842  
    [PtqConcat](#) 842

[PtqDataType](#) 842  
[PtqDiv](#) 843  
[PtqEq](#) 843  
[PtqErr](#) 843  
[PtqExp](#) 844  
[PtqExtraArray](#) 844  
[PtqExtraCol](#) 845  
[PtqExtraList](#) 845  
[PtqExtraMem](#) 846  
[PtqFunc](#) 846  
[PtqFuncVar](#) 847  
[PtqGe](#) 847  
[PtqGt](#) 848  
[PtqInt](#) 848  
[PtqIsect](#) 848  
[PtqLe](#) 848  
[PtqList](#) 849  
[PtqLt](#) 850  
[PtqMemArea](#) 851  
[PtqMemErr](#) 851  
[PtqMemFunc](#) 852  
[PtqMemNoMem](#) 852  
[PtqMissArg](#) 853  
[PtqMul](#) 853  
[PtqName](#) 853  
[PtqNameX](#) 854  
[PtqNe](#) 854  
[PtqNum](#) 855  
[PtqParen](#) 855  
[PtqPercent](#) 855  
[PtqPower](#) 856  
[PtqRange](#) 856  
[PtqRef](#) 856  
[PtqRef3d](#) 857  
[PtqRefErr](#) 857  
[PtqRefErr3d](#) 858  
[PtqRefN](#) 858  
[PtqRowType](#) 859  
[PtqStr](#) 859  
[PtqSub](#) 860  
[PtqSxName](#) 860  
[PtqUminus](#) 860  
[PtqUnion](#) 861  
[PtqUPlus](#) 861  
[RevExtern](#) 861  
[RevItab](#) 862  
[RevLblName](#) 862  
[RevName](#) 863  
[RevNamePly](#) 864  
[RevNameTabId](#) 865  
[RevSheetName](#) 865  
[RqbExtra](#) 866  
[Rqce](#) 867  
[RqceArea](#) 870  
[RqceAreaRel](#) 871  
[RqceLoc](#) 871  
[RqceLocRel](#) 872  
[SerAr](#) 872  
[SerBool](#) 873  
[SerErr](#) 873  
[SerNum](#) 873



[SerStr](#) 874  
[SharedParsedFormula](#) 874  
[SxOs](#) 875  
[SxSu](#) 875  
[VirtualPath](#) 876  
[XLUnicodeString](#) 878  
[XtiIndex](#) 879  
[Part](#) 46  
[Part enumeration](#) 49  
[ActiveX](#) 52  
[ActiveX binary](#) 56  
[attached toolbars](#) 57  
[calculation chain](#) 57  
[chart](#) 57  
[chart drawing](#) 57  
[chart sheet](#) 58  
[comments](#) 58  
[control properties](#) 59  
[core file properties](#) 64  
[custom data](#) 59  
[custom data properties](#) 59  
[custom file properties](#) 64  
[custom property](#) 59  
[custom XML data storage](#) 59  
[custom XML data storage properties](#) 59  
[custom XML maps](#) 59  
[diagram colors](#) 60  
[diagram data](#) 60  
[diagram layout definition](#) 60  
[diagram styles](#) 60  
[dialog sheet](#) 60  
[digital signature origin](#) 61  
[digital signature XML signature](#) 61  
[drawings](#) 61  
[extended file properties](#) 64  
[external data connections](#) 62  
[external link](#) 63  
[images](#) 65  
[international macro sheet](#) 65  
[macro sheet](#) 65  
[macro sheet binary index](#) 66  
[metadata](#) 66  
[model](#) 67  
[OLE object](#) 67  
[OLE package](#) 68  
[PivotCache definition](#) 68  
[PivotCache records](#) 71  
[PivotTable](#) 71  
[printer settings](#) 74  
[query table](#) 74  
[revision headers](#) 75  
[revision log](#) 75  
[shared strings](#) 76  
[single cell tables](#) 77  
[slicer cache](#) 77  
[slicers](#) 78  
[sort map](#) 79  
[styles](#) 79  
[table](#) 80  
[theme](#) 81  
[thumbnail file properties](#) 65  
[timeline cache](#) 81  
[timelines](#) 81  
[user names](#) 82  
[VBA project](#) 82  
[VBA project signature](#) 82  
[VML drawings](#) 83  
[volatile dependencies](#) 83  
[workbook](#) 84  
[worksheet](#) 86  
[worksheet binary index](#) 88  
[Password verifier algorithm](#) 158  
[PCDCalcMemCommon](#) 879  
[PCDIAddInfo](#) 880  
[PCDIDateTime](#) 881  
[PCDISrvFmt](#) 882  
[PhRun](#) 883  
[Pivot chart](#) 96  
[PivotCache](#) 102  
[PivotCache definition](#) 68  
[PivotCache records](#) 71  
[PivotFilterType](#) 884  
[PivotItemType](#) 886  
[PivotNumFmt](#) 887  
[PivotNumFmtExt](#) 887  
[PivotParsedFormula](#) 827  
[PivotTable](#) 71  
[\[BrtBeginPCDField 5 example\]\(#\) 1034](#)  
[PivotTable example](#) 1017  
[PivotTable view](#) 124  
[PivotTable: BrtBeginISXVDRws example](#) 1072  
[PivotTable: BrtBeginISXVIs 1 example](#) 1073  
[PivotTable: BrtBeginISXVIs 2 example](#) 1074  
[PivotTable: BrtBeginISXVIs 3 example](#) 1075  
[PivotTable: BrtBeginSXDI example](#) 1078  
[PivotTable: BrtBeginSXDIIs example](#) 1078  
[PivotTable: BrtBeginSXLIs 1 example](#) 1073  
[PivotTable: BrtBeginSXLIs 2 example](#) 1074  
[PivotTable: BrtBeginSXLIs 3 example](#) 1075  
[PivotTable: BrtBeginSXLIs 4 example](#) 1076  
[PivotTable: BrtBeginSXLICols example](#) 1076  
[PivotTable: BrtBeginSXLIRws example](#) 1073  
[PivotTable: BrtBeginSxLocation example](#) 1048  
[PivotTable: BrtBeginSXPI example](#) 1077  
[PivotTable: BrtBeginSXPIs example](#) 1077  
[PivotTable: BrtBeginSXVD 1 example](#) 1049  
[PivotTable: BrtBeginSXVD 2 example](#) 1059  
[PivotTable: BrtBeginSXVD 3 example](#) 1064  
[PivotTable: BrtBeginSXVD 4 example](#) 1067  
[PivotTable: BrtBeginSXVD 5 example](#) 1069  
[PivotTable: BrtBeginSXVDs example](#) 1049  
[PivotTable: BrtBeginSXVI 1 example](#) 1054  
[PivotTable: BrtBeginSXVI 2 example](#) 1055  
[PivotTable: BrtBeginSXVI 3 example](#) 1056  
[PivotTable: BrtBeginSXVI 4 example](#) 1057  
[PivotTable: BrtBeginSXVI 5 example](#) 1058  
[PivotTable: BrtBeginSXVI 6 example](#) 1061  
[PivotTable: BrtBeginSXVI 7 example](#) 1062  
[PivotTable: BrtBeginSXVI 8 example](#) 1063  
[PivotTable: BrtBeginSXVIs 1 example](#) 1054  
[PivotTable: BrtBeginSXVIs 2 example](#) 1061  
[PivotTable: BrtPCRRecord 3 example](#) 1038

[PivotTable: BrtPCRRecord 4 example](#) 1039  
[PivotTable: BrtPCRRecord 5 example](#) 1040  
[PivotTable: BrtPCRRecord 6 example](#) 1040  
 PivotTable: BrtPCRRecord 7 example ([section 3.8.25](#) 1041, [section 3.8.26](#) 1042)  
[PivotTable: BrtBeginPCDFatbl 1 example](#) 1025  
[PivotTable: BrtBeginPCDFatbl 2 example](#) 1035  
[PivotTable: BrtBeginPCDFatbl example](#) 1023  
[PivotTable: BrtBeginPCDField 1 example](#) 1022  
[PivotTable: BrtBeginPCDField 2 example](#) 1025  
[PivotTable: BrtBeginPCDField 3 example](#) 1032  
[PivotTable: BrtBeginPCDField 4 example](#) 1033  
[PivotTable: BrtBeginPCDFields example](#) 1021  
[PivotTable: BrtBeginPCDIRun example](#) 1027  
[PivotTable: BrtBeginPCDSrc example](#) 1020  
[PivotTable: BrtBeginPCDSRange example](#) 1020  
[PivotTable: BrtBeginPivotCacheDef example](#) 1018  
[PivotTable: BrtBeginPivotCacheID example](#) 1018  
[PivotTable: BrtBeginPivotCacheIDs example](#) 1017  
[PivotTable: BrtBeginPivotCacheRecords example](#) 1036  
[PivotTable: BrtPCDIString 1 example](#) 1024  
[PivotTable: BrtPCDIString 2 example](#) 1024  
[PivotTable: BrtPCRRecord 1 example](#) 1036  
[PivotTable: BrtPCRRecord 2 example](#) 1037  
[PivotTables](#) 101  
     [data functionality level](#) 102  
     [non-worksheet pivot tables](#) 146  
     [OLAP data model](#) 146  
     [PivotCache](#) 102  
     [PivotTable view](#) 124  
     [pivotvalues](#) 147  
[PivotValues](#) 147  
[Pnn](#) 888  
[PRFilter](#) 888  
[Printer settings](#) 74  
[PrintErrorsAs](#) 890  
 Product behavior  
     [overview](#) 1106  
[PRuleHeaderData](#) 890  
[Ptg](#) 828  
[PtgAdd](#) 834  
[PtgArea](#) 834  
[PtgArea3d](#) 834  
[PtgAreaErr](#) 835  
[PtgAreaErr3d](#) 836  
[PtgAreaN](#) 836  
[PtgArray](#) 837  
[PtgAttrBaxcel](#) 838  
[PtgAttrChoose](#) 838  
[PtgAttrGoTo](#) 839  
[PtgAttrIf](#) 839  
[PtgAttrIfError](#) 839  
[PtgAttrSemi](#) 840  
[PtgAttrSpace](#) 840  
[PtgAttrSpaceSemi](#) 840  
[PtgAttrSpaceType](#) 841  
[PtgAttrSum](#) 841  
[PtgBool](#) 842  
[PtgConcat](#) 842  
[PtgDataType](#) 842

[PtgDiv](#) 843  
[PtgEq](#) 843  
[PtgErr](#) 843  
[PtgExp](#) 844  
[PtgExtraArray](#) 844  
[PtgExtraCol](#) 845  
[PtgExtraList](#) 845  
[PtgExtraMem](#) 846  
[PtgFunc](#) 846  
[PtgFuncVar](#) 847  
[PtgGe](#) 847  
[PtgGt](#) 848  
[PtgInt](#) 848  
[PtgIsect](#) 848  
[PtgLe](#) 848  
[PtgList](#) 849  
[PtgLt](#) 850  
[PtgMemArea](#) 851  
[PtgMemErr](#) 851  
[PtgMemFunc](#) 852  
[PtgMemNoMem](#) 852  
[PtgMissArg](#) 853  
[PtgMul](#) 853  
[PtgName](#) 853  
[PtgNameX](#) 854  
[PtgNe](#) 854  
[PtgNum](#) 855  
[PtgParen](#) 855  
[PtgPercent](#) 855  
[PtgPower](#) 856  
[PtgRange](#) 856  
[PtgRef](#) 856  
[PtgRef3d](#) 857  
[PtgRefErr](#) 857  
[PtgRefErr3d](#) 858  
[PtgRefN](#) 858  
[PtgRowType](#) 859  
[PtgStr](#) 859  
[PtgSub](#) 860  
[PtgSxName](#) 860  
[PtgUminus](#) 860  
[PtgUnion](#) 861  
[PtgUPlus](#) 861

## Q

[QsiFieldId](#) 893  
[Query table](#) 74

## R

[RangeProtectionTitleSDRel](#) 893  
[ReadingOrder](#) 894  
[Record](#) 47  
[Record enumeration](#) 171  
     [by name](#) 171  
     [by number](#) 198  
 Records  
     [BrtAbsPath15](#) 225  
     [BrtACBegin](#) 226  
     [BrtACEnd](#) 226  
     [BrtActiveX](#) 226

[BrtAFilterDateGroupItem](#) 227  
[BrtArrFmla](#) 228  
[BrtBeginActiveXControls](#) 229  
[BrtBeginAFilter](#) 229  
[BrtBeginAutoSortScope](#) 229  
[BrtBeginBook](#) 230  
[BrtBeginBookViews](#) 230  
[BrtBeginBorders](#) 230  
[BrtBeginBundleShs](#) 230  
[BrtBeginCellIgnoreECs](#) 231  
[BrtBeginCellIgnoreECs14](#) 231  
[BrtBeginCellSmartTag](#) 231  
[BrtBeginCellSmartTags](#) 231  
[BrtBeginCellStyleXFs](#) 232  
[BrtBeginCellWatches](#) 232  
[BrtBeginCellXFs](#) 232  
[BrtBeginCFRule](#) 232  
[BrtBeginCFRule14](#) 238  
[BrtBeginColBrk](#) 246  
[BrtBeginColInfos](#) 246  
[BrtBeginColorPalette](#) 246  
[BrtBeginColorScale](#) 246  
[BrtBeginColorScale14](#) 247  
[BrtBeginComment](#) 247  
[BrtBeginCommentAuthors](#) 248  
[BrtBeginCommentList](#) 248  
[BrtBeginComments](#) 248  
[BrtBeginConditionalFormatting](#) 248  
[BrtBeginConditionalFormatting14](#) 249  
[BrtBeginConditionalFormattings](#) 250  
[BrtBeginCERrs](#) 250  
[BrtBeginCsView](#) 251  
[BrtBeginCsViews](#) 251  
[BrtBeginCustomFilters](#) 252  
[BrtBeginCustomFilters14](#) 252  
[BrtBeginDatabar](#) 252  
[BrtBeginDatabar14](#) 253  
[BrtBeginDataFeedPr15](#) 255  
[BrtBeginDataModel](#) 256  
[BrtBeginDbTables15](#) 256  
[BrtBeginDCon](#) 256  
[BrtBeginDecoupledPivotCacheIDs](#) 257  
[BrtBeginDeletedName](#) 258  
[BrtBeginDeletedNames](#) 258  
[BrtBeginDim](#) 258  
[BrtBeginDims](#) 259  
[BrtBeginDRefs](#) 259  
[BrtBeginDVals](#) 260  
[BrtBeginDVals14](#) 260  
[BrtBeginDXF14s](#) 260  
[BrtBeginDXFs](#) 261  
[BrtBeginDXFs15](#) 261  
[BrtBeginECDbProps](#) 262  
[BrtBeginECOLapProps](#) 263  
[BrtBeginECParam](#) 264  
[BrtBeginECParams](#) 267  
[BrtBeginECTwFldInfo](#) 267  
[BrtBeginECTwFldInfo15](#) 267  
[BrtBeginECTwFldInfoLst](#) 268  
[BrtBeginECTwFldInfoLst15](#) 268  
[BrtBeginECTxtWiz](#) 268  
[BrtBeginECTxtWiz15](#) 269  
[BrtBeginECWebProps](#) 269  
[BrtBeginEcWpTables](#) 272  
[BrtBeginEsfmd](#) 272  
[BrtBeginEsmdb](#) 273  
[BrtBeginEsmdtinfo](#) 273  
[BrtBeginEsmx](#) 274  
[BrtBeginEsstr](#) 274  
[BrtBeginExtConn14](#) 274  
[BrtBeginExtConn15](#) 275  
[BrtBeginExtConnection](#) 276  
[BrtBeginExtConnections](#) 280  
[BrtBeginExternals](#) 280  
[BrtBeginFills](#) 280  
[BrtBeginFilterColumn](#) 280  
[BrtBeginFilters](#) 281  
[BrtBeginFmd](#) 281  
[BrtBeginFmts](#) 281  
[BrtBeginFnGroup](#) 282  
[BrtBeginFonts](#) 282  
[BrtBeginHeaderFooter](#) 282  
[BrtBeginIconSet](#) 284  
[BrtBeginIconSet14](#) 285  
[BrtBeginIndexedColors](#) 286  
[BrtBeginISXTHCols](#) 286  
[BrtBeginISXTHRws](#) 287  
[BrtBeginISXVDCols](#) 287  
[BrtBeginISXVDRws](#) 288  
[BrtBeginISXVIs](#) 288  
[BrtBeginItemUniqueNames](#) 289  
[BrtBeginList](#) 289  
[BrtBeginListCol](#) 292  
[BrtBeginListCols](#) 294  
[BrtBeginListParts](#) 294  
[BrtBeginListXmlCPr](#) 295  
[BrtBeginMap](#) 296  
[BrtBeginMdx](#) 296  
[BrtBeginMdxKPI](#) 296  
[BrtBeginMdxMbrProp](#) 297  
[BrtBeginMdxSet](#) 297  
[BrtBeginMdxTuple](#) 298  
[BrtBeginMergeCells](#) 299  
[BrtBeginMetadata](#) 299  
[BrtBeginMG](#) 299  
[BrtBeginMGMaps](#) 299  
[BrtBeginMgs](#) 300  
[brtBeginModelRelationships](#) 300  
[BrtBeginModelTables](#) 300  
[BrtBeginMRUColors](#) 300  
[BrtBeginOledbPr15](#) 300  
[BrtBeginOleObjects](#) 301  
[BrtBeginPCD14](#) 301  
[BrtBeginPCDCalcItem](#) 302  
[BrtBeginPCDCalcItems](#) 302  
[BrtBeginPCDCalcMem](#) 303  
[BrtBeginPCDCalcMem14](#) 303  
[BrtBeginPCDCalcMemExt](#) 304  
[BrtBeginPCDCalcMems](#) 305  
[BrtBeginPCDCalcMemsExt](#) 305  
[BrtBeginPCDFAtbl](#) 306  
[BrtBeginPCDFGDiscrete](#) 308

[BrtBeginPCDFGItems](#) 308  
[BrtBeginPCDFGRange](#) 309  
[BrtBeginPCDFGroup](#) 310  
[BrtBeginPCDFField](#) 312  
[BrtBeginPCDFFields](#) 315  
[BrtBeginPCDHFieldsUsage](#) 315  
[BrtBeginPCDHGLLevel](#) 316  
[BrtBeginPCDHGLLevels](#) 317  
[BrtBeginPCDHGLGMember](#) 317  
[BrtBeginPCDHGLGMembers](#) 318  
[BrtBeginPCDHGLGroup](#) 318  
[BrtBeginPCDHGLGroups](#) 319  
[BrtBeginPCDHierarchies](#) 320  
[BrtBeginPCDHierarchy](#) 320  
[BrtBeginPCDIRun](#) 324  
[BrtBeginPCDKPI](#) 325  
[BrtBeginPCDKPIs](#) 328  
[BrtBeginPCDSConsol](#) 329  
[BrtBeginPCDSCPage](#) 329  
[BrtBeginPCDSCPages](#) 330  
[BrtBeginPCDSCPItem](#) 330  
[BrtBeginPCDSCSet](#) 330  
[BrtBeginPCDSCSets](#) 332  
[BrtBeginPCSDTCEMember](#) 333  
[BrtBeginPCSDTCEMembers](#) 334  
[BrtBeginPCSDTCEMembersSortBy](#) 334  
[BrtBeginPCSDTCEEntries](#) 335  
[BrtBeginPCSDTDCQueries](#) 335  
[BrtBeginPCSDTDCQuery](#) 335  
[BrtBeginPCSDTDCSet](#) 336  
[BrtBeginPCSDTDCSets](#) 337  
[BrtBeginPCSDTtupleCache](#) 337  
[BrtBeginPcdSFCIEntries](#) 337  
[BrtBeginPCDSsource](#) 337  
[BrtBeginPCDSRange](#) 338  
[BrtBeginPivotCacheDef](#) 339  
[BrtBeginPivotCacheID](#) 341  
[BrtBeginPivotCacheIDs](#) 342  
[BrtBeginPivotCacheRecords](#) 342  
[BrtBeginPivotTableRefs](#) 342  
[BrtBeginPivotTableUISettings](#) 342  
[BrtBeginPName](#) 343  
[BrtBeginPNames](#) 344  
[BrtBeginPNPair](#) 344  
[BrtBeginPNPairs](#) 346  
[BrtBeginPRFilter](#) 346  
[BrtBeginPRFilter14](#) 347  
[BrtBeginPRFilters](#) 347  
[BrtBeginPRFilters14](#) 348  
[BrtBeginPRFItem](#) 348  
[BrtBeginPRFItem14](#) 348  
[BrtBeginPRRule](#) 349  
[BrtBeginPRRule14](#) 349  
[BrtBeginQSI](#) 350  
[BrtBeginQSI14](#) 352  
[BrtBeginQSI14Fs](#) 353  
[BrtBeginQSI14R](#) 354  
[BrtBeginRRSort](#) 355  
[BrtBeginRwBrk](#) 355  
[BrtBeginScenMan](#) 356  
[BrtBeginSct](#) 356  
[BrtBeginSheet](#) 358  
[BrtBeginSheetData](#) 358  
[BrtBeginSingleCells](#) 358  
[BrtBeginSlicer](#) 358  
[BrtBeginSlicerCache](#) 360  
[BrtBeginSlicerCacheDef](#) 360  
[BrtBeginSlicerCacheID](#) 361  
[BrtBeginSlicerCacheIDs](#) 361  
[BrtBeginSlicerCacheLevelData](#) 362  
[BrtBeginSlicerCacheLevelsData](#) 363  
[BrtBeginSlicerCacheNative](#) 363  
[BrtBeginSlicerCacheOlapImpl](#) 364  
[BrtBeginSlicerCacheSelections](#) 365  
[BrtBeginSlicerCacheSiRange](#) 365  
[BrtBeginSlicerCacheSiRanges](#) 365  
[BrtBeginSlicerCachesPivotCacheID](#) 366  
[BrtBeginSlicerCachesPivotCacheIDs](#) 366  
[BrtBeginSlicerEx](#) ([section 2.4.205](#) 366, [section 2.4.273](#) 429)  
[BrtBeginSlicers](#) 367  
[BrtBeginSlicersEx](#) 367  
[BrtBeginSlicerStyle](#) 367  
[BrtBeginSlicerStyleElements](#) 368  
[BrtBeginSlicerStyles](#) 368  
[BrtBeginSmartTags](#) 368  
[BrtBeginSmartTagTypes](#) 368  
[BrtBeginSortCond](#) 369  
[BrtBeginSortCond14](#) 370  
[BrtBeginSortState](#) 372  
[BrtBeginSparklineGroup](#) 373  
[BrtBeginSparklineGroups](#) 377  
[BrtBeginSparklines](#) 377  
[BrtBeginSst](#) 377  
[BrtBeginStyles](#) 377  
[BrtBeginStyleSheet](#) 378  
[BrtBeginStyleSheetExt14](#) 378  
[BrtBeginSupBook](#) 378  
[BrtBeginSXChange](#) 379  
[BrtBeginSXChanges](#) 380  
[BrtBeginSXCondFmt](#) 380  
[BrtBeginSXCondFmt14](#) 381  
[BrtBeginSXCondFmts](#) 382  
[BrtBeginSXCondFmts14](#) 383  
[BrtBeginSXCrtFormat](#) 383  
[BrtBeginSXCrtFormats](#) 384  
[BrtBeginSXDI](#) 384  
[BrtBeginSXDI14](#) 386  
[BrtBeginSXEdit](#) 386  
[BrtBeginSXEdits](#) 388  
[BrtBeginSXFILTER](#) 388  
[BrtBeginSXFilters](#) 390  
[BrtBeginSXFormat](#) 390  
[BrtBeginSXFormats](#) 390  
[BrtBeginSXLI](#) 391  
[BrtBeginSXLICols](#) 391  
[BrtBeginSXLIRws](#) 392  
[BrtBeginSXLocation](#) 392  
[BrtBeginSXPI](#) 393  
[BrtBeginSXPIs](#) 395  
[BrtBeginSxRow](#) 395  
[BrtBeginSXRules](#) 396

[BrtBeginSXRules14](#) 396  
[BrtBeginSxSelect](#) 396  
[BrtBeginSXTDMP](#) 399  
[BrtBeginSXTDMPS](#) 400  
[BrtBeginSXTH](#) 401  
[BrtBeginSXTHItem](#) 403  
[BrtBeginSXTHItems](#) 403  
[BrtBeginSXTHs](#) 404  
[BrtBeginSXTupleSet](#) 404  
[BrtBeginSXTupleSetData](#) 405  
[BrtBeginSXTupleSetHeader](#) 405  
[BrtBeginSXTupleSetRow](#) 405  
[BrtBeginSxvcells](#) 405  
[BrtBeginSXVD](#) 406  
[BrtBeginSXVDs](#) 413  
[BrtBeginSXVI](#) 414  
[BrtBeginSXView](#) 416  
[BrtBeginSXView14](#) 424  
[BrtBeginSXVIs](#) 425  
[BrtBeginTableSlicerCache](#) 425  
[BrtBeginTableStyle](#) 427  
[BrtBeginTableStyles](#) 427  
[BrtBeginTimelineCacheID](#) 428  
[BrtBeginTimelineCacheIDs](#) 428  
[BrtBeginTimelineCachePivotCacheIDs](#) 428  
[BrtBeginTimelineEx](#) 429  
[BrtBeginTimelinesEx](#) 429  
[BrtBeginTimelineStyle](#) 429  
[BrtBeginTimelineStyleElements](#) 430  
[BrtBeginTimelineStyles](#) 430  
[BrtBeginTimelineStylesheetExt15](#) 430  
[BrtBeginUserCsView](#) 431  
[BrtBeginUserCsViews](#) 431  
[BrtBeginUsers](#) 431  
[BrtBeginUserShView](#) 432  
[BrtBeginUserShViews](#) 435  
[BrtBeginVolDeps](#) 435  
[BrtBeginVolMain](#) 435  
[BrtBeginVolTopic](#) 436  
[BrtBeginVolType](#) 436  
[BrtBeginWebExtensions](#) 436  
[BrtBeginWebPubItem](#) 436  
[BrtBeginWebPubItems](#) 438  
[BrtBeginWsSortMap](#) 439  
[BrtBeginWsView](#) 439  
[BrtBeginWsViews](#) 441  
[BrtBigName](#) 441  
[BrtBkHim](#) 441  
[BrtBookProtection](#) 442  
[BrtBookProtectionIso](#) 442  
[BrtBookView](#) 444  
[BrtBorder](#) 445  
[BrtBrk](#) 446  
[BrtBundleSh](#) 447  
[BrtCalcProp](#) 448  
[BrtCellBlank](#) 450  
[BrtCellBool](#) 451  
[BrtCellError](#) 451  
[BrtCellIgnoreEC](#) 452  
[BrtCellIgnoreEC14](#) 452  
[BrtCellIsst](#) 454  
[BrtCellMeta](#) 454  
[BrtCellReal](#) 455  
[BrtCellRk](#) 455  
[BrtCellRString](#) 455  
[BrtCellSmartTagProperty](#) 456  
[BrtCellSt](#) 456  
[BrtCellWatch](#) 457  
[BrtCFIcon](#) 457  
[BrtCFRuleExt](#) 458  
[BrtCFVO](#) 458  
[BrtCFVO14](#) 460  
[BrtColInfo](#) 462  
[BrtColor](#) 463  
[BrtColor14](#) 464  
[BrtColorFilter](#) 465  
[BrtCommentAuthor](#) 465  
[BrtCommentText](#) 466  
[BrtCrashRecErr](#) 466  
[BrtCsPageSetup](#) 466  
[BrtCsProp](#) 472  
[BrtCsProtection](#) 472  
[BrtCsProtectionIso](#) 473  
[BrtCUsr](#) 474  
[BrtCustomFilter](#) 475  
[BrtCustomFilter14](#) 476  
[BrtDbCommand15](#) 477  
[BrtDbTable15](#) 478  
[BrtDecoupledPivotCacheID](#) 478  
[BrtDrawing](#) 479  
[BrtDRef](#) 479  
[BrtDVal](#) 481  
[BrtDVal14](#) 484  
[BrtDValList](#) 487  
[BrtDXF](#) 488  
[BrtDXF14](#) 488  
[BrtDXF15](#) 489  
[BrtDynamicFilter](#) 490  
[BrtEndActiveXControls](#) 492  
[BrtEndAFilter](#) 492  
[BrtEndAutoSortScope](#) 492  
[BrtEndBook](#) 492  
[BrtEndBookViews](#) 492  
[BrtEndBorders](#) 493  
[BrtEndBundleShs](#) 493  
[BrtEndCellIgnoreECs](#) 493  
[BrtEndCellIgnoreECs14](#) 493  
[BrtEndCellSmartTag](#) 493  
[BrtEndCellSmartTags](#) 493  
[BrtEndCellStyleXFs](#) 493  
[BrtEndCellWatches](#) 493  
[BrtEndCellXFs](#) 494  
[BrtEndCFRule](#) 494  
[BrtEndCFRule14](#) 494  
[BrtEndColBrk](#) 494  
[BrtEndColInfos](#) 494  
[BrtEndColorPalette](#) 494  
[BrtEndColorScale](#) 494  
[BrtEndColorScale14](#) 494  
[BrtEndComment](#) 495  
[BrtEndCommentAuthors](#) 495  
[BrtEndCommentList](#) 495

[BrtEndComments](#) 495  
[BrtEndConditionalFormatting](#) 495  
[BrtEndConditionalFormatting14](#) 495  
[BrtEndConditionalFormattings](#) 495  
[BrtEndCReErrs](#) 495  
[BrtEndCsView](#) 495  
[BrtEndCsViews](#) 496  
[BrtEndCustomFilters](#) 496  
[BrtEndDatabar](#) 496  
[BrtEndDatabar14](#) 496  
[BrtEndDataFeedPr15](#) 496  
[BrtEndDataModel](#) 496  
[BrtEndDbTables15](#) 496  
[BrtEndDCon](#) 496  
[BrtEndDecoupledPivotCacheIDs](#) 497  
[BrtEndDeletedName](#) 497  
[BrtEndDeletedNames](#) 497  
[BrtEndDim](#) 497  
[BrtEndDims](#) 497  
[BrtEndDRefs](#) 497  
[BrtEndDVals](#) 497  
[BrtEndDVals14](#) 497  
[BrtEndDXF14s](#) 497  
[BrtEndDXFs](#) 498  
[brtEndDxf15](#) 498  
[BrtEndECdbProps](#) 498  
[BrtEndECOLapProps](#) 498  
[BrtEndECPParam](#) 498  
[BrtEndECPParams](#) 498  
[BrtEndECTWFldInfoLst](#) 498  
[BrtEndECTWFldInfoLst15](#) 498  
[BrtEndECTxtWiz](#) 498  
[BrtEndECWebProps](#) 499  
[BrtEndECWPTables](#) 499  
[BrtEndEsfmd](#) 499  
[BrtEndEsmdb](#) 499  
[BrtEndEsmdtinfo](#) 499  
[BrtEndEsmdx](#) 499  
[BrtEndEsstr](#) 499  
[BrtEndExtConn14](#) 499  
[BrtEndExtConn15](#) 500  
[BrtEndExtConnection](#) 500  
[BrtEndExtConnections](#) 500  
[BrtEndExternals](#) 500  
[BrtEndFills](#) 500  
[BrtEndFilterColumn](#) 500  
[BrtEndFilters](#) 500  
[BrtEndFmd](#) 500  
[BrtEndFmts](#) 500  
[BrtEndFnGroup](#) 501  
[BrtEndFonts](#) 501  
[BrtEndHeaderFooter](#) 501  
[BrtEndIconSet](#) 501  
[BrtEndIconSet14](#) 501  
[BrtEndIndexedColors](#) 501  
[BrtEndISXTHCols](#) 501  
[BrtEndISXTHRws](#) 501  
[BrtEndISXVDCols](#) 502  
[BrtEndISXVDRws](#) 502  
[BrtEndISXVIs](#) 502  
[BrtEndItemUniqueNames](#) 502  
[BrtEndList](#) 502  
[BrtEndListCol](#) 502  
[BrtEndListCols](#) 502  
[BrtEndListParts](#) 502  
[BrtEndListXmlCPr](#) 502  
[BrtEndMap](#) 503  
[BrtEndMdx](#) 503  
[BrtEndMdxKPI](#) 503  
[BrtEndMdxMbrProp](#) 503  
[BrtEndMdxSet](#) 503  
[BrtEndMdxTuple](#) 503  
[BrtEndMergeCells](#) 503  
[BrtEndMetadata](#) 503  
[BrtEndMG](#) 503  
[BrtEndMGMaps](#) 504  
[BrtEndMGs](#) 504  
[brtEndModelRelationships](#) 504  
[BrtEndModelTables](#) 504  
[BrtEndMRUColors](#) 504  
[BrtEndOledbPr15](#) 504  
[BrtEndOleObjects](#) 504  
[BrtEndPCD14](#) 504  
[BrtEndPCDCalcItem](#) 504  
[BrtEndPCDCalcItems](#) 505  
[BrtEndPCDCalcMem](#) 505  
[BrtEndPCDCalcMem14](#) 505  
[BrtEndPCDCalcMemExt](#) 505  
[BrtEndPCDCalcMems](#) 505  
[BrtEndPCDCalcMemsExt](#) 505  
[BrtEndPCDFAtbl](#) 505  
[BrtEndPCDFGDiscrete](#) 505  
[BrtEndPCDFGItems](#) 506  
[BrtEndPCDFGRange](#) 506  
[BrtEndPCDFGroup](#) 506  
[BrtEndPCDField](#) 506  
[BrtEndPCDFields](#) 506  
[BrtEndPCDHFieldsUsage](#) 506  
[BrtEndPCDHGLevel](#) 506  
[BrtEndPCDHGLevels](#) 506  
[BrtEndPCDHGLGMember](#) 507  
[BrtEndPCDHGLGMembers](#) 507  
[BrtEndPCDHGLGroup](#) 507  
[BrtEndPCDHGLGroups](#) 507  
[BrtEndPCDHierarchies](#) 507  
[BrtEndPCDHierarchy](#) 507  
[BrtEndPCDIRun](#) 507  
[BrtEndPCDKPI](#) 507  
[BrtEndPCDKPIs](#) 507  
[BrtEndPCDSConsol](#) 508  
[BrtEndPCDSCPage](#) 508  
[BrtEndPCDSCPIItem](#) 508  
[BrtEndPCDSCSet](#) 508  
[BrtEndPCDSCSets](#) 508  
[BrtEndPCSDTCEMember](#) 508  
[BrtEndPCSDTCEMembers](#) 508  
[BrtEndPCSDTCEEntries](#) 509  
[BrtEndPCSDTCTCQueries](#) 509  
[BrtEndPCSDTCTCQuery](#) 509  
[BrtEndPCSDTCTCSet](#) 509  
[BrtEndPCSDTCTCSETS](#) 509  
[BrtEndPCSDTCTCSETS](#) 509  
[BrtEndPCSDTCTupleCache](#) 509

[BrtEndPCDSFCIEntries](#) 509  
[BrtEndPCDSource](#) 509  
[BrtEndPCDSRange](#) 509  
[BrtEndPivotCacheDef](#) 510  
[BrtEndPivotCacheID](#) 510  
[BrtEndPivotCacheIDs](#) 510  
[BrtEndPivotCacheRecords](#) 510  
[BrtEndPivotTableRefs](#) 510  
[BrtEndPivotTableUISettings](#) ([section 2.4.167](#) 342,  
[section 2.4.502](#) 510)  
[BrtEndPName](#) 510  
[BrtEndPNames](#) 510  
[BrtEndPNPair](#) 511  
[BrtEndPNPairs](#) 511  
[BrtEndPRFilter](#) 511  
[BrtEndPRFilter14](#) 511  
[BrtEndPRFilters](#) 511  
[BrtEndPRFilters14](#) 511  
[BrtEndPRFItem](#) 511  
[BrtEndPRFItem14](#) 512  
[BrtEndPRRule](#) 512  
[BrtEndPRRule14](#) 512  
[BrtEndQSI](#) 512  
[BrtEndQSIF](#) 512  
[BrtEndQSIFs](#) 512  
[BrtEndQSIR](#) 512  
[BrtEndRRSort](#) 512  
[BrtEndRwBrk](#) 512  
[BrtEndScenMan](#) 513  
[BrtEndSct](#) 513  
[BrtEndSheet](#) 513  
[BrtEndSheetData](#) 513  
[BrtEndSingleCells](#) 513  
[BrtEndSlicer](#) 513  
[BrtEndSlicerCache](#) 513  
[BrtEndSlicerCacheDef](#) 513  
[BrtEndSlicerCacheID](#) 513  
[BrtEndSlicerCacheIDs](#) 514  
[BrtEndSlicerCacheLevelData](#) 514  
[BrtEndSlicerCacheLevelsData](#) 514  
[BrtEndSlicerCacheNative](#) 514  
[BrtEndSlicerCacheOlapImpl](#) 514  
[BrtEndSlicerCacheSelections](#) 514  
[BrtEndSlicerCacheSiRange](#) 514  
[BrtEndSlicerCacheSiRanges](#) 514  
[BrtEndSlicerCachesPivotCacheID](#) 515  
[BrtEndSlicerCachesPivotCacheIDs](#) 515  
[BrtEndSlicerEx](#) 515  
[BrtEndSlicers](#) 515  
[BrtEndSlicersEx](#) 515  
[BrtEndSlicerStyle](#) 515  
[BrtEndSlicerStyleElements](#) 515  
[BrtEndSlicerStyles](#) 515  
[BrtEndSmartTags](#) 516  
[BrtEndSmartTagTypes](#) 516  
[BrtEndSortCond](#) 516  
[BrtEndSortCond14](#) 516  
[BrtEndSortState](#) 516  
[BrtEndSparklineGroup](#) 516  
[BrtEndSparklineGroups](#) 516  
[BrtEndSparklines](#) 516  
[BrtEndSst](#) 517  
[BrtEndStyles](#) 517  
[BrtEndStyleSheet](#) 517  
[BrtEndStyleSheetExt14](#) 517  
[BrtEndSupBook](#) 517  
[BrtEndSXChange](#) 517  
[BrtEndSXChanges](#) 517  
[BrtEndSXCondFmt](#) 517  
[BrtEndSXCondFmt14](#) 518  
[BrtEndSXCondFmts](#) 518  
[BrtEndSXCondFmts14](#) 518  
[BrtEndSXCrtFormat](#) 518  
[BrtEndSXCrtFormats](#) 518  
[BrtEndSXDI](#) 518  
[BrtEndSXDIIs](#) 518  
[BrtEndSXEdit](#) 518  
[BrtEndSXEdits](#) 519  
[BrtEndSXFilter](#) 519  
[BrtEndSXFilters](#) 519  
[BrtEndSXFormat](#) 519  
[BrtEndSxFormats](#) 519  
[BrtEndSXLI](#) 519  
[BrtEndSXLICols](#) 519  
[BrtEndSXLIRws](#) 519  
[BrtEndSXLocation](#) 520  
[BrtEndSXPI](#) 520  
[BrtEndSXPIs](#) 520  
[BrtEndSXRow](#) 520  
[BrtEndSxRules](#) 520  
[BrtEndSXRules14](#) 520  
[BrtEndSxSelect](#) 520  
[BrtEndSXTDMP](#) 520  
[BrtEndSXTDMPs](#) 520  
[BrtEndSXTH](#) 521  
[BrtEndSXTHItem](#) 521  
[BrtEndSXTHItems](#) 521  
[BrtEndSXTHs](#) 521  
[BrtEndSXTupleSet](#) 521  
[BrtEndSXTupleSetData](#) 521  
[BrtEndSXTupleSetHeader](#) 521  
[BrtEndSXTupleSetRow](#) 521  
[BrtEndSxvcells](#) 522  
[BrtEndSXVD](#) 522  
[BrtEndSXVDs](#) 522  
[BrtEndSXVI](#) 522  
[BrtEndSXView](#) 522  
[BrtEndSXView14](#) 522  
[BrtEndSXVIs](#) 522  
[BrtEndTableSlicerCache](#) 522  
[BrtEndTableStyle](#) 522  
[BrtEndTableStyles](#) 523  
[BrtEndTimelineCacheID](#) 523  
[BrtEndTimelineCacheIDs](#) 523  
[BrtEndTimelineCachePivotCacheIDs](#) 523  
[BrtEndTimelineEx](#) 523  
[BrtEndTimelinesEx](#) 523  
[BrtEndTimelineStyle](#) 523  
[BrtEndTimelineStyleElements](#) 523  
[BrtEndTimelineStyles](#) 523  
[BrtEndTimelineStyleSheetExt15](#) 524  
[BrtEndUserCsView](#) 524



[BrtEndUserCsViews](#) 524  
[BrtEndUserShView](#) 524  
[BrtEndUserShViews](#) 524  
[BrtEndVolDeps](#) 524  
[BrtEndVolMain](#) 524  
[BrtEndVolTopic](#) 524  
[BrtEndVolType](#) 525  
[BrtEndWebExtentions](#) 525  
[BrtEndWebPubItem](#) 525  
[BrtEndWebPubItems](#) 525  
[BrtEndWsSortMap](#) 525  
[BrtEndWsView](#) 525  
[BrtEndWsViews](#) 525  
[BrtEOF](#) 525  
[BrtExternCellBlank](#) 526  
[BrtExternCellBool](#) 526  
[BrtExternCellError](#) 526  
[BrtExternCellReal](#) 526  
[BrtExternCellString](#) 527  
[BrtExternRowHdr](#) 527  
[BrtExternSheet](#) 528  
[BrtExternTableEnd](#) 528  
[BrtExternTableStart](#) 528  
[BrtExternValueMeta](#) 528  
[BrtFieldListActiveItem](#) 529  
[BrtFileRecover](#) 530  
[BrtFileSharing](#) 530  
[BrtFileSharingIso](#) 531  
[BrtFileVersion](#) 531  
[BrtFill](#) 532  
[BrtFilter](#) 538  
[BrtFilter14](#) 539  
[BrtFmlaBool](#) 539  
[BrtFmlaError](#) 540  
[BrtFmlaNum](#) 540  
[BrtFmlaString](#) 541  
[BrtFmt](#) 541  
[BrtFnGroup](#) 542  
[BrtFont](#) 542  
[BrtFRTBegin](#) 545  
[BrtFRTEnd](#) 545  
[BrtHLink](#) 545  
[BrtIconFilter](#) 546  
[BrtIconFilter14](#) 547  
[BrtIndexBlock](#) 547  
[BrtIndexedColor](#) 548  
[BrtIndexPartEnd](#) 548  
[BrtIndexRowBlock](#) 548  
[BrtInfo](#) 549  
[BrtItemUniqueName](#) 551  
[BrtKnownFonts](#) 551  
[BrtLegacyDrawing](#) 551  
[BrtLegacyDrawingHF](#) 552  
[BrtList14](#) 552  
[BrtListCCFmla](#) 552  
[BrtListPart](#) 553  
[BrtListTrFmla](#) 553  
[BrtMargins](#) 553  
[BrtMdb](#) 554  
[BrtMdtinfo](#) 555  
[BrtMdxMbrIstr](#) 555  
[BrtMergeCell](#) 556  
[brtModelRelationship](#) 556  
[BrtModelTable](#) 557  
[BrtMRUColor](#) 558  
[BrtName](#) 558  
[BrtNameExt](#) 560  
[BrtOleObject](#) 561  
[BrtOleSize](#) 563  
[BrtPageSetup](#) 563  
[BrtPane](#) 570  
[BrtPCDCalcMem15](#) 571  
[BrtPCDField14](#) 572  
[BrtPCDH14](#) 573  
[BrtPCDH15](#) 576  
[BrtPCDIABoolean](#) 576  
[BrtPCDIADatetime](#) 576  
[BrtPCDIAError](#) 577  
[BrtPCDIAMissing](#) 577  
[BrtPCDIANumber](#) 578  
[BrtPCDIAStrng](#) 578  
[BrtPCDIBoolean](#) 578  
[BrtPCDIADatetime](#) 579  
[BrtPCDIError](#) 579  
[BrtPCDIIndex](#) 579  
[BrtPCDIMissing](#) 580  
[BrtPCDINumber](#) 580  
[BrtPCDIString](#) 580  
[BrtPCDSFCIEntry](#) 581  
[BrtPCRRecord](#) 582  
[BrtPCRRecordDt](#) 582  
[BrtPhoneticInfo](#) 583  
[BrtPivotCacheConnectionName](#) 583  
[BrtPivotCacheIdVersion](#) 584  
[BrtPivotTableRef](#) 584  
[BrtPlaceholderName](#) 585  
[BrtPrintOptions](#) 586  
[BrtQsi15](#) 586  
[BrtRangePr15](#) 587  
[BrtRangeProtection](#) 587  
[BrtRangeProtection14](#) 588  
[BrtRangeProtectionIso](#) 588  
[BrtRangeProtectionIso14](#) 589  
[BrtRowHdr](#) 591  
[BrtRRAutoFmt](#) 592  
[BrtRRChgCell](#) 593  
[BrtRRConflict](#) 595  
[BrtRRDefName](#) 596  
[BrtRREndChgCell](#) 599  
[BrtRREndFormat](#) 599  
[BrtRREndInsDel](#) 599  
[BrtRREndMove](#) 599  
[BrtRRFormat](#) 599  
[BrtRRHeader](#) 601  
[BrtRRInsDel](#) 603  
[BrtRRInsertSh](#) 604  
[BrtRRMove](#) 605  
[BrtRRNote](#) 606  
[BrtRRRenSheet](#) 607  
[BrtRRSortItem](#) 608  
[BrtRRTQSIF](#) 608  
[BrtRRUserView](#) 609



[BrtRwDescent](#) 610  
[BrtSel](#) 610  
[BrtSheetCalcProp](#) 611  
[BrtSheetProtection](#) 611  
[BrtSheetProtectionIso](#) 616  
[BrtShrFmla](#) 622  
[BrtSlc](#) 622  
[BrtSlicerCacheBookPivotTables](#) 623  
[BrtSlicerCacheHideItemsWithNoData](#) 624  
[BrtSlicerCacheNativeItem](#) 625  
[BrtSlicerCacheOlapItem](#) 625  
[BrtSlicerCachePivotTables](#) 626  
[BrtSlicerCacheSelection](#) 626  
[BrtSlicerStyleElement](#) 627  
[BrtSmartTagType](#) 628  
[BrtSparkline](#) 628  
[BrtSSTItem](#) 629  
[BrtStr](#) 629  
[BrtStyle](#) 630  
[BrtSupAddin](#) 631  
[BrtSupBookSrc](#) 631  
[BrtSupNameBits](#) 631  
[BrtSupNameBool](#) 631  
[BrtSupNameEnd](#) 632  
[BrtSupNameErr](#) 632  
[BrtSupNameFmla](#) 632  
[BrtSupNameNil](#) 633  
[BrtSupNameNum](#) 633  
[BrtSupNameSt](#) 633  
[BrtSupNameStart](#) 633  
[BrtSupNameValueEnd](#) 634  
[BrtSupNameValueStart](#) 634  
[BrtSupSame](#) 634  
[BrtSupSelf](#) 634  
[BrtSupTabs](#) 635  
[BrtSXDI14](#) ([section 2.4.772](#) 635, [section 2.4.773](#) 636)  
[BrtSxFilter15](#) 637  
[BrtSXTDMPOrder](#) 639  
[BrtSXTH14](#) 639  
[BrtSXTupleItems](#) 640  
[BrtSXTupleSetHeaderItem](#) 640  
[BrtSXTupleSetRowItem](#) 641  
[BrtSxvcellBool](#) 642  
[BrtSxvcellDate](#) 642  
[BrtSxvcellErr](#) 643  
[BrtSxvcellNil](#) 644  
[BrtSxvcellNum](#) 644  
[BrtSxvcellStr](#) 645  
[BrtSXVD14](#) 645  
[BrtTable](#) 646  
[BrtTableSlicerCacheID](#) 648  
[BrtTableSlicerCacheIDs](#) 648  
[BrtTableStyleClient](#) 648  
[BrtTableStyleElement](#) 649  
[BrtTextPr15](#) 650  
[BrtTimelineCachePivotCacheID](#) 650  
[BrtTimelineStyleElement](#) 651  
[BrtTop10Filter](#) 651  
[BrtUCR](#) 653  
[BrtUserBookView](#) 655  
[BrtUsr](#) 660  
[BrtValueMeta](#) 660  
[BrtVolBool](#) 661  
[BrtVolErr](#) 661  
[BrtVolNum](#) 661  
[BrtVolRef](#) 661  
[BrtVolStr](#) 662  
[BrtVolSubtopic](#) 662  
[BrtWbFactoid](#) 662  
[BrtWbProp](#) 663  
[BrtWbProp14](#) 665  
[BrtWebExtension](#) 666  
[BrtWebOpt](#) 666  
[BrtWorkbookPr15](#) 667  
[BrtWsDim](#) 668  
[BrtWsFmtInfo](#) 668  
[BrtWsFmtInfoEx14](#) 669  
[BrtWsProp](#) 670  
[BrtXF](#) 672  
[RecordsBrtEndPCDSCPages](#) 508  
References  
[informative](#) 43  
[normative](#) 41  
[overview](#) 41  
[Relationship](#) 46  
[Relationship to protocols and other structures](#) 44  
[RelID](#) 894  
[Retrieval of last-calculated cell values without loading cell table](#) 93  
[RevExtern](#) 861  
[Revision headers](#) 75  
[Revision headers log](#) 161  
[Revision log](#) 75  
[Revision logs](#) 161  
[Revision records](#) 161  
[RevisionLogSheetName](#) 894  
[RevisionType](#) 895  
[RevItab](#) 862  
[RevLblName](#) 862  
[RevName](#) 863  
[RevNamePly](#) 864  
[RevNameTabId](#) 865  
[RevSheetName](#) 865  
[RFX](#) 895  
[RFXRel](#) 896  
[RgbExtra](#) 866  
[Rqce](#) 867  
[RqceArea](#) 870  
[RqceAreaRel](#) 871  
[RqceAreaSmall](#) 897  
[RqceLoc](#) 871  
[RqceLocRel](#) 872  
[RqceLocSmall](#) 897  
[RichStr](#) 897  
[RkNumber](#) 899  
[RRd](#) 899  
[RRdDnGrbit](#) 900  
[Rw](#) 901  
[Rw\\_Col](#) 901  
[RwNullable](#) 901  
[RwRelNeg](#) 901

[RwShort](#) 901

## S

[Script](#) 902

[SdSetSortOrder](#) 902

[Security – implementer considerations](#) 1105

Security considerations

[overview](#) 1105

[SerAr](#) 872

[SerBool](#) 873

[SerErr](#) 873

[SerNum](#) 873

[SerStr](#) 874

[Shared strings](#) 76

[Shared workbooks](#) 159

[change cells revision](#) 162

[format revision](#) 162

[insertion / deletion of rows / columns revision](#)  
162

[move cells revision](#) 162

[revision headers log](#) 161

[revision logs](#) 161

[revision records](#) 161

[sort map](#) 163

[undo chain](#) 163

[user log](#) 160

[SharedParsedFormula](#) 874

[ShortDtr](#) 902

[ShowDataAs](#) 903

[Single cell tables](#) 77

Slicer cache ([section 2.1.7.47](#) 77, [section 2.2.14.1](#)  
164)

[Slicer example](#) 1097

Slicer view ([section 2.2.14.2](#) 168, [section 2.2.15.2](#)  
170)

[Slicer: BrtBeginSlicer example](#) 1103

[Slicer: BrtBeginSlicerCache example](#) 1099

[Slicer: BrtBeginSlicerCacheDef example](#) 1099

[Slicer: BrtBeginSlicerCacheNative example](#) 1100

[Slicer: BrtBeginSlicers example](#) 1103

[Slicer: BrtEndSlicer example](#) 1104

[Slicer: BrtEndSlicerCache example](#) 1102

[Slicer: BrtEndSlicerCacheDef example](#) 1102

[Slicer: BrtEndSlicerCacheNative example](#) 1102

[Slicer: BrtEndSlicers example](#) 1104

[Slicer: BrtSlicerCacheNativeItem example](#) 1101

[Slicer: BrtSlicerCachePivotTables example](#) 1099

[SlicerCacheLevelData](#) 904

[SlicerCacheNativeItem](#) 904

[SlicerCachePivotTable](#) 905

Slicers ([section 2.1.7.48](#) 78, [section 2.2.14](#) 164,  
[section 2.2.15](#) 168)

[slicer cache](#) 164

[slicer view](#) ([section 2.2.14.2](#) 168, [section](#)  
[2.2.15.2](#) 170)

[slicers and cube functions](#) ([section 2.2.14.3](#) 168,  
[section 2.2.15.3](#) 171)

[Slicers and cube functions](#) ([section 2.2.14.3](#) 168,  
[section 2.2.15.3](#) 171)

[Sort map](#) ([section 2.1.7.49](#) 79, [section 2.2.12.10](#)  
163)

[SqEtxp](#) 905

[SrvFmtCV](#) 906

[SrvFmtData](#) 906

[SrvFmtFlags](#) 907

[SrvFmtNum](#) 907

[ST\\_SheetState](#) 908

[Strong password verifier algorithm](#) 158

[StrRun](#) 908

Structures

[ACProductVersion](#) 676

[ActiveX](#) 52

[ActiveX binary](#) 56

[ADO recordset connections](#) 157

[alternate content mechanism](#) 49

[ArgDesc](#) 676

[ArrayParsedFormula](#) 742

[attached toolbars](#) 57

[AutoFormatID](#) 677

[BErr](#) 743

[Blxf](#) 683

[Bold](#) 684

[BookProtectionFlags](#) 684

[Boolean](#) 743

[BorderStyle](#) 684

[BrtColSpan](#) 685

[cached returned values](#) 164

[calculation chain](#) 57

[Cell](#) 686

[cell metadata](#) 98

[cell table](#) 92

[CellParsedFormula](#) 744

[CellStyleName](#) 686

[Cetab](#) 744

[CFDateOper](#) 687

[CFFlag](#) 687

[CFFlag14](#) 688

[CFOper](#) 688

[CFParsedFormula](#) 775

[CFTemp](#) 689

[CFTextOper](#) 691

[CFType](#) 691

[CFVOParsedFormula](#) 776

[CFVOType](#) 692

[CFVOType14](#) 692

[change cells revision](#) 162

[chart](#) 57

[chart drawing](#) 57

[chart part](#) 96

[chart sheet](#) 58

[CmdType](#) 693

[CodeName](#) 693

[Col](#) 694

[collection of records](#) 48

[ColNullable](#) 694

[ColRel](#) 694

[ColRelShort](#) 694

[ColShort](#) 695

[comments](#) 58

[common productions](#) 89

[conceptual overview](#) 92

[connection name](#) 156

[control properties](#) 59  
[control tokens](#) 95  
[core file properties](#) 64  
[custom data](#) 59  
[custom data properties](#) 59  
[custom file properties](#) 64  
[custom property](#) 59  
[custom XML data storage](#) 59  
[custom XML data storage properties](#) 59  
[custom XML maps](#) 59  
[DAO recordset connections](#) 157  
[data functionality level](#) 102  
[DataConsolidationFunction](#) 695  
[DataFunctionalityLevel](#) 696  
[DateAsXnum](#) 696  
[DBType](#) 696  
[DCol](#) 697  
[DColShort](#) 697  
[DDEItemProperties](#) 697  
[diagram colors](#) 60  
[diagram data](#) 60  
[diagram layout definition](#) 60  
[diagram styles](#) 60  
[dialog sheet](#) 60  
[differential formatting \(DXFs\)](#) 149  
[digital signature origin](#) 61  
[digital signature XML signature](#) 61  
[display tokens](#) 95  
[drawings](#) 61  
[DRw](#) 698  
[DVals](#) 698  
[DValStrings](#) 699  
[DVParsedFormula](#) 777  
[DXFId](#) 699  
[DXFId14](#) 700  
[ECTwFldInfoData](#) 700  
[ECTxtWizData](#) 700  
[encryption \(password to open\)](#) 159  
[Etxp](#) 702  
[extended file properties](#) 64  
[external connection files](#) 156  
[external connections](#) 155  
[external data connections](#) 62  
[external link \(section 2.1.7.25 63, section 2.2.7.4 153\)](#)  
[external reference consumers](#) 152  
[external references](#) 151  
[external workbook base paths](#) 91  
[external workbooks](#) 91  
[ExternalNameProperties](#) 705  
[ExternalReferenceType](#) 706  
[ExtPtqArea3D](#) 706  
[ExtPtqAreaErr3D](#) 707  
[ExtPtqErr](#) 707  
[ExtPtqRef3D](#) 708  
[ExtPtqRefErr3D](#) 708  
[ExtSheetPair](#) 709  
[file structure](#) 46  
[FillPattern](#) 709  
[FnGroupID](#) 710  
[FontFlags](#) 711  
[FontScheme](#) 712  
[format conflicts](#) 151  
[format revision](#) 162  
[formula elements](#) 95  
[formulas](#) 94  
[FRTBlank](#) 712  
[FRTCFVParsedFormula14](#) 712  
[FRTCFVOParsedFormula14](#) 713  
[FRTDVParsedFormula14](#) 714  
[FRTFormula](#) 715  
[FRTFormulas](#) 715  
[FRTHeader](#) 716  
[FRTParsedFormula](#) 778  
[FRTProductVersion](#) 717  
[FRTRef](#) 717  
[FRTRefs](#) 718  
[FRTRelID](#) 719  
[FRTSqref](#) 719  
[FRTSqrefs](#) 720  
[Ftab](#) 778  
[future metadata](#) 101  
[future record](#) 48  
[future record mechanism](#) 48  
[GradientStop](#) 720  
[GrbitBeginSlicer](#) 720  
[GrbitFmla](#) 721  
[GrbitSXTupleSetHeaderItem](#) 721  
[GrbitSXTupleSetRowItem](#) 722  
[HeaderFooterString](#) 722  
[HorizAlign](#) 725  
[hyperlinks](#) 91  
[Icon](#) 725  
[Icv](#) 725  
[Ifmt](#) 730  
[IHDB](#) 731  
[IIFtab](#) 731  
[images](#) 65  
[insertion / deletion of rows / columns revision](#) 162  
[international macro sheet](#) 65  
[IsoPasswordData](#) 731  
[Istr](#) 732  
[ISXDI](#) 732  
[ISXTH](#) 732  
[ISXVD](#) 733  
[KPIProp](#) 733  
[KPISets](#) 733  
[KPISets14](#) 734  
[ListParsedFormula](#) 825  
[ListTotalRowFunction](#) 736  
[ListType](#) 737  
[LongRGBA](#) 737  
[LPByteBuf](#) 738  
[LPWideString](#) 738  
[macro sheet](#) 65  
[macro sheet binary index](#) 66  
[main topic](#) 163  
[Margin](#) 738  
[Mdir](#) 739  
[MdtFlags](#) 739  
[MDX metadata](#) 99

[MdxMbrIstrFlags](#) 741  
[mem tokens](#) 95  
[metadata](#) ([section 2.1.7.34](#) 66, [section 2.2.4](#) 96)  
[metadata block](#) 98  
[metadata block stores](#) 98  
[metadata stores](#) 98  
[metadata string store](#) 98  
[metadata types](#) 97  
[model](#) 67  
[model data source connections](#) 157  
[move cells revision](#) 162  
[NameParsedFormula](#) 825  
[non-worksheet pivot tables](#) 146  
[ObjectParsedFormula](#) 826  
[ODBC connections](#) 156  
[OLAP data model](#) 146  
[OLE DB connections](#) ([section 2.2.8.3](#) 156, [section 2.2.8.9.1](#) 157, [section 2.2.8.9.2](#) 157)  
[OLE object](#) 67  
[OLE package](#) 68  
[OLEItemProperties](#) 742  
[operand tokens](#) 95  
[operator tokens](#) 94  
[overview](#) 46  
[package](#) 46  
[ParameterParsedFormula](#) 827  
[part](#) 46  
[part enumeration](#) 49  
[password verifier algorithm](#) 158  
[PCDCalcMemCommon](#) 879  
[PCDIAddlInfo](#) 880  
[PCDIDateTime](#) 881  
[PCDISrvFmt](#) 882  
[PhRun](#) 883  
[pivot chart](#) 96  
[PivotCache](#) 102  
[PivotCache definition](#) 68  
[PivotCache records](#) 71  
[PivotFilterType](#) 884  
[PivotItemType](#) 886  
[PivotNumFmt](#) 887  
[PivotNumFmtExt](#) 887  
[PivotParsedFormula](#) 827  
[PivotTable](#) 71  
[PivotTable view](#) 124  
[PivotTables](#) 101  
[pivotvalues](#) 147  
[Pnn](#) 888  
[PRFilter](#) 888  
[printer settings](#) 74  
[PrintErrorsAs](#) 890  
[PRuleHeaderData](#) 890  
[Ptg](#) 828  
[PtgAdd](#) 834  
[PtgArea](#) 834  
[PtgArea3d](#) 834  
[PtgAreaErr](#) 835  
[PtgAreaErr3d](#) 836  
[PtgAreaN](#) 836  
[PtgArray](#) 837  
[PtgAttrBaxcel](#) 838  
[PtgAttrChoose](#) 838  
[PtgAttrGoTo](#) 839  
[PtgAttrIf](#) 839  
[PtgAttrIfError](#) 839  
[PtgAttrSemi](#) 840  
[PtgAttrSpace](#) 840  
[PtgAttrSpaceSemi](#) 840  
[PtgAttrSpaceType](#) 841  
[PtgAttrSum](#) 841  
[PtgBool](#) 842  
[PtgConcat](#) 842  
[PtgDataType](#) 842  
[PtgDiv](#) 843  
[PtgEq](#) 843  
[PtgErr](#) 843  
[PtgExp](#) 844  
[PtgExtraArray](#) 844  
[PtgExtraCol](#) 845  
[PtgExtraList](#) 845  
[PtgExtraMem](#) 846  
[PtgFunc](#) 846  
[PtgFuncVar](#) 847  
[PtgGe](#) 847  
[PtgGt](#) 848  
[PtgInt](#) 848  
[PtgIsect](#) 848  
[PtgLe](#) 848  
[PtgList](#) 849  
[PtgLt](#) 850  
[PtgMemArea](#) 851  
[PtgMemErr](#) 851  
[PtgMemFunc](#) 852  
[PtgMemNoMem](#) 852  
[PtgMissArg](#) 853  
[PtgMul](#) 853  
[PtgName](#) 853  
[PtgNameX](#) 854  
[PtgNe](#) 854  
[PtgNum](#) 855  
[PtgParen](#) 855  
[PtgPercent](#) 855  
[PtgPower](#) 856  
[PtgRange](#) 856  
[PtgRef](#) 856  
[PtgRef3d](#) 857  
[PtgRefErr](#) 857  
[PtgRefErr3d](#) 858  
[PtgRefN](#) 858  
[PtgRowType](#) 859  
[PtgStr](#) 859  
[PtgSub](#) 860  
[PtgSxName](#) 860  
[PtgUminus](#) 860  
[PtgUnion](#) 861  
[PtgUPlus](#) 861  
[QsiFieldId](#) 893  
[query table](#) 74  
[RangeProtectionTitleSDRel](#) 893  
[ReadingOrder](#) 894  
[record](#) 47  
[record enumeration](#) 171

[relationship](#) 46  
[RelID](#) 894  
[RevExtern](#) 861  
[revision headers](#) 75  
[revision headers log](#) 161  
[revision log](#) 75  
[revision logs](#) 161  
[revision records](#) 161  
[RevisionLogSheetName](#) 894  
[RevisionType](#) 895  
[RevItab](#) 862  
[RevLblName](#) 862  
[RevName](#) 863  
[RevNamePly](#) 864  
[RevNameTabId](#) 865  
[RevSheetName](#) 865  
[RfX](#) 895  
[RfXRel](#) 896  
[RgbExtra](#) 866  
[Rqce](#) 867  
[RqceArea](#) 870  
[RqceAreaRel](#) 871  
[RqceAreaSmall](#) 897  
[RqceLoc](#) 871  
[RqceLocRel](#) 872  
[RqceLocSmall](#) 897  
[RichStr](#) 897  
[RkNumber](#) 899  
[RRd](#) 899  
[RRdDnGrbit](#) 900  
[Rw](#) 901  
[Rw\\_Col](#) 901  
[RwNullable](#) 901  
[RwRelNeg](#) 901  
[RwShort](#) 901  
[Script](#) 902  
[SdSetSortOrder](#) 902  
[SerAr](#) 872  
[SerBool](#) 873  
[SerErr](#) 873  
[SerNum](#) 873  
[SerStr](#) 874  
[shared strings](#) 76  
[shared workbooks](#) 159  
[SharedParsedFormula](#) 874  
[ShortDtr](#) 902  
[ShowDataAs](#) 903  
[single cell tables](#) 77  
 [slicer cache \(\[section 2.1.7.47\]\(#\) 77, \[section 2.2.14.1\]\(#\) 164\)](#)  
 [slicer view \(\[section 2.2.14.2\]\(#\) 168, \[section 2.2.15.2\]\(#\) 170\)](#)  
[SlicerCacheLevelData](#) 904  
[SlicerCacheNativeItem](#) 904  
[SlicerCachePivotTable](#) 905  
[slicers \(\[section 2.1.7.48\]\(#\) 78, \[section 2.2.14\]\(#\) 164, \[section 2.2.15\]\(#\) 168\)](#)  
[slicers and cube functions \(\[section 2.2.14.3\]\(#\) 168, \[section 2.2.15.3\]\(#\) 171\)](#)  
[sort map \(\[section 2.1.7.49\]\(#\) 79, \[section 2.2.12.10\]\(#\) 163\)](#)  
[SqEtxp](#) 905  
[SrvFmtCV](#) 906  
[SrvFmtData](#) 906  
[SrvFmtFlags](#) 907  
[SrvFmtNum](#) 907  
[ST\\_SheetState](#) 908  
[strong\\_password\\_verifier\\_algorithm](#) 158  
[StrRun](#) 908  
[StyleFlags](#) 909  
[styles \(\[section 2.1.7.50\]\(#\) 79, \[section 2.2.6\]\(#\) 148\)](#)  
[subtopic sequences](#) 163  
[supporting link](#) 153  
[supporting link record](#) 153  
[SXAxis](#) 909  
[SXET](#) 909  
[SXMA](#) 910  
[SxOs](#) 875  
[SxSu](#) 875  
[table](#) 80  
[table styles](#) 150  
[TagFnMdx](#) 910  
[text import connections \(\[section 2.2.8.6\]\(#\) 156, \[section 2.2.8.9.4\]\(#\) 158\)](#)  
[theme](#) 81  
[thumbnail file properties](#) 65  
[timeline cache \(\[section 2.1.7.53\]\(#\) 81, \[section 2.2.15.1\]\(#\) 169\)](#)  
[timeline view](#) 170  
[timelines \(\[section 2.1.7.54\]\(#\) 81, \[section 2.2.15\]\(#\) 168\)](#)  
[timelines and cube functions](#) 171  
[TSEType](#) 910  
[Tws](#) 915  
[types](#) 163  
[TypeSql](#) 916  
[UncheckedCol](#) 916  
[UncheckedRfX](#) 916  
[UncheckedRw](#) 917  
[UncheckedSqRfX](#) 917  
[Underline](#) 917  
[undo chain](#) 163  
[user log](#) 160  
[user names](#) 82  
[value metadata](#) 98  
[VBA project](#) 82  
[VBA project signature](#) 82  
[VertAlign](#) 918  
[VirtualPath](#) 876  
[VML\\_drawings](#) 83  
[volatile dependencies \(\[section 2.1.7.59\]\(#\) 83, \[section 2.2.13\]\(#\) 163\)](#)  
[Web connections](#) 156  
[workbook](#) 84  
[worksheet](#) 86  
[worksheet binary index](#) 88  
[XFProp](#) 918  
[XFPropBorder](#) 921  
[XFPropColor](#) 921  
[XFPropGradient](#) 923  
[XFPropGradientStop](#) 924  
[XFProps](#) 924

- [XFPropTextRotation](#) 925
- [XFs](#) 148
- [XLNameWideString](#) 925
- [XLNullableWideString](#) 927
- [XLUnicodeString](#) 878
- [XLView](#) 927
- [XLWideString](#) 927
- [XmlDataType](#) 928
- [XmlMappedXPath](#) 929
- [Xnum](#) 930
- [Xti](#) 930
- [XtiIndex](#) 879
- [StyleFlags](#) 909
- Styles ([section 2.1.7.50](#) 79, [section 2.2.6](#) 148)
  - [differential formatting \(DXFs\)](#) 149
  - [format conflicts](#) 151
  - [table styles](#) 150
  - [XFs](#) 148
- [Subtopic sequences](#) 163
- [Supporting link](#) 153
- [Supporting link record](#) 153
- [SXAxis](#) 909
- [SXET](#) 909
- [SXMA](#) 910
- [SxOs](#) 875
- [SxSu](#) 875

**T**

- [Table](#) 80
- [Table example](#) 943
- [Table styles](#) 150
- [Table: BrtBeginAFilter example](#) 946
- [Table: BrtBeginList example](#) 943
- [Table: BrtBeginListCol 1 example](#) 947
- [Table: BrtBeginListCol 2 example](#) 948
- [Table: BrtBeginListCol 3 example](#) 949
- [Table: BrtBeginListCols example](#) 947
- [Table: BrtEndAFilter example](#) 946
- [Table: BrtEndList example](#) 954
- [Table: BrtEndListCol 1 example](#) 948
- [Table: BrtEndListCol 2 example](#) 949
- [Table: BrtEndListCol 3 example](#) 953
- [Table: BrtEndListCols example](#) 953
- [Table: BrtListCCFmla example](#) 950
- [Table: BrtListPart example](#) 943
- [Table: BrtTableStyleClient example](#) 953
- [TagFnMdx](#) 910
- Text import connections ([section 2.2.8.6](#) 156, [section 2.2.8.9.4](#) 158)
- [Theme](#) 81
- [Thumbnail file properties](#) 65
- Timeline cache ([section 2.1.7.53](#) 81, [section 2.2.15.1](#) 169)
- [Timeline view](#) 170
- timelines ([section 2.1.7.54](#) 81, [section 2.2.15](#) 168)
  - [timeline cache](#) 169
  - [timeline view](#) 170
  - [timelines and cube functions](#) 171
- [Timelines and cube functions](#) 171
- Tokens
  - [control tokens](#) 95

- [display tokens](#) 95
- [mem tokens](#) 95
- [operand](#) 95
- [operator](#) 94
- [Tracking changes](#) 1133
- [TSEType](#) 910
- [Tws](#) 915
- [Types](#) 163
- [TypeSql](#) 916

**U**

- [UncheckedCol](#) 916
- [UncheckedRfX](#) 916
- [UncheckedRw](#) 917
- [UncheckedSqRfX](#) 917
- [Underline](#) 917
- [Undo chain](#) 163
- [User log](#) 160
- [User names](#) 82

**V**

- [Value metadata](#) 98
- [VBA project](#) 82
- [VBA project signature](#) 82
- [Vendor-extensible fields](#) 45
- [Versioning](#) 44
- [VertAlign](#) 918
- [VirtualPath](#) 876
- [VML drawings](#) 83
- Volatile dependencies ([section 2.1.7.59](#) 83, [section 2.2.13](#) 163)
  - [cached returned values](#) 164
  - [main topic](#) 163
  - [subtopic sequences](#) 163
  - [types](#) 163

**W**

- [Web connections](#) 156
- [Workbook](#) 84
- [Workbook example](#) 986
- [Workbook:BrtBeginBook example](#) 986
- [Workbook:BrtBeginBundleShs example](#) 990
- [Workbook:BrtBeginSheet example](#) 996
- [Workbook:BrtBeginSheetData example](#) 1004
- [Workbook:BrtBeginSst example](#) 995
- [Workbook:BrtBeginWsView example](#) 999
- [Workbook:BrtBeginWsViews example](#) 999
- [Workbook:BrtBookView example](#) 989
- [Workbook:BrtBundleSh 1 example](#) 991
- [Workbook:BrtBundleSh 2 example](#) 991
- [Workbook:BrtBundleSh 3 example](#) 992
- [Workbook:BrtCalcProp example](#) 992
- [Workbook:BrtCellIsst 1 example](#) 1005
- [Workbook:BrtCellIsst 2 example](#) 1009
- [Workbook:BrtCellRk example](#) 1007
- [Workbook:BrtEndBook example](#) 995
- [Workbook:BrtEndBookViews example](#) 990
- [Workbook:BrtEndBundleShs example](#) 992
- [Workbook:BrtEndSheet example](#) 1016

[Workbook:BrtEndSheetData example](#) 1013  
[Workbook:BrtEndSst example](#) 996  
[Workbook:BrtEndWsView example](#) 1002  
[Workbook:BrtEndWsViews example](#) 1003  
[Workbook:BrtFileRecover example](#) 994  
[Workbook:BrtFileVersion example](#) 986  
[Workbook:BrtFmlaNum example](#) 1010  
[Workbook:BrtMargins example](#) 1015  
[Workbook:BrtPrintOptions example](#) 1015  
[Workbook:BrtRowHdr 1 example](#) 1004  
[Workbook:BrtRowHdr 2 example](#) 1006  
[Workbook:BrtRowHdr 3 example](#) 1008  
[Workbook:BrtRowHdr 4 example](#) 1009  
[Workbook:BrtSel example](#) 1001  
[Workbook:BrtSheetProtection example](#) 1013  
[Workbook:BrtSSTItem 1 example](#) 995  
[Workbook:BrtSSTItem 2 example](#) 995  
[Workbook:BrtWbFactoid example](#) 994  
[Workbook:BrtWbProp example](#) ([section 3.7.3](#) 987,  
[section 3.7.4](#) 989)  
[Workbook:BrtWsDim example](#) 999  
[Workbook:BrtWsFmtInfo example](#) 1003  
[Workbook:BrtWsProp example](#) 996  
[Worksheet](#) 86  
[Worksheet Binary Index](#) 88

## X

[XFProp](#) 918  
[XFPropBorder](#) 921  
[XFPropColor](#) 921  
[XFPropGradient](#) 923  
[XFPropGradientStop](#) 924  
[XFProps](#) 924  
[XFPropTextRotation](#) 925  
[XFs](#) 148  
[XLNameWideString](#) 925  
[XLNullableWideString](#) 927  
[XLUnicodeString](#) 878  
[XLView](#) 927  
[XLWideString](#) 927  
[XmlDataType](#) 928  
[XmlMappedXpath](#) 929  
[Xnum](#) 930  
[XtiIndex](#) 879