

## [MS-XLSX]:

# Excel (.xlsx) Extensions to the Office Open XML SpreadsheetML File Format

---

### Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation (“this documentation”) for protocols, file formats, data portability, computer languages, and standards support. Additionally, overview documents cover inter-protocol relationships and interactions.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you can make copies of it in order to develop implementations of the technologies that are described in this documentation and can distribute portions of it in your implementations that use these technologies or in your documentation as necessary to properly document the implementation. You can also distribute in your implementation, with or without modification, any schemas, IDLs, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications documentation.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that might cover your implementations of the technologies described in the Open Specifications documentation. Neither this notice nor Microsoft's delivery of this documentation grants any licenses under those patents or any other Microsoft patents. However, a given Open Specifications document might be covered by the Microsoft [Open Specifications Promise](#) or the [Microsoft Community Promise](#). If you would prefer a written license, or if the technologies described in this documentation are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting [iplg@microsoft.com](mailto:iplg@microsoft.com).
- **License Programs.** To see all of the protocols in scope under a specific license program and the associated patents, visit the [Patent Map](#).
- **Trademarks.** The names of companies and products contained in this documentation might be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit [www.microsoft.com/trademarks](http://www.microsoft.com/trademarks).
- **Fictitious Names.** The example companies, organizations, products, domain names, email addresses, logos, people, places, and events that are depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

**Reservation of Rights.** All other rights are reserved, and this notice does not grant any rights other than as specifically described above, whether by implication, estoppel, or otherwise.

**Tools.** The Open Specifications documentation does not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments, you are free to take advantage of them. Certain Open Specifications documents are intended for use in conjunction with publicly available standards specifications and network programming art and, as such, assume that the reader either is familiar with the aforementioned material or has immediate access to it.

**Support.** For questions and support, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

## Revision Summary

Date	Revision History	Revision Class	Comments
7/13/2009	0.1	Major	Initial Availability
8/28/2009	0.2	Editorial	Revised and edited the technical content
11/6/2009	0.3	Editorial	Revised and edited the technical content
2/19/2010	1.0	Major	Updated and revised the technical content
3/31/2010	1.01	Editorial	Revised and edited the technical content
4/30/2010	1.02	Editorial	Revised and edited the technical content
6/7/2010	1.03	Editorial	Revised and edited the technical content
6/29/2010	1.04	Editorial	Changed language and formatting in the technical content.
7/23/2010	1.04	None	No changes to the meaning, language, or formatting of the technical content.
9/27/2010	1.04	None	No changes to the meaning, language, or formatting of the technical content.
11/15/2010	1.04	None	No changes to the meaning, language, or formatting of the technical content.
12/17/2010	1.04	None	No changes to the meaning, language, or formatting of the technical content.
3/18/2011	1.5	Minor	Clarified the meaning of the technical content.
6/10/2011	1.5	None	No changes to the meaning, language, or formatting of the technical content.
1/20/2012	2.0	Major	Significantly changed the technical content.
4/11/2012	2.0	None	No changes to the meaning, language, or formatting of the technical content.
7/16/2012	3.0	Major	Significantly changed the technical content.
10/8/2012	4.0	Major	Significantly changed the technical content.
2/11/2013	4.1	Minor	Clarified the meaning of the technical content.
7/30/2013	4.1	None	No changes to the meaning, language, or formatting of the technical content.
11/18/2013	4.2	Minor	Clarified the meaning of the technical content.
2/10/2014	4.2	None	No changes to the meaning, language, or formatting of the technical content.
4/30/2014	4.3	Minor	Clarified the meaning of the technical content.
7/31/2014	5.0	Major	Significantly changed the technical content.
10/30/2014	5.1	Minor	Clarified the meaning of the technical content.
3/16/2015	6.0	Major	Significantly changed the technical content.

<b>Date</b>	<b>Revision History</b>	<b>Revision Class</b>	<b>Comments</b>
9/4/2015	7.0	Major	Significantly changed the technical content.
9/29/2016	7.1	Minor	Clarified the meaning of the technical content.
11/14/2016	7.1	None	No changes to the meaning, language, or formatting of the technical content.
1/18/2017	8.0	Major	Significantly changed the technical content.
6/20/2017	8.0	None	No changes to the meaning, language, or formatting of the technical content.
12/12/2017	9.0	Major	Significantly changed the technical content.
4/27/2018	10.0	Major	Significantly changed the technical content.
5/9/2018	11.0	Major	Significantly changed the technical content.
6/8/2018	12.0	Major	Significantly changed the technical content.
8/1/2018	13.0	Major	Significantly changed the technical content.
8/28/2018	14.0	Major	Significantly changed the technical content.
10/10/2018	15.0	Major	Significantly changed the technical content.
12/11/2018	16.0	Major	Significantly changed the technical content.
1/11/2019	17.0	Major	Significantly changed the technical content.
3/19/2019	17.1	Minor	Clarified the meaning of the technical content.
11/19/2019	18.0	Major	Significantly changed the technical content.
2/19/2020	19.0	Major	Significantly changed the technical content.
10/15/2020	20.0	Major	Significantly changed the technical content.
4/22/2021	21.0	Major	Significantly changed the technical content.
8/17/2021	22.0	Major	Significantly changed the technical content.
11/16/2021	23.0	Major	Significantly changed the technical content.
2/15/2022	23.0	None	No changes to the meaning, language, or formatting of the technical content.
5/17/2022	23.1	Minor	Clarified the meaning of the technical content.
8/16/2022	23.2	Minor	Clarified the meaning of the technical content.
11/15/2022	23.3	Minor	Clarified the meaning of the technical content.
6/16/2023	23.4	Minor	Clarified the meaning of the technical content.
2/20/2024	24.0	Major	Significantly changed the technical content.

# Table of Contents

<b>1</b>	<b>Introduction .....</b>	<b>15</b>
1.1	Glossary .....	15
1.2	References .....	22
1.2.1	Normative References .....	22
1.2.2	Informative References .....	23
1.3	Structure Overview (Synopsis) .....	23
1.4	Relationship to Protocols and Other Structures .....	23
1.5	Applicability Statement .....	24
1.6	Versioning and Localization .....	24
1.7	Vendor-Extensible Fields .....	24
<b>2</b>	<b>Structures .....</b>	<b>25</b>
2.1	Part Enumerations.....	25
2.1.1	Control Properties.....	25
2.1.2	Custom Data.....	25
2.1.3	Custom Data Properties.....	26
2.1.4	Slicer Cache.....	26
2.1.5	Slicers.....	26
2.1.6	Data Model .....	27
2.1.6.1	Command Annotations.....	27
2.1.6.2	DimensionAttribute Annotations.....	28
2.1.7	Timeline Cache.....	28
2.1.8	Timelines.....	29
2.1.9	Survey .....	29
2.1.10	Rich Value Data.....	29
2.1.11	Rich Value Structure .....	30
2.1.12	Rich Value Array.....	30
2.1.13	Rich Styles.....	30
2.1.14	Supporting Property Bag Data .....	31
2.1.15	Supporting Property Bag Structure .....	31
2.1.16	Rich Value Types .....	32
2.1.17	Threaded Comments.....	32
2.1.18	Persons .....	32
2.1.19	Named Sheet Views .....	33
2.1.20	Web Image Supporting Rich Data .....	33
2.1.21	Rich Value Rels.....	34
2.1.22	Feature Property Bag .....	34
2.1.23	Python .....	34
2.2	Extensions .....	35
2.2.1	SpreadsheetML Extensibility Elements .....	35
2.2.2	Formulas .....	35
2.2.2.1	Cell Formulas .....	61
2.2.2.2	Conditional Formatting Formulas.....	61
2.2.2.3	Data Validation Formulas .....	62
2.2.2.4	External Name Formulas .....	62
2.2.2.5	Name Formulas .....	62
2.2.2.6	Pivot Field Formulas .....	62
2.2.2.7	Pivot Item Formulas .....	63
2.2.3	Functions.....	63
2.2.4	Extensions by Part .....	69
2.2.4.1	Connections .....	69
2.2.4.2	Drawing.....	69
2.2.4.3	External Workbook References .....	70
2.2.4.4	Metadata .....	70
2.2.4.5	Pivot Table.....	70

2.2.4.6	Pivot Table Cache Definition .....	72
2.2.4.7	Query Table .....	73
2.2.4.8	SlicerCache .....	74
2.2.4.9	Styles.....	74
2.2.4.10	Table Definition .....	75
2.2.4.11	Workbook .....	76
2.2.4.12	Worksheet .....	77
2.3	Conceptual Overview .....	79
2.3.1	PivotTable What-if Analysis .....	79
2.3.2	Slicers.....	79
2.3.2.1	Slicer Cache .....	80
2.3.2.1.1	Slicer Source Data.....	80
2.3.2.1.2	Slicer Cache Relationship to PivotCache.....	80
2.3.2.1.3	Slicer Cache Relationship to Table .....	81
2.3.2.1.4	Slicer Cache Relationship to PivotTable View .....	81
2.3.2.1.5	Slicer Cache Relationship to Table column .....	82
2.3.2.1.6	Slicer Items .....	82
2.3.2.1.6.1	Non-OLAP Slicer Items .....	82
2.3.2.1.6.2	OLAP Slicer Items .....	82
2.3.2.1.7	Slicer Cross Filtering .....	83
2.3.2.2	Slicer View .....	83
2.3.2.2.1	Slicer View Relationship to Slicer Cache.....	83
2.3.2.3	Slicers and Cube Functions.....	84
2.3.2.4	Slicer Styles .....	84
2.3.3	Non-Worksheet PivotTable .....	84
2.3.4	PivotValues.....	85
2.3.4.1	PivotValueCell.....	85
2.3.4.1.1	Value .....	85
2.3.4.1.2	Server Formatting .....	85
2.3.5	Timelines.....	85
2.3.5.1	Timeline Cache .....	85
2.3.5.1.1	Timeline Source Data .....	86
2.3.5.1.2	Timeline Cache Relationship to PivotCache .....	86
2.3.5.1.3	Timeline Cache Relationship to PivotTable View .....	86
2.3.5.1.4	Timeline State.....	86
2.3.5.2	Timeline View .....	86
2.3.5.2.1	Timeline View Relationship to Timeline Cache .....	87
2.3.5.3	Timelines and Cube Functions.....	87
2.3.5.4	Timeline Styles .....	87
2.3.6	Rich Data.....	87
2.3.6.1	Rich Values .....	87
2.3.6.1.1	Array Type .....	88
2.3.6.1.2	Entity Type .....	88
2.3.6.1.3	Error Types.....	88
2.3.6.1.3.1	Blocked Error Type.....	89
2.3.6.1.3.2	Busy Error Types .....	89
2.3.6.1.3.3	Calc Error Type.....	89
2.3.6.1.3.4	Connect Error Type .....	89
2.3.6.1.3.5	Name Error Type .....	90
2.3.6.1.3.6	Field Error Type .....	90
2.3.6.1.3.7	Spill Error Type.....	90
2.3.6.1.3.8	Unknown Error Type.....	90
2.3.6.1.3.9	TimeOut Error Type.....	91
2.3.6.1.3.10	External Error Type .....	91
2.3.6.1.4	Formatted Number Type.....	91
2.3.6.1.5	Hyperlink Type.....	91
2.3.6.1.6	ImageUrl Type .....	92
2.3.6.1.7	Linked Entity Types .....	93

2.3.6.1.7.1	Linked Entity and Linked Entity Core Types .....	93
2.3.6.1.7.2	Linked Entity 2 and Linked Entity 2 Core Types.....	93
2.3.6.1.8	Local Image Type .....	95
2.3.6.1.9	SourceAttribution Type.....	95
2.3.6.1.10	Stock History Cache Type .....	96
2.3.6.1.11	Web Image Type .....	96
2.3.6.1.12	ExternalCodeServiceObject Type .....	97
2.3.6.2	Supporting Property Bags .....	98
2.3.6.3	Special Keys and Key Flags .....	98
2.3.6.4	Rich Styles and Properties.....	99
2.3.7	Threaded Comments .....	100
2.3.7.1	Persons .....	100
2.3.7.2	Mentions.....	100
2.3.7.3	Legacy Comment Placeholders.....	101
2.3.7.3.1	Reconciliation.....	101
2.3.8	Named Sheet Views .....	101
2.3.8.1	Table Filters and Worksheet Filters .....	102
2.3.8.2	Reconciliation .....	102
2.3.9	Feature Property Bag .....	103
2.3.9.1	XFComplements.....	103
2.3.9.2	XFComplement .....	103
2.3.9.3	XFControls .....	103
2.3.9.4	Checkbox.....	104
2.3.9.5	DXFComplements.....	104
2.3.10	Python in Excel.....	104
2.3.10.1	Python environment .....	104
2.3.10.2	Python Function .....	105
2.3.10.3	Python Script.....	105
2.3.10.4	Parameter reference encoding .....	105
2.4	Global Elements .....	105
2.4.1	pivotTableReference.....	105
2.4.2	pivotTableServerFormats .....	105
2.4.3	f.....	105
2.4.4	ref .....	106
2.4.5	sqref .....	106
2.4.6	conditionalFormattings .....	107
2.4.7	dataValidations.....	107
2.4.8	sparklineGroups .....	107
2.4.9	slicerList.....	107
2.4.10	protectedRanges .....	108
2.4.11	ignoredErrors .....	108
2.4.12	pivotCaches .....	108
2.4.13	slicerCaches.....	109
2.4.14	workbookPr.....	109
2.4.15	calculatedMember.....	109
2.4.16	cacheHierarchy.....	110
2.4.17	dataField .....	110
2.4.18	pivotField.....	110
2.4.19	pivotTableDefinition .....	110
2.4.20	pivotCacheDefinition .....	111
2.4.21	connection .....	111
2.4.22	table .....	111
2.4.23	slicerStyles .....	112
2.4.24	dxfs .....	112
2.4.25	oleItem .....	112
2.4.26	pivotHierarchy.....	113
2.4.27	cacheField .....	113
2.4.28	id .....	113

2.4.29	iconFilter .....	113
2.4.30	filter.....	114
2.4.31	customFilters .....	114
2.4.32	sortCondition .....	114
2.4.33	sourceConnection .....	115
2.4.34	formControlPr .....	115
2.4.35	datastoreItem .....	115
2.4.36	slicers .....	115
2.4.37	slicer.....	116
2.4.38	slicerCacheDefinition .....	116
2.4.39	pivotCaches .....	116
2.4.40	pivotTableReferences .....	117
2.4.41	queryTable .....	117
2.4.42	webExtensions .....	117
2.4.43	connection .....	118
2.4.44	calculatedMember.....	118
2.4.45	pivotTableUISettings.....	118
2.4.46	pivotFilter .....	118
2.4.47	slicerCaches .....	119
2.4.48	tableSlicerCache .....	119
2.4.49	timelineCacheRefs .....	119
2.4.50	timelineRefs .....	119
2.4.51	timelineCachePivotCaches.....	120
2.4.52	cacheHierarchy.....	120
2.4.53	slicerCacheHideItemsWithNoData .....	120
2.4.54	timelineStyles .....	121
2.4.55	dxfs .....	121
2.4.56	timelinePivotCacheDefinition .....	121
2.4.57	timelines .....	122
2.4.58	timelineCacheDefinition .....	122
2.4.59	workbookPr.....	122
2.4.60	slicerCachePivotTables .....	122
2.4.61	cachedUniqueNames .....	123
2.4.62	dataModel.....	123
2.4.63	pivotTableData .....	123
2.4.64	pivotCacheIdVersion .....	124
2.4.65	timeslicer .....	124
2.4.66	list .....	124
2.4.67	absPath .....	125
2.4.68	dataField .....	125
2.4.69	survey.....	125
2.4.70	contentPart.....	125
2.4.71	modelTimeGroupings .....	126
2.4.72	revisionPtr .....	126
2.4.73	pivotTableDefinition16.....	126
2.4.74	arrayData .....	126
2.4.75	richStyleSheet.....	127
2.4.76	rvb .....	127
2.4.77	rvData.....	127
2.4.78	rvStructures.....	127
2.4.79	rvTypesInfo .....	128
2.4.80	spbStructures.....	128
2.4.81	supportingPropertyBags .....	128
2.4.82	calcFeatures.....	128
2.4.83	filterColumn .....	129
2.4.84	richSortCondition.....	129
2.4.85	personList.....	129
2.4.86	ThreadedComments .....	130

2.4.87	dynamicArrayProperties.....	130
2.4.88	namedSheetViews .....	130
2.4.89	externalLinksPr.....	130
2.4.90	webImagesSrd .....	131
2.4.91	implicitMeasureSupport .....	131
2.4.92	refreshIntervals.....	131
2.4.93	dataFieldFutureData.....	132
2.4.94	ignorableAfterVersion .....	132
2.4.95	cacheVersionInfo .....	132
2.4.96	pivotVersionInfo .....	132
2.4.97	alternateUrls .....	133
2.4.98	FeaturePropertyBags.....	133
2.4.99	xfComplement.....	133
2.4.100	richValueRels .....	134
2.4.101	externalCodeService .....	134
2.4.102	python .....	134
2.4.103	DXFComplement.....	134
2.4.104	aggregationInfo.....	135
2.4.105	featureSupportInfo .....	135
2.5	Global Attributes .....	135
2.5.1	coauthVersionLast .....	135
2.5.2	coauthVersionMax.....	136
2.5.3	dyDescent .....	136
2.5.4	formatCode16 .....	136
2.5.5	knownFonts .....	137
2.5.6	misleadingFormat .....	137
2.5.7	uid.....	138
2.5.8	uid.....	138
2.5.9	uid.....	138
2.5.10	uid.....	139
2.5.11	uid.....	139
2.5.12	uid.....	139
2.5.13	uidLastSave .....	140
2.6	Complex Types .....	140
2.6.1	CT_ConditionalFormattings .....	140
2.6.2	CT_ConditionalFormatting.....	140
2.6.3	CT_DataValidations.....	141
2.6.4	CT_DataValidationFormula .....	142
2.6.5	CT_DataValidation .....	143
2.6.6	CT_SparklineGroups.....	145
2.6.7	CT_SparklineGroup .....	146
2.6.8	CT_Sparklines .....	149
2.6.9	CT_Sparkline .....	150
2.6.10	CT_WorkbookPr.....	150
2.6.11	CT_SlicerRefs .....	151
2.6.12	CT_SlicerRef .....	151
2.6.13	CT_SlicerCaches .....	152
2.6.14	CT_SlicerCache .....	152
2.6.15	CT_CalculatedMember.....	153
2.6.16	CT_TupleSet .....	154
2.6.17	CT_TupleSetHeaders.....	155
2.6.18	CT_TupleSetHeader .....	155
2.6.19	CT_TupleSetRows .....	156
2.6.20	CT_TupleSetRow .....	156
2.6.21	CT_TupleSetRowItem.....	157
2.6.22	CT_SetLevels .....	157
2.6.23	CT_SetLevel.....	158
2.6.24	CT_CacheHierarchy.....	158



2.6.25	CT_DataField .....	162
2.6.26	CT_Cfvo .....	163
2.6.27	CT_CfRule.....	164
2.6.28	CT_IconSet.....	168
2.6.29	CT_ColorScale.....	169
2.6.30	CT_DataBar .....	170
2.6.31	CT_PivotField .....	172
2.6.32	CT_PivotTableDefinition.....	174
2.6.33	CT_PivotCacheDefinition.....	176
2.6.34	CT_Connection .....	177
2.6.35	CT_Table .....	178
2.6.36	CT_CfIcon.....	178
2.6.37	CT_PivotEdits.....	179
2.6.38	CT_PivotEdit .....	179
2.6.39	CT_PivotChanges.....	180
2.6.40	CT_PivotChange .....	180
2.6.41	CT_PivotUserEdit.....	181
2.6.42	CT_PivotEditValue.....	182
2.6.43	CT_TupleItems.....	182
2.6.44	CT_SlicerStyle.....	183
2.6.45	CT_SlicerStyleElement .....	183
2.6.46	CT_OleItem .....	184
2.6.47	CT_PivotHierarchy .....	185
2.6.48	CT_CacheField.....	186
2.6.49	CT_ConditionalFormats.....	188
2.6.50	CT_ConditionalFormat .....	188
2.6.51	CT_SlicerStyles .....	189
2.6.52	CT_SlicerStyleElements .....	189
2.6.53	CT_IgnoredErrors .....	190
2.6.54	CT_IgnoredError.....	190
2.6.55	CT_ProtectedRanges .....	193
2.6.56	CT_ProtectedRange.....	193
2.6.57	CT_IconFilter .....	195
2.6.58	CT_Filter .....	196
2.6.59	CT_CustomFilters .....	196
2.6.60	CT_CustomFilter.....	197
2.6.61	CT_SortCondition.....	197
2.6.62	CT_SourceConnection .....	198
2.6.63	CT_ListItem .....	199
2.6.64	CT_ListItems.....	199
2.6.65	CT_FormControlPr .....	200
2.6.66	CT_DatastoreItem .....	204
2.6.67	CT_Slicers .....	204
2.6.68	CT_Slicer.....	205
2.6.69	CT_Slicer.....	207
2.6.70	CT_SlicerCacheDefinition .....	207
2.6.71	CT_SlicerCacheData.....	209
2.6.72	CT_SlicerCachePivotTables.....	209
2.6.73	CT_SlicerCachePivotTable.....	210
2.6.74	CT_OlapSlicerCacheItem .....	210
2.6.75	CT_OlapSlicerCacheItemParent .....	211
2.6.76	CT_OlapSlicerCacheRange .....	211
2.6.77	CT_OlapSlicerCacheRanges.....	212
2.6.78	CT_OlapSlicerCacheLevelData .....	212
2.6.79	CT_OlapSlicerCacheLevelsData.....	213
2.6.80	CT_OlapSlicerCache .....	214
2.6.81	CT_OlapSlicerCacheSelections.....	215
2.6.82	CT_OlapSlicerCacheSelection .....	215

2.6.83	CT_TabularSlicerCache .....	216
2.6.84	CT_TabularSlicerCacheItems .....	217
2.6.85	CT_TabularSlicerCacheItem .....	218
2.6.86	CT_PivotTableReferences .....	218
2.6.87	CT_PivotTableReference .....	219
2.6.88	CT_QueryTable .....	220
2.6.89	CT_WebExtensions .....	220
2.6.90	CT_WebExtension .....	221
2.6.91	CT_Connection .....	221
2.6.92	CT_CalculatedMemberExt .....	223
2.6.93	CT_CalculatedMember .....	224
2.6.94	CT_FieldListActiveTabTopLevelEntity .....	224
2.6.95	CT_PivotFilter .....	225
2.6.96	CT_PivotTableUISettings .....	227
2.6.97	CT_TableSlicerCache .....	227
2.6.98	CT_TimelineCacheRefs .....	228
2.6.99	CT_TimelineCacheRef .....	229
2.6.100	CT_TimelineRefs .....	229
2.6.101	CT_TimelineRef .....	230
2.6.102	CT_CacheHierarchy .....	230
2.6.103	CT_SlicerCacheHideNoData .....	231
2.6.104	CT_SlicerCacheOlapLevelName .....	231
2.6.105	CT_TimelineStyles .....	232
2.6.106	CT_TimelineStyleElements .....	232
2.6.107	CT_TimelineStyle .....	233
2.6.108	CT_TimelineStyleElement .....	233
2.6.109	CT_TimelinePivotCacheDefinition .....	234
2.6.110	CT_Timelines .....	234
2.6.111	CT_Timeline .....	235
2.6.112	CT_TimelineCacheDefinition .....	237
2.6.113	CT_TimelineCachePivotTables .....	239
2.6.114	CT_TimelineCachePivotTable .....	239
2.6.115	CT_TimelineRange .....	240
2.6.116	CT_TimelineState .....	240
2.6.117	CT_WorkbookPr .....	241
2.6.118	CT_TimelinePivotFilter .....	242
2.6.119	CT_ModelTextPr .....	243
2.6.120	CT_RangePr .....	243
2.6.121	CT_DbTable .....	244
2.6.122	CT_DbTables .....	244
2.6.123	CT_DbCommand .....	245
2.6.124	CT_OledbPr .....	245
2.6.125	CT_DataFeedPr .....	246
2.6.126	CT_CachedUniqueNames .....	246
2.6.127	CT_CachedUniqueName .....	247
2.6.128	CT_ModelTable .....	247
2.6.129	CT_ModelTables .....	248
2.6.130	CT_ModelRelationship .....	248
2.6.131	CT_ModelRelationships .....	249
2.6.132	CT_DataModel .....	249
2.6.133	CT_PivotTableData .....	250
2.6.134	CT_PivotRow .....	251
2.6.135	CT_PivotValueCell .....	251
2.6.136	CT_PivotValueCellExtra .....	252
2.6.137	CT_PivotTableServerFormats .....	253
2.6.138	CT_PivotCacheIdVersion .....	254
2.6.139	CT_Timeline .....	254
2.6.140	CT_AbsolutePath .....	255

2.6.141	CT_DataField .....	255
2.6.142	CT_Survey .....	255
2.6.143	CT_SurveyQuestions .....	256
2.6.144	CT_SurveyQuestion .....	257
2.6.145	CT_SurveyElementPr.....	258
2.6.146	CT_Ref .....	259
2.6.147	CT_Sqref .....	260
2.6.148	CT_ApplicationNonVisualDrawingProps .....	261
2.6.149	CT_CacheSourceExt .....	261
2.6.150	CT_ContentPart .....	261
2.6.151	CT_ContentPartNonVisual .....	262
2.6.152	CT_CalculatedTimeColumn.....	263
2.6.153	CT_ModelTimeGrouping.....	263
2.6.154	CT_ModelTimeGroupings .....	264
2.6.155	CT_RevisionPtr .....	264
2.6.156	CT_PivotTableDefinition16 .....	265
2.6.157	CT_Array .....	266
2.6.158	CT_ArrayData .....	267
2.6.159	CT_ArrayValue .....	267
2.6.160	CT_CustomRichFilter .....	268
2.6.161	CT_CustomRichFilters.....	268
2.6.162	CT_DynamicRichFilter .....	269
2.6.163	CT_Key .....	270
2.6.164	CT_RichDateGroupItem .....	271
2.6.165	CT_RichFilter.....	271
2.6.166	CT_RichFilters .....	272
2.6.167	CT_RichFormatProperties.....	273
2.6.168	CT_RichFormatProperty .....	273
2.6.169	CT_RichSortCondition.....	273
2.6.170	CT_RichStyle.....	275
2.6.171	CT_RichStylePropertyValue .....	275
2.6.172	CT_RichStyles .....	276
2.6.173	CT_RichStylesheet .....	276
2.6.174	CT_RichTop10 .....	277
2.6.175	CT_RichValue .....	277
2.6.176	CT_RichValueBlock .....	278
2.6.177	CT_RichValueData .....	279
2.6.178	CT_RichValueFallback.....	279
2.6.179	CT_RichValueGlobalType .....	280
2.6.180	CT_RichValueStructure .....	280
2.6.181	CT_RichValueStructures .....	281
2.6.182	CT_RichValueType .....	281
2.6.183	CT_RichValueTypeKeyFlags.....	282
2.6.184	CT_RichValueTypeReservedKey .....	282
2.6.185	CT_RichValueTypeReservedKeyFlag .....	283
2.6.186	CT_RichValueTypes.....	283
2.6.187	CT_RichValueTypesInfo .....	284
2.6.188	CT_SupportingPropertyBag .....	284
2.6.189	CT_SupportingPropertyBagArray .....	285
2.6.190	CT_SupportingPropertyBagArrayData .....	286
2.6.191	CT_SupportingPropertyBagArrayValue.....	286
2.6.192	CT_SupportingPropertyBagData .....	287
2.6.193	CT_SupportingPropertyBagKey .....	287
2.6.194	CT_SupportingPropertyBags.....	288
2.6.195	CT_SupportingPropertyBagStructure .....	288
2.6.196	CT_SupportingPropertyBagStructures.....	289
2.6.197	CT_SupportingPropertyBagValue .....	289
2.6.198	CT_Value.....	290

2.6.199	CT_CalcFeature .....	290
2.6.200	CT_CalcFeatures.....	291
2.6.201	CT_RichFilterColumn .....	291
2.6.202	CT_Mention .....	292
2.6.203	CT_Person .....	292
2.6.204	CT_PersonList .....	293
2.6.205	CT_ThreadedComment .....	294
2.6.206	CT_ThreadedCommentMentions .....	295
2.6.207	CT_ThreadedComments .....	295
2.6.208	CT_DynamicArrayProperties .....	296
2.6.209	CT_ColumnFilter .....	296
2.6.210	CT_NamedSheetView .....	297
2.6.211	CT_NamedSheetViews.....	298
2.6.212	CT_NsvFilter .....	298
2.6.213	CT_SortRule.....	299
2.6.214	CT_SortRules .....	300
2.6.215	CT_ExternalLinksPr .....	301
2.6.216	CT_WebImagesSupportingRichData .....	301
2.6.217	CT_WebImageSupportingRichData .....	302
2.6.218	CT_WebImageSupportingRichDataRelationship .....	302
2.6.219	CT_CommentHyperlink.....	303
2.6.220	CT_ThreadedComments2Ext .....	303
2.6.221	CT_RichValueRefreshInterval .....	304
2.6.222	CT_RichValueRefreshIntervals .....	305
2.6.223	CT_DataFieldFutureData .....	305
2.6.224	CT_Ignorable .....	305
2.6.225	CT_CacheVersionInfo .....	306
2.6.226	CT_PivotVersionInfo .....	306
2.6.227	CT_AlternateUrl.....	307
2.6.228	CT_ExternalBookAlternateUrls .....	307
2.6.229	CT_ArrayFeatureProperty .....	308
2.6.230	CT_BagFeatureProperty.....	309
2.6.231	CT_BoolFeatureProperty .....	309
2.6.232	CT_DecimalFeatureProperty .....	310
2.6.233	CT_FeaturePropertyBag .....	310
2.6.234	CT_FeaturePropertyBags .....	311
2.6.235	CT_IntFeatureProperty .....	312
2.6.236	CT_RelFeatureProperty.....	312
2.6.237	CT_StringFeatureProperty.....	313
2.6.238	CT_XfComplement .....	313
2.6.239	CT_XfComplementExt .....	314
2.6.240	CT_BagExtensions .....	314
2.6.241	CT_RichValueRelRelationship.....	315
2.6.242	CT_RichValueRels .....	315
2.6.243	CT_MsForm.....	315
2.6.244	CT_MsFormsExt.....	316
2.6.245	CT_QuestionExt.....	317
2.6.246	CT_Question .....	317
2.6.247	CT_ExternalCodeService.....	317
2.6.248	CT_ExternalCodeServiceExt .....	318
2.6.249	CT_Python .....	318
2.6.250	CT_PythonEnvironmentDefinition .....	319
2.6.251	CT_PythonInitialization .....	319
2.6.252	CT_PythonScript .....	320
2.6.253	CT_PythonScripts .....	320
2.6.254	CT_DXFComplementExt.....	321
2.6.255	CT_DXFComplement .....	321
2.6.256	CT_AggregationInfo .....	322

2.6.257	CT_FeatureSupport .....	322
2.7	Simple Types.....	322
2.7.1	ST_Ref .....	322
2.7.2	ST_Sqref .....	323
2.7.3	ST_DisplanksAs .....	323
2.7.4	ST_SparklineAxisMinMax .....	324
2.7.5	ST_SparklineType.....	325
2.7.6	ST_PivotShowAs.....	325
2.7.7	ST_DataBarDirection.....	326
2.7.8	ST_DataBarAxisPosition.....	326
2.7.9	ST_CfvoType.....	327
2.7.10	ST_IconSetType .....	328
2.7.11	ST_PivotEditValueType .....	330
2.7.12	ST_AllocationMethod.....	330
2.7.13	ST_SlicerStyleType .....	331
2.7.14	ST_ObjectType.....	332
2.7.15	ST_Checked .....	333
2.7.16	ST_DropStyle.....	333
2.7.17	ST_SelType.....	334
2.7.18	ST_EditValidation .....	334
2.7.19	ST_OlapSlicerCacheSortOrder .....	335
2.7.20	ST_TabularSlicerCacheSortOrder .....	336
2.7.21	ST_SlicerCacheCrossFilter.....	336
2.7.22	ST_TextHAlign .....	337
2.7.23	ST_TextVAlign.....	337
2.7.24	ST_TimelineStyleType .....	338
2.7.25	ST_CalcMemNumberFormat .....	339
2.7.26	ST_SXVCellType .....	339
2.7.27	ST_QuestionType .....	340
2.7.28	ST_QuestionFormat .....	341
2.7.29	ST_SurveyPosition .....	342
2.7.30	ST_ModelTimeGroupingContentType .....	343
2.7.31	ST_Xrevid.....	343
2.7.32	ST_ArrayValueType.....	344
2.7.33	ST_RichFormatPropertyType .....	344
2.7.34	ST_RichValueFallbackType .....	345
2.7.35	ST_RichValueValueType .....	346
2.7.36	ST_SupportingPropertyBagArrayType .....	346
2.7.37	ST_SupportingPropertyBagValueType.....	347
2.7.38	ST_RichFilterKey .....	348
2.7.39	ST_AggregationType .....	348
<b>3</b>	<b>Structure Examples .....</b>	<b>350</b>
3.1	Slicer.....	350
3.1.1	Slicer Cache Part .....	351
3.1.2	Slicer Part.....	352
<b>4</b>	<b>Security Considerations.....</b>	<b>354</b>
4.1	Security Considerations for Implementers .....	354
4.2	Index of Security Fields .....	354
<b>5</b>	<b>Appendix A: Full XML Schema.....</b>	<b>355</b>
5.1	http://schemas.microsoft.com/office/excel/2006/main Schema .....	356
5.2	http://schemas.microsoft.com/office/drawing/2010/slicer Schema .....	357
5.3	http://schemas.microsoft.com/office/spreadsheetml/2010/11/main Schema .....	357
5.4	http://schemas.microsoft.com/office/spreadsheetml/2009/9/main Schema .....	364
5.5	http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac Schema.....	378
5.6	http://schemas.microsoft.com/office/spreadsheetml/2011/1/ac Schema.....	379
5.7	http://schemas.microsoft.com/office/drawing/2012/timeslicer Schema.....	379

5.8	<a href="http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing">http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing</a> Schema.....	379
5.9	<a href="http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac">http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac</a> Schema .....	380
5.10	<a href="http://schemas.microsoft.com/office/spreadsheetml/2014/11/main">http://schemas.microsoft.com/office/spreadsheetml/2014/11/main</a> Schema .....	380
5.11	<a href="http://schemas.microsoft.com/office/spreadsheetml/2015/02/main">http://schemas.microsoft.com/office/spreadsheetml/2015/02/main</a> Schema .....	381
5.12	<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10">http://schemas.microsoft.com/office/spreadsheetml/2016/revision10</a> Schema .....	381
5.13	<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision9">http://schemas.microsoft.com/office/spreadsheetml/2016/revision9</a> Schema .....	381
5.14	<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision6">http://schemas.microsoft.com/office/spreadsheetml/2016/revision6</a> Schema .....	382
5.15	<a href="http://schemas.microsoft.com/office/spreadsheetml/2014/revision">http://schemas.microsoft.com/office/spreadsheetml/2014/revision</a> Schema .....	382
5.16	<a href="http://schemas.microsoft.com/office/spreadsheetml/2015/revision2">http://schemas.microsoft.com/office/spreadsheetml/2015/revision2</a> Schema .....	382
5.17	<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision3">http://schemas.microsoft.com/office/spreadsheetml/2016/revision3</a> Schema .....	383
5.18	<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision5">http://schemas.microsoft.com/office/spreadsheetml/2016/revision5</a> Schema .....	383
5.19	<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout">http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout</a> Schema .....	383
5.20	<a href="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2">http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2</a> Schema.....	384
5.21	<a href="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata">http://schemas.microsoft.com/office/spreadsheetml/2017/richdata</a> Schema .....	388
5.22	<a href="http://schemas.microsoft.com/office/spreadsheetml/2018/calfeatures">http://schemas.microsoft.com/office/spreadsheetml/2018/calfeatures</a> Schema .....	389
5.23	<a href="http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments">http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments</a> Schema .....	390
5.24	<a href="http://schemas.microsoft.com/office/spreadsheetml/2018/08/main">http://schemas.microsoft.com/office/spreadsheetml/2018/08/main</a> Schema .....	391
5.25	<a href="http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray">http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray</a> Schema .....	391
5.26	<a href="http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews">http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews</a> Schema .....	391
5.27	<a href="http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops">http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops</a> Schema .....	392
5.28	<a href="http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage">http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage</a> Schema .....	393
5.29	<a href="http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020">http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020</a> Schema .....	393
5.30	<a href="http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2">http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2</a> Schema .....	394
5.31	<a href="http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh">http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh</a> Schema .....	394
5.32	<a href="http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo">http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo</a> Schema .....	394
5.33	<a href="http://schemas.microsoft.com/office/spreadsheetml/2022/pivotRichData">http://schemas.microsoft.com/office/spreadsheetml/2022/pivotRichData</a> Schema .....	395
5.34	<a href="http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021">http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021</a> Schema .....	395
5.35	<a href="http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel">http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel</a> Schema .....	395
5.36	<a href="http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag">http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag</a> Schema .....	396
5.37	<a href="http://schemas.microsoft.com/office/spreadsheetml/2023/msForms">http://schemas.microsoft.com/office/spreadsheetml/2023/msForms</a> Schema .....	398
5.38	<a href="http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService">http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService</a> Schema .....	398
5.39	<a href="http://schemas.microsoft.com/office/spreadsheetml/2023/python">http://schemas.microsoft.com/office/spreadsheetml/2023/python</a> Schema .....	399
5.40	<a href="http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation">http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation</a> Schema .....	399
<b>6</b>	<b>Appendix B: Product Behavior .....</b>	<b>401</b>
<b>7</b>	<b>Change Tracking.....</b>	<b>411</b>
<b>8</b>	<b>Index.....</b>	<b>415</b>

# 1 Introduction

The Excel (.xlsx) Extensions to the Office Open XML SpreadsheetML File Format specifies extensions to the Office Open XML file formats described in [\[ISO/IEC29500-1:2016\]](#). The extensions are specified using conventions provided by the Office Open XML file formats described in [\[ISO/IEC29500-3:2015\]](#). The extensions are a collection of structures and parts in a container that specify appropriate content, which can include unstructured or semi-structured tables of numbers, text, or both numbers and text, equations or functions, external **data connections**, charts, and images. Content in such a container is typically organized in a grid-based layout, and often includes numeric data, structured data, and formulas.

Sections 1.7 and 2 of this specification are normative. All other sections and examples in this specification are informative.

## 1.1 Glossary

This document uses the following terms:

**add-in:** Supplemental functionality that is provided by an external application or macro to extend the capabilities of an application.

**adjacent cell:** A cell that is in the same row as and adjoins the current cell in a worksheet.

**aggregation function:** A function, such as sum or average, that appears in the total row of a table and is used to summarize data.

**attribute:** A characteristic of some object or entity, typically encoded as a name/value pair.

**Augmented Backus-Naur Form (ABNF):** A modified version of Backus-Naur Form (BNF), commonly used by Internet specifications. ABNF notation balances compactness and simplicity with reasonable representational power. ABNF differs from standard BNF in its definitions and uses of naming rules, repetition, alternatives, order-independence, and value ranges. For more information, see [\[RFC5234\]](#).

**AutoComplete:** A feature that suggests text automatically based on the first few characters that a user types.

**AutoFilter:** A mechanism that can be used to filter tabular data based on user-defined criteria such as values, strings, and formatting.

**binary large image or picture (BLIP):** A binary data structure that stores information about a metafile image or bitmap picture.

**Boolean:** An operation or expression that can be evaluated only as either true or false.

**bottom N filter:** A filter that matches the smallest numerical values or oldest time and date values in a specified range.

**calculate:** The process by which computations in a workbook are performed.

**calculated column:** A **column** in a table that contains a formula that is copied automatically to each record in the column.

**cell:** A box that is formed by the intersection of a **row** and a **column** in a worksheet or a table. A cell can contain numbers, strings, and formulas, and various formats can be applied to that data.

**cell error value:** Any of a number of special values that are returned as a result of an unsuccessful formula calculation.

**cell reference:** A set of coordinates that a cell occupies on a worksheet. For example, "B3" is the reference of a cell that appears at the intersection of column "B" and row "3".

**cell value:** The text or numeric content of a cell, or the results of a formula. A cell value does not include a formula expression, cell formatting, or other metadata.

**character set:** A mapping between the characters of a written language and the values that are used to represent those characters to a computer.

**color scale:** A specific range of colors that is used to give additional meaning to data by assigning certain values to colors in the spectrum.

**column:** A single set of data that is displayed vertically in a worksheet or a table.

**comment:** An annotation that is associated with a cell, text, or other object to provide context-specific information or reviewer feedback.

**comment thread:** A collection of annotations that is associated with a cell to provide context-specific information, viewer feedback and collaborative discussion, which is made of a main comment and its replies, if there are any.

**condition:** A logical expression comparing one or more properties in all incoming Message objects against a set of clauses. This logical expression can evaluate to TRUE or FALSE.

**conditional formatting:** A mechanism that changes the appearance of a user interface element based on the evaluation of a rule or expression.

**control:** A graphical user interface object that users interact with when working with applications, forms, documents, webpages, and other types of files.

**credential:** Previously established, authentication data that is used by a security principal to establish its own identity. When used in reference to the Netlogon Protocol, it is the data that is stored in the NETLOGON\_CREDENTIAL structure.

**cube function:** A function that is used to extract and display Online Analytical Processing (OLAP) data sets and values.

**custom filter:** A filter that contains preconfigured expressions in which users can optionally enter a string to filter data.

**custom list:** A user-defined list or enumeration that can be used to sort data in a worksheet.

**data bar:** A graphical representation of cell content as a bar graph.

**data connection:** A collection of information, such as the type and location, that defines how to connect to an external data source, such as a database, web service, SharePoint list, or XML file.

**data marker:** A customizable symbol or shape that identifies a data point on a line, scatter, or radar chart. A data marker can be formatted with various sizes and colors.

**data point:** A representation of a PivotTable item in a PivotTable data field contained in a PivotChart report.

**data provider:** A known data source that is specific to a target type and that provides data to a collector type.

**data source:** A database, web service, disk, file, or other collection of information from which data is queried or submitted. Supported data sources vary based on application and data provider.



**data table:** A range of cells that is designated to perform what-if analysis for formulas, based on various input values.

**data type:** A property of a field that defines the kind of data that is stored in the field, or defines the kind of data returned by an expression when the expression is evaluated.

**data validation:** The process of testing the accuracy of data; a set of rules that specify the type and range of data that users can enter.

**defined name:** A word or string of characters in a formula that represents a cell, range of cells, formula, or constant value.

**descendant:** A member that is below the current member in a hierarchy.

**dimension:** A structural attribute of a cube, which is an organized hierarchy of categories (levels) that describe data in a fact table. These categories typically describe a similar set of members upon which the user bases an analysis.

**display folder:** A folder into which attributes, measures, calculated members, and key performance indicators can be organized to facilitate browsing.

**drillthrough:** A query that is used to retrieve individual records that were used to calculate an aggregate value.

**dynamic array:** An array resulting from a formula whose dimensions may change when the formula is evaluated.

**email address:** A string that identifies a user and enables the user to receive Internet messages.

**English Metric Unit (EMU):** A measurement in computer typography. There are 635 EMUs per twip, 6,350 EMUs per half-point, 12,700 EMUs per point, and 914,400 EMUs per inch. These units are used to translate on-screen layouts to printed layouts for specified printer hardware.

**external code service:** An external service responsible for executing code and returning result or error.

**field:** An element or **attribute** in a data source that can contain data.

**filter:** A mechanism by which a set of data is scoped to display only those entries that meet specified logical criteria.

**formula:** A logical equation or function that produces a result in a spreadsheet application.

**future function:** A function that can be written to but is not implemented in a file.

**globally unique identifier (GUID):** A term used interchangeably with universally unique identifier (UUID) in Microsoft protocol technical documents (TDs). Interchanging the usage of these terms does not imply or require a specific algorithm or mechanism to generate the value. Specifically, the use of this term does not imply or require that the algorithms described in [\[RFC4122\]](#) or [\[C706\]](#) must be used for generating the **GUID**. See also universally unique identifier (UUID).

**hash:** A fixed-size result that is obtained by applying a one-way mathematical function, which is sometimes referred to as a hash algorithm, to an arbitrary amount of data. If the input data changes, the hash also changes. The hash can be used in many operations, including authentication and digital signing.

**hidden:** A condition of an object that prevents it from being displayed in rendered output.

**hierarchy:** A logical tree structure that organizes the members of a dimension such that each member has one parent member and zero or more child members.

**icon:** A graphical image used to supplement alphanumeric text in the visual identification of an object on a computer monitor. **Icons** are typically small, relative to the size of the area on which they are displayed.

**icon set:** A collection of icons that can be used to comment and classify data into categories.

**ink:** A process of entering text in handwritten form. Instead of converting handwritten text to typed text, ink is converted to an object and displayed exactly as it was written.

**Input Method Editor (IME):** An application that is used to enter characters in written Asian languages by using a standard 101-key keyboard. An IME consists of both an engine that converts keystrokes into phonetic and ideographic characters and a dictionary of commonly used ideographic words.

**key value pair (KVP):** A set of two linked data items: a key that is an identifier for some data item, and a value that is a value associated with the data item for the identifier represented by the key.

**left-to-right:** A reading order in which characters in words are read from left to right, and words are read from left to right in sentences.

**locale:** A collection of rules and data that are specific to a language and a geographical area. A locale can include information about sorting rules, date and time formatting, numeric and monetary conventions, and character classification.

**locked:** The condition of a cell, worksheet, or other object that restricts edits or modifications to it by users.

**MDX unique name:** A unique identifier for a multidimensional expression (MDX) member or value in a given Online Analytical Processing (OLAP) cube, for example "[Customer].[Customer Geography].[Country].&[Australia]".

**measure:** In a cube, a set of values that are typically numeric and are based on a column in the fact table of the cube. Measures are the central values that are aggregated and analyzed.

**mention:** A part of a threaded comment that provides a reference to a person's information.

**Multidimensional Expressions (MDX):** A syntax that is used for defining multidimensional objects, and for querying and manipulating multidimensional data.

**named sheet view:** A named set of sort and/or filter conditions that can be easily restored onto a given sheet.

**nsvfilter:** A set of sort and/or filter conditions associated with a single autofilter. Part of a named sheet view.

**Object Linking and Embedding (OLE):** A technology for transferring and sharing information between applications by inserting a file or part of a file into a compound document. The inserted file can be either embedded or linked. See also embedded object and linked object.

**object model:** A collection of object-oriented APIs that represent data structures and are designed to promote software interoperability.

**OLAP All level:** An optional level at the top of a hierarchy. It typically contains an **OLAP All member** that represents an aggregation of all of the lower-level members of that hierarchy.

**OLAP All member:** A multidimensional expression (MDX) that evaluates a hierarchy and returns a set that contains all of the members of the specified hierarchy.

**OLAP allocation:** An operation in which the values for members at lower levels in an **OLAP hierarchy** are changed based on changes to values for members at higher levels in that hierarchy.

**OLAP hierarchy:** An attribute hierarchy or a user-defined hierarchy in a data structure. By default, each dimension **attribute** has an attribute hierarchy. A user-defined hierarchy is a set of related attribute hierarchies that is used to facilitate browsing an OLAP cube.

**OLAP level:** Within an **OLAP hierarchy**, a set of data that is organized into a lower or higher level of detail, such as Year, Quarter, Month, and Day levels in a Time hierarchy.

**OLAP measure:** A set of numeric values in an OLAP cube that is used in aggregation and analysis.

**OLAP member:** An item that is in an **OLAP level**. For example, a Canada member in a Country level of a Geography hierarchy.

**OLAP named set:** A collection of **OLAP tuples** that have the same dimensionality. Also referred to as OLAP set.

**OLAP subselect:** The ability to execute multiple SELECT commands in a FROM clause that is inside a multidimensional expression (MDX) statement.

**OLAP tuple:** An ordered collection of members that are from different dimensions of an OLAP cube. A single member is a special case of a tuple.

**OLAP weight expression:** A multidimensional expression (MDX) that is used to apply and allocate modified values to an **Online Analytical Processing (OLAP)** provider. It typically returns a decimal value between "0" and "1".

**OLE DB:** A set of interfaces that are based on the Component Object Model (COM) programming model and expose data from a variety of sources. These interfaces support the amount of Database Management System (DBMS) functionality that is appropriate for a data store and they enable a data store to share data.

**Online Analytical Processing (OLAP):** A technology that uses multidimensional structures to provide access to data for analysis. The source data for OLAP is stored in data warehouses in a relational database. See also cube.

**PivotTable:** An interactive table that summarizes large amounts of data from various sources by using format and calculation methods. Row and column headings can be rotated to view different summaries of the source data, filter the data, or display detail data for specific areas.

**PivotTable data field:** A PivotTable field that is contained in the PivotTable area where data values are shown.

**PivotTable field:** An element in a PivotTable report that represents a logical collection of data. A PivotTable field can represent a dimension hierarchy or actual data values.

**PivotTable field list:** A user interface element that displays a list of all of the fields in a PivotTable report. It can be used to populate a PivotTable report and to manipulate the fields.

**pixel:** A discrete unit of display on a computer display device.

**plot area:** A portion of a chart area that contains the plotted data and axes.

**point:** A unit of measurement for fonts and spacing. A point is equal to 1/72 of an inch.

**protection:** A mechanism that helps restrict users from making unwanted changes to the data or structure of a workbook.

**Python script:** executable code written in the Python programming language.

**query table:** A two-dimensional table that presents data from an external data source.

**range:** An addressable region that is in a workbook. A range typically consists of zero or more cells and represents a single, contiguous rectangle of cells on a single sheet.

**rich array:** A type of rich value data that is a two-dimensional array of values.

**rich value:** A complex representation of data that contains a **rich value type**, a **rich value fallback**, and a collection of **key value pairs (KVP)**. A rich value can exist as the value of a cell or nested as the value in a key value pair.

**rich value data:** The value part of the **key value pair (KVP)**.

**rich value fallback:** A value that will be used for any feature that does not know how to interpret a given **rich value type**.

**rich value key:** The name of the key in the **key value pair (KVP)**.

**rich value key flag:** A rich value flag assigned to a particular **rich value key**. Each flag is assigned a Boolean value that indicates particular behaviors for the key.

**rich value type:** A collection of required **key value pairs (KVP)** and key flag definitions.

**right-to-left:** A reading and display order that is optimized for right-to-left languages.

**root element:** The top-level element in an XML document. It contains all other elements and is not contained by any other element, as described in [\[XML\]](#).

**row:** A single set of data that is displayed horizontally in a worksheet or a table.

**salt:** An additional random quantity, specified as input to an encryption function that is used to increase the strength of the encryption.

**security descriptor:** A data structure containing the security information associated with a securable object. A **security descriptor** identifies an object's owner by its security identifier (SID). If access control is configured for the object, its **security descriptor** contains a discretionary access control list (DACL) with SIDs for the security principals who are allowed or denied access. Applications use this structure to set and query an object's security status. The **security descriptor** is used to guard access to an object as well as to control which type of auditing takes place when the object is accessed. The **security descriptor** format is specified in [\[MS-DTYP\]](#) section 2.4.6; a string representation of **security descriptors**, called SDDL, is specified in [\[MS-DTYP\]](#) section 2.5.1.

**selected:** The condition of a set of items that has focus in a workbook.

**service:** A process or agent that is available on the network, offering resources or services for clients. Examples of services include file servers, web servers, and so on.

**shape:** A collection of qualifiers, such as names, and quantifiers, such as coordinates, that is used to represent a geometric object. A shape can be contained in a document, file structure, run-time structure, or other medium.

**sheet:** A part of an Excel workbook. There are four types of sheets: **worksheet**, macro sheet, dialog sheet, and chart sheet. Multiple sheets are stored together within a workbook.

**sort:** A process that arranges cells in ascending or descending order, based on cell content.

**sort condition:** A condition that determines how to sort cells in a range.

**sort order:** A specific arrangement of cells that is based on cell content. The order can be ascending or descending.

**source data:** The data that is used as the basis for charts, PivotTable reports, and other data visualization features.

**sparkline:** A miniature chart that can be inserted into text or embedded in a cell on a worksheet to illustrate highs, lows, and trends in data.

**spreadsheet data model:** A local **Online Analytical Processing (OLAP)** storage of data used by a spreadsheet application.

**style:** A set of formatting options that is applied to text, tables, charts, and other objects in a document.

**supporting property bag:** A set of GLOSSARY: [key value pairs (KVP)]. A supporting property bag can exist as the value of a **rich value** or nested as the value in another supporting property bag.

**supporting property bag array:** A type of **supporting property bag data** that is a one-dimensional array of values.

**supporting property bag data:** The value part of the **key value pair (KVP)**.

**supporting property bag key:** The name of the key in a **key value pair (KVP)**.

**table:** A list that is defined in a workbook.

**threaded comment:** A comment in a comment thread. It can be a main comment or a reply.

**top N filter:** A filter that matches the top or bottom N items or N% of items in a specified **column**.

**Unicode:** A character encoding standard developed by the Unicode Consortium that represents almost all of the written languages of the world. The **Unicode** standard [\[UNICODE5.0.0/2007\]](#) provides three forms (UTF-8, UTF-16, and UTF-32) and seven schemes (UTF-8, UTF-16, UTF-16 BE, UTF-16 LE, UTF-32, UTF-32 LE, and UTF-32 BE).

**Uniform Resource Locator (URL):** A string of characters in a standardized format that identifies a document or resource on the World Wide Web. The format is as specified in [\[RFC1738\]](#).

**unique identifier (UID):** A pair consisting of a **GUID** and a version sequence number to identify each resource uniquely. The UID is used to track the object for its entire lifetime through any number of times that the object is modified or renamed.

**workbook:** A container for a collection of **sheets**.

**worksheet:** A single logical container for a set of tabular data and other objects in a workbook.

**XML:** The Extensible Markup Language, as described in [\[XML1.0\]](#).

**XML namespace:** A collection of names that is used to identify elements, types, and attributes in XML documents identified in a URI reference [\[RFC3986\]](#). A combination of XML namespace and local name allows XML documents to use elements, types, and attributes that have the same names but come from different sources. For more information, see [\[XMLNS-2ED\]](#).

**XML schema definition (XSD):** The World Wide Web Consortium (W3C) standard language that is used in defining XML schemas. Schemas are useful for enforcing structure and constraining the types of data that can be used validly within other XML documents. XML schema definition refers to the fully specified and currently recommended standard for use in authoring XML schemas.

**XOR obfuscation:** A type of file encryption that helps protect private data by using an exclusive or bitwise operation. This is done by adding a mathematical expression that prevents a simple reverse-engineering process.

**zoom level:** The degree to which a portion of an image, document, or other screen object is made to appear closer or farther away relative to its default appearance. This value is usually expressed as a percentage of the default appearance.

**MAY, SHOULD, MUST, SHOULD NOT, MUST NOT:** These terms (in all caps) are used as defined in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

## 1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the [Errata](#).

### 1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com). We will assist you in finding the relevant information.

[CSS-Level2-2009] World Wide Web Consortium, "Cascading Style Sheets Level 2 Revision 1 (CSS 2.1) Specification", W3C Candidate Recommendation 08 September 2009, <http://www.w3.org/TR/2009/CR-CSS2-20090908/>

[ISO/IEC29500-1:2016] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 1: Fundamentals and Markup Language Reference", ISO/IEC 29500-1:2016, <https://www.iso.org/standard/71691.html>

[ISO/IEC29500-3:2015] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 3: Markup Compatibility and Extensibility", <https://www.iso.org/standard/65533.html>

[ISO/IEC29500-4:2016] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 4: Transitional Migration Features", <https://www.iso.org/standard/71692.html>

[MS-DTYP] Microsoft Corporation, "[Windows Data Types](#)".

[MS-ODRAWXML] Microsoft Corporation, "[Office Drawing Extensions to Office Open XML Structure](#)".

[MS-OFFCRYPTO] Microsoft Corporation, "[Office Document Cryptography Structure](#)".

[MS-OSHARED] Microsoft Corporation, "[Office Common Data Types and Objects Structures](#)".

[MS-OWEXML] Microsoft Corporation, "[Office Web Extensibility Extensions to Office Open XML Structure Specification](#)".

[MS-XLDM] Microsoft Corporation, "[Spreadsheet Data Model File Format](#)".

[MS-XLSB] Microsoft Corporation, "[Excel \(.xlsb\) Binary File Format](#)".

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <https://www.rfc-editor.org/info/rfc2119>

[RFC3066] Alvestrand, H., "Tags for the Identification of Languages", BCP 47, RFC 3066, January 2001, <https://www.rfc-editor.org/info/rfc3066>

[RFC5234] Crocker, D., Ed., and Overell, P., "Augmented BNF for Syntax Specifications: ABNF", STD 68, RFC 5234, January 2008, <https://www.rfc-editor.org/info/rfc5234>

[RFC5646] Phillips, A, and Davis, M., "Tags for Identifying Languages", BCP 47, RFC 4646, September 2006, <https://www.rfc-editor.org/info/rfc5646>

[UNICODE5.1] The Unicode Consortium, "The Unicode Standard, Version 5.1.0, defined by: The Unicode Standard, Version 5.0 (Boston, MA, Addison-Wesley, 2007. ISBN 0-321-48091-0), as amended by Unicode 5.1.0", <http://www.unicode.org/versions/Unicode5.1.0/>

[W3C-XML] Bray, T., Paoli, J., Sperberg-McQueen, C.M., Maler, E., Yergeau, F., Eds., "Extensible Markup Language (XML) 1.1 (Second Edition)", W3C Recommendation, August 2006, <http://www.w3.org/TR/2006/REC-xml11-20060816/>

[XMLNS] Bray, T., Hollander, D., Layman, A., et al., Eds., "Namespaces in XML 1.0 (Third Edition)", W3C Recommendation, December 2009, <https://www.w3.org/TR/2009/REC-xml-names-20091208/>

[XMLSCHEMA1/2] Thompson, H., Beech, D., Maloney, M., and Mendelsohn, N., Eds., "XML Schema Part 1: Structures Second Edition", W3C Recommendation, October 2004, <https://www.w3.org/TR/2004/REC-xmlschema-1-20041028/>

[XMLSCHEMA2/2] Biron, P., and Malhotra, A., Eds., "XML Schema Part 2: Datatypes Second Edition", W3C Recommendation, October 2004, <https://www.w3.org/TR/2004/REC-xmlschema-2-20041028/>

### 1.2.2 Informative References

[ISO/IEC29500-2:2012] ISO/IEC, "Information technology -- Document description and processing languages -- Office Open XML File Formats -- Part 2: Open Packaging Conventions", ISO/IEC 29500-2:2012, [http://www.iso.org/iso/home/store/catalogue\\_ics/catalogue\\_detail\\_ics.htm?csnumber=61796](http://www.iso.org/iso/home/store/catalogue_ics/catalogue_detail_ics.htm?csnumber=61796)

[MS-AZOD] Microsoft Corporation, "[Authorization Protocols Overview](#)".

### 1.3 Structure Overview (Synopsis)

This document specifies spreadsheet-related extensions to Office Open XML file formats as described in [\[ISO/IEC29500-1:2016\]](#). **Workbook** data is contained in a ZIP package conforming to the Open Packaging Conventions as described in [\[ISO/IEC29500-2:2012\]](#). Individual files stored in the ZIP package, called parts [\[ISO/IEC29500-1:2016\]](#), contain information about the content and structure of a workbook, including workbook data, such as **worksheet** definitions. Some parts [\[ISO/IEC29500-1:2016\]](#) store information by using **XML** and other parts [\[ISO/IEC29500-1:2016\]](#) store information by using binary data. The extensions specified in this document use the conventions specified by [\[ISO/IEC29500-3:2015\]](#), and they are both structures within parts specified by [\[ISO/IEC29500-1:2016\]](#) and extension parts within the package described by [\[ISO/IEC29500-2:2012\]](#).

### 1.4 Relationship to Protocols and Other Structures

This file format is a specified set of extensions to Office Open XML SpreadsheetML, specified in [\[ISO/IEC29500-1:2016\]](#). This specification is dependent on the structures and concepts defined in the following references:

- [\[ISO/IEC29500-1:2016\]](#) for baseline SpreadsheetML persistence format.
- [\[ISO/IEC29500-2:2012\]](#) for open packaging conventions.
- [\[ISO/IEC29500-3:2015\]](#) for markup compatibility and extensibility.
- [\[ISO/IEC29500-4:2016\]](#) for backward compatibility considerations.

- [\[MS-OFFCRYPTO\]](#) for the persistence format for document signing, information rights management, document encryption, and obfuscation.
- [\[MS-ODRAWXML\]](#) for the persistence format for **shapes**.

## 1.5 Applicability Statement

This document specifies a persistence format for extensions to Office Open XML file formats as described in [\[ISO/IEC29500-1:2016\]](#) SpreadsheetML documents. The extensions specified in this document allow for expressing additional content and properties, and are not applicable as a stand-alone file format. Each structure specified in this document is integrated with SpreadsheetML documents as described in [\[ISO/IEC29500-1:2016\]](#) in a particular way, as specified in the section for that structure. All structures are integrated into SpreadsheetML documents in such a way that maintains compatibility with implementations of the Office Open XML file formats as described in [\[ISO/IEC29500-1:2016\]](#).

The extensions specified in this document do not require any other extensions to be used, and do not prohibit any other extensions from being used in the same document.

This persistence format provides interoperability with applications that create or read documents conforming to this structure.

## 1.6 Versioning and Localization

This document covers versioning issues in the following areas:

- **Structure Versions:** There is only one version of Excel Extensions to the Office Open XML SpreadsheetML File Format.
- **Localization:** The [CT\\_ProtectedRange](#) structure contains **fields** that specify locale-dependent meaning.

The [Security Considerations](#) section also specifies processes and data that are locale-dependent. See each structure and section description for more information.

## 1.7 Vendor-Extensible Fields

Specified in this document are extensions, using conventions described in [\[ISO/IEC29500-3:2015\]](#), both as structures within parts described in [\[ISO/IEC29500-1:2016\]](#) and as extension parts within the package described in [\[ISO/IEC29500-2:2012\]](#). Implementations are not required to preserve or remove additional parts when modifying an existing document. See [\[ISO/IEC29500-3:2015\]](#) for more information.



## 2 Structures

In the following sections, the schema definition might be less restrictive than the processing rules imposed by the application. The XSD in this specification provides a base description of the file format. The text that introduces the XSD specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the application as specified restricts the same elements to being non-empty, not null, and present.

### 2.1 Part Enumerations

This section specifies parts in this file format that extend Office Open XML file formats as specified in [\[ISO/IEC29500-1:2016\]](#).

#### 2.1.1 Control Properties

Content type: application/vnd.ms-excel.controlproperties+xml

Source relationship: <http://schemas.openxmlformats.org/officeDocument/2006/relationships/ctrlProp>

An instance of this part type specifies the properties of a form **control** embedded object in the package. A package can contain one or more control properties parts, and each part **MUST** be the target of an explicit relationship from a SpreadsheetML control, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.3.1.19.

If this relationship is present, the control **MUST NOT** have a relationship with an embedded control persistence part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 15.2.9.

The syntax of the structures contained in this part uses **XML schema definition (XSD)**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **formControlPr** element, as specified in section [2.4.34](#).

#### 2.1.2 Custom Data

Content type: application/binary

Source relationship: <http://schemas.openxmlformats.org/officeDocument/2006/relationships/customData>

An instance of this part type specifies user-defined binary data.

A package **MUST** contain at most one custom data part per custom data properties part, as specified in section [2.1.3](#), and that part **MUST** be the target of an implicit relationship from a custom data properties part.

A custom data part **MUST NOT** have any implicit or explicit relationships to any other part specified by this protocol.

The content of this part consists of user-defined binary data that is stored on behalf of **add-ins**. The content is not specified in this protocol.

### 2.1.3 Custom Data Properties

Content type: application/vnd.openxmlformats-officedocument.customDataProperties+xml

Source relationship:

<http://schemas.openxmlformats.org/officeDocument/2006/relationships/customDataProps>

An instance of this part type specifies a single custom data properties part. This part specifies properties for the associated custom data part, as specified in section [2.1.2](#), specifically a **unique identifier (UID)** for the data storage.

A custom data properties part MUST be the target of an implicit relationship from the workbook part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.23.

A custom data properties part is permitted to contain implicit relationships to the custom data part specified in section 2.1.2.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **datastoreItem** element, as specified in section [2.4.35](#).

### 2.1.4 Slicer Cache

Content type: application/vnd.ms-excel.slicerCache+xml

Source relationship: <http://schemas.microsoft.com/office/2007/relationships/slicerCache>

An instance of this part type specifies a single slicer cache part, as specified in section [3.1.1](#), in the **workbook**.

A package MUST contain one slicer cache part per **CT\_SlicerCache** element, as specified in section [2.6.14](#), in the workbook part, a specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.23, and that part MUST be the target of an explicit relationship from the workbook part.

A slicer cache part MUST NOT have implicit or explicit relationships to any part specified by this protocol.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **slicerCacheDefinition** element, as specified in section [2.4.38](#).

### 2.1.5 Slicers

Content type: application/vnd.ms-excel.slicer+xml

Source relationship: <http://schemas.microsoft.com/office/2007/relationships/slicer>

An instance of this part type specifies the slicer views, as specified in section [2.3.2.2](#), for a single **worksheet**.

The presence of a slicers part indicates that there is at least one slicer view on the associated worksheet, and that this part MUST be the target of an explicit relationship from the worksheet part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.24.

A slicers part MUST NOT have implicit or explicit relationships to any part specified by this protocol.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **slicers** element, as specified in section [2.4.36](#).

## 2.1.6 Data Model

Content type: application/vnd.openxmlformats-officedocument.model+data

The presence of a model part indicates that there is a **spreadsheet data model** present in the workbook.

The content of this part is specified in [\[MS-XLDM\]](#). In addition, this specification is extended by the **Annotations** property on different objects. Unless otherwise specified, all extensions in an **Annotations** object are written as **XML**.

### 2.1.6.1 Command Annotations

The **Annotations** property of a command object describing a **measure** ([\[MS-XLDM\]](#) section 2.6.9) can be extended with the following optional properties:

**Type:** MUST be either "Implicit" or "Explicit". "Implicit" specifies that the measure was created in the **field** list. "Explicit" specifies that the measure was created by the user specifying the definition of the measure.

**Name:** Specifies the name of the measure. MUST exist if **Type** is equal to "Implicit".

**Table:** Specifies the name of the source table for this measure. MUST exist if **Type** is equal to "Implicit".

**Column:** Specifies the name of the source field for this measure. MUST exist if **Type** is equal to "Implicit".

**Aggregation:** Specifies the aggregation type of an implicit measure. If this attribute is present, **Type** MUST be equal to "Implicit". This value MUST have the following form:

AGGREGATION (TABLENAME . COLUMNNAME)

Where TABLENAME MUST be equal to **Table**, COLUMNNAME MUST be equal to **Column**, and the aggregation MUST be equal to one of the following:

Value	Meaning
SUM	The measure is the sum of the values in the source field specified by <b>Column</b> .

Value	Meaning
MAX	This measure is the maximum value in the source field specified by <b>Column</b> .
COUNTA	This measure is the count of values in the source field specified by <b>Column</b> .
AVERAGE	This measure is the average of the values in the source field specified by <b>Column</b> .
STDEV.S	This measure is the standard deviation of the values in the source field specified by <b>Column</b> .
STDEV.P	This measure is the standard deviation of the values in the source field specified by <b>Column</b> .
VAR.S	This measure is the variance in the values of the source field specified by <b>Column</b> .
DISTINCTCOUNT	This measure is the count of unique values in the source field specified by <b>Column</b> .

**Application:** Specifies the name of the application that created this measure. MUST exist if **Type** is equal to "Implicit"

### 2.1.6.2 DimensionAttribute Annotations

The **Annotations** property of a **DimensionAttribute** object describing a **column** in a **DimensionTabularModel** ([\[MS-XLDM\]](#) section 2.6.6) can be extended with the following optional properties:

**ShortColumnId:** Specifies the identifier used to represent this column in the command text when data is pushed to the model.

### 2.1.7 Timeline Cache

*Content type:* application/vnd.ms-excel.TimelineCache+xml

*Source relationship:* <http://schemas.microsoft.com/office/2010/relationships/TimelineCache>

An instance of this part type specifies a single **Timeline Cache** (section [2.3.5.1](#)) in the **workbook**.

A package MUST contain one Timeline cache part per **CT\_TimelineCacheRef** element, as specified in section [2.6.99](#), in the workbook part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.23, and that part MUST be the target of an explicit relationship from the workbook part.

A **Timeline cache** part MUST NOT have implicit or explicit relationships to any part specified by this protocol.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **timelineCacheDefinition** element, as specified in section [2.4.58](#).

### 2.1.8 Timelines

*Content type:* application/vnd.ms-excel.Timeline+xml

*Source relationship:* <http://schemas.microsoft.com/office/2010/relationships/Timeline>

An instance of this part type specifies the [Timeline views](#) for a single **worksheet**.

The presence of a Timelines part indicates that there is at least one Timeline view on the associated worksheet, and that this part MUST be the target of an explicit relationship from the worksheet part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.24.

A Timelines part MUST NOT have implicit or explicit relationships to any part specified by this protocol.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **timelines** element, as specified in section [2.4.57](#).

### 2.1.9 Survey

*Content type:* application/vnd.ms-excel.Survey+xml

*Source relationship:* <http://schemas.microsoft.com/office/2010/relationships/Survey>

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **survey** element, as specified in section [2.4.69](#).

### 2.1.10 Rich Value Data

*Content type:* application/vnd.ms-excel.rdRichValue+xml

*Source relationship:* <http://schemas.microsoft.com/office/2017/06/relationships/rdRichValue>

The presence of this part type indicates that there are **rich values** in the **workbook** and a **Rich Value Structure** (section [2.1.11](#)) part MUST be part of the package.

A **Rich Value Data** part MUST be the target of an implicit relationship from the **Metadata** part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.9.2.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **rvData** element, as specified in section [2.4.77](#).

### 2.1.11 Rich Value Structure

*Content type:* application/vnd.ms-excel.rdRichValueStructure+xml

*Source relationship:* <http://schemas.microsoft.com/office/2017/06/relationships/rdRichValueStructure>

The presence of this part type indicates that there are **rich values** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part MUST be part of the package.

A **Rich Value Structure** part MUST be the target of an implicit relationship from the **Rich Value Data** part, as specified in section [2.6.175](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **rvStructures** element, as specified in section [2.4.78](#).

### 2.1.12 Rich Value Array

*Content type:* application/vnd.ms-excel.rdArray+xml

*Source relationship:* <http://schemas.microsoft.com/office/2017/06/relationships/rdArray>

The presence of this part type indicates that there are **rich values** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part and a **Rich Value Structure** (section [2.1.11](#)) part MUST be part of the package.

A **Rich Value Array** part MUST be the target of an implicit relationship from the **Rich Value Data** part, as specified in section [2.6.175](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **arrayData** element, as specified in section [2.4.74](#).

### 2.1.13 Rich Styles

*Content type:* application/vnd.ms-excel.richStyles+xml

*Source relationship:* <http://schemas.microsoft.com/office/2017/06/relationships/richStyles>

The presence of this part type indicates that there are **rich values** with **styles** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part, a **Rich Value Structure** (section [2.1.11](#)) part, a **Supporting Property Bag Data** (section [2.1.14](#)) part, and a **Supporting Property Bag Structure** (section [2.1.15](#)) part MUST be part of the package.

A **Rich Styles** part MUST be the target of an implicit relationship from the **Supporting Property Bag Data** part (section [2.6.192](#)), as specified in Special Keys and Key Flags in section [2.3.6.3](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **richStyleSheet** element, as specified in section [2.4.75](#).

### 2.1.14 Supporting Property Bag Data

*Content type:* application/vnd.ms-excel.rdSupportingPropertyBag+xml

*Source relationship:*

<http://schemas.microsoft.com/office/2017/06/relationships/rdSupportingPropertyBag>

The presence of this part type indicates that there are **rich values** with **supporting property bags** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part, a **Rich Value Structure** (section [2.1.11](#)) part, and a **Supporting Property Bag Structure** (section [2.1.15](#)) part MUST be part of the package.

A **Supporting Property Bag** part MUST be the target of an implicit relationship from the **Rich Value Data** part, as specified in section [2.6.175](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **supportingPropertyBags** element, as specified in section [2.4.81](#).

### 2.1.15 Supporting Property Bag Structure

*Content type:* application/vnd.ms-excel.rdSupportingPropertyBagStructure+xml

*Source relationship:*

<http://schemas.microsoft.com/office/2017/06/relationships/rdSupportingPropertyBagStructure>

The presence of this part type indicates that there are **rich values** with **supporting property bags** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part, a **Rich Value Structure** (section [2.1.11](#)) part, and a **Supporting Property Bag Data** (section [2.1.14](#)) part MUST be part of the package.

A **Supporting Property Bag Structure** part MUST be the target of an implicit relationship from the **Supporting Property Bag** part, as specified in section [2.6.188](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **spbStructures** element, as specified in section [2.4.80](#).

### 2.1.16 Rich Value Types

*Content type:* application/vnd.ms-excel.rdRichValuetypes+xml

*Source relationship:* <http://schemas.microsoft.com/office/2017/06/relationships/rdRichValueTypes>

The presence of this part type indicates that there is information about **rich value types** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part, and a **Rich Value Structure** (section [2.1.11](#)) part MAY be part of the package.

A **Rich Value Types** part MAY be the target of an implicit relationship from the **RichValue Structure** part, as specified in section [2.3.6.3](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **rvTypesInfo** element, as specified in section [2.4.79](#).

### 2.1.17 Threaded Comments

*Content type:* application/vnd.ms-excel.threadedcomments+xml

*Source relationship:* <http://schemas.microsoft.com/office/2017/10/relationships/threadedComment>

An instance of this part type specifies the **Threaded Comments** (section [2.3.7](#)) for a single **worksheet**.

The presence of a Threaded Comments part indicates that there is at least one Threaded Comment on the associated worksheet, and that this part **MUST** be the target of an implicit relationship from the worksheet part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.24.

A Threaded Comments part **MUST NOT** have implicit or explicit relationships to any part specified by this protocol.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **ThreadedComments** element, as specified in section [2.4.86](#)

### 2.1.18 Persons

*Content type:* application/vnd.ms-excel.person+xml

*Source relationship:* <http://schemas.microsoft.com/office/2017/10/relationships/person>



The presence of this part type indicates that there is information about **Persons** (section [2.3.7.1](#)) in the **workbook**.

A **Persons** part MUST be the target of an implicit relationship from the workbook part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.23.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **personList** element, as specified in section [2.4.85](#)

### 2.1.19 Named Sheet Views

*Content type:* application/vnd.ms-excel.namedsheetviews+xml

*Source relationship:* <http://schemas.microsoft.com/office/2019/04/relationships/namedSheetView>

An instance of this part type specifies the **Named Sheet Views** (section [2.3.8](#)) for a single **worksheet**.

The presence of a Named Sheet Views part indicates that there is at least one Named Sheet View on the associated worksheet, and that this part MUST be the target of an implicit relationship from the worksheet part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.24.

A Named Sheet Views part MUST NOT have implicit or explicit relationships to any part specified by this protocol.

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **namedSheetViews** element, as specified in section [2.4.88](#)

### 2.1.20 Web Image Supporting Rich Data

*Content type:* application/vnd.ms-excel.rdrichvaluwebimage+xml

*Source relationship:* <http://schemas.microsoft.com/office/2020/07/relationships/rdrichvaluwebimage>

The presence of this part type indicates that there is supporting information for web image **rich values** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part, and a **Rich Value Structure** (section [2.1.11](#)) part MUST be part of the package.

A **Web Image Supporting Rich Data** part MUST be the target of an implicit relationship from the **Rich Value Data** part, as specified in section [2.3.6.1.11](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **webImagesSrd** element, as specified in section [2.4.90](#).

### 2.1.21 Rich Value Rels

*Content type:* application/vnd.ms-excel.richvaluerel+xml

*Source relationship:* <http://schemas.microsoft.com/office/2022/10/relationships/richValueRel>

The presence of this part type indicates that there are **rich values** in the **workbook** and a **Rich Value Data** (section [2.1.10](#)) part and a **Rich Value Structure** (section [2.1.11](#)) part **MUST** be part of the package.

A **Rich Value Rels** part **MUST** be the target of an implicit relationship from the **Rich Value Data** part, as specified in section [2.3.6.3](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **richValueRels** element, as specified in section [2.4.100](#).

### 2.1.22 Feature Property Bag

*Content type:* application/vnd.ms-excel.featurepropertybag+xml

*Source relationship:* <http://schemas.microsoft.com/office/2022/11/relationships/FeaturePropertyBag>

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the **root element** for the part is the **FeaturePropertyBags** element, as specified in section [2.4.98](#).

### 2.1.23 Python

*Content type:* application/vnd.ms-excel.python+xml

*Source relationship:* <http://schemas.microsoft.com/office/2023/09/relationships/Python>

The presence of this part type indicates that PY function has been used at least once in the workbook. Each Python script (section [2.3.10.3](#)) in the Python part **MUST** be the target of an implicit relationship from the PY function in worksheet part, as specified in section [2.3.10.2](#).

The syntax of the structures contained in this part uses **XSD**, as specified in [\[XMLSCHEMA1/2\]](#) and [\[XMLSCHEMA2/2\]](#).

This specification defines and references various **XML namespaces** by using the mechanisms specified in [\[XMLNS\]](#).

The content of this part is **XML**, and the root element for the part is the **python** element, as specified in section [2.4.102](#).

## 2.2 Extensions

Extensions are specified by using the conventions provided by Office Open XML file formats as specified in [\[ISO/IEC29500-3:2015\]](#). The following namespaces are utilized by the extensions specified in this document:

- "http://schemas.microsoft.com/office/drawingml/2010/slicer" [<1>](#)
- "http://schemas.microsoft.com/office/spreadsheetml/2009/9/main" [<2>](#)
- "http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac" [<3>](#)
- "http://schemas.microsoft.com/office/excel/2006/main"
- "http://schemas.microsoft.com/office/spreadsheetml/2010/11/main" [<4>](#)
- "http://schemas.microsoft.com/office/drawing/2012/timeslicer" [<5>](#)

### 2.2.1 SpreadsheetML Extensibility Elements

When the global elements [f](#), [ref](#), or [sqref](#) are contained within an **ext** ([\[ISO/IEC29500-1:2016\]](#) section 18.2.7) element and contain **cell references**, an application can adjust these cell references when the **worksheet** layout changes, even when the containing **ext** element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.7) is not recognized by the application. See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more details about how extension lists are used.

### 2.2.2 Formulas

The following ABNF grammar is used by formulas in other parts of this document.

```
formula = expression / solo-function

solo-function = "_xlfn._xlws." "PY" py-params
expression= ref-expression / *whitespace nospace-expression *whitespace
ref-expression= *whitespace ref-nospace-expression *whitespace
nospace-expression = "(" expression ")" / constant / prefix-operator expression /
expression infix-operator expression / expression postfix-operator / function-call
ref-nospace-expression = "(" ref-expression ")" / ref-constant / ref-expression ref-infix-
operator ref-expression / cell-reference / ref-function-call / name-reference / structure-
reference
constant = error-constant / logical-constant / numerical-constant / string-constant / array-
constant
ref-constant = "#REF!"
error-constant = ref-constant / "#DIV/0!" / "#N/A" / "#NAME?" / "#NULL!" / "#NUM!" /
"#VALUE!" / "#GETTING_DATA"
logical-constant = "FALSE" / "TRUE"
numerical-constant = [neg-sign] significand-part [exponent-part]
significand-part = whole-number-part [fractional-part] / fractional-part
whole-number-part = digit-sequence
fractional-part = full-stop digit-sequence
exponent-part = exponent-character [ sign ] digit-sequence
full-stop = "."
sign = "+" / neg-sign
neg-sign = "-"
exponent-character = "E"
digit-sequence = 1*decimal-digit
decimal-digit = %x30-39
hex-digit = decimal-digit / %x41-46 / %x61-66
guid = 8hex-digit "-" 3(4hex-digit "-") 12hex-digit
nonzero-decimal-digit = %x31-39
string-constant = double-quote [string-chars] double-quote
string-chars = string-char *string-char
string-char = escaped-double-quote / character ; MUST NOT be a double-quote
```

```

escaped-double-quote = 2double-quote
double-quote = %x22
;character = as defined by the production Char in the [W3C-XML] section 2.2
array-constant = "{" constant-list-rows "}"
constant-list-rows = constant-list-row *(semicolon constant-list-row)
semicolon = ";"
constant-list-row = constant *(comma constant)
;An array-constant MUST NOT contain an array-constant or columns of unequal length or rows of
unequal length.
operator = ":" / comma / space / "^" / "*" / "/" / "+" / "-" / "&" / "=" / "<>" / "<" / "<="
/ ">" / ">=" / "%"
infix-operator = ref-infix-operator / value-infix-operator
value-infix-operator = "^" / "*" / "/" / "+" / "-" / "&" / "=" / "<>" / "<" / "<=" / ">" /
">="
ref-infix-operator = range-operator / union-operator / intersection-operator
union-operator = comma
intersection-operator = space
range-operator = ":"
postfix-operator = "%"
prefix-operator = "+" / "-"
cell-reference = external-cell-reference / local-cell-reference
local-cell-reference = A1-reference
external-cell-reference = bang-reference / sheet-range-reference / single-sheet-reference
book-prefix = workbook-index "!"
bang-reference = "!" (A1-reference / "#REF!")
sheet-range-reference = sheet-range "!" A1-reference
single-sheet-prefix = single-sheet "!"
single-sheet-reference = single-sheet-prefix (A1-reference / "#REF!")
single-sheet-area = single-sheet-prefix A1-area
single-sheet = [workbook-index] sheet-name / apostrophe [workbook-index] sheet-name-special
apostrophe
sheet-range = [workbook-index] sheet-name ":" sheet-name / apostrophe [workbook-index] sheet-
name-special ":" sheet-name-special apostrophe
workbook-index = "[" whole-number-part "]"
sheet-name = sheet-name-characters
sheet-name-characters = 1*sheet-name-character
sheet-name-character = character ; MUST NOT be an operator, ', [, ], \, or ?
apostrophe= "'"
space = " "
whitespace = space / %x0D %x0A
sheet-name-special = sheet-name-base-character [*sheet-name-character-special sheet-name-
base-character]
sheet-name-character-special = 2apostrophe / sheet-name-base-character
sheet-name-base-character = character ; MUST NOT be ', *, [, ], \, :, /, ?, or Unicode
character 'END OF TEXT'
parameter-name = "xlpn." Name
lambda-parameter-name = parameter-name / "xlop." Name
A1-reference = (A1-column ":" A1-column) / (A1-row ":" A1-row) / A1-cell / A1-area
A1-cell = A1-column A1-row
A1-area = A1-cell ":" A1-cell
A1-column = A1-relative-column / A1-absolute-column
A1-relative-column = 1*2letter / A-to-W 2letter / "X" A-to-E letter / "XF" A-to-D
A-to-D = %x41-44 / %x61-64
A-to-E = A-to-D / "E"
A-to-W = %x41-57 / %x61-77
letter = %x41-5A / %x61-7A
A1-absolute-column = "$" A1-relative-column
A1-row = A1-relative-row / A1-absolute-row
A1-relative-row = row-digit-sequence
row-digit-sequence = nonzero-decimal-digit *5decimal-digit / "10" %x30-33 4decimal-digit /
"104" %x30-37 3decimal-digit / "1048" %x30-34 2decimal-digit / "10485" %x30-36 decimal-digit
/ "104857" %x30-36
A1-absolute-row = "$" A1-relative-row
cell-function-call = A1-cell "(" argument-list ")"
user-defined-function-call = user-defined-function-name "(" argument-list ")"
user-defined-function-name = name-reference
argument-list = argument *253(comma argument)
comma= ","
argument = *whitespace [argument-expression]

```

```

argument-expression= ref-argument-expression / *whitespace nospace-argument-expression
*whitespace
ref-argument-expression= *whitespace ref-argument-nospace-expression *whitespace
nospace-argument-expression = "(" expression ")" / constant / prefix-operator argument-
expression / argument-expression argument-infix-operator argument-expression / argument-
expression postfix-operator / function-call
ref-argument-nospace-expression = "(" ref-expression ")" / ref-constant / ref-argument-
expression ref-argument-infix-operator ref-argument-expression / cell-reference / ref-
function-call / name-reference / structure-reference
argument-infix-operator = ref-argument-infix-operator / value-infix-operator

ref-argument-infix-operator = range-operator / intersection-operator
unicode-digit = (any code points which are digits as defined by the Unicode character
properties, [UNICODE5.1] chapter 4)
R1C1-cell-reference = R1C1-row / R1C1-column / R1C1-row R1C1-column / R1C1-column R1C1-row
R1C1-row = "R" row-number

R1C1-column = "C" column-number
column-number = 1-16384
; A string composed of unicode-digits that represents an unsigned integer that is greater
than or equal to 1 and less than or equal to 16384

row-number = 1-1048576
; A string composed of unicode-digits that represents an unsigned integer that is greater
than or equal to 1 and less than or equal to 1048576.

name-reference = name / external-name
external-name = bang-name / (single-sheet-prefix / book-prefix ) name
bang-name = "!" name
name = name-start-character [ name-characters ]
name-start-character = underscore / backslash / letter / name-base-character
underscore = "_"
backslash = "\"
name-base-character = (any code points which are characters as defined by the Unicode
character properties, [UNICODE5.1] chapter 4 ; MUST NOT be 0x0-0x7F)
name-characters= 1*name-character
name-character = name-start-character / decimal-digit / full-stop / questionmark
questionmark = "?"
;A name MUST NOT have any of the following forms:
;TRUE or FALSE
;cell-reference
;function-list
;command-list
;future-function-list
;R1C1-cell-reference
;worksheet-only-function-list

structure-reference = [table-identifier] intra-table-reference
table-identifier = [book-prefix] table-name
table-name = name
;table-name is the name of the table the structure reference refers to. If it is missing, the
formula containing the structure reference MUST be entered into a cell which belongs to a
table and that table's name is used as the table-name. table-name MUST be the value of the
displayName attribute of some table element ([ISO/IEC29500-1:2016] section 18.5.1.2). It MUST
NOT be any other user-defined name.
intra-table-reference = spaced-lbracket inner-reference spaced-rbracket / keyword / ("["
[simple-column-name] ")")
inner-reference = keyword-list / ([keyword-list spaced-comma] column-range)
keyword = "[#All]" / "[#Data]" / "[#Headers]" / "[#Totals]" / "[#This Row]"
keyword-list = keyword / ("[#Headers]" spaced-comma "[#Data]") / ("[#Data]" spaced-comma
"[#Totals]")
column-range = column [":" column]
column = simple-column-name / ("[" *space simple-column-name *space "]")
simple-column-name = [any-nospace-column-character *any-column-character] any-nospace-column-
character
escape-column-character = tick / "[" / "]" / "#"
tick = %x27
unescaped-column-character = character ; MUST NOT match escape-column-character or space
any-column-character = any-nospace-column-character / space

```

any-nospace-column-character = unescaped-column-character / (tick escape-column-character)  
spaced-comma = [space] comma [space]  
spaced-lbracket = "[" [space]  
spaced-rbracket = [space] "]"  
function-list = "ABS" / "ABSREF" / "ACCRINT" / "ACCRINTM" / "ACOS" / "ACOSH" / "ACTIVE.CELL"  
/ "ADD.BAR" / "ADD.COMMAND" / "ADD.MENU" / "ADD.TOOLBAR" / "ADDRESS" / "AMORDEGRC" /  
"AMORLINC" / "AND" / "APP.TITLE" / "AREAS" / "ARGUMENT" / "ASC" / "ASIN" / "ASINH" / "ATAN" /  
"ATAN2" / "ATANH" / "AVEDEV" / "AVERAGE" / "AVERAGEA" / "AVERAGEIF" / "AVERAGEIFS" /  
"BAHTTEXT" / "BESSELI" / "BESSELJ" / "BESSELK" / "BESSELY" / "BETADIST" / "BETAINV" /  
"BIN2DEC" / "BIN2HEX" / "BIN2OCT" / "BINOMDIST" / "BREAK" / "CALL" / "CALLER" / "CANCEL.KEY"  
/ "CEILING" / "CELL" / "CHAR" / "CHECK.COMMAND" / "CHIDIST" / "CHIINV" / "CHITEST" / "CHOOSE"  
/ "CLEAN" / "CODE" / "COLUMN" / "COLUMNS" / "COMBIN" / "COMPLEX" / "CONCAT" / "CONCATENATE" /  
"CONFIDENCE" / "CONVERT" / "CORREL" / "COS" / "COSH" / "COUNT" / "COUNTA" / "COUNTBLANK" /  
"COUNTIF" / "COUNTIFS" / "COUPDAYBS" / "COUPDAYS" / "COUPDAYSNC" / "COUPNCD" / "COUPNUM" /  
"COUPPCD" / "COVAR" / "CREATE.OBJECT" / "CRITBINOM" / "CUBEKPIMEMBER" / "CUBEMEMBER" /  
"CUBEMEMBERPROPERTY" / "CUBERANKEDMEMBER" / "CUBESET" / "CUBESETCOUNT" / "CUBEVALUE" /  
"CUMIPMT" / "CUMPRINC" / "CUSTOM.REPEAT" / "CUSTOM.UNDO" / "DATE" / "DATEDIF" / "DATESTRING"  
/ "DATEVALUE" / "DAVERAGE" / "DAY" / "DAYS360" / "DB" / "DBCS" / "DCOUNT" / "DCOUNTA" / "DDB"  
/ "DEC2BIN" / "DEC2HEX" / "DEC2OCT" / "DEGREES" / "DELETE.BAR" / "DELETE.COMMAND" /  
"DELETE.MENU" / "DELETE.TOOLBAR" / "DELTA" / "DEREF" / "DEVSQ" / "DGET" / "DIALOG.BOX" /  
"DIRECTORY" / "DISC" / "DMAX" / "DMIN" / "DOCUMENTS" / "DOLLAR" / "DOLLARDE" / "DOLLARFR" /  
"DPRODUCT" / "DSTDEV" / "DSTDEVP" / "DSUM" / "DURATION" / "DVAR" / "DVARP" / "ECHO" / "EDATE"  
/ "EFFECT" / "ELSE" / "ELSE.IF" / "ENABLE.COMMAND" / "ENABLE.TOOL" / "END.IF" / "EOMONTH"  
/ "ERF" / "ERFC" / "ERROR" / "ERROR.TYPE" / "EVALUATE" / "EVEN" / "EXACT" / "EXEC" / "EXECUTE"  
/ "EXP" / "EXPONDIST" / "FACT" / "FACTDOUBLE" / "FALSE" / "FCLOSE" / "FDIST" / "FILES" /  
"FINDB" / "FINV" / "FISHER" / "FISHERINV" / "FIXED" / "FLOOR" / "FOPEN" / "FOR" /  
"FOR.CELL" / "FORECAST" / "FORMULA.CONVERT" / "FPOS" / "FREAD" / "FREADLN" / "FREQUENCY" /  
"FSIZE" / "FTST" / "FV" / "FVSCHEDULE" / "FWRITE" / "FWRITELN" / "GAMMADIST" / "GAMMAINV" /  
"GAMMALN" / "GCD" / "GEOMEAN" / "GESTEP" / "GET.BAR" / "GET.CELL" / "GET.CHART.ITEM" /  
"GET.DEF" / "GET.DOCUMENT" / "GET.FIELD" / "GET.FORMULA" / "GET.ITEM" / "GET.LINK.INFO" /  
"GET.MOVIE" / "GET.NAME" / "GET.NOTE" / "GET.OBJECT" / "GET.TOOL" / "GET.TOOLBAR" /  
"GET.VIEW" / "GET.WINDOW" / "GET.WORKBOOK" / "GET.WORKSPACE" / "GETPIVOTDATA" / "GOTO" /  
"GROUP" / "GROWTH" / "HALT" / "HARMEAN" / "HELP" / "HEX2BIN" / "HEX2DEC" / "HEX2OCT" /  
"HLOOKUP" / "HOUR" / "HYPERLINK" / "HYPGEOMDIST" / "IF" / "IFS" / "IFERROR" / "IMABS" /  
"IMAGINARY" / "IMARGUMENT" / "IMCONJUGATE" / "IMCOS" / "IMDIV" / "IMEXP" / "IMLN" / "IMLOG10"  
/ "IMLOG2" / "IMPOWER" / "IMPRODUCT" / "IMREAL" / "IMSIN" / "IMSQRT" / "IMSUB" / "IMSUM" /  
"INDEX" / "INDIRECT" / "INFO" / "INITIATE" / "INPUT" / "INT" / "INTERCEPT" / "INTRATE" /  
"IPMT" / "IRR" / "ISBLANK" / "ISERR" / "ISERROR" / "ISEVEN" / "ISLOGICAL" / "ISNA" /  
"ISNONTEXT" / "ISNUMBER" / "ISODD" / "ISPMT" / "ISREF" / "ISTEXT" / "ISTHAIDIGIT" / "KURT" /  
"LARGE" / "LAST.ERROR" / "LCM" / "LEFT" / "LEFTB" / "LEN" / "LENB" / "LINEST" / "LINKS" /  
"LN" / "LOG" / "LOG10" / "LOGEST" / "LOGINV" / "LOGNORMDIST" / "LOOKUP" / "LOWER" / "MATCH" /  
"MAX" / "MAXA" / "MAXIFS" / "MDTERM" / "MDURATION" / "MEDIAN" / "MID" / "MIDB" / "MIN" /  
"MINA" / "MINIFS" / "MINUTE" / "MINVERSE" / "MIRR" / "MMULT" / "MOD" / "MODE" / "MONTH" /  
"MOVIE.COMMAND" / "MROUND" / "MULTINOMIAL" / "N" / "NA" / "NAMES" / "NEGBINOMDIST" /  
"NETWORKDAYS" / "NEXT" / "NOMINAL" / "NORMDIST" / "NORMINV" / "NORMSDIST" / "NORMSINV" /  
"NOT" / "NOTE" / "NOW" / "NPER" / "NPV" / "NUMBERSTRING" / "OCT2BIN" / "OCT2DEC" / "OCT2HEX"  
/ "ODD" / "ODDFPRICE" / "ODDFYIELD" / "ODDLPRICE" / "ODDLYIELD" / "OFFSET" / "OPEN.DIALOG" /  
"OPTIONS.LISTS.GET" / "OR" / "PAUSE" / "PEARSON" / "PERCENTILE" / "PERCENTRANK" / "PERMUT" /  
"PHONETIC" / "PI" / "PMT" / "POISSON" / "POKE" / "POWER" / "PPMT" / "PRESS.TOOL" / "PRICE" /  
"PRICEDISC" / "PRICEMAT" / "PROB" / "PRODUCT" / "PROPER" / "PV" / "QUARTILE" / "QUOTIENT" /  
"RADIAN" / "RAND" / "RANDBETWEEN" / "RANK" / "RATE" / "RECEIVED" / "REFTXT" / "REGISTER" /  
"REGISTER.ID" / "RELREF" / "RENAME.COMMAND" / "REPLACE" / "REPLACEB" / "REPT" / "REQUEST" /  
"RESET.TOOLBAR" / "RESTART" / "RESULT" / "RESUME" / "RETURN" / "RIGHT" / "RIGHTB" / "ROMAN" /  
"ROUND" / "ROUNDBAHTDOWN" / "ROUNDBAHTUP" / "ROUNDDOWN" / "ROUNDUP" / "ROW" / "ROWS" / "RSQ"  
/ "RTD" / "SAVE.DIALOG" / "SAVE.TOOLBAR" / "SCENARIO.GET" / "SEARCH" / "SEARCHB" / "SECOND" /  
"SELECTION" / "SERIES" / "SERIESSUM" / "SET.NAME" / "SET.VALUE" / "SHOW.BAR" / "SIGN" / "SIN"  
/ "SINH" / "SKEW" / "SLN" / "SLOPE" / "SMALL" / "SPELLING.CHECK" / "SPREADBASE.DATA.FIELD" /  
"SQRT" / "SQRTPI" / "STANDARDIZE" / "STDEV" / "STDEVA" / "STDEVP" / "STDEVPA" / "STEP" /  
"STEYX" / "SUBSTITUTE" / "SUBTOTAL" / "SUM" / "SUMIF" / "SUMIFS" / "SUMPRODUCT" / "SUMSQ" /  
"SUMX2MY2" / "SUMX2PY2" / "SUMXMY2" / "SWITCH" / "SYD" / "T" / "TAN" / "TANH" / "TBILLEQ" /  
"TBILLPRICE" / "TBILLYIELD" / "TDIST" / "TERMINATE" / "TEXT" / "TEXT.BOX" / "TEXTJOIN" /  
"TEXTREF" / "THAIDAYOFWEEK" / "THAIDIGIT" / "THAIMONTHOFYEAR" / "THAINUMSOUND" /  
"THAINUMSTRING" / "THAISTRINGLENGTH" / "THAIYEAR" / "TIME" / "TIMEVALUE" / "TINV" / "TODAY" /  
"TRANSPOSE" / "TREND" / "TRIM" / "TRIMMEAN" / "TRUE" / "TRUNC" / "TTEST" / "TYPE" /  
"UNREGISTER" / "UPPER" / "USDOLLAR" / "VALUE" / "VAR" / "VARA" / "VARP" / "VARPA" / "VDB" /  
"VIEW.GET" / "VLOOKUP" / "VOLATILE" / "WEEKDAY" / "WEEKNUM" / "WEIBULL" / "WHILE" /  
"WINDOW.TITLE" / "WINDOWS" / "WORKDAY" / "XIRR" / "XNPV" / "YEAR" / "YEARFRAC" / "YIELD" /  
"YIELDDISC" / "YIELDMAT" / "ZTEST"

command-list = ("A1.R1C1" / "ACTIVATE" / "ACTIVATE.NEXT" / "ACTIVATE.NOTES" / "ACTIVATE.PREV" / "ACTIVE.CELL.FONT" / "ADD.ARROW" / "ADD.CHART.AUTOFORMAT" / "ADD.LIST.ITEM" / "ADD.OVERLAY" / "ADD.PRINT.AREA" / "ADD.TOOL" / "ADDIN.MANAGER" / "ALERT" / "ALIGNMENT" / "APP.ACTIVATE" / "APP.ACTIVATE.MICROSOFT" / "APP.MAXIMIZE" / "APP.MINIMIZE" / "APP.MOVE" / "APP.RESTORE" / "APP.SIZE" / "APPLY.NAMES" / "APPLY.STYLE" / "ARRANGE.ALL" / "ASSIGN.TO.OBJECT" / "ASSIGN.TO.TOOL" / "ATTACH.TEXT" / "ATTACH.TOOLBARS" / "ATTRIBUTES" / "AUTO.OUTLINE" / "AUTOCORRECT" / "AXES" / "BEEP" / "BORDER" / "BRING.TO.FRONT" / "CALCULATE.DOCUMENT" / "CALCULATE.NOW" / "CALCULATION" / "CANCEL.COPY" / "CELL.PROTECTION" / "CHANGE.LINK" / "CHART.ADD.DATA" / "CHART.TREND" / "CHART.WIZARD" / "CHECKBOX.PROPERTIES" / "CLEAR" / "CLEAR.OUTLINE" / "CLEAR.PRINT.AREA" / "CLEAR.ROUTING.SLIP" / "CLOSE" / "CLOSE.ALL" / "COLOR.PALETTE" / "COLUMN.WIDTH" / "COMBINATION" / "CONSOLIDATE" / "CONSTRAIN.NUMERIC" / "COPY" / "COPY.CHART" / "COPY.PICTURE" / "COPY.TOOL" / "CREATE.NAMES" / "CREATE.PUBLISHER" / "CUSTOMIZE.TOOLBAR" / "CUT" / "DATA.DELETE" / "DATA.FIND" / "DATA.FIND.NEXT" / "DATA.FIND.PREV" / "DATA.FORM" / "DATA.LABEL" / "DATA.SERIES" / "DEFINE.NAME" / "DEFINE.STYLE" / "DELETE.ARROW" / "DELETE.CHART.AUTOFORMAT" / "DELETE.FORMAT" / "DELETE.NAME" / "DELETE.NOTE" / "DELETE.OVERLAY" / "DELETE.STYLE" / "DELETE.TOOL" / "DEMOTE" / "DISABLE.INPUT" / "DISPLAY" / "DUPLICATE" / "EDIT.COLOR" / "EDIT.DELETE" / "EDIT.OBJECT" / "EDIT.REPEAT" / "EDIT.SERIES" / "EDIT.TOOL" / "EDITBOX.PROPERTIES" / "EDITION.OPTIONS" / "ENABLE.OBJECT" / "ENABLE.TIPWIZARD" / "ENTER.DATA" / "ERRORBAR.X" / "ERRORBAR.Y" / "EXTEND.POLYGON" / "EXTRACT" / "FILE.CLOSE" / "FILE.DELETE" / "FILL.AUTO" / "FILL.DOWN" / "FILL.GROUP" / "FILL.LEFT" / "FILL.RIGHT" / "FILL.UP" / "FILTER" / "FILTER.ADVANCED" / "FILTER.SHOW.ALL" / "FIND.FILE" / "FONT" / "FONT.PROPERTIES" / "FORMAT.AUTO" / "FORMAT.CHART" / "FORMAT.CHARTTYPE" / "FORMAT.FONT" / "FORMAT.LEGEND" / "FORMAT.MAIN" / "FORMAT.MOVE" / "FORMAT.NUMBER" / "FORMAT.OVERLAY" / "FORMAT.SHAPE" / "FORMAT.SIZE" / "FORMAT.TEXT" / "FORMULA" / "FORMULA.ARRAY" / "FORMULA.FILL" / "FORMULA.FIND" / "FORMULA.FIND.NEXT" / "FORMULA.FIND.PREV" / "FORMULA.GOTO" / "FORMULA.REPLACE" / "FREEZE.PANES" / "FULL" / "FULL.SCREEN" / "FUNCTION.WIZARD" / "GALLERY.3D.AREA" / "GALLERY.3D.BAR" / "GALLERY.3D.COLUMN" / "GALLERY.3D.LINE" / "GALLERY.3D.PIE" / "GALLERY.3D.SURFACE" / "GALLERY.AREA" / "GALLERY.BAR" / "GALLERY.COLUMN" / "GALLERY.CUSTOM" / "GALLERY.DOUGHNUT" / "GALLERY.LINE" / "GALLERY.PIE" / "GALLERY.RADAR" / "GALLERY.SCATTER" / "GOAL.SEEK" / "GRIDLINES" / "HIDE" / "HIDE.DIALOG" / "HIDE.OBJECT" / "HIDEALL.INKNANOTS" / "HIDEALL.NOTES" / "HIDECURR.NOTE" / "HLINE" / "HPAGE" / "HSCROLL" / "INSERT" / "INSERT.MAP.OBJECT" / "INSERT.OBJECT" / "INSERT.PICTURE" / "INSERT.TITLE" / "INSERTDATATABLE" / "JUSTIFY" / "LABEL.PROPERTIES" / "LAYOUT" / "LEGEND" / "LINE.PRINT" / "LINK.COMBO" / "LINK.FORMAT" / "LIST.NAMES" / "LISTBOX.PROPERTIES" / "MACRO.OPTIONS" / "MAIL.ADD.MAILER" / "MAIL.DELETE.MAILER" / "MAIL.EDIT.MAILER" / "MAIL.FORWARD" / "MAIL.LOGOFF" / "MAIL.LOGON" / "MAIL.NEXT.LETTER" / "MAIL.REPLY" / "MAIL.REPLY.ALL" / "MAIL.SEND.MAILER" / "MAIN.CHART" / "MAIN.CHART.TYPE" / "MENU.EDITOR" / "MERGE.STYLES" / "MESSAGE" / "MOVE.BRK" / "MOVE.TOOL" / "MSOCHECKS" / "NEW" / "NEW.WINDOW" / "NEWWEBQUERY" / "NORMAL" / "OBJECT.PROPERTIES" / "OBJECT.PROTECTION" / "ON.DATA" / "ON.DOUBLECLICK" / "ON.KEY" / "ON.RECALC" / "ON.SHEET" / "ON.TIME" / "ON.WINDOW" / "OPEN" / "OPEN.LINKS" / "OPEN.MAIL" / "OPEN.TEXT" / "OPTIONS.CALCULATION" / "OPTIONS.CHART" / "OPTIONS.EDIT" / "OPTIONS.GENERAL" / "OPTIONS.LISTS.ADD" / "OPTIONS.LISTS.DELETE" / "OPTIONS.ME" / "OPTIONS.MENONO" / "OPTIONS.SAVE" / "OPTIONS.SPELL" / "OPTIONS.TRANSITION" / "OPTIONS.VIEW" / "OUTLINE" / "OVERLAY" / "OVERLAY.CHART.TYPE" / "PAGE.SETUP" / "PARSE" / "PASTE" / "PASTE.LINK" / "PASTE.PICTURE" / "PASTE.PICTURE.LINK" / "PASTE.SPECIAL" / "PASTE.TOOL" / "PATTERNS" / "PICKLIST" / "PIVOT.ADD.FIELDS" / "PIVOT.FIELD" / "PIVOT.FIELD.GROUP" / "PIVOT.FIELD.PROPERTIES" / "PIVOT.FIELD.UNGROUP" / "PIVOT.ITEM" / "PIVOT.ITEM.PROPERTIES" / "PIVOT.REFRESH" / "PIVOT.SHOW.PAGES" / "PIVOT.TABLE.CHART" / "PIVOT.TABLE.WIZARD" / "POST.DOCUMENT" / "PRECISION" / "PREFERRED" / "PRINT" / "PRINT.PREVIEW" / "PRINTER.SETUP" / "PROMOTE" / "PROTECT.DOCUMENT" / "PROTECT.REVISIONS" / "PUSHBUTTON.PROPERTIES" / "QUIT" / "REMOVE.LIST.ITEM" / "REMOVE.PAGE.BREAK" / "RENAME.OBJECT" / "REPLACE.FONT" / "RESET.TOOL" / "RM.PRINT.AREA" / "ROUTE.DOCUMENT" / "ROUTING.SLIP" / "ROW.HEIGHT" / "RUN" / "SAVE" / "SAVE.AS" / "SAVE.COPY.AS" / "SAVE.NEW.OBJECT" / "SAVE.WORKBOOK" / "SAVE.WORKSPACE" / "SCALE" / "SCENARIO.ADD" / "SCENARIO.CELLS" / "SCENARIO.DELETE" / "SCENARIO.EDIT" / "SCENARIO.MERGE" / "SCENARIO.SHOW" / "SCENARIO.SHOW.NEXT" / "SCENARIO.SUMMARY" / "SCROLLBAR.PROPERTIES" / "SELECT" / "SELECT.ALL" / "SELECT.CHART" / "SELECT.END" / "SELECT.LAST.CELL" / "SELECT.LIST.ITEM" / "SELECT.PLOT.AREA" / "SELECT.SPECIAL" / "SEND.KEYS" / "SEND.MAIL" / "SEND.TO.BACK" / "SERIES.AXES" / "SERIES.ORDER" / "SERIES.X" / "SERIES.Y" / "SET.CONTROL.VALUE" / "SET.CRITERIA" / "SET.DATABASE" / "SET.DIALOG.DEFAULT" / "SET.DIALOG.FOCUS" / "SET.EXTRACT" / "SET.LIST.ITEM" / "SET.PAGE.BREAK" / "SET.PREFERRED" / "SET.PRINT.AREA" / "SET.PRINT.TITLES" / "SET.UPDATE.STATUS" / "SHARE" / "SHARE.NAME" / "SHEET.BACKGROUND" / "SHORT.MENUS" / "SHOW.ACTIVE.CELL" / "SHOW.CLIPBOARD" / "SHOW.DETAIL" / "SHOW.DIALOG" / "SHOW.INFO" / "SHOW.LEVELS" / "SHOW.TOOLBAR" / "SORT" / "SORT.SPECIAL" / "SOUND.NOTE" / "SOUND.PLAY" / "SPELLING" / "SPLIT" / "STANDARD.FONT" / "STANDARD.WIDTH" / "STYLE" / "SUBSCRIBE.TO" / "SUBTOTAL.CREATE" / "SUBTOTAL.REMOVE" / "SUMMARY.INFO" / "TAB.ORDER" / "TABLE" / "TEXT.TO.COLUMNS" / "TRACER.CLEAR" / "TRACER.DISPLAY" / "TRACER.ERROR" / "TRACER.NAVIGATE" / "TRAVERSE.NOTES" / "UNDO" / "UNGROUP" / "UNGROUP.SHEETS" / "UNHIDE" / "UNLOCKED.NEXT" / "UNLOCKED.PREV" / "UNPROTECT.REVISIONS" / "UPDATE.LINK" /

"VBA.INSERT.FILE" / "VBA.MAKE.ADDIN" / "VBA.PROCEDURE.DEFINITION" / "VBAActivate" / "VIEW.3D"  
/ "VIEW.DEFINE" / "VIEW.DELETE" / "VIEW.SHOW" / "VLIN" / "VPAGE" / "VSCROLL" / "WAIT" /  
"WEB.PUBLISH" / "WINDOW.MAXIMIZE" / "WINDOW.MINIMIZE" / "WINDOW.MOVE" / "WINDOW.RESTORE" /  
"WINDOW.SIZE" / "WORKBOOK.ACTIVATE" / "WORKBOOK.ADD" / "WORKBOOK.COPY" / "WORKBOOK.DELETE" /  
"WORKBOOK.HIDE" / "WORKBOOK.INSERT" / "WORKBOOK.MOVE" / "WORKBOOK.NAME" / "WORKBOOK.NEW" /  
"WORKBOOK.NEXT" / "WORKBOOK.OPTIONS" / "WORKBOOK.PREV" / "WORKBOOK.PROTECT" /  
"WORKBOOK.SCROLL" / "WORKBOOK.SELECT" / "WORKBOOK.TAB.SPLIT" / "WORKBOOK.UNHIDE" /  
"WORKGROUP" / "WORKGROUP.OPTIONS" / "WORKSPACE" / "ZOOM") [{"?"]  
future-function-list = ("\_xlfn." ("AGGREGATE" / "ACOT" / ref"ACOTH" / "ARABIC" / "BASE" /  
"BETA.DIST" / "BETA.INV" / "BINOM.DIST" / "BINOM.DIST.RANGE" / "BINOM.INV" / "BITAND" /  
"BITLSHIFT" / "BITOR" / "BITRSHIFT" / "BITXOR" / "BYCOL" / "BYROW" / "CEILING.MATH" /  
"CEILING.PRECISE" / "CHISQ.DIST" / "CHISQ.DIST.RT" / "CHISQ.INV" / "CHISQ.INV.RT" /  
"CHISQ.TEST" / "CHOOSECOLS" / "CHOOSEROWS" / "COMBINA" / "CONFIDENCE.NORM" / "CONFIDENCE.T" /  
"COT" / "COTH" / "COVARIANCE.P" / "COVARIANCE.S" / "CSC" / "CSCH" / "DAYS" / "DECIMAL" /  
"DROP" / "ERF.PRECISE" / "ERFC.PRECISE" / "EXPAND" / "EXPON.DIST" / "F.DIST" / "F.DIST.RT" /  
"F.INV" / "F.INV.RT" / "F.TEST" / "FIELDVALUE" / "FILTERXML" / "FLOOR.MATH" / "FLOOR.PRECISE"  
/ "FORMULATEXT" / "GAMMA" / "GAMMA.DIST" / "GAMMA.INV" / "GAMMALN.PRECISE" / "GAUSS" /  
"HSTACK" / "HYPGEOM.DIST" / "IFNA" / "IMCOSH" / "IMCOT" / "IMCSC" / "IMCSCH" / "IMSEC" /  
"IMSECH" / "IMSINH" / "IMTAN" / "ISFORMULA" / "ISOMITTED" / "ISOWEENUM" / "LAMBDA" / "LET" /  
"LOGNORM.DIST" / "LOGNORM.INV" / "MAKEARRAY" / "MAP" / "MODE.MULT" / "MODE.SNGL" / "MUNIT" /  
"NEGBINOM.DIST" / "NORM.DIST" / "NORM.INV" / "NORM.S.DIST" / "NORM.S.INV" / "NUMBERVALUE" /  
"PDURATION" / "PERCENTILE.EXC" / "PERCENTILE.INC" / "PERCENTRANK.EXC" / "PERCENTRANK.INC" /  
"PERMUTATIONA" / "PHI" / "POISSON.DIST" / "PQSOURCE" / "PYTHON\_STR" / "PYTHON\_TYPE" /  
"PYTHON\_TYPENAME" / "QUARTILE.EXC" / "QUARTILE.INC" / "QUERYSTRING" / "RANDARRAY" / "RANK.AVG"  
/ "RANK.EQ" / "REDUCE" / "RRI" / "SCAN" / "SEC" / "SECH" / "SEQUENCE" / "SHEET" / "SHEETS"  
/ "SKEW.P" / "SORTBY" / "STDEV.P" / "STDEV.S" / "T.DIST" / "T.DIST.2T" / "T.DIST.RT" / "T.INV"  
/ "T.INV.2T" / "T.TEST" / "TAKE" / "TEXTAFTER" / "TEXTBEFORE" / "TEXTSPLIT" / "TOCOL" /  
"TOROW" / "UNICHAR" / "UNICODE" / "UNIQUE" / "VAR.P" / "VAR.S" / "VSTACK" / "WEBSERVICE" /  
"WEIBULL.DIST" / "WRAPCOLS" / "WRAPROWS" / "XLOOKUP" / "XOR" / "Z.TEST")) / "ECMA.CEILING" /  
"ISO.CEILING" / "NETWORKDAYS.INTL" / "WORKDAY.INTL" / "FORECAST.ETS" / "FORECAST.ETS.CONFINT"  
/ "FORECAST.ETS.SEASONALITY" / "FORECAST.LINEAR" / "FORECAST.ETS.STAT"  
ref-function-call = "CHOOSE" choose-params / "IF" if-params / "IF" if-worksheet-params /  
"INDEX" index-params / "INDIRECT" indirect-params / "OFFSET" offset-params  
future-function-call = ("\_xlfn." ( ("ACOT" acot-params) / ("ACOTH" acoth-params) /  
("AGGREGATE" aggregate-params) / ("ARABIC" arabic-params) / ("BASE" base-params) /  
("BETA.DIST" beta-dist-params) / ("BETA.INV" beta-inv-params) / ("BINOM.DIST" binom-dist-  
params) / ("BINOM.DIST.RANGE" binom-dist-range-params) / ("BINOM.INV" binom-inv-params) /  
("BITAND" bitand-params) / ("BITLSHIFT" bitlshift-params) / ("BITOR" bitor-params) /  
("BITRSHIFT" bitrshift-params) / ("BITXOR" bitxor-params) / ("BYCOL" bycol-params) / ("BYROW"  
byrow-params) / ("CEILING.MATH" ceiling-math-params) / ("CEILING.PRECISE" ceiling-precise-  
params) / ("CHISQ.DIST" chisq-dist-params) / ("CHISQ.DIST.RT" chisq-dist-rt-params) /  
("CHISQ.INV" chisq-inv-params) / ("CHISQ.INV.RT" chisq-inv-rt-params) / ("CHISQ.TEST" chisq-  
test-params) / ("CHOOSECOLS" choosecols-params) / ("CHOOSEROWS" chooserows-params) /  
("COMBINA" combina-params) / ("CONFIDENCE.NORM" confidence-norm-params) / ("CONFIDENCE.T"  
confidence-t-params) / ("COT" cot-params) / ("COTH" coth-params) / ("COVARIANCE.P"  
covariance-p-params) / ("COVARIANCE.S" covariance-s-params) / ("CSC" csc-params) / ("CSCH"  
csch-params) / ("DAYS" days-params) / ("DECIMAL" decimal-params) / ("DROP" drop-params) /  
("ERF.PRECISE" erf-precise-params) / ("ERFC.PRECISE" erfc-precise-params) / ("EXPAND" expand-  
params) / ("EXPON.DIST" expon-dist-params) / ("F.DIST" f-dist-params) / ("F.DIST.RT" f-dist-  
rt-params) / ("F.INV" f-inv-params) / ("F.INV.RT" f-inv-rt-params) / ("F.TEST" f-test-params)  
/ ("FIELDVALUE" fieldvalue-params) / ("FILTERXML" filterxml-params) / ("FLOOR.MATH" floor-  
math-params) / ("FLOOR.PRECISE" floor-precise-params) / ("FORMULATEXT" formulatext-params) /  
("GAMMA" gamma-params) / ("GAMMA.DIST" gamma-dist-params) / ("GAMMA.INV" gamma-inv-params) /  
("GAMMALN.PRECISE" gammaln-precise-params) / ("GAUSS" gauss-params) / ("HSTACK" hstack-  
params) / ("HYPGEOM.DIST" hypgeom-dist-params) / ("IFNA" ifna-params) / ("IMCOSH" imcosh-  
params) / ("IMCOT" imcot-params) / ("IMCSC" imcsc-params) / ("IMCSCH" imcsch-params) /  
("IMSEC" imsec-params) / ("IMSECH" imsech-params) / ("IMSINH" imsinh-params) / ("IMTAN"  
imtan-params) / ("ISFORMULA" isformula-params) / ("ISOMITTED" isomitted-params) /  
("ISOWEENUM" isoweeknum-params) / ("LAMBDA" lambda-params) / ("LET" let-params) /  
("LOGNORM.DIST" lognorm-dist-params) / ("LOGNORM.INV" lognorm-inv-params) / ("MAKEARRAY"  
makearray-params) / ("MAP" map-params) / ("MODE.MULT" mode-mult-params) / ("MODE.SNGL" mode-  
sngl-params) / ("MUNIT" munit-params) / ("NEGBINOM.DIST" negbinom-dist-params) / ("NORM.DIST"  
norm-dist-params) / ("NORM.INV" norm-inv-params) / ("NORM.S.DIST" norm-s-dist-params) /  
("NORM.S.INV" norm-s-inv-params) / ("NUMBERVALUE" numbervalue-params) / ("PDURATION"  
pduration-params) / ("PERCENTILE.EXC" percentile-exc-params) / ("PERCENTILE.INC" percentile-  
inc-params) / ("PERCENTRANK.EXC" percentrank-exc-params) / ("PERCENTRANK.INC" percentrank-  
inc-params) / ("PERMUTATIONA" permutationa-params) / ("PHI" phi-params) / ("POISSON.DIST"  
poisson-dist-params) / ("PQSOURCE" pqsource-params) / ("PYTHON\_STR" python-str-params) /  
("PYTHON\_TYPE" python-type-params) / ("PYTHON\_TYPENAME" python-typename-params) /  
("QUARTILE.EXC" quartile-exc-params) / ("QUARTILE.INC" quartile-inc-params) / ("QUERYSTRING"



querystring-params) / ("RANDARRAY" randarray-params) / ("RANK.AVG" rank-avg-params) / ("RANK.EQ" rank-eq-params) / ("REDUCE" reduce-params) / ("RRI" rri-params) / ("SCAN" scan-params) / ("SEC" sec-params) / ("SECH" sech-params) / ("SEQUENCE" sequence-params) / ("SHEET" sheet-params) / ("SHEETS" sheets-params) / ("SKEW.P" skew-p-params) / ("SORTBY" sortby-params) / ("STDEV.P" stdev-p-params) / ("STDEV.S" stdev-s-params) / ("T.DIST" t-dist-params) / ("T.DIST.2T" t-dist-2t-params) / ("T.DIST.RT" t-dist-rt-params) / ("T.INV" t-inv-params) / ("T.INV.2T" t-inv-2t-params) / ("T.TEST" t-test-params) / ("TAKE" take-params) / ("TEXTAFTER" textafter-params) / ("TEXTBEFORE" textbefore-params) / ("TEXTSPLIT" textsplit-params) / ("TOCOL" tocol-params) / ("TOROW" torow-params) / ("UNICHAR" unichar-params) / ("UNICODE" unicode-params) / ("UNIQUE" unique-params) / ("VAR.P" var-p-params) / ("VAR.S" var-s-params) / ("VSTACK" vstack-params) / ("WEBSERVICE" webservice-params) / ("WEIBULL.DIST" weibull-dist-params) / ("WRAPCOLS" wrapcols-params) / ("WRAPROWS" wraprows-params) / ("XLOOKUP" xlookup-params) / ("XOR" xor-params) / ("Z.TEST" z-test-params)) / ("ECMA.CEILING" ecma-ceiling-params) / ("ISO.CEILING" iso-ceiling-params) / ("NETWORKDAYS.INTL" networkdays-intl-params) / ("WORKDAY.INTL" workday-intl-params) / ("FORECAST.ETS" forecast-ets-params) / ("FORECAST.ETS.CONFINT" forecast-ets-confint-params) / ("FORECAST.ETS.SEASONALITY" forecast-ets-seasonality-params) / ("FORECAST.LINEAR" forecast-linear-params) / ("FORECAST.ETS.STAT" forecast-ets-stat-params)

function-call = ref-function-call / future-function-call / worksheet-only-function-call / cell-function-call / user-defined-function-call / "ABS" abs-params / "ACCRINT" accrint-params / "ACCRINTM" accrintm-params / "ACOS" acos-params / "ACOSH" acosh-params / "ADDRESS" address-params / "AMORDEGRC" amordegrc-params / "AMORLINC" amorlinc-params / "AND" and-params / "AREAS" areas-params / "ASC" asc-params / "ASIN" asin-params / "ASINH" asinh-params / "ATAN" atan-params / "ATAN2" atan2-params / "ATANH" atanh-params / "AVEDEV" aveDEV-params / "AVERAGE" average-params / "AVERAGEA" averagea-params / "AVERAGEIF" averageif-params / "AVERAGEIFS" averageifs-params / "BAHTTEXT" bahttext-params / "BESSELI" besseli-params / "BESSELJ" besselj-params / "BESSELK" besselk-params / "BESSELY" bessely-params / "BETADIST" betadist-params / "BETAINV" betainv-params / "BIN2DEC" bin2dec-params / "BIN2HEX" bin2hex-params / "BIN2OCT" bin2oct-params / "BINOMDIST" binomdist-params / "CEILING" ceiling-params / "CELL" cell-params / "CHAR" char-params / "CHIDIST" chidist-params / "CHIINV" chiinv-params / "CHITEST" chitest-params / "CLEAN" clean-params / "CODE" code-params / "COLUMN" column-params / "COLUMNS" columns-params / "COMBIN" combin-params / "COMPLEX" complex-params / "CONCAT" concat-params / "CONCATENATE" concatenate-params / "CONFIDENCE" confidence-params / "CONVERT" convert-params / "CORREL" corREL-params / "COS" cos-params / "COSH" cosh-params / "COUNT" count-params / "COUNTA" counta-params / "COUNTBLANK" countblank-params / "COUNTIF" countif-params / "COUNTIFS" countifs-params / "COUPDAYBS" coupdaybs-params / "COUPDAYS" coupdays-params / "COUPDAYSNC" coupdaysnc-params / "COUPNCD" coupncd-params / "COUPNUM" coupnum-params / "COUPPCD" couppcd-params / "COVAR" covar-params / "CRITBINOM" critbinom-params / "CUBEKPIMEMBER" cubekpimember-params / "CUBEMEMBER" cubemember-params / "CUBEMEMBERPROPERTY" cubememberproperty-params / "CUBERANKEDMEMBER" cuberankedmember-params / "CUBESET" cubeset-params / "CUBESETCOUNT" cubesetcount-params / "CUBEVALUE" cubevalue-params / "CUMIPMT" cumipmt-params / "CUMPRINC" cumprinc-params / "DATE" date-params / "DATEDIF" datedif-params / "DATESTRING" datestring-params / "DATEVALUE" datevalue-params / "DAVERAGE" daverage-params / "DAY" day-params / "DAYS360" days360-params / "DB" db-params / "DBCS" dBCS-params / "DCOUNT" dcount-params / "DCOUNTA" dcounta-params / "DDB" ddb-params / "DEC2BIN" dec2bin-params / "DEC2HEX" dec2hex-params / "DEC2OCT" dec2oct-params / "DEGREES" degrees-params / "DELTA" delta-params / "DEVSQ" devsq-params / "DGET" dget-params / "DISC" disc-params / "DMAX" dmax-params / "DMIN" dmin-params / "DOLLAR" dollar-params / "DOLLARDE" dollarde-params / "DOLLARFR" dollarfr-params / "DPRODUCT" dproduct-params / "DSTDEV" dstdev-params / "DSTDEVP" dstdevp-params / "DSUM" dsum-params / "DURATION" duration-params / "DVAR" dvar-params / "DVARP" dvarp-params / "EDATE" edate-params / "EFFECT" effect-params / "EOMONTH" eomonth-params / "ERF" erf-params / "ERFC" erfc-params / "ERROR.TYPE" error-type-params / "EVEN" even-params / "EXACT" exact-params / "EXP" exp-params / "EXPONDIST" exponDist-params / "FACT" fact-params / "FACTDOUBLE" factdouble-params / "FALSE" false-params / "FDIST" fdist-params / "FIND" find-params / "FINDB" findb-params / "FINV" finv-params / "FISHER" fisher-params / "FISHERINV" fisherinv-params / "FIXED" fixed-params / "FLOOR" floor-params / "FORECAST" forecast-params / "FREQUENCY" frequency-params / "FTEST" ftest-params / "FV" fv-params / "FVCHEDULE" fvschedule-params / "GAMMADIST" gammadist-params / "GAMMAINV" gammainv-params / "GAMMALN" gammaln-params / "GCD" gcd-params / "GEOMEAN" geomean-params / "GESTEP" gestep-params / "GETPIVOTDATA" getpivotdata-params / "GROWTH" growth-params / "HARMEAN" harmean-params / "HEX2BIN" hex2bin-params / "HEX2DEC" hex2dec-params / "HEX2OCT" hex2oct-params / "HLOOKUP" hlookup-params / "HOUR" hour-params / "HYPERLINK" hyperlink-params / "HYPGEOMDIST" hypgeomdist-params / "IFS" ifs-params / "IFERROR" iferror-params / "IMABS" imabs-params / "IMAGINARY" imaginary-params / "IMARGUMENT" imargument-params / "IMCONJUGATE" imconjugate-params / "IMCOS" imcos-params / "IMDIV" imdiv-params / "IMEXP" imexp-params / "IMLN" imln-params / "IMLOG10" imlog10-params / "IMLOG2" imlog2-params / "IMPOWER" impower-params / "IMPRODUCT" improduct-params / "IMREAL" imreal-params / "IMSIN" imsin-params / "IMSQRT" imsqrt-params / "IMSUB" imsub-params / "IMSUM" imsum-params / "INFO" info-params / "INT" int-params / "INTERCEPT" intercept-params / "INTRATE" intrate-params / "IPMT" ipmt-params / "IRR" irr-params / "ISBLANK" isblank-params / "ISERR" iserr-params / "ISERROR" iserror-params /

"ISEVEN" iseven-params / "ISLOGICAL" islogical-params / "ISNA" isna-params / "ISNONTEXT" isnontext-params / "ISNUMBER" isnumber-params / "ISODD" isodd-params / "ISPMT" ispmt-params / "ISREF" isref-params / "ISTEXT" istext-params / "ISTHAIDIGIT" isthaidigit-params / "KURT" kurt-params / "LARGE" large-params / "LCM" lcm-params / "LEFT" left-params / "LEFTB" leftb-params / "LEN" len-params / "LENB" lenb-params / "LINEST" linest-params / "LN" ln-params / "LOG" log-params / "LOG10" log10-params / "LOGEST" logest-params / "LOGINV" loginv-params / "LOGNORMDIST" lognormdist-params / "LOOKUP" lookup-params / "LOWER" lower-params / "MATCH" match-params / "MAX" max-params / "MAXA" maxa-params / "MAXIFS" maxifs-params / "MDTERM" mdeterm-params / "MDURATION" mduration-params / "MEDIAN" median-params / "MID" mid-params / "MIDB" midb-params / "MIN" min-params / "MINA" mina-params / "MINIFS" minifs-params / "MINUTE" minute-params / "MINVERSE" minverse-params / "MIRR" mirr-params / "MMULT" mmult-params / "MOD" mod-params / "MODE" mode-params / "MONTH" month-params / "MROUND" mround-params / "MULTINOMIAL" multinomial-params / "N" n-params / "NA" na-params / "NEGBINOMDIST" negbinomdist-params / "NETWORKDAYS" networkdays-params / "NOMINAL" nominal-params / "NORMDIST" normdist-params / "NORMINV" norminv-params / "NORMSDIST" normsdist-params / "NORMSINV" normsinv-params / "NOT" not-params / "NOW" now-params / "NPER" nper-params / "NPV" npv-params / "NUMBERSTRING" numberstring-params / "OCT2BIN" oct2bin-params / "OCT2DEC" oct2dec-params / "OCT2HEX" oct2hex-params / "ODD" odd-params / "ODDFPRICE" oddfprice-params / "ODDFYIELD" oddfyield-params / "ODDLPRICE" oddlprice-params / "ODDLYIELD" oddlyield-params / "OR" or-params / "PEARSON" pearson-params / "PERCENTILE" percentile-params / "PERCENTRANK" percentrank-params / "PERMUT" permut-params / "PHONETIC" phonetic-params / "PI" pi-params / "PMT" pmt-params / "POISSON" poisson-params / "POWER" power-params / "PPMT" ppmt-params / "PRICE" price-params / "PRICEDISC" pricedisc-params / "PRICEMAT" pricemat-params / "PROB" prob-params / "PRODUCT" product-params / "PROPER" proper-params / "PV" pv-params / "QUARTILE" quartile-params / "QUOTIENT" quotient-params / "RADIANS" radians-params / "RAND" rand-params / "RANDBETWEEN" randbetween-params / "RANK" rank-params / "RATE" rate-params / "RECEIVED" received-params / "REPLACE" replace-params / "REPLACEB" replaceb-params / "REPT" rept-params / "RIGHT" right-params / "RIGHTB" rightb-params / "ROMAN" roman-params / "ROUND" round-params / "ROUNDBAHTDOWN" roundbahtdown-params / "ROUNDBAHTUP" roundbahtup-params / "ROUNDDOWN" rounddown-params / "ROUNDUP" roundup-params / "ROW" row-params / "ROWS" rows-params / "RSQ" rsq-params / "RTD" rtd-params / "SEARCH" search-params / "SEARCHB" searchb-params / "SECOND" second-params / "SERIES" series-params / "SERIESSUM" seriessum-params / "SIGN" sign-params / "SIN" sin-params / "SINH" sinh-params / "SKEW" skew-params / "SLN" sln-params / "SLOPE" slope-params / "SMALL" small-params / "SQRT" sqrt-params / "SQRTPI" sqrtpi-params / "STANDARDIZE" standardize-params / "STDEV" stdev-params / "STDEVA" stdeva-params / "STDEVP" stdevp-params / "STDEVPA" stdevpa-params / "STEYX" steyx-params / "SUBSTITUTE" substitute-params / "SUBTOTAL" subtotal-params / "SUM" sum-params / "SUMIF" sumif-params / "SUMIFS" sumifs-params / "SUMPRODUCT" sumproduct-params / "SUMSQ" sumsq-params / "SUMX2MY2" sumx2my2-params / "SUMX2PY2" sumx2py2-params / "SUMXMY2" sumxmy2-params / "SWITCH" switch-params / "SYD" syd-params / "T" t-params / "TAN" tan-params / "TANH" tanh-params / "TBILLEQ" tbilleq-params / "TBILLPRICE" tbillprice-params / "TBILLYIELD" tbillyield-params / "TDIST" tdist-params / "TEXT" text-params / "TEXTJOIN" textjoin-params / "THAIDAYOFWEEK" thaidayofweek-params / "THAIDIGIT" thaidigit-params / "THAIMONTHOFYEAR" thaimonthofyear-params / "THAINUMSOUND" thainumsound-params / "THAINUMSTRING" thainumstring-params / "THAISTRINGLENGTH" thaistringlength-params / "THAIYEAR" thaiyear-params / "TIME" time-params / "TIMEVALUE" timevalue-params / "TINV" tinv-params / "TODAY" today-params / "TRANSPOSE" transpose-params / "TREND" trend-params / "TRIM" trim-params / "TRIMMEAN" trimmean-params / "TRUE" true-params / "TRUNC" trunc-params / "TTEST" ttest-params / "TYPE" type-params / "UPPER" upper-params / "USDOLLAR" usdollar-params / "VALUE" value-params / "VAR" var-params / "VARA" vara-params / "VARP" varp-params / "VARPA" varpa-params / "VDB" vdb-params / "VLOOKUP" vlookup-params / "WEEKDAY" weekday-params / "WEEKNUM" weeknum-params / "WEIBULL" weibull-params / "WORKDAY" workday-params / "XIRR" xirr-params / "XNPV" xnpv-params / "YEAR" year-params / "YEARFRAC" yearfrac-params / "YIELD" yield-params / "YIELDDISC" yielddisc-params / "YIELDMAT" yielddmat-params / "ZTEST" ztest-params  
 worksheet-only-function-list = ("\_xlfn.\_xlws." ("FILTER" / "PY" / "SORT"))  
 worksheet-only-function-call = ("\_xlfn.\_xlws." (("FILTER" filter-worksheet-params) / ("SORT" sort-worksheet-params)))  
 emptyparams = "(" \*whitespace ")"  
 abs-params = "(" argument-expression )"  
 accrintm-params = "(" argument "," argument "," argument "," argument ["," argument] )"  
 accrint-params = "(" argument "," argument "," argument "," argument "," argument "," argument ["," argument ["," argument]] )"  
 acosh-params = "(" argument-expression )"  
 acos-params = "(" argument-expression )"  
 acoth-params = "(" argument-expression )"  
 acot-params = "(" argument-expression )"  
 address-params = "(" argument "," argument ["," argument ["," argument ["," argument]] ] )"  
 aggregate-params = "(" argument "," argument "," argument ["," argument ["," argument ["," ref-argument-expression \*249("," ref-argument-expression )]] ] )"

```

amordegrc-params = "(" argument "," argument "," argument "," argument "," argument ","
argument ["," argument] ")"
amorlinc-params = "(" argument "," argument "," argument "," argument "," argument ","
argument ["," argument] ")"
and-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
arabic-params = "(" argument-expression ")"
areas-params = "(" ref-argument-expression ")"
asc-params = "(" argument-expression ")"
asinh-params = "(" argument-expression ")"
asin-params = "(" argument-expression ")"
atan2-params = "(" argument "," argument ")"
atanh-params = "(" argument-expression ")"
atan-params = "(" argument-expression ")"
avedev-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
averagea-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
averageif-params = "(" ref-argument-expression "," argument ["," ref-argument-expression ]
)"
averageifs-params = "(" ref-argument-expression "," ref-argument-expression "," argument
*126("," ref-argument-expression "," argument) ")"
average-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
bahttext-params = "(" argument-expression ")"
base-params = "(" argument "," argument ["," argument] ")"
besseli-params = "(" argument "," argument ")"
besselj-params = "(" argument "," argument ")"
besselk-params = "(" argument "," argument ")"
bessely-params = "(" argument "," argument ")"
beta-dist-params = "(" argument "," argument "," argument "," argument ["," argument [","
argument]] ")"
betadist-params = "(" argument "," argument "," argument ["," argument ["," argument]] ")"
betainv-params = "(" argument "," argument "," argument ["," argument ["," argument]] ")"
beta-inv-params = "(" argument "," argument "," argument ["," argument ["," argument]] ")"
bin2dec-params = "(" argument-expression ")"
bin2hex-params = "(" (argument-expression / (argument "," argument)) ")"
bin2oct-params = "(" (argument-expression / (argument "," argument)) ")"
binom-dist-range-params = "(" argument "," argument "," argument ["," argument] ")"
binomdist-params = "(" argument "," argument "," argument "," argument ")"
binom-dist-params = "(" argument "," argument "," argument "," argument ")"
binom-inv-params = "(" argument "," argument "," argument ")"
bitand-params = "(" argument "," argument ")"
bitlshift-params = "(" argument "," argument ")"
bitor-params = "(" argument "," argument ")"
bitrshift-params = "(" argument "," argument ")"
bitxor-params = "(" argument "," argument ")"
bycol-params = "(" argument ["," argument] ")"
byrow-params = "(" argument ["," argument] ")"
ceiling-math-params = "(" (argument-expression / (argument "," argument ["," argument])) ")"
ceiling-params = "(" argument "," argument ")"
ceiling-precise-params = "(" argument "," argument ")"
cell-params = "(" (argument-expression / (argument "," ref-argument-expression)) ")"
char-params = "(" argument-expression ")"
chidist-params = "(" argument "," argument ")"
chiinv-params = "(" argument "," argument ")"
chisq-dist-params = "(" argument "," argument "," argument ")"
chisq-dist-rt-params = "(" argument "," argument ")"
chisq-inv-params = "(" argument "," argument ")"
chisq-inv-rt-params = "(" argument "," argument ")"
chisq-test-params = "(" argument "," argument ")"
chitest-params = "(" argument "," argument ")"
choose-params = "(" argument "," argument *253("," argument) ")"
choosecols-params = "(" argument 1*253("," argument) ")"
chooserows-params = "(" argument 1*253("," argument) ")"
clean-params = "(" argument-expression ")"
code-params = "(" argument-expression ")"
column-params = "(" [ref-argument-expression] ")"
columns-params = "(" argument-expression ")"
combina-params = "(" argument "," argument ")"
combin-params = "(" argument "," argument ")"
complex-params = "(" argument "," argument ["," argument] ")"
concat-params = "(" (argument-expression / (argument 1*253("," argument))) ")"

```

```

concatenate-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
confidence-norm-params = "(" argument "," argument "," argument ")"
confidence-params = "(" argument "," argument "," argument ")"
confidence-t-params = "(" argument "," argument "," argument ")"
convert-params = "(" argument "," argument "," argument ")"
correl-params = "(" argument "," argument ")"
cosh-params = "(" argument-expression ")"
cos-params = "(" argument-expression ")"
coth-params = "(" argument-expression ")"
cot-params = "(" argument-expression ")"
counta-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
countblank-params = "(" ref-argument-expression ")"
countif-params = "(" ref-argument-expression "," argument ")"
countifs-params = "(" ref-argument-expression "," argument *126("," ref-argument-expression
"," argument) ")"
count-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
coupdaybs-params = "(" argument "," argument "," argument ["," argument] ")"
coupdaysnc-params = "(" argument "," argument "," argument ["," argument] ")"
coupdays-params = "(" argument "," argument "," argument ["," argument] ")"
coupncd-params = "(" argument "," argument "," argument ["," argument] ")"
coupnum-params = "(" argument "," argument "," argument ["," argument] ")"
couppcd-params = "(" argument "," argument "," argument ["," argument] ")"
covariance-p-params = "(" argument "," argument ")"
covariance-s-params = "(" argument "," argument ")"
covar-params = "(" argument "," argument ")"
critbinom-params = "(" argument "," argument "," argument ")"
csch-params = "(" argument-expression ")"
csc-params = "(" argument-expression ")"
cubekpimember-params = "(" argument "," argument "," argument ["," argument] ")"
cubemember-params = "(" argument "," argument ["," argument] ")"
cubememberproperty-params = "(" argument "," argument "," argument ")"
cuberankedmember-params = "(" argument "," argument "," argument ["," argument] ")"
cubesetcount-params = "(" argument-expression ")"
cubeset-params = "(" argument "," argument ["," argument ["," argument ["," argument]] ")"
cubevalue-params = "(" (argument-expression / (argument "," argument *253("," argument))) ")"
cumipmt-params = "(" argument "," argument "," argument "," argument "," argument ","
argument ")"
cumprinc-params = "(" argument "," argument "," argument "," argument "," argument ","
argument ")"
datedif-params = "(" argument "," argument "," argument ")"
date-params = "(" argument "," argument "," argument ")"
datestring-params = "(" argument-expression ")"
datevalue-params = "(" argument-expression ")"
daverage-params = "(" ref-argument-expression "," argument "," argument ")"
day-params = "(" argument-expression ")"
days360-params = "(" argument "," argument ["," argument] ")"
days-params = "(" argument "," argument ")"
dbcs-params = "(" argument-expression ")"
db-params = "(" argument "," argument "," argument "," argument ["," argument] ")"
dcounta-params = "(" ref-argument-expression "," argument "," argument ")"
dcount-params = "(" ref-argument-expression "," argument "," argument ")"
ddb-params = "(" argument "," argument "," argument "," argument ["," argument] ")"
dec2bin-params = "(" (argument-expression / (argument "," argument)) ")"
dec2hex-params = "(" (argument-expression / (argument "," argument)) ")"
dec2oct-params = "(" (argument-expression / (argument "," argument)) ")"
decimal-params = "(" argument "," argument ")"
degrees-params = "(" argument-expression ")"
delta-params = "(" (argument-expression / (argument "," argument)) ")"
devsq-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
dget-params = "(" ref-argument-expression "," argument "," argument ")"
disc-params = "(" argument "," argument "," argument "," argument ["," argument] ")"
dmax-params = "(" ref-argument-expression "," argument "," argument ")"
dmin-params = "(" ref-argument-expression "," argument "," argument ")"
dollarde-params = "(" argument "," argument ")"
dollarfr-params = "(" argument "," argument ")"
dollar-params = "(" (argument-expression / (argument "," argument)) ")"
dproduct-params = "(" ref-argument-expression "," argument "," argument ")"
drop-params = "(" argument 1*2("," argument) ")"
dstdev-params = "(" ref-argument-expression "," argument "," argument ")"

```

```

dstdevp-params = "(" ref-argument-expression "," argument "," argument ")"
dsum-params = "(" ref-argument-expression "," argument "," argument ")"
duration-params = "(" argument "," argument "," argument "," argument "," argument ["","
argument] ")"
dvar-params = "(" ref-argument-expression "," argument "," argument ")"
dvarp-params = "(" ref-argument-expression "," argument "," argument ")"
ecma-ceiling-params = "(" argument "," argument ")"
edate-params = "(" argument "," argument ")"
effect-params = "(" argument "," argument ")"
eomonth-params = "(" argument "," argument ")"
erfc-params = "(" argument-expression ")"
erfc-precise-params = "(" argument-expression ")"
erf-params = "(" (argument-expression / (argument "," argument)) ")"
erf-precise-params = "(" argument-expression ")"
error-type-params = "(" argument-expression ")"
even-params = "(" argument-expression ")"
exact-params = "(" argument "," argument ")"
expondist-params = "(" argument "," argument "," argument ")"
expon-dist-params = "(" argument "," argument "," argument ")"
exp-params = "(" argument-expression ")"
expand-params = "(" argument 1*3("," argument) ")"
factdouble-params = "(" argument-expression ")"
fact-params = "(" argument-expression ")"
false-params = emptyparams
fdist-params = "(" argument "," argument "," argument ")"
f-dist-params = "(" argument "," argument "," argument "," argument ")"
f-dist-rt-params = "(" argument "," argument "," argument ")"
fieldvalue-params = "(" argument "," argument ")"
filter-worksheet-params = "(" argument "," argument 1*2("," argument) ")"
filterxml-params = "(" argument "," argument ")"
findb-params = "(" argument "," argument ["," argument] ")"
find-params = "(" (argument "," argument ["," argument] ")"
finv-params = "(" argument "," argument "," argument ")"
f-inv-params = "(" argument "," argument "," argument ")"
f-inv-rt-params = "(" argument "," argument "," argument ")"
fisherinv-params = "(" argument-expression ")"
fisher-params = "(" argument-expression ")"
fixed-params = "(" (argument-expression / (argument "," argument ["," argument])) ")"
floor-math-params = "(" (argument-expression / (argument "," argument ["," argument])) ")"
floor-params = "(" argument "," argument ")"
floor-precise-params = "(" argument "," argument ")"
forecast-params = "(" argument "," argument "," argument ")"
forecast-linear-params = "(" argument "," argument "," argument ")"
forecast-ets-params = "(" argument "," argument "," argument ["," argument] ["," argument]
["," argument] ")"
forecast-ets-confint-params = "(" argument "," argument "," argument ["," argument] [","
argument] ["," argument] ["," argument] ")"
forecast-ets-seasonality-params = "(" argument "," argument ["," argument] ["," argument] ")"
forecast-ets-stat-params = "(" argument "," argument "," argument ["," argument] [","
argument] ["," argument] ")"
formulatext-params = "(" ref-argument-expression ")"
frequency-params = "(" argument "," argument ")"
ftest-params = "(" argument "," argument ")"
f-test-params = "(" argument "," argument ")"
fv-params = "(" argument "," argument "," argument ["," argument ["," argument]] ")"
fvschedule-params = "(" argument "," argument ")"
gammadist-params = "(" argument "," argument "," argument "," argument ")"
gamma-dist-params = "(" argument "," argument "," argument "," argument ")"
gammainv-params = "(" argument "," argument "," argument ")"
gamma-inv-params = "(" argument "," argument "," argument ")"
gammaln-params = "(" argument-expression ")"
gammaln-precise-params = "(" argument-expression ")"
gamma-params = "(" argument-expression ")"
gauss-params = "(" argument-expression ")"
gcd-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
geomean-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
gestep-params = "(" (argument-expression / (argument "," argument)) ")"
getpivotdata-params = "(" argument "," argument ["," argument ["," argument *125("," argument
"," argument)] ")"

```

```

growth-params = "(" (argument-expression / (argument "," argument [" argument [" argument [" argument ]])) )"
harmean-params = "(" (argument-expression / (argument 1*254("," argument))) )"
hex2bin-params = "(" (argument-expression / (argument "," argument)) )"
hex2dec-params = "(" argument-expression )"
hex2oct-params = "(" (argument-expression / (argument "," argument)) )"
hlookup-params = "(" argument "," argument "," argument [" argument ] )"
hour-params = "(" argument-expression )"
hstack-params = "(" (argument-expression / (argument 1*253("," argument))) )"
hyperlink-params = "(" (argument-expression / (argument "," argument)) )"
hypgeomdist-params = "(" argument "," argument "," argument "," argument )"
hypgeom-dist-params = "(" argument "," argument "," argument "," argument "," argument )"
iferror-params = "(" argument "," argument )"
ifna-params = "(" argument "," argument )"
if-params = "(" (argument-expression / (argument "," argument [" argument ])) )"
ifs-params = "(" argument "," argument *126("," argument "," argument )"
if-worksheet-params = "(" argument "," argument 1*2("," argument) )"
imabs-params = "(" argument-expression )"
imaginary-params = "(" argument-expression )"
imargument-params = "(" argument-expression )"
imconjugate-params = "(" argument-expression )"
imcosh-params = "(" argument-expression )"
imcos-params = "(" argument-expression )"
imcot-params = "(" argument-expression )"
imcsch-params = "(" argument-expression )"
imcsc-params = "(" argument-expression )"
imdiv-params = "(" argument "," argument )"
imexp-params = "(" argument-expression )"
imln-params = "(" argument-expression )"
imlog10-params = "(" argument-expression )"
imlog2-params = "(" argument-expression )"
impower-params = "(" argument "," argument )"
improduct-params = "(" (argument-expression / (argument 1*254("," argument))) )"
imreal-params = "(" argument-expression )"
imsech-params = "(" argument-expression )"
imsec-params = "(" argument-expression )"
imsinh-params = "(" argument-expression )"
imsin-params = "(" argument-expression )"
imsqrt-params = "(" argument-expression )"
imsub-params = "(" argument "," argument )"
imsum-params = "(" (argument-expression / (argument 1*254("," argument))) )"
imtanh-params = "(" argument-expression )"
index-params = "(" argument "," argument [" argument [" argument ]]"
indirect-params = "(" (argument-expression / (argument "," argument)) )"
info-params = "(" argument-expression )"
intercept-params = "(" argument "," argument )"
int-params = "(" argument-expression )"
intrate-params = "(" argument "," argument "," argument "," argument [" argument ] )"
ipmt-params = "(" argument "," argument "," argument "," argument [" argument [" argument ]]"
irr-params = "(" (argument-expression / (argument "," argument)) )"
isblank-params = "(" argument-expression )"
iserror-params = "(" argument-expression )"
iserr-params = "(" argument-expression )"
iseven-params = "(" argument-expression )"
isformula-params = "(" ref-argument-expression )"
islogical-params = "(" argument-expression )"
isna-params = "(" argument-expression )"
isnontext-params = "(" argument-expression )"
isnumber-params = "(" argument-expression )"
iso-ceiling-params = "(" (argument-expression / (argument "," argument)) )"
isodd-params = "(" argument-expression )"
isomitted-params = "(" argument-expression )"
isoweeknum-params = "(" argument-expression )"
ispmt-params = "(" argument "," argument "," argument "," argument )"
isref-params = "(" argument-expression )"
istext-params = "(" argument-expression )"
isthaidigit-params = "(" argument-expression )"
kurt-params = "(" (argument-expression / (argument 1*254("," argument))) )"

```

```

lambda-params = "(" *252(lambda-parameter-name "," argument ")"
large-params = "(" argument "," argument ")"
lcm-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
leftb-params = "(" (argument-expression / (argument "," argument)) ")"
left-params = "(" (argument-expression / (argument "," argument)) ")"
lenb-params = "(" argument-expression ")"
len-params = "(" argument-expression ")"
let-params = "(" 1*126(parameter-name "," argument) "," argument ")"
linest-params = "(" (argument-expression / (argument "," argument [" argument [" argument [" argument]])) ")"
ln-params = "(" argument-expression ")"
log10-params = "(" argument-expression ")"
logest-params = "(" (argument-expression / (argument "," argument [" argument [" argument [" argument]])) ")"
loginv-params = "(" argument "," argument "," argument ")"
lognormdist-params = "(" argument "," argument "," argument ")"
lognorm-dist-params = "(" argument "," argument "," argument "," argument ")"
lognorm-inv-params = "(" argument "," argument "," argument ")"
log-params = "(" (argument-expression / (argument "," argument)) ")"
lookup-params = "(" argument "," argument [" argument"] ")"
lower-params = "(" argument-expression ")"
makearray-params = "(" argument "," argument "," argument ")"
map-params = "(" 2*252(argument "," argument) ")"
match-params = "(" argument "," argument [" argument"] ")"
maxa-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
max-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
maxifs-params = "(" ref-argument-expression "," ref-argument-expression "," argument *125("," ref-argument-expression "," argument) ")"
mdeterm-params = "(" argument-expression ")"
mduration-params = "(" argument "," argument "," argument "," argument "," argument "," argument [" argument"] ")"
median-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
midb-params = "(" argument "," argument "," argument ")"
mid-params = "(" argument "," argument "," argument ")"
mina-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
min-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
minifs-params = "(" ref-argument-expression "," ref-argument-expression "," argument *125("," ref-argument-expression "," argument) ")"
minute-params = "(" argument-expression ")"
minverse-params = "(" argument-expression ")"
mirr-params = "(" argument "," argument "," argument ")"
mmult-params = "(" argument "," argument ")"
mode-mult-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
mode-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
mode-sngl-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
mod-params = "(" argument "," argument ")"
month-params = "(" argument-expression ")"
mround-params = "(" argument "," argument ")"
multinomial-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
munit-params = "(" argument-expression ")"
na-params = emptyparams
negbinomdist-params = "(" argument "," argument "," argument ")"
negbinom-dist-params = "(" argument "," argument "," argument "," argument ")"
networkdays-intl-params = "(" argument "," argument [" argument [" argument [" argument]] ")"
networkdays-params = "(" argument "," argument [" argument"] ")"
nominal-params = "(" argument "," argument ")"
normdist-params = "(" argument "," argument "," argument "," argument ")"
norm-dist-params = "(" argument "," argument "," argument "," argument ")"
norminv-params = "(" argument "," argument "," argument ")"
norm-inv-params = "(" argument "," argument "," argument ")"
norm-s-dist-params = "(" argument "," argument ")"
normsdist-params = "(" argument-expression ")"
normsinv-params = "(" argument-expression ")"
norm-s-inv-params = "(" argument-expression ")"
not-params = "(" argument-expression ")"
now-params = emptyparams
n-params = "(" argument-expression ")"
nper-params = "(" argument "," argument "," argument [" argument [" argument [" argument]] ")"
npv-params = "(" argument "," argument *253("," argument) ")"

```

```

numberstring-params = "(" argument "," argument ")"
numbervalue-params = "(" (argument-expression / (argument "," argument ["argument"])) ")"
oct2bin-params = "(" (argument-expression / (argument "," argument)) ")"
oct2dec-params = "(" argument-expression ")"
oct2hex-params = "(" (argument-expression / (argument "," argument)) ")"
oddfprice-params = "(" argument "," argument "," argument "," argument "," argument "," argument "," argument ["argument"] ")"
oddfyield-params = "(" argument "," argument "," argument "," argument "," argument "," argument "," argument "," argument ["argument"] ")"
oddlprice-params = "(" argument "," argument "," argument "," argument "," argument "," argument "," argument "," argument ["argument"] ")"
oddlyield-params = "(" argument "," argument "," argument "," argument "," argument "," argument "," argument "," argument ["argument"] ")"
odd-params = "(" argument-expression ")"
offset-params = "(" ref-argument-expression "," argument "," argument ["argument ["argument]] ")"
or-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
pduration-params = "(" argument "," argument "," argument ")"
pearson-params = "(" argument "," argument ")"
percentile-exc-params = "(" argument "," argument ")"
percentile-inc-params = "(" argument "," argument ")"
percentile-params = "(" argument "," argument ")"
percentrank-exc-params = "(" argument "," argument ["argument"] ")"
percentrank-inc-params = "(" argument "," argument ["argument"] ")"
percentrank-params = "(" argument "," argument ["argument"] ")"
permutationa-params = "(" argument "," argument ")"
permut-params = "(" argument "," argument ")"
phi-params = "(" argument-expression ")"
phonetic-params = "(" ref-argument-expression ")"
pi-params = emptyparams
pmt-params = "(" argument "," argument "," argument ["argument ["argument]] ")"
poisson-dist-params = "(" argument "," argument "," argument ")"
poisson-params = "(" argument "," argument "," argument ")"
power-params = "(" argument "," argument ")"
ppmt-params = "(" argument "," argument "," argument "," argument ["argument ["argument]] ")"
pqsources-params = "(" guid ")"
pricedisc-params = "(" argument "," argument "," argument "," argument ["argument"] ")"
pricemat-params = "(" argument "," argument "," argument "," argument "," argument ["argument"] ")"
price-params = "(" argument "," argument "," argument "," argument "," argument "," argument ["argument"] ")"
prob-params = "(" argument "," argument "," argument ["argument"] ")"
product-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
proper-params = "(" argument-expression ")"
pv-params = "(" argument "," argument "," argument ["argument ["argument]] ")"
py-params = "(" whole-number-part "," ("0" / "1") *252("," argument) ")"
;whole-number-part MUST be 0-based index referencing CT PythonScript element
that indicates Python script corresponding to the function as specified in section 2.3.10.2.
python-str-params = "(" argument-expression ")"
python-type-params = "(" argument-expression ")"
python-typename-params = "(" argument-expression ")"
quartile-exc-params = "(" argument "," argument ")"
quartile-inc-params = "(" argument "," argument ")"
quartile-params = "(" argument "," argument ")"
querystring-params = "(" argument "," argument *126( "," argument "," argument) ")"
quotient-params = "(" argument "," argument ")"
radians-params = "(" argument-expression ")"
randarray-params = "(" [argument *4("," argument)] ")"
randbetween-params = "(" argument "," argument ")"
rand-params = emptyparams
rank-avg-params = "(" argument "," ref-argument-expression ["argument"] ")"
rank-eq-params = "(" argument "," ref-argument-expression ["argument"] ")"
rank-params = "(" argument "," ref-argument-expression ["argument"] ")"
rate-params = "(" argument "," argument "," argument ["argument ["argument ["argument]]] ")"
received-params = "(" argument "," argument "," argument "," argument ["argument"] ")"
reduce-params = "(" argument "," argument "," argument ")"
replaceb-params = "(" argument "," argument "," argument "," argument ")"

```



```

replace-params = "(" argument "," argument "," argument "," argument ")"
rept-params = "(" argument "," argument ")"
rightb-params = "(" (argument-expression / (argument "," argument)) ")"
right-params = "(" (argument-expression / (argument "," argument)) ")"
roman-params = "(" (argument-expression / (argument "," argument)) ")"
roundbahtdown-params = "(" argument-expression ")"
roundbahtup-params = "(" argument-expression ")"
rounddown-params = "(" argument "," argument ")"
round-params = "(" argument "," argument ")"
roundup-params = "(" argument "," argument ")"
row-params = "(" [ref-argument-expression] ")"
rows-params = "(" argument-expression ")"
rri-params = "(" argument "," argument "," argument ")"
rsq-params = "(" argument "," argument ")"
rtd-params = "(" argument "," argument "," argument *252("," argument) ")"
scan-params = "(" argument "," argument "," argument ")"
searchb-params = "(" argument "," argument ["," argument] ")"
search-params = "(" argument "," argument ["," argument] ")"
sech-params = "(" argument-expression ")"
second-params = "(" argument-expression ")"
sec-params = "(" argument-expression ")"
sequence-params = "(" argument *3("," argument) ")"
series-params = "(" argument "," argument "," argument "," argument ["," argument] ")"
seriessum-params = "(" argument "," argument "," argument "," argument ")"
sheet-params = "(" argument ")"
sheets-params = "(" argument ")"
sign-params = "(" argument-expression ")"
sinh-params = "(" argument-expression ")"
sin-params = "(" argument-expression ")"
skew-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
skew-p-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
sln-params = "(" argument "," argument "," argument ")"
slope-params = "(" argument "," argument ")"
small-params = "(" argument "," argument ")"
sortby-params = "(" argument "," argument ["," argument *125("," argument "," argument)] ")"
sort-worksheet-params = "(" (argument-expression / (argument 1*3("," argument))) ")"
sqrt-params = "(" argument-expression ")"
sqrtpi-params = "(" argument-expression ")"
standardize-params = "(" argument "," argument "," argument ")"
stdeva-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
stdevpa-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
stdev-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
stdev-p-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
stdevp-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
stdev-s-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
steyx-params = "(" argument "," argument ")"
substitute-params = "(" argument "," argument "," argument ["," argument] ")"
subtotal-params = "(" argument "," ref-argument-expression *253("," ref-argument-expression)
)"
sumif-params = "(" ref-argument-expression "," argument ["," ref-argument-expression] ")"
sumifs-params = "(" ref-argument-expression "," ref-argument-expression "," argument *126(","
ref-argument-expression "," argument) ")"
sum-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
sumproduct-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
sumsq-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
sumx2my2-params = "(" argument "," argument ")"
sumx2py2-params = "(" argument "," argument ")"
sumxmy2-params = "(" argument "," argument ")"
switch-params = "(" argument "," argument "," argument 1*251("," argument) ")"
syd-params = "(" argument "," argument "," argument "," argument ")"
take-params = "(" argument 1*2("," argument) ")"
tanh-params = "(" argument-expression ")"
tan-params = "(" argument-expression ")"
tbilleq-params = "(" argument "," argument "," argument ")"
tbillprice-params = "(" argument "," argument "," argument ")"
tbillyield-params = "(" argument "," argument "," argument ")"
t-dist-2t-params = "(" argument "," argument ")"
tdist-params = "(" argument "," argument "," argument ")"
t-dist-params = "(" argument "," argument "," argument ")"

```

```

t-dist-rt-params = "(" argument "," argument ")"
text-params = "(" argument "," argument ")"
textafter-params = "(" argument 1*5("," argument) ")"
textbefore-params = "(" argument 1*5("," argument) ")"
textjoin-params = "(" argument "," argument "," argument *251("," argument) ")"
textsplit-params = "(" argument 1*5("," argument) ")"
thaidayofweek-params = "(" argument-expression ")"
thaidigit-params = "(" argument-expression ")"
thaimonthofyear-params = "(" argument-expression ")"
thainumsound-params = "(" argument-expression ")"
thainumstring-params = "(" argument-expression ")"
thainstringlength-params = "(" argument-expression ")"
thaiyear-params = "(" argument-expression ")"
time-params = "(" argument "," argument "," argument ")"
timevalue-params = "(" argument-expression ")"
t-inv-2t-params = "(" argument "," argument ")"
tinv-params = "(" argument "," argument ")"
t-inv-params = "(" argument "," argument ")"
tocol-params = "(" (argument-expression / (argument 1*2("," argument))) ")"
today-params = emptyparams
torow-params = "(" (argument-expression / (argument 1*2("," argument))) ")"
t-params = "(" argument-expression ")"
transpose-params = "(" argument-expression ")"
trend-params = "(" (argument-expression / (argument "," argument ["," argument ["," argument]])) ")"
trimmean-params = "(" argument "," argument ")"
trim-params = "(" argument-expression ")"
true-params = emptyparams
trunc-params = "(" (argument-expression / (argument "," argument)) ")"
ttest-params = "(" argument "," argument "," argument "," argument ")"
t-test-params = "(" argument "," argument "," argument "," argument ")"
type-params = "(" argument-expression ")"
unicar-params = "(" argument-expression ")"
unicode-params = "(" argument-expression ")"
unique-params = "(" argument *2("," argument) ")"
upper-params = "(" argument-expression ")"
usdollar-params = "(" (argument-expression / (argument "," argument)) ")"
value-params = "(" argument-expression ")"
vara-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
varpa-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
var-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
var-p-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
varp-params = "(" (argument-expression / (argument 1*254("," argument))) ")"
var-s-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
vdb-params = "(" argument "," argument "," argument "," argument "," argument ["," argument ["," argument]] ")"
vlookup-params = "(" argument "," argument "," argument ["," argument] ")"
vstack-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
webservice-params = "(" (argument-expression / (argument "," argument)) ")"
weekday-params = "(" (argument-expression / (argument "," argument)) ")"
weeknum-params = "(" (argument-expression / (argument "," argument)) ")"
weibull-dist-params = "(" argument "," argument "," argument "," argument ")"
weibull-params = "(" argument "," argument "," argument "," argument ")"
workday-intl-params = "(" argument "," argument ["," argument ["," argument]] ")"
workday-params = "(" argument "," argument ["," argument] ")"
wrapcols-params = "(" argument 1*2("," argument) ")"
wraprows-params = "(" argument 1*2("," argument) ")"
xirr-params = "(" argument "," argument ["," argument] ")"
xnpv-params = "(" argument "," argument "," argument ")"
xlookup-params = "(" argument "," argument "," argument *3("," argument) ")"
xor-params = "(" (argument-expression / (argument 1*253("," argument))) ")"
yearfrac-params = "(" argument "," argument ["," argument] ")"
year-params = "(" argument-expression ")"
yielddisc-params = "(" argument "," argument "," argument "," argument ["," argument] ")"
yieldmat-params = "(" argument "," argument "," argument "," argument "," argument ["," argument] ")"
yield-params = "(" argument "," argument "," argument "," argument "," argument "," argument ["," argument] ")"
ztest-params = "(" argument "," argument ["," argument] ")"

```

```

z-test-params = "(" argument "," argument ["," argument] ")"

ref-macro-function-call = "ABSREF" absref-params / "ACTIVE.CELL" active-cell-params / "CALL"
call-params / "CALLER" caller-params / "EVALUATE" evaluate-params / "GET.DOCUMENT" get-
document-params / "IF" if-params / "INPUT" input-params / "LAST.ERROR" last-error-params /
"SCENARIO.GET" scenario-get-params / "SELECTION" selection-params / "TEXTREF" textref-params
/ "VIEW.GET" view-get-params
macro-function-call = ref-macro-function-call / "ADD.BAR" add-bar-params / "ADD.COMMAND" add-
command-params / "ADD.MENU" add-menu-params / "ADD.TOOLBAR" add-toolbar-params / "APP.TITLE"
app-title-params / "ARGUMENT" argument-params / "BREAK" break-params / "CANCEL.KEY" cancel-
key-params / "CHECK.COMMAND" check-command-params / "CREATE.OBJECT" create-object-params /
"CUSTOM.REPEAT" custom-repeat-params / "CUSTOM.UNDO" custom-undo-params / "DELETE.BAR"
delete-bar-params / "DELETE.COMMAND" delete-command-params / "DELETE.MENU" delete-menu-params
/ "DELETE.TOOLBAR" delete-toolbar-params / "DEREF" deref-params / "DIALOG.BOX" dialog-box-
params / "DIRECTORY" directory-params / "DOCUMENTS" documents-params / "ECHO" echo-params /
"ELSE" else-params / "ELSE.IF" else-if-params / "ENABLE.COMMAND" enable-command-params /
"ENABLE.TOOL" enable-tool-params / "END.IF" end-if-params / "ERROR" error-params / "EXEC"
exec-params / "EXECUTE" execute-params / "FCLOSE" fclose-params / "FILES" files-params /
"FOPEN" fopen-params / "FOR" for-params / "FOR.CELL" for-cell-params / "FORMULA.CONVERT"
formula-convert-params / "FPOS" fpos-params / "FREAD" fread-params / "FREADLN" freadln-params
/ "FSIZE" fsize-params / "FWRITE" fwrite-params / "FWRITELN" fwrite-params / "GET.BAR" get-
bar-params / "GET.CELL" get-cell-params / "GET.CHART.ITEM" get-chart-item-params / "GET.DEF"
get-def-params / "GET.FORMULA" get-formula-params / "GET.LINK.INFO" get-link-info-params /
"GET.MOVIE" get-movie-params / "GET.NAME" get-name-params / "GET.NOTE" get-note-params /
"GET.OBJECT" get-object-params / "GET.TOOL" get-tool-params / "GET.TOOLBAR" get-toolbar-
params / "GET.WINDOW" get-window-params / "GET.WORKBOOK" get-workbook-params /
"GET.WORKSPACE" get-workspace-params / "GOTO" goto-params / "GROUP" group-params / "HALT"
halt-params / "HELP" help-params / "INITIATE" initiate-params / "LINKS" links-params /
"MOVIE.COMMAND" movie-command-params / "NAMES" names-params / "NEXT" next-params / "NOTE"
note-params / "OPEN.DIALOG" open-dialog-params / "OPTIONS.LISTS.GET" options-lists-get-params
/ "PAUSE" pause-params / "POKE" poke-params / "PRESS.TOOL" press-tool-params / "RETEXT"
reftext-params / "REGISTER" register-params / "REGISTER.ID" register-id-params / "RELREF"
relref-params / "RENAME.COMMAND" rename-command-params / "REQUEST" request-params /
"RESET.TOOLBAR" reset-toolbar-params / "RESTART" restart-params / "RESULT" result-params /
"RESUME" resume-params / "RETURN" return-params / "SAVE.DIALOG" save-dialog-params /
"SAVE.TOOLBAR" save-toolbar-params / "SET.NAME" set-name-params / "SET.VALUE" set-value-
params / "SHOW.BAR" show-bar-params / "SPELLING.CHECK" spelling-check-params / "STEP" step-
params / "TERMINATE" terminate-params / "TEXT.BOX" text-box-params / "UNREGISTER" unregister-
params / "VOLATILE" volatile-params / "WHILE" while-params / "WINDOW.TITLE" window-title-
params / "WINDOWS" windows-params

absref-params = "(" argument "," ref-argument-expression ")"
active-cell-params = "(" *space ")"
add-bar-params = "(" argument ")"
add-command-params = "(" argument "," argument "," argument ["," argument ["," argument]] ")"
add-menu-params = "(" argument "," argument ["," argument ["," argument]] ")"
add-toolbar-params = "(" argument ["," argument] ")"
app-title-params = "(" argument ")"
argument-params = "(" argument ["," argument ["," ref-argument-expression]] ")"
break-params = "(" *space ")"
call-params = "(" (argument-expression / (argument "," argument *253("," argument))) ")"
caller-params = "(" *space ")"
cancel-key-params = "(" argument ["," ref-argument-expression] ")"
check-command-params = "(" argument "," argument "," argument "," argument ["," argument] ")"
create-object-params = "(" argument "," argument ["," argument ["," argument ["," argument
["," argument ["," argument ["," argument ["," argument ["," argument ["," argument]]]]]]]]
)"
custom-repeat-params = "(" argument ["," argument ["," argument]] ")"
custom-undo-params = "(" argument ["," argument] ")"
delete-bar-params = "(" argument-expression ")"
delete-command-params = "(" argument "," argument "," argument ["," argument] ")"
delete-menu-params = "(" argument "," argument ["," argument] ")"
delete-toolbar-params = "(" argument-expression ")"
deref-params = "(" ref-argument-expression ")"
dialog-box-params = "(" argument-expression ")"
directory-params = "(" argument ")"
documents-params = "(" argument ["," argument] ")"
echo-params = "(" argument ")"
else-params = "(" *space ")"

```

```

else-if-params = "(" argument-expression ")"
enable-command-params = "(" argument "," argument "," argument "," argument ["," argument]
)"
enable-tool-params = "(" argument "," argument "," argument ")"
end-if-params = "(" *space ")"
error-params = "(" argument ["," argument] ")"
evaluate-params = "(" argument-expression ")"
exec-params = "(" (argument-expression / (argument "," argument ["," argument [","
argument]])) ")"
execute-params = "(" argument "," argument ")"
fclose-params = "(" argument-expression ")"
files-params = "(" argument ["," argument] ")"
fopen-params = "(" (argument-expression / (argument "," argument)) ")"
for-params = "(" argument "," argument "," argument ["," argument] ")"
for-cell-params = "(" (argument-expression / (argument "," argument ["," argument])) ")"
formula-convert-params = "(" argument "," argument ["," argument ["," argument [","
argument]] ")"
fpos-params = "(" (argument-expression / (argument "," argument)) ")"
fread-params = "(" argument "," argument ")"
freadln-params = "(" argument-expression ")"
fsize-params = "(" argument-expression ")"
fwrite-params = "(" argument "," argument ")"
fwriteln-params = "(" argument "," argument ")"
get-bar-params = "(" argument ["," argument ["," argument ["," argument]] ")"
get-cell-params = "(" (argument-expression / (argument "," ref-argument-expression)) ")"
get-chart-item-params = "(" (argument-expression / (argument "," argument ["," argument]))
)"
get-def-params = "(" (argument-expression / (argument "," argument ["," argument])) ")"
get-document-params = "(" (argument-expression / (argument "," argument)) ")"
get-formula-params = "(" argument-expression ")"
get-link-info-params = "(" argument "," argument ["," argument ["," argument]] ")"
get-movie-params = "(" argument "," argument ["," argument] ")"
get-name-params = "(" (argument-expression / (argument "," argument)) ")"
get-note-params = "(" argument ["," argument ["," argument]] ")"
get-object-params = "(" (argument-expression / (argument "," argument ["," argument [","
argument ["," argument]])) ")"
get-tool-params = "(" (argument-expression / (argument "," argument ["," argument])) ")"
get-toolbar-params = "(" (argument-expression / (argument "," argument)) ")"
get-window-params = "(" (argument-expression / (argument "," argument)) ")"
get-workbook-params = "(" (argument-expression / (argument "," argument)) ")"
get-workspace-params = "(" argument-expression ")"
goto-params = "(" ref-argument-expression ")"
group-params = "(" *space ")"
halt-params = "(" argument ")"
help-params = "(" argument ")"
initiate-params = "(" argument "," argument ")"
input-params = "(" (argument-expression / (argument "," argument ["," argument ["," argument
["," argument ["," argument ["," argument]]])) ")"
last-error-params = "(" *space ")"
links-params = "(" argument ["," argument] ")"
movie-command-params = "(" argument "," argument "," argument ["," argument] ")"
names-params = "(" argument ["," argument ["," argument]] ")"
next-params = "(" *space ")"
note-params = "(" argument ["," argument ["," argument ["," argument]] ")"
open-dialog-params = "(" argument ["," argument ["," argument ["," argument]] ")"
options-lists-get-params = "(" argument-expression ")"
pause-params = "(" argument ")"
poke-params = "(" argument "," argument "," argument ")"
press-tool-params = "(" argument "," argument "," argument ")"
reftext-params = "(" ref-argument-expression "," argument ")"
register-params = "(" (argument-expression / (argument "," argument ["," argument [","
argument ["," argument ["," argument ["," argument ["," argument ["," argument
*245("," argument]]]]]]])) ")"
register-id-params = "(" argument "," argument ["," argument] ")"
relref-params = "(" ref-argument-expression "," ref-argument-expression ")"
rename-command-params = "(" argument "," argument "," argument "," argument ["," argument]
)"
request-params = "(" argument "," argument ")"
reset-toolbar-params = "(" argument-expression ")"

```

```

restart-params = "(" argument ")"
result-params = "(" argument ")"
resume-params = "(" argument ")"
return-params = "(" argument ")"
save-dialog-params = "(" argument ["," argument ["," argument ["," argument ["," argument]]]]
)"
save-toolbar-params = "(" argument ["," argument] ")"
scenario-get-params = "(" (argument-expression / (argument "," argument)) ")"
selection-params = "(" *space ")"
set-name-params = "(" (argument-expression / (argument "," argument)) ")"
set-value-params = "(" ref-argument-expression "," argument ")"
show-bar-params = "(" argument ")"
spelling-check-params = "(" (argument-expression / (argument "," argument ["," argument]))
)"
step-params = "(" *space ")"
terminate-params = "(" argument-expression ")"
text-box-params = "(" (argument-expression / (argument "," argument ["," argument [","
argument]])) ")"
textref-params = "(" (argument-expression / (argument "," argument)) ")"
unregister-params = "(" argument-expression ")"
view-get-params = "(" (argument-expression / (argument "," argument)) ")"
volatile-params = "(" argument ")"
while-params = "(" argument-expression ")"
window-title-params = "(" argument ")"
windows-params = "(" argument ["," argument] ")"
command-function-call = "Al.RlCl" al-rlcl-params / "ACTIVATE" ["?"] activate-params /
"ACTIVATE.NEXT" activate-next-params / "ACTIVATE.NOTES" activate-notes-params /
"ACTIVATE.PREV" activate-prev-params / "ACTIVE.CELL.FONT" ["?"] active-cell-font-params /
"ADD.ARROW" add-arrow-params / "ADD.CHART.AUTOFORMAT" ["?"] add-chart-autoformat-params /
"ADD.LIST.ITEM" add-list-item-params / "ADD.OVERLAY" add-overlay-params / "ADD.PRINT.AREA"
add-print-area-params / "ADD.TOOL" add-tool-params / "ADDIN.MANAGER" ["?"] addin-manager-
params / "ALERT" alert-params / "ALIGNMENT" ["?"] alignment-params / "APP.ACTIVATE" app-
activate-params / "APP.ACTIVATE.MICROSOFT" app-activate-microsoft-params / "APP.MAXIMIZE"
app-maximize-params / "APP.MINIMIZE" app-minimize-params / "APP.MOVE" ["?"] app-move-params /
"APP.RESTORE" app-restore-params / "APP.SIZE" ["?"] app-size-params / "APPLY.NAMES" ["?"]
apply-names-params / "APPLY.STYLE" ["?"] apply-style-params / "ARRANGE.ALL" ["?"] arrange-
all-params / "ASSIGN.TO.OBJECT" ["?"] assign-to-object-params / "ASSIGN.TO.TOOL" ["?"]
assign-to-tool-params / "ATTACH.TEXT" ["?"] attach-text-params / "ATTACH.TOOLBARS" ["?"]
attach-toolbars-params / "ATTRIBUTES" ["?"] attributes-params / "AUTO.OUTLINE" auto-outline-
params / "AUTOCORRECT" ["?"] autocorrect-params / "AXES" ["?"] axes-params / "BEEP" beep-
params / "BORDER" ["?"] border-params / "BRING.TO.FRONT" bring-to-front-params /
"CALCULATE.DOCUMENT" calculate-document-params / "CALCULATE.NOW" calculate-now-params /
"CALCULATION" ["?"] calculation-params / "CANCEL.COPY" cancel-copy-params / "CELL.PROTECTION"
["?"] cell-protection-params / "CHANGE.LINK" ["?"] change-link-params / "CHART.ADD.DATA"
["?"] chart-add-data-params / "CHART.TREND" ["?"] chart-trend-params / "CHART.WIZARD" ["?"]
chart-wizard-params / "CHECKBOX.PROPERTIES" ["?"] checkbox-properties-params / "CLEAR" ["?"]
clear-params / "CLEAR.OUTLINE" clear-outline-params / "CLEAR.PRINT.AREA" clear-print-area-
params / "CLEAR.ROUTING.SLIP" clear-routing-slip-params / "CLOSE" close-params / "CLOSE.ALL"
close-all-params / "COLOR.PALETTE" ["?"] color-palette-params / "COLUMN.WIDTH" ["?"] column-
width-params / "COMBINATION" ["?"] combination-params / "CONSOLIDATE" ["?"] consolidate-
params / "CONSTRAIN.NUMERIC" constrain-numeric-params / "COPY" copy-params / "COPY.CHART"
["?"] copy-chart-params / "COPY.PICTURE" ["?"] copy-picture-params / "COPY.TOOL" copy-tool-
params / "CREATE.NAMES" ["?"] create-names-params / "CREATE.PUBLISHER" ["?"] create-
publisher-params / "CUSTOMIZE.TOOLBAR" ["?"] customize-toolbar-params / "CUT" cut-params /
"DATA.DELETE" ["?"] data-delete-params / "DATA.FIND" data-find-params / "DATA.FIND.NEXT"
data-find-next-params / "DATA.FIND.PREV" data-find-prev-params / "DATA.FORM" data-form-params
/ "DATA.LABEL" ["?"] data-label-params / "DATA.SERIES" ["?"] data-series-params /
"DEFINE.NAME" ["?"] define-name-params / "DEFINE.STYLE" ["?"] define-style-params /
"DELETE.ARROW" delete-arrow-params / "DELETE.CHART.AUTOFORMAT" delete-chart-autoformat-params
/ "DELETE.FORMAT" ["?"] delete-format-params / "DELETE.NAME" ["?"] delete-name-params /
"DELETE.NOTE" delete-note-params / "DELETE.OVERLAY" delete-overlay-params / "DELETE.STYLE"
delete-style-params / "DELETE.TOOL" delete-tool-params / "DEMOTE" ["?"] demote-params /
"DISABLE.INPUT" disable-input-params / "DISPLAY" ["?"] display-params / "DUPLICATE"
duplicate-params / "EDIT.COLOR" ["?"] edit-color-params / "EDIT.DELETE" ["?"] edit-delete-
params / "EDIT.OBJECT" edit-object-params / "EDIT.REPEAT" edit-repeat-params / "EDIT.SERIES"
["?"] edit-series-params / "EDIT.TOOL" edit-tool-params / "EDITBOX.PROPERTIES" ["?"] editbox-
properties-params / "EDITION.OPTIONS" ["?"] edition-options-params / "ENABLE.OBJECT" enable-
object-params / "ENABLE.TIPWIZARD" enable-tipwizard-params / "ENTER.DATA" enter-data-params /
"ERRORBAR.X" ["?"] errorbar-x-params / "ERRORBAR.Y" ["?"] errorbar-y-params /

```

"EXTEND.POLYGON" extend-polygon-params / "EXTRACT" ["?"] extract-params / "FILE.CLOSE" file-close-params / "FILE.DELETE" ["?"] file-delete-params / "FILL.AUTO" fill-auto-params / "FILL.DOWN" fill-down-params / "FILL.GROUP" ["?"] fill-group-params / "FILL.LEFT" fill-left-params / "FILL.RIGHT" fill-right-params / "FILL.UP" fill-up-params / "FILTER" ["?"] filter-params / "FILTER.ADVANCED" ["?"] filter-advanced-params / "FILTER.SHOW.ALL" filter-show-all-params / "FIND.FILE" ["?"] find-file-params / "FONT" ["?"] font-params / "FONT.PROPERTIES" ["?"] font-properties-params / "FORMAT.AUTO" ["?"] format-auto-params / "FORMAT.CHART" ["?"] format-chart-params / "FORMAT.CHARTTYPE" ["?"] format-charttype-params / "FORMAT.FONT" ["?"] format-font-params / "FORMAT.LEGEND" ["?"] format-legend-params / "FORMAT.MAIN" ["?"] format-main-params / "FORMAT.MOVE" format-move-params / "FORMAT.NUMBER" ["?"] format-number-params / "FORMAT.OVERLAY" ["?"] format-overlay-params / "FORMAT.SHAPE" format-shape-params / "FORMAT.SIZE" format-size-params / "FORMAT.TEXT" ["?"] format-text-params / "FORMULA" formula-params / "FORMULA.ARRAY" formula-array-params / "FORMULA.FILL" formula-fill-params / "FORMULA.FIND" ["?"] formula-find-params / "FORMULA.FIND.NEXT" formula-find-next-params / "FORMULA.FIND.PREV" formula-find-prev-params / "FORMULA.GOTO" ["?"] formula-goto-params / "FORMULA.REPLACE" ["?"] formula-replace-params / "FREEZE.PANES" freeze-panes-params / "FULL" full-params / "FULL.SCREEN" full-screen-params / "FUNCTION.WIZARD" ["?"] function-wizard-params / "GALLERY.3D.AREA" ["?"] gallery-3d-area-params / "GALLERY.3D.BAR" ["?"] gallery-3d-bar-params / "GALLERY.3D.COLUMN" ["?"] gallery-3d-column-params / "GALLERY.3D.LINE" ["?"] gallery-3d-line-params / "GALLERY.3D.PIE" ["?"] gallery-3d-pie-params / "GALLERY.3D.SURFACE" ["?"] gallery-3d-surface-params / "GALLERY.AREA" ["?"] gallery-area-params / "GALLERY.BAR" ["?"] gallery-bar-params / "GALLERY.COLUMN" ["?"] gallery-column-params / "GALLERY.CUSTOM" ["?"] gallery-custom-params / "GALLERY.DOUGHNUT" ["?"] gallery-doughnut-params / "GALLERY.LINE" ["?"] gallery-line-params / "GALLERY.PIE" ["?"] gallery-pie-params / "GALLERY.RADAR" ["?"] gallery-radar-params / "GALLERY.SCATTER" ["?"] gallery-scatter-params / "GOAL.SEEK" ["?"] goal-seek-params / "GRIDLINES" ["?"] gridlines-params / "HIDE" hide-params / "HIDE.DIALOG" hide-dialog-params / "HIDE.OBJECT" hide-object-params / "HIDEALL.INKANOTS" hideall-inkannots-params / "HIDEALL.NOTES" hideall-notes-params / "HIDECURR.NOTE" hidecurr-note-params / "HLINE" hline-params / "HPAGE" hpage-params / "HSCROLL" hscroll-params / "INSERT" ["?"] insert-params / "INSERT.MAP.OBJECT" ["?"] insert-map-object-params / "INSERT.OBJECT" ["?"] insert-object-params / "INSERT.PICTURE" ["?"] insert-picture-params / "INSERT.TITLE" ["?"] insert-title-params / "INSERTDATATABLE" ["?"] insertdatatable-params / "JUSTIFY" justify-params / "LABEL.PROPERTIES" ["?"] label-properties-params / "LAYOUT" layout-params / "LEGEND" legend-params / "LINE.PRINT" line-print-params / "LINK.COMBO" link-combo-params / "LINK.FORMAT" link-format-params / "LIST.NAMES" list-names-params / "LISTBOX.PROPERTIES" ["?"] listbox-properties-params / "MACRO.OPTIONS" ["?"] macro-options-params / "MAIL.ADD.MAILER" mail-add-mailer-params / "MAIL.DELETE.MAILER" mail-delete-mailer-params / "MAIL.EDIT.MAILER" ["?"] mail-edit-mailer-params / "MAIL.FORWARD" mail-forward-params / "MAIL.LOGOFF" mail-logoff-params / "MAIL.LOGON" ["?"] mail-logon-params / "MAIL.NEXT.LETTER" mail-next-letter-params / "MAIL.REPLY" mail-reply-params / "MAIL.REPLY.ALL" mail-reply-all-params / "MAIL.SEND.MAILER" ["?"] mail-send-mailer-params / "MAIN.CHART" ["?"] main-chart-params / "MAIN.CHART.TYPE" ["?"] main-chart-type-params / "MENU.EDITOR" ["?"] menu-editor-params / "MERGE.STYLES" merge-styles-params / "MESSAGE" message-params / "MOVE.BRK" move-brk-params / "MOVE.TOOL" move-tool-params / "NEW" ["?"] new-params / "NEW.WINDOW" new-window-params / "NEWWEBQUERY" newwebquery-params / "NORMAL" normal-params / "OBJECT.PROPERTIES" ["?"] object-properties-params / "OBJECT.PROTECTION" ["?"] object-protection-params / "ON.DATA" on-data-params / "ON.DOUBLECLICK" on-doubleclick-params / "ON.ENTRY" on-entry-params / "ON.KEY" on-key-params / "ON.RECALC" on-recalc-params / "ON.SHEET" on-sheet-params / "ON.TIME" on-time-params / "ON.WINDOW" on-window-params / "OPEN" ["?"] open-params / "OPEN.LINKS" ["?"] open-links-params / "OPEN.MAIL" ["?"] open-mail-params / "OPEN.TEXT" open-text-params / "OPTIONS.CALCULATION" ["?"] options-calculation-params / "OPTIONS.CHART" ["?"] options-chart-params / "OPTIONS.EDIT" ["?"] options-edit-params / "OPTIONS.GENERAL" ["?"] options-general-params / "OPTIONS.LISTS.ADD" ["?"] options-lists-add-params / "OPTIONS.LISTS.DELETE" options-lists-delete-params / "OPTIONS.ME" ["?"] options-me-params / "OPTIONS.MENONO" ["?"] options-menono-params / "OPTIONS.SAVE" ["?"] options-save-params / "OPTIONS.SPELL" ["?"] options-spell-params / "OPTIONS.TRANSITION" ["?"] options-transition-params / "OPTIONS.VIEW" ["?"] options-view-params / "OUTLINE" ["?"] outline-params / "OVERLAY" ["?"] overlay-params / "OVERLAY.CHART.TYPE" ["?"] overlay-chart-type-params / "PAGE.SETUP" ["?"] page-setup-params / "PARSE" ["?"] parse-params / "PASTE" paste-params / "PASTE.LINK" paste-link-params / "PASTE.PICTURE" paste-picture-params / "PASTE.PICTURE.LINK" paste-picture-link-params / "PASTE.SPECIAL" ["?"] paste-special-params / "PASTE.TOOL" paste-tool-params / "PATTERNS" ["?"] patterns-params / "PICKLIST" ["?"] picklist-params / "PIVOT.ADD.FIELDS" pivot-add-fields-params / "PIVOT.FIELD" pivot-field-params / "PIVOT.FIELD.GROUP" ["?"] pivot-field-group-params / "PIVOT.FIELD.PROPERTIES" ["?"] pivot-field-properties-params / "PIVOT.FIELD.UNGROUP" ["?"] pivot-field-ungroup-params / "PIVOT.ITEM" pivot-item-params / "PIVOT.ITEM.PROPERTIES" pivot-item-properties-params / "PIVOT.REFRESH" pivot-refresh-params / "PIVOT.SHOW.PAGES" ["?"] pivot-show-pages-params / "PIVOT.TABLE.CHART" ["?"] pivot-table-chart-params / "PIVOT.TABLE.WIZARD" ["?"] pivot-table-wizard-params / "POST.DOCUMENT" ["?"] post-document-params / "PRECISION" precision-params / "PREFERRED" preferred-params / "PRINT" ["?"] print-params / "PRINT.PREVIEW" ["?"] print-

```

preview-params / "PRINTER.SETUP" ["?"] printer-setup-params / "PROMOTE" ["?"] promote-params
/ "PROTECT.DOCUMENT" ["?"] protect-document-params / "PROTECT.REVISIONS" ["?"] protect-
revisions-params / "PUSHBUTTON.PROPERTIES" ["?"] pushbutton-properties-params / "QUIT" quit-
params / "REMOVE.LIST.ITEM" remove-list-item-params / "REMOVE.PAGE.BREAK" remove-page-break-
params / "RENAME.OBJECT" rename-object-params / "REPLACE.FONT" ["?"] replace-font-params
/"RESET.TOOL" reset-tool-params / "RM.PRINT.AREA" rm-print-area-params / "ROUTE.DOCUMENT"
route-document-params / "ROUTING.SLIP" ["?"] routing-slip-params / "ROW.HEIGHT" ["?"] row-
height-params / "RUN" ["?"] run-params / "SAVE" save-params / "SAVE.AS" ["?"] save-as-params
/ "SAVE.COPY.AS" save-copy-as-params / "SAVE.NEW.OBJECT" ["?"] save-new-object-params /
"SAVE.WORKBOOK" ["?"] save-workbook-params / "SAVE.WORKSPACE" ["?"] save-workspace-params /
"SCALE" ["?"] scale-params / "SCENARIO.ADD" ["?"] scenario-add-params / "SCENARIO.CELLS"
["?"] scenario-cells-params / "SCENARIO.DELETE" scenario-delete-params / "SCENARIO.EDIT"
["?"] scenario-edit-params / "SCENARIO.MERGE" ["?"] scenario-merge-params / "SCENARIO.SHOW"
scenario-show-params / "SCENARIO.SHOW.NEXT" scenario-show-next-params / "SCENARIO.SUMMARY"
["?"] scenario-summary-params / "SCROLLBAR.PROPERTIES" ["?"] scrollbar-properties-params /
"SELECT" select-params / "SELECT.ALL" select-all-params / "SELECT.CHART" select-chart-params
/ "SELECT.END" select-end-params / "SELECT.LAST.CELL" select-last-cell-params /
"SELECT.LIST.ITEM" select-list-item-params / "SELECT.PLOT.AREA" select-plot-area-params /
"SELECT.SPECIAL" ["?"] select-special-params / "SEND.KEYS" send-keys-params / "SEND.MAIL"
["?"] send-mail-params / "SEND.TO.BACK" send-to-back-params / "SERIES.AXES" ["?"] series-
axes-params / "SERIES.ORDER" ["?"] series-order-params / "SERIES.X" ["?"] series-x-params /
"SERIES.Y" ["?"] series-y-params / "SET.CONTROL.VALUE" set-control-value-params /
"SET.CRITERIA" set-criteria-params / "SET.DATABASE" set-database-params /
"SET.DIALOG.DEFAULT" set-dialog-default-params / "SET.DIALOG.FOCUS" set-dialog-focus-params /
"SET.EXTRACT" set-extract-params / "SET.LIST.ITEM" set-list-item-params / "SET.PAGE.BREAK"
set-page-break-params / "SET.PREFERRED" set-preferred-params / "SET.PRINT.AREA" set-print-
area-params / "SET.PRINT.TITLES" ["?"] set-print-titles-params / "SET.UPDATE.STATUS" ["?"]
set-update-status-params / "SHARE" share-params / "SHARE.NAME" ["?"] share-name-params /
"SHEET.BACKGROUND" ["?"] sheet-background-params / "SHORT.MENUS" short-menus-params /
"SHOW.ACTIVE.CELL" show-active-cell-params / "SHOW.CLIPBOARD" show-clipboard-params /
"SHOW.DETAIL" ["?"] show-detail-params / "SHOW.DIALOG" show-dialog-params / "SHOW.INFO" show-
info-params / "SHOW.LEVELS" show-levels-params / "SHOW.TOOLBAR" ["?"] show-toolbar-params /
"SORT" ["?"] sort-params / "SORT.SPECIAL" ["?"] sort-special-params / "SOUND.NOTE" sound-
note-params / "SOUND.PLAY" sound-play-params / "SPELLING" spelling-params / "SPLIT" ["?"]
split-params / "STANDARD.FONT" ["?"] standard-font-params / "STANDARD.WIDTH" ["?"] standard-
width-params / "STYLE" ["?"] style-params / "SUBSCRIBE.TO" ["?"] subscribe-to-params /
"SUBTOTAL.CREATE" ["?"] subtotal-create-params / "SUBTOTAL.REMOVE" subtotal-remove-params /
"SUMMARY.INFO" ["?"] summary-info-params / "TAB.ORDER" ["?"] tab-order-params / "TABLE" ["?"]
table-params / "TEXT.TO.COLUMNS" ["?"] text-to-columns-params / "TRACER.CLEAR" tracer-clear-
params / "TRACER.DISPLAY" tracer-display-params / "TRACER.ERROR" tracer-error-params /
"TRACER.NAVIGATE" tracer-navigate-params / "TRAVERSE.NOTES" traverse-notes-params / "UNDO"
undo-params / "UNGROUP" ungroup-params / "UNGROUP.SHEETS" ungroup-sheets-params / "UNHIDE"
["?"] unhide-params / "UNLOCKED.NEXT" unlocked-next-params / "UNLOCKED.PREV" unlocked-prev-
params / "UNPROTECT.REVISIONS" unprotect-revisions-params / "UPDATE.LINK" ["?"] update-link-
params / "VBA.INSERT.FILE" ["?"] vba-insert-file-params / "VBA.MAKE.ADDIN" ["?"] vba-make-
addin-params / "VBA.PROCEDURE.DEFINITION" ["?"] vba-procedure-definition-params /
"VBA.ACTIVATE" vbaactivate-params / "VIEW.3D" ["?"] view-3d-params / "VIEW.DEFINE" ["?"] view-
define-params / "VIEW.DELETE" view-delete-params / "VIEW.SHOW" ["?"] view-show-params /
"VLINE" vline-params / "VPAGE" vpage-params / "VSCROLL" vscroll-params / "WAIT" wait-params /
"WEB.PUBLISH" web-publish-params / "WINDOW.MAXIMIZE" window-maximize-params /
"WINDOW.MINIMIZE" window-minimize-params / "WINDOW.MOVE" ["?"] window-move-params /
"WINDOW.RESTORE" window-restore-params / "WINDOW.SIZE" ["?"] window-size-params /
"WORKBOOK.ACTIVATE" workbook-activate-params / "WORKBOOK.ADD" ["?"] workbook-add-params /
"WORKBOOK.COPY" ["?"] workbook-copy-params / "WORKBOOK.DELETE" workbook-delete-params /
"WORKBOOK.HIDE" workbook-hide-params / "WORKBOOK.INSERT" ["?"] workbook-insert-params /
"WORKBOOK.MOVE" ["?"] workbook-move-params / "WORKBOOK.NAME" ["?"] workbook-name-params /
"WORKBOOK.NEW" ["?"] workbook-new-params / "WORKBOOK.NEXT" workbook-next-params /
"WORKBOOK.OPTIONS" ["?"] workbook-options-params / "WORKBOOK.PREV" workbook-prev-params /
"WORKBOOK.PROTECT" ["?"] workbook-protect-params / "WORKBOOK.SCROLL" workbook-scroll-params /
"WORKBOOK.SELECT" workbook-select-params / "WORKBOOK.TAB.SPLIT" ["?"] workbook-tab-split-
params / "WORKBOOK.UNHIDE" ["?"] workbook-unhide-params / "WORKGROUP" ["?"] workgroup-params
/ "WORKGROUP.OPTIONS" ["?"] workgroup-options-params / "WORKSPACE" ["?"] workspace-params /
"ZOOM" ["?"] zoom-params
al-rlcl-params = "(" argument ")"
activate-params = "(" argument ["," argument] ")"
activate-next-params = "(" argument ")"
activate-notes-params = "(" argument ["," argument] ")"
activate-prev-params = "(" argument ")"
active-cell-font-params = "(" argument *13("," argument) ")"
add-arrow-params = "(" *space ")"

```

```

add-chart-autoformat-params = "(" argument ["," argument] ")"
add-list-item-params = "(" argument ["," argument] ")"
add-overlay-params = "(" *space ")"
add-print-area-params = "(" *space ")"
add-tool-params = "(" argument *2("," argument) ")"
addin-manager-params = "(" argument *2("," argument) ")"
alert-params = "(" argument *2("," argument) ")"
alignment-params = "(" argument *9("," argument) ")"
app-activate-params = "(" argument ["," argument] ")"
app-activate-microsoft-params = "(" argument ")"
app-maximize-params = "(" *space ")"
app-minimize-params = "(" *space ")"
app-move-params = "(" argument ["," argument] ")"
app-restore-params = "(" *space ")"
app-size-params = "(" argument ["," argument] ")"
apply-names-params = "(" argument *6("," argument) ")"
apply-style-params = "(" argument ")"
arrange-all-params = "(" argument *3("," argument) ")"
assign-to-object-params = "(" argument ")"
assign-to-tool-params = "(" argument *2("," argument) ")"
attach-text-params = "(" argument *2("," argument) ")"
attach-toolbars-params = "(" *space ")"
attributes-params = "(" argument ["," argument] ")"
auto-outline-params = "(" *space ")"
autocorrect-params = "(" argument ["," argument] ")"
axes-params = "(" argument *5("," argument) ")"
beep-params = "(" argument ")"
border-params = "(" argument *26("," argument) ")"
bring-to-front-params = "(" *space ")"
calculate-document-params = "(" *space ")"
calculate-now-params = "(" *space ")"
calculation-params = "(" argument *10("," argument) ")"
cancel-copy-params = "(" argument ")"
cell-protection-params = "(" argument ["," argument] ")"
change-link-params = "(" argument *2("," argument) ")"
chart-add-data-params = "(" argument *5("," argument) ")"
chart-trend-params = "(" argument *7("," argument) ")"
chart-wizard-params = "(" argument *13("," argument) ")"
checkbox-properties-params = "(" argument *4("," argument) ")"
clear-params = "(" argument ")"
clear-outline-params = "(" *space ")"
clear-print-area-params = "(" *space ")"
clear-routing-slip-params = "(" argument ")"
close-params = "(" argument ["," argument] ")"
close-all-params = "(" *space ")"
color-palette-params = "(" argument ")"
column-width-params = "(" argument *4("," argument) ")"
combination-params = "(" argument ")"
consolidate-params = "(" argument *4("," argument) ")"
constrain-numeric-params = "(" argument ")"
copy-params = "(" argument ["," argument] ")"
copy-chart-params = "(" argument ")"
copy-picture-params = "(" argument *2("," argument) ")"
copy-tool-params = "(" argument ["," argument] ")"
create-names-params = "(" argument *3("," argument) ")"
create-publisher-params = "(" argument *3("," argument) ")"
customize-toolbar-params = "(" argument ")"
cut-params = "(" argument ["," argument] ")"
data-delete-params = "(" *space ")"
data-find-params = "(" argument ")"
data-find-next-params = "(" *space ")"
data-find-prev-params = "(" *space ")"
data-form-params = "(" *space ")"
data-label-params = "(" argument *9("," argument) ")"
data-series-params = "(" argument *5("," argument) ")"
define-name-params = "(" argument *6("," argument) ")"
define-style-params = "(" argument *13("," argument) ")"
delete-arrow-params = "(" *space ")"
delete-chart-autoformat-params = "(" argument ")"

```



```

delete-format-params = "(" argument ")"
delete-name-params = "(" argument ")"
delete-note-params = "(" argument ")"
delete-overlay-params = "(" *space ")"
delete-style-params = "(" argument ")"
delete-tool-params = "(" argument ["," argument] ")"
demote-params = "(" argument ")"
disable-input-params = "(" argument ")"
display-params = "(" argument *8("," argument) ")"
duplicate-params = "(" *space ")"
edit-color-params = "(" argument *3("," argument) ")"
edit-delete-params = "(" argument ")"
edit-object-params = "(" argument ")"
edit-repeat-params = "(" *space ")"
edit-series-params = "(" argument *6("," argument) ")"
edit-tool-params = "(" argument ["," argument] ")"
editbox-properties-params = "(" argument *3("," argument) ")"
edition-options-params = "(" argument *6("," argument) ")"
enable-object-params = "(" argument ["," argument] ")"
enable-tipwizard-params = "(" argument ")"
enter-data-params = "(" argument ")"
errorbar-x-params = "(" argument *3("," argument) ")"
errorbar-y-params = "(" argument *3("," argument) ")"
extend-polygon-params = "(" argument ")"
extract-params = "(" argument ")"
file-close-params = "(" argument ["," argument] ")"
file-delete-params = "(" argument ")"
fill-auto-params = "(" argument ["," argument] ")"
fill-down-params = "(" *space ")"
fill-group-params = "(" argument ")"
fill-left-params = "(" *space ")"
fill-right-params = "(" *space ")"
fill-up-params = "(" *space ")"
filter-params = "(" argument *5("," argument) ")"
filter-advanced-params = "(" argument *4("," argument) ")"
filter-show-all-params = "(" *space ")"
find-file-params = "(" *space ")"
font-params = "(" argument ["," argument] ")"
font-properties-params = "(" argument *13("," argument) ")"
format-auto-params = "(" argument *6("," argument) ")"
format-chart-params = "(" argument *17("," argument) ")"
format-charttype-params = "(" argument *3("," argument) ")"
format-font-params = "(" argument *14("," argument) ")"
format-legend-params = "(" argument ")"
format-main-params = "(" argument *13("," argument) ")"
format-move-params = "(" argument *2("," argument) ")"
format-number-params = "(" argument ")"
format-overlay-params = "(" argument *13("," argument) ")"
format-shape-params = "(" argument *4("," argument) ")"
format-size-params = "(" argument *2("," argument) ")"
format-text-params = "(" argument *10("," argument) ")"
formula-params = "(" argument ["," argument] ")"
formula-array-params = "(" argument ["," argument] ")"
formula-fill-params = "(" argument ["," argument] ")"
formula-find-params = "(" argument *11("," argument) ")"
formula-find-next-params = "(" *space ")"
formula-find-prev-params = "(" *space ")"
formula-goto-params = "(" argument ["," argument] ")"
formula-replace-params = "(" argument *10("," argument) ")"
freeze-panes-params = "(" argument *2("," argument) ")"
full-params = "(" argument ")"
full-screen-params = "(" argument ")"
function-wizard-params = "(" argument ")"
gallery-3d-area-params = "(" argument ")"
gallery-3d-bar-params = "(" argument ")"
gallery-3d-column-params = "(" argument ")"
gallery-3d-line-params = "(" argument ")"
gallery-3d-pie-params = "(" argument ")"
gallery-3d-surface-params = "(" argument ")"

```

```

gallery-area-params = "(" argument ["," argument] ")"
gallery-bar-params = "(" argument ["," argument] ")"
gallery-column-params = "(" argument ["," argument] ")"
gallery-custom-params = "(" argument ")"
gallery-doughnut-params = "(" argument ["," argument] ")"
gallery-line-params = "(" argument ["," argument] ")"
gallery-pie-params = "(" argument ["," argument] ")"
gallery-radar-params = "(" argument ["," argument] ")"
gallery-scatter-params = "(" argument ["," argument] ")"
goal-seek-params = "(" argument *2("," argument) ")"
gridlines-params = "(" argument *6("," argument) ")"
hide-params = "(" *space ")"
hide-dialog-params = "(" argument ")"
hide-object-params = "(" argument ["," argument] ")"
hideall-inkannots-params = "(" argument ")"
hideall-notes-params = "(" argument ")"
hidecurr-note-params = "(" argument ["," argument] ")"
hline-params = "(" argument ")"
hpage-params = "(" argument ")"
hscroll-params = "(" argument ["," argument] ")"
insert-params = "(" argument ["," argument] ")"
insert-map-object-params = "(" *space ")"
insert-object-params = "(" argument *12("," argument) ")"
insert-picture-params = "(" argument ["," argument] ")"
insert-title-params = "(" argument *4("," argument) ")"
insertdatatable-params = "(" argument ")"
justify-params = "(" *space ")"
label-properties-params = "(" argument *2("," argument) ")"
layout-params = "(" *space ")"
legend-params = "(" argument ")"
line-print-params = "(" argument *10("," argument) ")"
link-combo-params = "(" argument ")"
link-format-params = "(" *space ")"
list-names-params = "(" *space ")"
listbox-properties-params = "(" argument *4("," argument) ")"
macro-options-params = "(" argument *9("," argument) ")"
mail-add-mailer-params = "(" *space ")"
mail-delete-mailer-params = "(" *space ")"
mail-edit-mailer-params = "(" argument *5("," argument) ")"
mail-forward-params = "(" *space ")"
mail-logoff-params = "(" *space ")"
mail-logon-params = "(" argument *2("," argument) ")"
mail-next-letter-params = "(" *space ")"
mail-reply-params = "(" *space ")"
mail-reply-all-params = "(" *space ")"
mail-send-mailer-params = "(" argument ["," argument] ")"
main-chart-params = "(" argument *9("," argument) ")"
main-chart-type-params = "(" argument ")"
menu-editor-params = "(" *space ")"
merge-styles-params = "(" argument ")"
message-params = "(" argument ["," argument] ")"
move-brk-params = "(" argument *3("," argument) ")"
move-tool-params = "(" argument *5("," argument) ")"
new-params = "(" argument *2("," argument) ")"
new-window-params = "(" *space ")"
newwebquery-params = "(" argument ")"
normal-params = "(" *space ")"
object-properties-params = "(" argument ["," argument] ")"
object-protection-params = "(" argument ["," argument] ")"
on-data-params = "(" argument ["," argument] ")"
on-doubleclick-params = "(" argument ["," argument] ")"
on-entry-params = "(" argument ["," argument] ")"
on-key-params = "(" argument ["," argument] ")"
on-recalc-params = "(" argument ["," argument] ")"
on-sheet-params = "(" argument *2("," argument) ")"
on-time-params = "(" argument *3("," argument) ")"
on-window-params = "(" argument ["," argument] ")"
open-params = "(" argument *16("," argument) ")"
open-links-params = "(" argument *14("," argument) ")"

```

open-mail-params = "(" argument ["," argument] ")"  
open-text-params = "(" argument \*16("," argument) ")"  
options-calculation-params = "(" argument \*9("," argument) ")"  
options-chart-params = "(" argument \*2("," argument) ")"  
options-edit-params = "(" argument \*10("," argument) ")"  
options-general-params = "(" argument \*13("," argument) ")"  
options-lists-add-params = "(" argument ["," argument] ")"  
options-lists-delete-params = "(" argument ")"  
options-me-params = "(" argument \*8("," argument) ")"  
options-menono-params = "(" argument \*4("," argument) ")"  
options-save-params = "(" argument \*3("," argument) ")"  
options-spell-params = "(" argument \*11("," argument) ")"  
options-transition-params = "(" argument \*4("," argument) ")"  
options-view-params = "(" argument \*17("," argument) ")"  
outline-params = "(" argument \*3("," argument) ")"  
overlay-params = "(" argument \*11("," argument) ")"  
overlay-chart-type-params = "(" argument ")"  
page-setup-params = "(" argument \*29("," argument) ")"  
parse-params = "(" argument ["," argument] ")"  
paste-params = "(" argument ")"  
paste-link-params = "(" \*space ")"  
paste-picture-params = "(" \*space ")"  
paste-picture-link-params = "(" \*space ")"  
paste-special-params = "(" argument \*6("," argument) ")"  
paste-tool-params = "(" argument ["," argument] ")"  
patterns-params = "(" argument \*12("," argument) ")"  
picklist-params = "(" \*space ")"  
pivot-add-fields-params = "(" argument \*4("," argument) ")"  
pivot-field-params = "(" argument \*3("," argument) ")"  
pivot-field-group-params = "(" argument \*3("," argument) ")"  
pivot-field-properties-params = "(" argument \*6("," argument) ")"  
pivot-field-ungroup-params = "(" \*space ")"  
pivot-item-params = "(" argument \*3("," argument) ")"  
pivot-item-properties-params = "(" argument \*6("," argument) ")"  
pivot-refresh-params = "(" argument ")"  
pivot-show-pages-params = "(" argument ["," argument] ")"  
pivot-table-chart-params = "(" argument \*15("," argument) ")"  
pivot-table-wizard-params = "(" argument \*15("," argument) ")"  
post-document-params = "(" argument ")"  
precision-params = "(" argument ")"  
preferred-params = "(" \*space ")"  
print-params = "(" argument \*16("," argument) ")"  
print-preview-params = "(" argument ")"  
printer-setup-params = "(" argument ")"  
promote-params = "(" argument ")"  
protect-document-params = "(" argument \*6("," argument) ")"  
protect-revisions-params = "(" \*space ")"  
pushbutton-properties-params = "(" argument \*5("," argument) ")"  
quit-params = "(" \*space ")"  
remove-list-item-params = "(" argument ["," argument] ")"  
remove-page-break-params = "(" argument ["," argument] ")"  
rename-object-params = "(" argument ")"  
replace-font-params = "(" argument \*9("," argument) ")"  
reset-tool-params = "(" argument ["," argument] ")"  
rm-print-area-params = "(" argument ")"  
route-document-params = "(" \*space ")"  
routing-slip-params = "(" argument \*5("," argument) ")"  
row-height-params = "(" argument \*3("," argument) ")"  
run-params = "(" argument ["," argument] ")"  
save-params = "(" \*space ")"  
save-as-params = "(" argument \*6("," argument) ")"  
save-copy-as-params = "(" argument ")"  
save-new-object-params = "(" argument ")"  
save-workbook-params = "(" argument \*5("," argument) ")"  
save-workspace-params = "(" argument ")"  
scale-params = "(" argument \*9("," argument) ")"  
scenario-add-params = "(" argument \*5("," argument) ")"  
scenario-cells-params = "(" argument ")"  
scenario-delete-params = "(" argument ")"

```

scenario-edit-params = "(" argument *6(", " argument) ")"
scenario-merge-params = "(" argument ")"
scenario-show-params = "(" argument ")"
scenario-show-next-params = "(" *space ")"
scenario-summary-params = "(" argument [", " argument] ")"
scrollbar-properties-params = "(" argument *6(", " argument) ")"
select-params = "(" argument [", " argument] ")"
select-all-params = "(" *space ")"
select-chart-params = "(" *space ")"
select-end-params = "(" argument ")"
select-last-cell-params = "(" *space ")"
select-list-item-params = "(" argument [", " argument] ")"
select-plot-area-params = "(" *space ")"
select-special-params = "(" argument *2(", " argument) ")"
send-keys-params = "(" argument [", " argument] ")"
send-mail-params = "(" argument *2(", " argument) ")"
send-to-back-params = "(" *space ")"
series-axes-params = "(" argument ")"
series-order-params = "(" argument *2(", " argument) ")"
series-x-params = "(" argument ")"
series-y-params = "(" argument [", " argument] ")"
set-control-value-params = "(" argument ")"
set-criteria-params = "(" *space ")"
set-database-params = "(" *space ")"
set-dialog-default-params = "(" argument ")"
set-dialog-focus-params = "(" argument ")"
set-extract-params = "(" *space ")"
set-list-item-params = "(" argument [", " argument] ")"
set-page-break-params = "(" *space ")"
set-preferred-params = "(" argument ")"
set-print-area-params = "(" argument ")"
set-print-titles-params = "(" argument [", " argument] ")"
set-update-status-params = "(" argument *2(", " argument) ")"
share-params = "(" *space ")"
share-name-params = "(" argument ")"
sheet-background-params = "(" argument [", " argument] ")"
short-menus-params = "(" argument ")"
show-active-cell-params = "(" *space ")"
show-clipboard-params = "(" *space ")"
show-detail-params = "(" argument *3(", " argument) ")"
show-dialog-params = "(" argument ")"
show-info-params = "(" argument ")"
show-levels-params = "(" argument [", " argument] ")"
show-toolbar-params = "(" argument *9(", " argument) ")"
sort-params = "(" argument *16(", " argument) ")"
sort-special-params = "(" argument *13(", " argument) ")"
sound-note-params = "(" argument *2(", " argument) ")"
sound-play-params = "(" argument *2(", " argument) ")"
spelling-params = "(" argument *5(", " argument) ")"
split-params = "(" argument [", " argument] ")"
standard-font-params = "(" argument *8(", " argument) ")"
standard-width-params = "(" argument ")"
style-params = "(" argument [", " argument] ")"
subscribe-to-params = "(" argument [", " argument] ")"
subtotal-create-params = "(" argument *5(", " argument) ")"
subtotal-remove-params = "(" *space ")"
summary-info-params = "(" argument *4(", " argument) ")"
tab-order-params = "(" *space ")"
table-params = "(" argument [", " argument] ")"
text-to-columns-params = "(" argument *13(", " argument) ")"
tracer-clear-params = "(" *space ")"
tracer-display-params = "(" argument [", " argument] ")"
tracer-error-params = "(" *space ")"
tracer-navigate-params = "(" argument *2(", " argument) ")"
traverse-notes-params = "(" argument [", " argument] ")"
undo-params = "(" *space ")"
ungroup-params = "(" *space ")"
ungroup-sheets-params = "(" *space ")"
unhide-params = "(" argument ")"

```

```

unlocked-next-params = "(" *space ")"
unlocked-prev-params = "(" *space ")"
unprotect-revisions-params = "(" *space ")"
update-link-params = "(" argument ["," argument] ")"
vba-insert-file-params = "(" argument ")"
vba-make-addin-params = "(" argument ")"
vba-procedure-definition-params = "(" *space ")"
vbaactivate-params = "(" argument ["," argument] ")"
view-3d-params = "(" argument *5("," argument) ")"
view-define-params = "(" argument *2("," argument) ")"
view-delete-params = "(" argument ")"
view-show-params = "(" argument ")"
vline-params = "(" argument ")"
vpage-params = "(" argument ")"
vscroll-params = "(" argument ["," argument] ")"
wait-params = "(" argument ")"
web-publish-params = "(" argument *8("," argument) ")"
window-maximize-params = "(" argument ")"
window-minimize-params = "(" argument ")"
window-move-params = "(" argument *2("," argument) ")"
window-restore-params = "(" argument ")"
window-size-params = "(" argument *2("," argument) ")"
workbook-activate-params = "(" argument ["," argument] ")"
workbook-add-params = "(" argument *2("," argument) ")"
workbook-copy-params = "(" argument *2("," argument) ")"
workbook-delete-params = "(" argument ")"
workbook-hide-params = "(" argument ["," argument] ")"
workbook-insert-params = "(" argument ")"
workbook-move-params = "(" argument *2("," argument) ")"
workbook-name-params = "(" argument ["," argument] ")"
workbook-new-params = "(" argument *2("," argument) ")"
workbook-next-params = "(" *space ")"
workbook-options-params = "(" argument *2("," argument) ")"
workbook-prev-params = "(" *space ")"
workbook-protect-params = "(" argument *2("," argument) ")"
workbook-scroll-params = "(" argument ["," argument] ")"
workbook-select-params = "(" argument *2("," argument) ")"
workbook-tab-split-params = "(" argument ")"
workbook-unhide-params = "(" argument ")"
workgroup-params = "(" argument ")"
workgroup-options-params = "(" *space ")"
workspace-params = "(" argument *15("," argument) ")"
zoom-params = "(" argument ")"

```

### 2.2.2.1 Cell Formulas

A **cell** formula is a **formula** that adheres to the grammar specified in section [2.2.2](#), with the following restrictions:

- The formula MUST NOT use the bang-reference or bang-name production rules.

All **f** elements of **CT\_Cell** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, and all **calculatedColumnFormula** and **totalsRowFormula** elements of **CT\_TableColumn** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, are cell formulas.

### 2.2.2.2 Conditional Formatting Formulas

A **conditional formatting** formula is a **formula** that adheres to the grammar specified in section [2.2.2](#), with the following restrictions:

- The formula MUST NOT use the union-operator, intersection-operator, range-operator, bang-reference, bang-name, array-constant, external-cell-reference, py-params, lambda-params, or structure-reference production rules.

All **val attributes** of **CT\_Cfvo** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, and all **formula** elements of **CT\_CfRule** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, are conditional formatting formulas.

### 2.2.2.3 Data Validation Formulas

A **data validation** formula is a **formula** that adheres to the grammar specified in section [2.2.2](#), with the following restrictions:

- The formula MUST NOT use the union-operator, intersection-operator, range-operator, bang-reference, bang-name, array-constant, sheet-range-reference, py-params, lambda-params, or structure-reference production rules.

All **formula1** and **formula2** elements of **CT\_DataValidation** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, are data validation formulas.

### 2.2.2.4 External Name Formulas

An external name formula is a **formula** that adheres to the following grammar:

```
external-name-formula = ref-constant / sheet-range-reference / single-sheet-reference
```

When matching the single-sheet or sheet-range rules for an external name formula, the optional workbook-index in those rules MUST NOT be omitted.

All **refersTo** attributes of **CT\_ExternalDefinedName** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, are external name formulas.

### 2.2.2.5 Name Formulas

A name formula is a **formula** that adheres to the grammar specified in section [2.2.2](#), with the following differences.

For name formulas, the function-call rule is expanded as follows:

```
function-call =/ (macro-function-call / command-function-call)
```

The formula MUST NOT use the py-params or local-cell-reference production rule.

All **formula** and **oldFormula** elements of **CT\_RevisionDefinedName** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, and all **definedName** elements of **CT\_DefinedNames** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, are name formulas.

### 2.2.2.6 Pivot Field Formulas

A pivot **field formula** is a formula that adheres to the grammar specified in section [2.2.2](#), with the following differences.

For pivot field formulas, the nospace-expression rule is expanded as follows:

```
nospace-expression =/ pivot-field-name
pivot-field-name = name / apostrophe 1*pivot-field-string-character apostrophe
pivot-field-string-character = apostrophe apostrophe / pivot-field-character
pivot-field-character = character ; MUST NOT be apostrophe
```

The formula MUST NOT use the ref-infix-operator, array-constant, getpivotdata-params, dcount-params, dcounta-params, dsum-params, daverage-params, dmin-params, dmax-params, dproduct-params, dstdev-params, dstdevp-params, dvar-params, dvarp-params, index-params, rand-params, now-params, areas-params, rows-params, columns-params, offset-params, cell-params, index-params, today-params, info-params, py-params, lambda-params, or randbetween-params production rules.

A name used in a pivot field formula MUST NOT have any of the following forms:

- All
- Blank

All **formula** attributes of **CT\_CacheField** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, are pivot field formulas.

### 2.2.2.7 Pivot Item Formulas

A pivot item formula is a **formula** that adheres to the grammar specified in section [2.2.2](#), with the following differences.

For pivot item formulas, the nospace-expression rule is expanded as follows:

```
nospace-expression =/ pivot-items
pivot-items = pivot-item space *(*whitespace pivot-item)
pivot-item = pivot-field-name / pivot-field-name "[" pivot-item-value "]"
pivot-item-value = pivot-field-name / [sign] whole-number-part
```

The formula MUST NOT use the ref-infix-operator, array-constant, getpivotdata-params, dcount-params, dcounta-params, dsum-params, daverage-params, dmin-params, dmax-params, dproduct-params, dstdev-params, dstdevp-params, dvar-params, dvarp-params, index-params, rand-params, now-params, areas-params, rows-params, columns-params, offset-params, cell-params, index-params, today-params, info-params, py-params, lambda-params, or randbetween-params production rules.

A name used in a pivot item formula MUST NOT have any of the following forms:

- All
- Blank

All **formula** attributes of **CT\_CalculatedItem** elements, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, are pivot item formulas.

### 2.2.3 Functions

The predefined functions ([\[ISO/IEC29500-1:2016\]](#) section 18.17.7) are extended by the following **future functions**.

Future function
_xlfn._xlws.FILTER
_xlfn._xlws.PY
_xlfn._xlws.SORT
_xlfn.ACOT

<b>Future function</b>
_xlnf.ACOTH
_xlnf.AGGREGATE
_xlnf.ARABIC
_xlnf.BASE
_xlnf.BETA.DIST
_xlnf.BETA.INV
_xlnf.BINOM.DIST
_xlnf.BINOM.DIST.RANGE
_xlnf.BINOM.INV
_xlnf.BITAND
_xlnf.BITLSHIFT
_xlnf.BITOR
_xlnf.BITRSHIFT
_xlnf.BITXOR
_xlnf.BYCOL
_xlnf.BYROW
_xlnf.CEILING.MATH
_xlnf.CEILING.PRECISE
_xlnf.CHISQ.DIST
_xlnf.CHISQ.DIST.RT
_xlnf.CHISQ.INV
_xlnf.CHISQ.INV.RT
_xlnf.CHISQ.TEST
_xlnf.CHOOSCOLS
_xlnf.CHOOSEROWS
_xlnf.COMBINA
_xlnf.CONCAT
_xlnf.CONFIDENCE.NORM
_xlnf.CONFIDENCE.T
_xlnf.COT
_xlnf.COTH
_xlnf.COVARANCE.P



<b>Future function</b>
_xlnf.COVARIANCE.S
_xlnf.CSC
_xlnf.CSCH
_xlnf.DAYS
_xlnf.DECIMAL
_xlnf.DROP
ECMA.CEILING
_xlnf.ERF.PRECISE
_xlnf.ERFC.PRECISE
_xlnf.EXPAND
_xlnf.EXPON.DIST
_xlnf.F.DIST
_xlnf.F.DIST.RT
_xlnf.F.INV
_xlnf.F.INV.RT
_xlnf.F.TEST
_xlnf.FIELDVALUE
_xlnf.FILTERXML
_xlnf.FLOOR.MATH
_xlnf.FLOOR.PRECISE
_xlnf.FORECAST.ETS
_xlnf.FORECAST.ETS.CONFINT
_xlnf.FORECAST.ETS.SEASONALITY
_xlnf.FORECAST.ETS.STAT
_xlnf.FORECAST.LINEAR
_xlnf.FORMULATEXT
_xlnf.GAMMA
_xlnf.GAMMA.DIST
_xlnf.GAMMA.INV
_xlnf.GAMMALN.PRECISE
_xlnf.GAUSS
_xlnf.HSTACK

<b>Future function</b>
_xlfn.HYPGEOM.DIST
_xlfn.IFNA
_xlfn.IFS
_xlfn.IMCOSH
_xlfn.IMCOT
_xlfn.IMCSC
_xlfn.IMCSCH
_xlfn.IMSEC
_xlfn.IMSECH
_xlfn.IMSINH
_xlfn.IMTAN
_xlfn.ISFORMULA
ISO.CEILING
_xlfn.ISOMITTED
_xlfn.ISOWEEKNUM
_xlfn.LAMBDA
_xlfn.LET
_xlfn.LOGNORM.DIST
_xlfn.LOGNORM.INV
_xlfn.MAKEARRAY
_xlfn.MAP
_xlfn.MAXIFS
_xlfn.MINIFS
_xlfn.MODE.MULT
_xlfn.MODE.SNGL
_xlfn.MUNIT
_xlfn.NEGBINOM.DIST
NETWORKDAYS.INTL
_xlfn.NORM.DIST
_xlfn.NORM.INV
_xlfn.NORM.S.DIST
_xlfn.NORM.S.INV

<b>Future function</b>
_xlnf.NUMBERVALUE
_xlnf.PDURATION
_xlnf.PERCENTILE.EXC
_xlnf.PERCENTILE.INC
_xlnf.PERCENTRANK.EXC
_xlnf.PERCENTRANK.INC
_xlnf.PERMUTATIONA
_xlnf.PHI
_xlnf.POISSON.DIST
_xlnf.PQSOURCE
_xlnf.PYTHON_STR
_xlnf.PYTHON_TYPE
_xlnf.PYTHON_TYPENAME
_xlnf.QUARTILE.EXC
_xlnf.QUARTILE.INC
_xlnf.QUERYSTRING
_xlnf.RANDARRAY
_xlnf.RANK.AVG
_xlnf.RANK.EQ
_xlnf.REDUCE
_xlnf.RRI
_xlnf.SCAN
_xlnf.SEC
_xlnf.SECH
_xlnf.SEQUENCE
_xlnf.SHEET
_xlnf.SHEETS
_xlnf.SKEW.P
_xlnf.SORTBY
_xlnf.STDEV.P
_xlnf.STDEV.S
_xlnf.SWITCH

<b>Future function</b>
_xlfn.T.DIST
_xlfn.T.DIST.2T
_xlfn.T.DIST.RT
_xlfn.T.INV
_xlfn.T.INV.2T
_xlfn.T.TEST
_xlfn.TAKE
_xlfn.TEXTAFTER
_xlfn.TEXTBEFORE
_xlfn.TEXTJOIN
_xlfn.TEXTSPLIT
_xlfn.TOCOL
_xlfn.TOROW
_xlfn.UNICHAR
_xlfn.UNICODE
_xlfn.UNIQUE
_xlfn.VAR.P
_xlfn.VAR.S
_xlfn.VSTACK
_xlfn.WEBSERVICE
_xlfn.WEIBULL.DIST
WORKDAY.INTL
_xlfn.WRAPCOLS
_xlfn.WRAPROWS
_xlfn.XLOOKUP
_xlfn.XOR
_xlfn.Z.TEST

The function syntax ([ISO/IEC29500-1:2016] section 18.17.2.4) is extended by changing the function-name rule to:

```
function-name =
    prefixed-function-name |
    predefined-function-name |
    user-defined-function-name |
    future-function-list |
```

worksheet-only-function-list;

The future-function-list and worksheet-only-function-list rules are found in the Formulas grammar.

## 2.2.4 Extensions by Part

This section specifies the elements from Office Open XML file formats as specified in [\[ISO/IEC29500-1:2016\]](#) that are extended by this format. Either the **Ignorable** attribute ([\[ISO/IEC29500-3:2015\]](#) section 10.1.1), **AlternateContent** element ([\[ISO/IEC29500-3:2015\]](#) section 10.2.1), or the **extLst** element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) MUST be used to maintain compatibility with Office Open XML file formats implementations as specified in [\[ISO/IEC29500-1:2016\]](#).

### 2.2.4.1 Connections

The **extLst** child element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) of the **connection** element ([\[ISO/IEC29500-1:2016\]](#) section 18.13.1) is extended by the addition of a new child **ext** element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{D79990A0-CA42-45E3-83F4-45C500A0EAA5}	<a href="#">connection</a>
{DE250136-89BD-433C-8126-D09CA5730AF9}	<a href="#">connection</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more details about how extension lists are used.

### 2.2.4.2 Drawing

The **oneCellAnchor** element ([\[ISO/IEC29500-1:2016\]](#) section 20.5.2.24) is extended by the addition of a child **AlternateContent** element ([\[ISO/IEC29500-3:2015\]](#) section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/drawingml/2010/slicer">http://schemas.microsoft.com/office/drawingml/2010/slicer</a>	<a href="#">slicer</a>
Fallback	<b>sp</b> ( <a href="#">[ISO/IEC29500-1:2016]</a> section 20.5.2.29)

The **twoCellAnchor** element ([\[ISO/IEC29500-1:2016\]](#) section 20.5.2.33) is extended by the addition of a child **AlternateContent** element ([\[ISO/IEC29500-3:2015\]](#) section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/drawingml/2010/slicer">http://schemas.microsoft.com/office/drawingml/2010/slicer</a>	<b>slicer</b>
Fallback	<b>sp</b> ( <a href="#">[ISO/IEC29500-1:2016]</a> section 20.5.2.29)

The **grpSp** element ([\[ISO/IEC29500-1:2016\]](#) section 20.5.2.17) is extended by the addition of a child **AlternateContent** element ([\[ISO/IEC29500-3:2015\]](#) section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/drawingml/2010/slicer">http://schemas.microsoft.com/office/drawingml/2010/slicer</a>	<b>slicer</b>
Fallback	<b>sp</b> ([ISO/IEC29500-1:2016] section 20.5.2.29)

The **absoluteAnchor** element ([ISO/IEC29500-1:2016] section 20.5.2.1) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/drawingml/2010/slicer">http://schemas.microsoft.com/office/drawingml/2010/slicer</a>	<b>slicer</b>
Fallback	<b>sp</b> ([ISO/IEC29500-1:2016] section 20.5.2.29)

### 2.2.4.3 External Workbook References

The **oleItems** element ([ISO/IEC29500-1:2016] section 18.14.10) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">oleItem</a>
Fallback	<b>oleItem</b> ([ISO/IEC29500-1:2016] section 18.14.9)

### 2.2.4.4 Metadata

The **extLst** child element ([ISO/IEC29500-1:2016] section A.2) of the **futureMetadata** element ([ISO/IEC29500-1:2016] section 18.9.4) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section A.2) whose structure is specified in the following table. All **futureMetadata** elements are also linked to a **metadataType** ([ISO/IEC29500-1:2016] section 18.9.10) by the **name** attribute.

Ext URI	name attribute	Child element
{3E2802C4-A4D2-4D8B-9148-E3BE6C30E623}	"XLRICHVALUE"	<a href="#">rvb</a>
{BDBB8CDC-FA1E-496E-A857-3C3F30C029C3}	"XLDAPR"	<a href="#">dynamicArrayProperties</a>

### 2.2.4.5 Pivot Table

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **pivotTableDefinition** element ([ISO/IEC29500-1:2016] section 18.10.1.73) is extended by the addition of new child **ext** elements ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{962EF5D1-5CA2-4C93-8EF4-DBF5C05439D2}	<a href="#">pivotTableDefinition</a>

Ext URI	Child element
{44433962-1CF7-4059-B4EE-95C3D5FFCF73}	<a href="#">pivotTableData</a>
{C510F80B-63DE-4267-81D5-13C33094786E}	<a href="#">pivotTableServerFormats</a>
{E67621CE-5B39-4880-91FE-76760E9C1902}	<a href="#">pivotTableUISettings</a>
{747A6164-185A-40DC-8AA5-F01512510D54}	<a href="#">pivotTableDefinition16</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **pivotField** element ([ISO/IEC29500-1:2016] section 18.10.1.69) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{2946ED86-A175-432A-8AC1-64E0C546D7DE}	<a href="#">pivotField</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **dataField** element ([ISO/IEC29500-1:2016] section 18.10.1.22) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{E15A36E0-9728-4E99-A89B-3F7291B0FE68}	<a href="#">dataField</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **pivotHierarchy** element ([ISO/IEC29500-1:2016] section 18.10.1.72) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{F1805F06-0CD304483-9156-8803C3D141DF}	<a href="#">pivotHierarchy</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">iconFilter</a>
Fallback	<b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3)

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">customFilters</a>
Fallback	Either <b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3)

AlternateContent components	Child element
	or none

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<b>filter</b>
Fallback	<b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3)

The **filters** element ([ISO/IEC29500-1:2016] section 18.3.2.8) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<b>filter</b>
Fallback	Either <b>filter</b> ([ISO/IEC29500-1:2016] section 18.3.2.6) or none

The **sortState** element ([ISO/IEC29500-1:2016] section 18.3.1.92) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<b>sortCondition</b>
Fallback	<b>sortCondition</b> ([ISO/IEC29500-1:2016] section 18.3.1.91)

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **filter** element ([ISO/IEC29500-1:2016] section 18.10.1.33) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{0605FD5F-26C8-4aeb-8148-2DB25E43C511}	<b>pivotFilter</b>

#### 2.2.4.6 Pivot Table Cache Definition

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **pivotCacheDefinition** element ([ISO/IEC29500-1:2016] section 18.10.1.67) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.



Ext URI	Child element
{725AE2AE-9491-48BE-B2B4-4EB974FC3084}	<a href="#">pivotCacheDefinition</a>
{5DA0FC9A-693D-419c-AD59-312A39285967}	<a href="#">timelinePivotCacheDefinition</a>
{ABF5C744-AB39-4b91-8756-CFA1BBC848D5}	<a href="#">pivotCacheIdVersion</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **cacheField** element ([ISO/IEC29500-1:2016] section 18.10.1.3) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{63CAB8AC-B538-458D-9797-405883B0398D}	<a href="#">cacheField</a>
{4F2E5C28-24EA-4EB8-9CBF-B6C8F9C3D259}	<a href="#">cachedUniqueNames</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **cacheHierarchy** element ([ISO/IEC29500-1:2016] section 18.10.1.6) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{8CF416AD-EC4C-4ABA-99F5-12A058AE0983}	<a href="#">cacheHierarchy</a>
{B97F6D7D-B522-45F9-BDA1-12C45D357490}	<a href="#">cacheHierarchy</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **calculatedMember** element ([ISO/IEC29500-1:2016] section 18.10.1.10) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{0C70D0D5-359C-4A49-802D-23BBF952B5CE}	<a href="#">calculatedMember</a>
{57DEB092-E4DC-418E-9C9A-C0C97F8552CB}	<a href="#">calculatedMember</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **cacheSource** element ([ISO/IEC29500-1:2016] section 18.10.1.7) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{F057638F-6D5F-4E77-A914-E7F072B9BCA8}	<a href="#">sourceConnection</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

### 2.2.4.7 Query Table

The **sortState** element ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.92) is extended by the addition of a child **AlternateContent** element ([\[ISO/IEC29500-3:2015\]](#) section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">sortCondition</a>
Fallback	<b>sortCondition</b>

AlternateContent components	Child element
	([ISO/IEC29500-1:2016] section 18.3.1.91)

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **queryTable** element ([ISO/IEC29500-1:2016] section 18.12.2) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{883FBD77-0823-4A55-B5E3-86C4891E6966}	<a href="#">queryTable</a>

See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

#### 2.2.4.8 SlicerCache

The **extLst** child element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) of the **slicerCacheDefinition** element (section [2.4.38](#)) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{03082B11-2C62-411c-B77F-237D8FCFBE4C}	<a href="#">slicerCachePivotTables</a>
{2F2917AC-EB37-4324-AD4E-5DD8C200BD13}	<a href="#">tableSlicerCache</a>
{470722E0-AACD-4C17-9CDC-17EF765DBC7E}	<a href="#">slicerCacheHideItemsWithNoData</a>

#### 2.2.4.9 Styles

The **extLst** child element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) of the **styleSheet** element ([ISO/IEC29500-1:2016] section 18.8.39) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{EB79DEF2-80B8-43E5-95BD-54CBDDF9020C}	<a href="#">slicerStyles</a>
{46F421CA-312F-682F-3DD2-61675219B42D}	<a href="#">dxfs</a>
{9260A510-F301-46a8-8635-F512D64BE5F5}	<a href="#">timelineStyles</a>
{A0A4C193-F2C1-4fcb-8827-314CF55A85BB}	<a href="#">dxfs</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more information about how extension lists are used.

The **font** element ([ISO/IEC29500-1:2016] section 18.8.22) is extended by the addition of a [knownFonts](#) attribute. To maintain compatibility with implementations of Office Open XML file formats as specified in [ISO/IEC29500-1:2016], the namespace prefix of the attribute MUST be specified as an **Ignorable** attribute ([ISO/IEC29500-3:2015] section 10.1.1).

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **xf** element ([ISO/IEC29500-1:2016] section 18.8.45) of the **cellXfs** element ([ISO/IEC29500-1:2016] section 18.8.10) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{C7286773-470A-42A8-94C5-96B5CB345126}	<a href="#">xfComplementExt</a>

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **dxfs** element ([ISO/IEC29500-1:2016] section 18.2.14) of the **dxfs** element ([ISO/IEC29500-1:2016] section

18.2.15) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{0417FA29-78FA-4A13-93AC-8FF0FAFDF519}	<a href="#">DXFComplementExt</a>

### 2.2.4.10 Table Definition

The **extLst** child element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) of the **table** element ([ISO/IEC29500-1:2016] section 18.5.1.2) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{504A1906-F514-4F6F-8877-14C23A59335A}	<a href="#">table</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more information about how extension lists are used.

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">iconFilter</a>
Fallback	<b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3)

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">customFilters</a>
Fallback	Either <b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3) or none

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<b>filters</b> ([ISO/IEC29500-1:2016] section 18.3.2.8) such that instead of any child <b>filter</b> ([ISO/IEC29500-1:2016] section 18.3.2.6) elements, there are <a href="#">filter</a> elements
Fallback	<b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3)

The **filters** element ([ISO/IEC29500-1:2016] section 18.3.2.8) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<b>filter</b>
Fallback	Either <b>filter</b> ([ISO/IEC29500-1:2016] section 18.3.2.6) or none

The **sortState** element ([ISO/IEC29500-1:2016] section 18.3.1.92) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">sortCondition</a>
Fallback	<b>sortCondition</b> ([ISO/IEC29500-1:2016] section 18.3.1.91)

### 2.2.4.11 Workbook

The **extLst** child element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) of the **workbook** element ([ISO/IEC29500-1:2016] section 18.2.27) is extended by the addition of new child **ext** elements ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{876F7934-8845-4945-9796-88D515C7AA90}	<a href="#">pivotCaches</a>
{BBE1A952-AA13-448E-AADC-164F8A28A991}	<a href="#">slicerCaches</a>
{79F54976-1DA5-4618-B147-ACDE4B953A38}	<a href="#">workbookPr</a>
{841E416B-1EF1-43b6-AB56-02D37102CBD5}	<a href="#">pivotCaches</a>
{983426D0-5260-488c-9760-48F4B6AC55F4}	<a href="#">pivotTableReferences</a>
{A2CB5862-8E78-49c6-8D9D-AF26E26ADB89}	<a href="#">timelineCachePivotCaches</a>
{D0CA8CA8-9F24-4464-BF8E-62219DCF47F9}	<a href="#">timelineCacheRefs</a>
{140A7094-0E35-4892-8432-C4D2E57EDEB5}	<a href="#">workbookPr</a>
{FCE2AD5D-F65C-4FA6-A056-5C36A1767C68}	<a href="#">dataModel</a>
{B58B0392-4F1F-4190-BB64-5DF3571DCE5F}	<a href="#">calcFeatures</a>
{FCE6A71B-6B00-49CD-AB44-F6B1AE7CDE65}	<a href="#">externalLinkPr</a>

The **extLst** child element ([ISO/IEC29500-1:2016] section 18.2.10) of the **dataModel** element (section 2.4.62) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{9835A34E-60A6-4A7C-AAB8-D5F71C897F49}	<a href="#">ModelTimeGroupings</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more information about how extension lists are used.

## 2.2.4.12 Worksheet

The **extLst** child element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) of the **worksheet** element ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.99) is extended by the addition of new child **ext** elements ([\[ISO/IEC29500-1:2016\]](#) section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{78C0D931-6437-407D-A8EE-F0AAD7539E65}	<a href="#">conditionalFormattings</a>
{CCE6A557-97BC-4B89-ADB6-D9C93CAAB3DF}	<a href="#">dataValidations</a>
{05C60535-1F16-4FD2-B633-F4F36F0B64E0}	<a href="#">sparklineGroups</a>
{A8765BA9-456A-4DAB-B4F3-ACF838C121DE}	<a href="#">slicerList</a>
{FC87AEE6-9EDD-4A0A-B7FB-166176984837}	<a href="#">protectedRanges</a>
{01252117-D84E-4E92-8308-4BE1C098FCBB}	<a href="#">ignoredErrors</a>
{F7C9EE02-42E1-4005-9D12-6889AFFD525C}	<a href="#">webExtensions</a>
{7E03D99C-DC04-49d9-9315-930204A7B6E9}	<a href="#">timelineRefs</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more information about how extension lists are used.

The **extLst** child element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) of the **cfRule** element ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.10) is extended by the addition of a new child **ext** element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{B025F937-C7B1-47D3-B67F-A62EFF666E3E}	<a href="#">id</a>

See [\[ISO/IEC29500-3:2015\]](#) section 10.1.2 for more information about how extension lists are used. The **sheetFormatPr** element ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.81) is extended by the addition of a **dyDescent** attribute. To maintain compatibility with Office Open XML file formats implementations as specified in [\[ISO/IEC29500-1:2016\]](#), the namespace prefix of the attribute MUST be specified as an **Ignorable** attribute ([\[ISO/IEC29500-3:2015\]](#) section 10.1.1).

The **row** element ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.73) is extended by the addition of a **dyDescent** attribute. To maintain compatibility with Office Open XML file formats implementations as specified in [\[ISO/IEC29500-1:2016\]](#), the namespace prefix of the attribute MUST be specified as an **Ignorable** attribute ([\[ISO/IEC29500-3:2015\]](#) section 10.1.1).

The **sortState** element ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.92) is extended by the addition of a child **AlternateContent** element ([\[ISO/IEC29500-3:2015\]](#) section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">sortCondition</a>
Fallback	<b>sortCondition</b> ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.3.1.91)

The **sortState** element ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.92) is extended by the addition of a new child **ext** element ([\[ISO/IEC29500-1:2016\]](#) section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{0FC57C36-975A-43D2-8416-536B9B585D1B}	<a href="#">richSortCondition</a>

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">iconFilter</a>
Fallback	<b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3)

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<a href="#">customFilters</a>
Fallback	Either <b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3) or none

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<b>filters</b> ([ISO/IEC29500-1:2016] section 18.3.2.8) such that instead of child <b>filter</b> ([ISO/IEC29500-1:2016] section 18.3.2.6) elements, there are <a href="#">filter</a> elements
Fallback	<b>customFilters</b> ([ISO/IEC29500-1:2016] section 18.3.2.3)

The **filterColumn** element ([ISO/IEC29500-1:2016] section 18.3.2.7) is extended by the addition of a new child **ext** element ([ISO/IEC29500-1:2016] section 18.2.7) whose structure is specified in the following table.

Ext URI	Child element
{68452572-C921-441B-96FD-77FB3E787301}	<a href="#">filterColumn</a>

The **filters** element ([ISO/IEC29500-1:2016] section 18.3.2.8) is extended by the addition of a child **AlternateContent** element ([ISO/IEC29500-3:2015] section 10.2.1) whose structure is specified in the following table.

AlternateContent components	Child element
Choice: <a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>	<b>filter</b>

AlternateContent components	Child element
Fallback	Either <b>filter</b> ([ISO/IEC29500-1:2016] section 18.3.2.6) or none

## 2.3 Conceptual Overview

This section specifies how higher-level features of the file format are represented by combinations of low-level structures.

### 2.3.1 PivotTable What-if Analysis

**PivotTable** what-if analysis enables the editing of summarized values in an **OLAP** PivotTable ([ISO/IEC29500-1:2016] section 18.10) view, for example, editing summarized values in the PivotTable data area of the PivotTable view.

A **CT\_PivotEdits** element, as specified in section 2.6.37, and its child **CT\_PivotEdit** elements, as specified in section 2.6.38, specify the values in the OLAP PivotTable view that have been modified and the corresponding values in the OLAP PivotTable **source data**. The **CT\_PivotUserEdit** child element, as specified in section 2.6.41, of the **CT\_PivotEdit** element specifies a value or a **formula**. The location of the modified value in the OLAP PivotTable view is specified by a PivotTable rule specified by the **CT\_PivotArea** element ([ISO/IEC29500-4:2016] section A.2) in this **CT\_PivotEdit** element. The **OLAP tuple** that identifies the corresponding value in the OLAP PivotTable source data is specified by the **CT\_TupleItems** element, as specified in section 2.6.43, in this **CT\_PivotEdit** element.

A **CT\_PivotChanges** element, as specified in section 2.6.39, and its child **CT\_PivotChange** elements, as specified in section 2.6.40, specify the values in the OLAP PivotTable view that have been designated for **OLAP allocation** and the corresponding values in the OLAP PivotTable source data. The order of the **CT\_PivotChange** elements determines the order in which they are designated for OLAP allocation. The **CT\_PivotChange** element specifies a single edited value designated for OLAP allocation. An OLAP allocation value is specified by the **CT\_PivotEditValue** child element, as specified in section 2.6.42, of the **CT\_PivotChange** element. The **allocationMethod** attribute of the **CT\_PivotChange** element specifies the OLAP allocation method. The OLAP tuple that identifies the location of the edited value in the OLAP PivotTable view and the corresponding value in the OLAP PivotTable source data is specified by the **CT\_TupleItems** child element of the **CT\_PivotChange** element.

For example, when an OLAP PivotTable is refreshed, the values designated for OLAP allocation, specified by the **CT\_PivotChanges** element and its child **CT\_PivotChange** elements, are sent to the OLAP **data provider** along with the OLAP allocation method indicating how to allocate the updated values. The OLAP data provider updates the values, and those new values are then refreshed and summarized in the data area of the PivotTable view, instead of summarizing the original values from the OLAP PivotTable source data.

If the **enableEdit** attribute of the **CT\_PivotTableDefinition** element, as specified in section 2.6.32, is "false", **CT\_PivotEdits** and **CT\_PivotChanges** elements MUST NOT exist in this part. PivotTable what-if analysis is enabled if, and only if, the **enableEdit** attribute of the **CT\_PivotTableDefinition** element is "true" and the PivotTable source data is OLAP.

### 2.3.2 Slicers

A slicer is a mechanism for filtering data in PivotTable ([ISO/IEC29500-1:2016] section 18.10) views, **cube functions, tables** ([ISO/IEC29500-1:2016] section 18.5.1.2) and Charts ([ISO/IEC29500-1:2016] section 21.2) based on [Non-Worksheet PivotTables](#). A slicer is based on a **field** in the [slicer](#)

[source data](#), and the slicer filters on distinct values in that **column**. In the case of using **OLAP** slicer source data, a slicer is based on an **OLAP hierarchy**.

A slicer has two major parts, a [slicer cache](#) and a [slicer view](#). There can be more than one slicer view based on a single slicer cache. When filtering multi-level OLAP hierarchies using slicers, separate slicer views are used for each **OLAP level**.

### 2.3.2.1 Slicer Cache

A slicer cache specifies the subset of [slicer source data](#) that is cached for display in [slicer views](#), as well as properties related to [slicer](#) filtering. A slicer cache is specified by the [CT\\_SlicerCacheDefinition](#) element.

A slicer cache has an associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache as specified in section [2.3.2.1.2](#), or **Table** ([\[ISO/IEC29500-1:2016\]](#) section 18.5.1.2).

If the slicer source data is an **OLAP data source**, the **sourceName** attribute of the [CT\\_SlicerCacheDefinition](#) element specifies the **MDX unique name** of the associated **OLAP hierarchy**.

If the slicer source data is a non-OLAP data source, the **sourceName** attribute of the [CT\\_SlicerCacheDefinition](#) element specifies the associated PivotTable cache **field** of the associated PivotTable **PivotCache**.

If the slicer source data is a table data source, the **sourceName** attribute of the [CT\\_SlicerCacheDefinition](#) element specifies the associated **table** field.

If the slicer is used to **filter** PivotTable views, the slicer cache specifies the PivotTable views being filtered as specified in section [2.3.2.1.4](#).

#### 2.3.2.1.1 Slicer Source Data

The **source data** for a [slicer](#) is specified by the associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache as specified in [Slicer Cache Relationship to PivotCache](#), or **Table** ([\[ISO/IEC29500-1:2016\]](#) section 18.5.1.2) as specified in Slicer Cache Relationship to Table.

#### 2.3.2.1.2 Slicer Cache Relationship to PivotCache

A [slicer cache](#) can be associated with a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache. The association is specified by the following rules:

- If the [CT\\_SlicerCacheDefinition](#) element has a child [CT\\_SlicerCacheData](#) element with a child [CT\\_OlapSlicerCache](#) element, then the type of [slicer source data](#) is **OLAP** and the associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache of the slicer cache is specified by the **pivotCacheId** attribute of the [CT\\_OlapSlicerCache](#) element. The associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache MUST be based on an OLAP connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13.5). The **slicerData** attribute of the [CT\\_PivotCacheDefinition](#) element MUST be "true".
- If the [CT\\_SlicerCacheDefinition](#) element has a child [CT\\_SlicerCacheData](#) element with a child [CT\\_TabularSlicerCache](#) element, the type of slicer source data is non-OLAP and the associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache of the slicer cache is specified by the **pivotCacheId** attribute of the [CT\\_TabularSlicerCache](#) element. The associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache MUST be based on a non-OLAP connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13). The **slicerData** attribute of the [CT\\_PivotCacheDefinition](#) element MUST be "false".

Multiple slicer caches can be associated with one PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache.



If a slicer cache is associated, as specified by [Slicer Cache Relationship to PivotTable View](#), with one or more PivotTable ([ISO/IEC29500-1:2016] section 18.10) views, and the slicer source data type is non-OLAP, the slicer cache and each associated PivotTable ([ISO/IEC29500-1:2016] section 18.10) view MUST be associated with the same PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache and the **slicerData** attribute of the CT\_PivotCacheDefinition element MUST be "false".

If a slicer cache is associated, as specified by Slicer Cache Relationship to PivotTable View, with one or more PivotTable ([ISO/IEC29500-1:2016] section 18.10) views, and the slicer source data type is OLAP, the PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache that is associated with the slicer cache and all PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCaches that are associated with the PivotTable ([ISO/IEC29500-1:2016] section 18.10) views MUST be based on the same OLAP connection ([ISO/IEC29500-1:2016] section 18.13.5) and the PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCaches associated with the PivotTable ([ISO/IEC29500-1:2016] section 18.10) views MUST NOT be associated with any slicer cache. The **slicerData** attribute of the **CT\_PivotCacheDefinition** element for each PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache associated with the PivotTable ([ISO/IEC29500-1:2016] section 18.10) views MUST be "false".

### 2.3.2.1.3 Slicer Cache Relationship to Table

A [slicer cache](#) can be associated with a **Table** ([ISO/IEC29500-1:2016] section 18.5.1.2). The association is specified by the following rule:

- If the **CT\_SlicerCacheDefinition** element has a child **extLst** element with a child **CT\_TableSlicerCache** element, the type of [slicer source data](#) is table and the associated **Table** ([ISO/IEC29500-1:2016] section 18.5.1.2) of the slicer cache is specified by the **tableId** attribute of the **CT\_TableSlicerCache** element.

Multiple slicer caches can be associated with one **Table** ([ISO/IEC29500-1:2016] section 18.5.1.2).

### 2.3.2.1.4 Slicer Cache Relationship to PivotTable View

A slicer cache, as specified in section [2.3.2.1](#), can be associated with PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, views and Charts ([ISO/IEC29500-1:2016] section 21.2) based on [Non-Worksheet PivotTables](#), by the **pivotTables** group element of the **CT\_SlicerCacheDefinition** element, as specified in section [2.6.70](#).

If the associated PivotTable **PivotCache** of a slicer cache, as specified by the [Slicer Cache Relationship to PivotCache](#), is an **OLAP** PivotTable **PivotCache**, the slicer items, as specified in section [2.3.2.1.6](#), in the slicer cache are used to apply PivotTable OLAP manual filters to the PivotTable **hierarchy** specified by the **sourceName** attribute of the **CT\_SlicerCacheDefinition** element in all associated PivotTable views and Charts based on [Non-Worksheet PivotTables](#), of the slicer cache. The **selected** slicer items in the slicer cache are converted into selected PivotTable items in the PivotTable OLAP manual filters by the application to apply the filter state of the slicer cache to the associated PivotTable views.

If the associated PivotTable **PivotCache** of a slicer cache, as specified by Slicer Cache Relationship to PivotCache, is a non-OLAP PivotTable **PivotCache**, the PivotTable **PivotCache** of the PivotTable views and the PivotTable **PivotCache** of the slicer cache MUST be the same.

When an OLAP PivotTable view is associated with an OLAP slicer cache, there MUST NOT be more than one slicer cache for each **OLAP hierarchy**. If the slicer cache is associated with at least one Chart based on [Non-Worksheet PivotTable](#), then the slicer cache MUST be OLAP sourced.

If the associated PivotTable **PivotCache** of a slicer cache, as specified by Slicer Cache Relationship to PivotCache, is a non-OLAP PivotTable **PivotCache**, the slicer items in the slicer cache are used to apply PivotTable non-OLAP manual filters to the **PivotTable field** specified by the **sourceName** attribute of the **CT\_SlicerCacheDefinition** element in all associated PivotTable views of the slicer cache. The selected slicer items in the slicer cache are converted into selected PivotTable items in the

PivotTable non-OLAP manual filters by the application to apply the filter state of the slicer cache to the associated PivotTable views. See the PivotTable items in [ISO/IEC29500-1:2016] section 18.10 for more details.

### 2.3.2.1.5 Slicer Cache Relationship to Table column

A slicer cache, as specified in section 2.3.2.1, can be associated with **column** in a **Table**, as specified in [ISO/IEC29500-1:2016] section 18.5.1.2. Associated column is specified by the **column** attribute of the **CT\_TableSlicerCache** element.

### 2.3.2.1.6 Slicer Items

Slicer items in a [slicer cache](#) represent distinct values in a **column** of the [slicer source data](#). In the case of [slicers](#) based on **OLAP** slicer source data, the slicer cache is based on an **OLAP hierarchy** and slicer items represent **OLAP members** within levels of that OLAP hierarchy.

For slicers associated with PivotTable ([ISO/IEC29500-1:2016] section 18.10) views, each slicer item specifies whether slicer source data exists for that slicer item. For more information, see [Slicer Cross Filtering](#).

Each slicer item also specifies the item selection state, used for filtering, and can specify additional properties. For more information see [Non-OLAP Slicer Items](#) and [OLAP Slicer Items](#).

#### 2.3.2.1.6.1 Non-OLAP Slicer Items

The slicer items of a non-**OLAP** slicer are specified by an ordered sequence of [CT\\_TabularSlicerCacheItem](#) elements. Each slicer item is associated with a PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache item of the associated PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache **field** in the associated PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache. For more information, see [Slicer Cache Relationship to PivotCache](#).

The associated cache field is specified by the **sourceName** attribute of the [CT\\_SlicerCacheDefinition](#) element and MUST be equal to the **name** attribute of a **CT\_CacheField** ([ISO/IEC29500-4:2016] section A.2) element in the collection of PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache fields ([ISO/IEC29500-4:2016] section A.2) of the associated PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache. The associated PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache item is specified by the **x** attribute of the **CT\_TabularSlicerCacheItem** element, which contains a PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache item index of the associated PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache item in the associated PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache field. Two non-OLAP slicer items MUST NOT be associated with the same PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache item.

The order of non-OLAP slicer items in the [slicer cache](#) is specified by the **sortOrder**, **crossFilter**, and **customListSort** attributes of the [CT\\_TabularSlicerCache](#) element.

The **CT\_TabularSlicerCacheItem** element also specifies whether the non-OLAP slicer item is selected for filtering and whether data exists in the [slicer source data](#) for it. For more information, see [Slicer Cross Filtering](#).

#### 2.3.2.1.6.2 OLAP Slicer Items

A [CT\\_OlapSlicerCache](#) element specifies properties of an **OLAP slicer cache**, and its **descendant** elements specify OLAP slicer items.

A [CT\\_OlapSlicerCacheRanges](#) element specifies the cache for an **OLAP level** in an OLAP slicer cache.

The cache is organized into **ranges** of cached OLAP slicer items for each OLAP level in the slicer cache. Each range is specified in a [CT\\_OlapSlicerCacheRange](#) element. The **startItem** attribute of the [CT\\_OlapSlicerCacheRange](#) element specifies the zero-based index of the first OLAP slicer item in this cached range in the ordered collection of all **OLAP members** that exist in the [slicer source data](#) for the associated OLAP level. The collection in the slicer source data is ordered as specified by the **sortOrder** and **crossFilter** attributes of the earlier [CT\\_OlapSlicerCacheLevelData](#) element.

Each cached OLAP slicer item in a range is specified by a [CT\\_OlapSlicerCacheItem](#) element.

The OLAP slicer items that are selected for filtering are specified by the [CT\\_OlapSlicerCacheSelections](#) element.

Each individual OLAP slicer item selected for filtering is specified by a [CT\\_OlapSlicerCacheSelection](#) element.

### 2.3.2.1.7 Slicer Cross Filtering

Cross filtering is an application behavior that allows one slicer to reflect the results of filtering by another. This behavior exposes whether data exists in the [slicer source data](#) for each [slicer item](#) when the slicer source data is filtered by the selected slicer items of all associated [slicer caches](#) of a PivotTable ([ISO/IEC29500-1:2016] section 18.10) view, as specified by [Slicer Cache Relationship to PivotTable View](#), and all PivotTable ([ISO/IEC29500-1:2016] section 18.10) manual filters in the PivotTable ([ISO/IEC29500-1:2016] section 18.10) view.

If the type of slicer source data is **OLAP**, the existence of data, after filtering, for a slicer item is specified by the **nd** attribute of the [CT\\_OlapSlicerCacheItem](#) element. If the type of slicer source data is non-OLAP, the existence of data for a slicer item is specified by the **nd** attribute of the [CT\\_TabularSlicerCacheItem](#) element.

If the type of slicer source data is non-OLAP, the **crossFilter** attribute of the [CT\\_TabularSlicerCache](#) element specifies how the [non-OLAP slicer items](#) that have no data appear.

If the type of slicer source data is OLAP, the **crossFilter** attribute of the [CT\\_OlapSlicerCacheLevelData](#) element specifies how the [OLAP slicer items](#) that have no data are displayed for the **OLAP level** specified by the **uniqueName** attribute of the [CT\\_OlapSlicerCacheLevelData](#) element.

### 2.3.2.2 Slicer View

A slicer view specifies the display of a [slicer](#) on a **worksheet**. A slicer view is displayed as a list of [slicer items](#). The slicer view is specified by a [CT\\_Slicer](#) element.

Each slicer view is associated with a [slicer cache](#) as specified in [Slicer View Relationship to Slicer Cache](#). The filtering state of slicer items displayed in the slicer view is specified by the associated slicer cache.

Each slicer view is associated with a drawing ([ISO/IEC29500-1:2016] section 20.5), contained in the Drawings part ([ISO/IEC29500-1:2016] section 12.3.8). The associated drawing ([ISO/IEC29500-1:2016] section 20.5) contains a [CT\\_Slicer](#) element that has a **name** attribute that matches the **name** attribute of the [CT\\_Slicer](#) element that specifies the slicer view.

#### 2.3.2.2.1 Slicer View Relationship to Slicer Cache

Each [slicer view](#) is associated with a [slicer cache](#). The slicer view is associated with a slicer cache through the **name** attribute of the [CT\\_SlicerCacheDefinition](#) element in the slicer cache that matches the **cache** attribute of the [CT\\_Slicer](#) element that specifies this slicer view.

If a slicer view is associated with an **OLAP** slicer cache, the slicer view also has an associated **OLAP level**, specified by the **level** attribute of the **CT\_Slicer** element. In this case, the slicer view displays [OLAP Slicer Items](#) of that OLAP level.

There can be multiple slicer views associated with a single slicer cache. There are two main reasons for this:

- For a user-defined **OLAP hierarchy** with several OLAP levels—for example, a Geography OLAP hierarchy with Country, State, and City OLAP levels —each slicer view is associated with a single OLAP level, providing a mechanism for filtering different OLAP levels of the OLAP hierarchy.
- Multiple slicer views associated with either the same slicer cache (for a non-OLAP slicer cache) or the same OLAP level (for an OLAP slicer cache) provide a mechanism for displaying the filter state in more than one location in the workbook.

### 2.3.2.3 Slicers and Cube Functions

Each [slicer cache](#) has a **defined name** associated with it as specified by the **name** attribute of the **CT\_SlicerCacheDefinition** element.

The value of the **CT\_DefinedName** ([\[ISO/IEC29500-1:2016\]](#) section 18.2.5) element specifying a defined name associated with a slicer cache MUST be #N/A.

If the [slicer source data](#) type of a slicer cache is **OLAP**, **cube functions** can use the defined name of the slicer cache as a parameter to refer to the selection state of the slicer cache.

### 2.3.2.4 Slicer Styles

Slicer styles specify the formatting to apply to visual components of [slicer views](#). The **style** attribute of the **CT\_Slicer** element specifies the slicer style to be applied. A slicer style can be either built-in or user-defined. Built-in slicer styles are specified in the **CT\_Slicer** element. User-defined slicer styles are specified in the [CT\\_SlicerStyles](#) element.

A slicer style is an extension of a table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) with additional table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements specific to the formatting of slicer views. A user-defined slicer style is specified by a [CT\\_SlicerStyle](#) element and the table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) it references.

A user-defined slicer style consists of the table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements from the referenced table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) and table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements specified by a group of [CT\\_SlicerStyleElement](#) elements.

The **slicerStyleElements** element of a **CT\_SlicerStyle** element specifies the slicer-style-specific table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements of the slicer style. The **name** attribute of the **CT\_SlicerStyle** element references the user-defined table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) that specifies the non-slicer-style-specific table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements of the slicer style.

### 2.3.3 Non-Worksheet PivotTable

Non-Worksheet PivotTables provide a way for Charts ([\[ISO/IEC29500-1:2016\]](#) section 21.2) to be based on PivotTable data without having to show the data in a **worksheet**. For more information see [\[MS-ODRAWXML\]](#).

A Non-Worksheet PivotTable MUST only be referenced from **workbook**.

## 2.3.4 PivotValues

PivotValues specifies the collection of values that are in the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data area. The PivotValues contain a collection of PivotValueCells organized as a two dimensional array corresponding to the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data area.

For a [Non-Worksheet PivotTable](#) the PivotValues are specified by the **pivotTableData** element (section [2.4.63](#)).

For PivotTables on a **worksheet** the PivotValues are specified by the cells of the worksheet ([\[ISO/IEC29500-1:2016\]](#) section 18.3) cell table in the locations specified by the location element ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.49) of the PivotTable.

### 2.3.4.1 PivotValueCell

A PivotValueCell is a point in individual data unit in the data area of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data area. PivotValueCells contain summarized values for associated PivotTable data items. Every PivotValueCell can have two kinds of information associated with it, the [value](#) and the [server formatting](#) information.

#### 2.3.4.1.1 Value

The value of a [PivotValueCell](#) is specified to be the number, string, error, date associated with the PivotValueCell.

#### 2.3.4.1.2 Server Formatting

The server formatting of a [PivotValueCell](#) specifies formatting to be applied to the PivotValueCell.

## 2.3.5 Timelines

A Timeline is a mechanism for filtering data in PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views, **cube functions** and Charts ([\[ISO/IEC29500-1:2016\]](#) section 21.2) based on [Non-Worksheet PivotTables](#). In the case of using OLAP [Timeline source data](#), a Timeline is based on a key **attribute** of an **OLAP hierarchy**. In the case of using native Timeline source data, a Timeline is based on a **data table column**.

A Timeline has two major parts: a [Timeline cache](#), and a [Timeline view](#). There can be more than one Timeline view based on a single Timeline cache.

### 2.3.5.1 Timeline Cache

A **Timeline cache** specifies the subset of **Timeline source data** (section [2.3.5.1.1](#)) that is cached for display in **Timeline views** (section [2.3.5.2](#)), as well as properties related to **Timeline** filtering (section [2.3.5](#)). A **Timeline cache** is specified by the **CT\_TimelineCacheDefinition** element (section [2.6.112](#)).

A **Timeline cache** has an associated **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **PivotCache** as specified in section [2.3.5.1.2](#).

If the **Timeline source data** is an **OLAP data source**, the **sourceName attribute** of the **CT\_TimelineCacheDefinition** element specifies the key attribute name of the associated **OLAP hierarchy**. If the **Timeline source data** is a native data source, the **sourceName** attribute of the **CT\_TimelineCacheDefinition** element specifies the name of the associated **data table column**.

If the timeline is used to **filter PivotTable** views, the **Timeline cache** specifies the **PivotTable** views being filtered as specified in **Timeline Cache Relationship to PivotTable View** (section [2.3.5.1.3](#)).

### 2.3.5.1.1 Timeline Source Data

The **source data** for a [Timeline](#) is specified by the associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache as specified in [Timeline Cache Relationship to PivotCache](#).

### 2.3.5.1.2 Timeline Cache Relationship to PivotCache

A [Timeline cache](#) is associated with a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache through the **pivotCacheId** attribute of the [CT\\_TimelineState](#) element. If the Timeline cache has an associated PivotTable PivotCache, the **timelineData** attribute of the [CT\\_TimelinePivotCacheDefinition](#) element MUST be "true".

Multiple Timeline caches can be associated with one PivotTable PivotCache.

If a Timeline cache is associated, as specified by [Timeline Cache Relationship to PivotTable View](#), with one or more PivotTable views, the PivotTable PivotCache that is associated with the Timeline cache and all PivotTable PivotCaches that are associated with the PivotTable views MUST be based on the same source – an OLAP connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13.5) if the [Timeline source data](#) is **OLAP** and a **data table** if the Timeline source data is native, and the PivotTable PivotCaches associated with the PivotTable views MUST NOT be associated with any Timeline cache. The **timelineData** attribute of the [CT\\_TimelinePivotCacheDefinition](#) element for each PivotTable PivotCache associated with the PivotTable views MUST be "false".

### 2.3.5.1.3 Timeline Cache Relationship to PivotTable View

A [Timeline cache](#) can be associated with PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views and Charts ([\[ISO/IEC29500-1:2016\]](#) section 21.2) based on [Non-Worksheet PivotTables](#), as specified by the **pivotTables** group element of the [CT\\_TimelineCacheDefinition](#) element.

The [Timeline State](#) of the Timeline cache is used to apply the PivotTable date filter to the PivotTable **hierarchy** which belongs to the same **dimension** as the hierarchy associated with the **sourceName** attribute of the [CT\\_TimelineState](#) element, in all associated PivotTable views and Charts based on Non-Worksheet [PivotTables](#) of the Timeline cache. The **selected** date range in the Timeline cache is converted into selected PivotTable items in the PivotTable date filters by the application to apply the filter state of the Timeline cache to the associated PivotTable views and Charts based on Non-Worksheet [PivotTables](#).

When an **OLAP** PivotTable view is associated with an OLAP Timeline cache, there MUST NOT be more than one Timeline cache for each **OLAP hierarchy**. If the Timeline cache has at least one Chart based on Non-Worksheet [PivotTable](#), then the Timeline cache MUST be OLAP sourced. When a native PivotTable view is associated with a native Timeline cache, there MUST NOT be more than one Timeline cache for each **data table column**.

### 2.3.5.1.4 Timeline State

**Timeline state** specifies the information used for display in [Timeline view](#). The **Timeline state** contains two elements, selection and bounds, of type [CT\\_TimelineRange](#). The selection element specifies the start and end dates of the selection in the Timeline and is used for filtering data in PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views and **cube functions**. The bounds element specifies the minimum and maximum dates that can be displayed by the Timeline view.

### 2.3.5.2 Timeline View

A Timeline view specifies the display of a Timeline (section [2.1.8](#)) on a **worksheet**. The Timeline view is specified by a [CT\\_Timeline](#) element.

Each Timeline view is associated with a [Timeline cache](#) as specified in [Timeline View Relationship to Timeline Cache](#). The filtering state of Timeline displayed in the Timeline view is specified by the associated Timeline cache.

Each Timeline view is associated with a drawing ([\[ISO/IEC29500-1:2016\]](#) section 20.5), contained in the Drawings part ([\[ISO/IEC29500-1:2016\]](#) section 12.3.8).

### 2.3.5.2.1 Timeline View Relationship to Timeline Cache

Each [Timeline view](#) is associated with a [Timeline cache](#). The Timeline view is associated with Timeline cache through the **name** attribute of the [CT\\_TimelineCacheDefinition](#) element in the Timeline cache that matches the **cache** attribute of the [CT\\_Timeline](#) element that specifies this Timeline view.

There can be multiple Timeline views associated with a single Timeline cache. The main reason for this is that multiple Timeline views associated with the same Timeline cache provide a mechanism for displaying the filter state in more than one location in the workbook.

### 2.3.5.3 Timelines and Cube Functions

Each [Timeline cache](#) has a **defined name** associated with it as specified by the **name** attribute of the [CT\\_TimelineCacheDefinition](#) element.

The value of the **CT\_DefinedName** ([\[ISO/IEC29500-1:2016\]](#) section 18.2.5) element specifying a defined name associated with a Timeline Cache MUST be #N/A.

If the [Timeline source data](#) type of a Timeline cache is **OLAP**, **cube functions** can use the defined name of the Timeline cache as a parameter to refer to the selection state of the Timeline cache.

### 2.3.5.4 Timeline Styles

Timeline styles specify the formatting to apply to visual components of [Timeline views](#). The **style** attribute of the [CT\\_Timeline](#) element specifies the Timeline style to be applied. A Timeline style can be either built-in or user-defined. Built-in Timeline styles are specified in the [CT\\_Timeline](#) element. User-defined Timeline styles are specified in the [CT\\_TimelineStyles](#) element.

A Timeline style is an extension of a table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) with additional table style elements specific to the formatting of [Timeline views](#). A user-defined Timeline style is specified by a [CT\\_TimelineStyle](#) element and the table style it references.

A user-defined Timeline style consists of the table style elements from the referenced table style and table style elements specified by a group of [CT\\_TimelineStyleElement](#) elements.

The **TimelineStyleElements** element of a [CT\\_TimelineStyle](#) element specifies the Timeline-style-specific table style elements of the Timeline style. The **name** attribute of the [CT\\_TimelineStyle](#) element references the user-defined table style that specifies the Timeline-style-specific table style elements of the Timeline style.

## 2.3.6 Rich Data

Rich Data is an extensible mechanism to store compound data objects and their properties in a workbook.

### 2.3.6.1 Rich Values

Each rich value consists of three components, **rich value type**, **key value pairs (KVP)**, and an optional **rich value fallback**.

The rich value type is indicated by a **CT\_RichValueStructure** (section [2.6.180](#)). All type names, specified by the **t** attribute, that begin with an underscore symbol MAY have restrictions on required key value pairs (KVP) and other defined behavior.

The set of key value pairs (KVP) is defined in **CT\_RichValue** (section [2.6.175](#)) and **CT\_RichValueStructure** (section [2.6.180](#)).

The rich value fallback is optionally defined in **CT\_RichValueFallback** (section [2.6.178](#)) and stands in place of the rich value for some features.

While there are restrictions on required key value pairs (KVP) for some rich value types (see the sub-sections of this section for more details), additional key value pairs (KVP) are allowed.

### 2.3.6.1.1 Array Type

The **rich value type** for a **rich array**.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_array" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"array"	a	An index to a <b>CT_ArrayValue</b> (section <a href="#">2.6.159</a> ). This is a zero-based index.

This rich value type has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more details.

Flag	Default Value
ShowInCardView	True
ShowInDotNotation	True
ShowInAutoComplete	True

### 2.3.6.1.2 Entity Type

The **rich value type** for an entity represents a set of **key value pairs (KVP)**.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_entity".

### 2.3.6.1.3 Error Types

The **rich value type** for errors is an extension of **cell error values**. This type represents a modern error in the file, which enables the storage of additional descriptive properties about the error.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_error" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	Integer, see following sub-sections for more information on specific errors.

This rich value type has the additional optional key value pair (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"subType"	i	Integer, used internally to differentiate help topic identifiers.



### 2.3.6.1.3.1 Blocked Error Type

A Blocked error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A Blocked error will show as #BLOCKED!. These errors indicate that the connection to the **service** was blocked.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_error" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	10

### 2.3.6.1.3.2 Busy Error Types

A Busy error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A Busy error will show as #BUSY!. These errors indicate that we are waiting on data from the service. This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_error" and MUST have one of the following sets of **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	14

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	17
"targetValue"	r	An index to a <b>rich value type</b> that is waiting on data.

### 2.3.6.1.3.3 Calc Error Type

A Calc error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A Calc error will show as #CALC!. These errors indicate a scenario currently unsupported by the calculation engine.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_error" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	13

### 2.3.6.1.3.4 Connect Error Type

A Connect error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A Connect error will show as #CONNECT!. These errors indicate that an attempt to connect to the **service** has failed.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_error" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	9

### 2.3.6.1.3.5 Name Error Type

A Name error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A Name error will show as #NAME?. These errors indicate that that a **formula** contained unrecognized text.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of " \_error" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	4

### 2.3.6.1.3.6 Field Error Type

A Field error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A Field error will show as #FIELD!. These errors indicate that a **rich value key** was not found.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of " \_error" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	12
"field"	s	A string representing the name of the rich value key that could not be found.

### 2.3.6.1.3.7 Spill Error Type

A Spill error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A Spill error will show as #SPILL!. These errors indicate that a **formula** result cannot be shown due to non-empty **adjacent cells**.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of " \_error" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	8
"colOffset"	i	An integer representing the count of additional columns in the result.
"rwOffset"	i	An integer representing the count of additional of rows in the result.

### 2.3.6.1.3.8 Unknown Error Type

An Unknown error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

An Unknown error will show as #UNKNOWN!. These errors indicate a **rich value** with an unknown rich value type.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of " \_error" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	11

### 2.3.6.1.3.9 TimeOut Error Type

A TimeOut error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

A TimeOut error will show as #TIMEOUT!. These errors indicate that this formula exceeded the maximum allotted execution time.

This rich value type is identified by having a CT\_RichValueStructure (section [2.6.180](#)) **t** attribute of "\_error" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	19

### 2.3.6.1.3.10 External Error Type

An External error is a subset of the **rich value type** for errors (section [2.3.6.1.3](#)).

An External error indicates that the **external code service**, this formula depended on, returned an error. The error shows differently depending on the programming language of the service (for example, #PYTHON! for the Python external code service).

This rich value type is identified by having a CT\_RichValueStructure (section [2.6.180](#)) **t** attribute of "\_error" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"errorType"	i	18

### 2.3.6.1.4 Formatted Number Type

The **rich value type** for formatted numbers. The number is stored as the fallback in CT\_RichValueFallback (section [2.6.178](#)).

This rich value type is identified by having a CT\_RichValueStructure (section [2.6.180](#)) **t** attribute of "\_formattednumber" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"_Format"	spb	An index to a <b>supporting property bag</b> . For more information about _Format see section <a href="#">2.3.6.3</a> .

### 2.3.6.1.5 Hyperlink Type

The **rich value type** for a hyperlink contains a hyperlink and optional display text.

This rich value type is identified by having a CT\_RichValueStructure (section [2.6.180](#)) **t** attribute of "\_hyperlink" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"Address"	s	String representation of the

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
		hyperlink

This rich value type has the additional optional key value pair (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"Text"	s	String representation of the display text associated with the hyperlink

This rich value type has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more details.

Flag	Default Value
ShowInCardView	False
ShowInDotNotation	False
ShowInAutoComplete	False

### 2.3.6.1.6 ImageUrl Type

The **rich value type** for an ImageUrl represents information for a URL to an image and associated optional properties.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "imageurl" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"Address"	s	String representation of the Url

This rich value type has the additional optional key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"Attribution Size"	i	Integer value of the minimum size in pixels that requires the attribution to be rendered
"Attribution"	r	Index to a nested SourceAttribution rich value type (section <a href="#">2.3.6.1.9</a> )
"Text"	s	String representation of the alt text associated with the image
"More Images Address"	s	String representation of the Url for more images
"ComputedImage"	b	Boolean value that when true indicates the image can be generated on demand.

This rich value type has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more information.

Flag	Default Value
ShowInCardView	True
ShowInDotNotation	True
ShowInAutoComplete	True

### 2.3.6.1.7 Linked Entity Types

These types represent **service** connected **rich value types**.

#### 2.3.6.1.7.1 Linked Entity and Linked Entity Core Types

All Linked Entities MUST contain a Linked Entity Core Value, which represents the information received from the **service**.

The Linked Entity **rich value type** is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_linkedentity" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"%cvi"	r	Integer that identifies the index to the nested Linked Entity Core Value

Linked Entity Core rich value type is identified by having a **CT\_RichValueStructure** (section 2.6.180) **t** attribute of "\_linkedentitycore" and MUST have the following key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"%EntityCulture"	s	String value for the service culture
"%EntityId"	s	String value that when combined with the "%EntityServiceId" and "%EntityCulture" creates a unique identifier
"%EntityServiceId"	i	Integer value that is an index to the service domain

Linked Entity Core rich value type has the additional optional key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"%DataProviderExternalLink"	s	String value that is provided by and targets the service.
"%DataProviderExternalLinkLogo"	s	String value that is a <b>URL</b> that points to a logo that identifies the service.
"%EntitySubDomainId"	i	Integer value that is an index to the service sub-domain.
"%IsRefreshable"	b	Boolean value that when true indicates the rich value is connected and can be refreshed to obtain the latest data.
"%ProviderInfo"	s	String value indicating the service provider.
"%VDPID/VSID"	s	String value used by the service.

This rich value type has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more information.

Flag	Default Value
ShowInCardView	True
ShowInDotNotation	True
ShowInAutoComplete	True

#### 2.3.6.1.7.2 Linked Entity 2 and Linked Entity 2 Core Types

Linked Entity 2s MAY reference a Linked Entity 2 Core Value, which represents the information received from the **service**.

The Linked Entity 2 **rich value type** is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_linkedentity2" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"%EntityCulture"	s	String value for the service culture.
"%EntityId"	s	String value that when combined with the %EntityServiceId and %EntityCulture values will create a unique identifier for the service.
"%EntityServiceId"	i	Integer value that is an index to the service domain.

Linked Entity 2 rich value type has the additional optional key value pair (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"%cvi"	r	Integer that identifies the index to the nested Linked Entity 2 Core Value.

Linked Entity 2 Core rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_linkedentity2core" and MUST have the following key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"%EntityCulture"	s	String value for the service culture
"%EntityId"	s	String value that when combined with the "%EntityServiceId" and "%EntityCulture" creates a unique identifier
"%EntityServiceId"	i	Integer value that is an index to the service domain

Linked Entity 2 Core rich value type has the additional optional key value pair (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"%IsRefreshable"	b	Boolean value that when true indicates the rich value is connected and can be refreshed to obtain the latest data.
"%VDPID/VSID"	s	String value used by the <b>service (1)</b> .
"%EntityDomainIdString"	s	Optional string value used to supplement the %EntityServiceId integer value.
"%DataRetrievedTime"	n	Optional number value that is the date/time when the linked entity data was retrieved from the <b>data provider</b> .
"%InfoToolTipLabelNames"	a	Optional array of string values that are expected to have optional corresponding values in the %InfoToolTipLabelValues.
"%InfoToolTipLabelValues"	a	Optional array of string values that are expected to correspond to names in %InfoToolTipLabelNames.
"%InfoToolTipLabelValuesType"	a	Optional array of values for time zone localization.
"%ClassificationId"	s	Optional string value that is used to apply a Windows Information Protection (WIP) policy.
"%DataProviderString"	s	Optional string value that identifies the data provider.
"%OutdatedReason"	i	Optional integer that indicates why the rich value is outdated.

These rich value types has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more information.

Flag	Default Value
ShowInCardView	True
ShowInDotNotation	True
ShowInAutoComplete	True

### 2.3.6.1.8 Local Image Type

The **rich value type** for a local image represents information for a stored image and associated optional properties.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_localImage" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"_rvRel:LocalImageIdentifier"	i	An integer for a zero-based index. This index MUST reference a <b>CT_RichValueRelRelationship</b> (section <a href="#">2.6.241</a> ).

This rich value type has the additional optional key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"CalcOrigin"	i	Integer value that indicates how the <b>rich value</b> was created.
"Text"	s	String representation of the alt text associated with the image.

### 2.3.6.1.9 SourceAttribution Type

The **rich value type** for SourceAttribution represents information about data source and license.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_sourceattribution" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"Source"	s or r	String or a nested Hyperlink rich value type (section <a href="#">2.3.6.1.5</a> )

This rich value type has the additional optional key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"License"	s or r	String or a nested Hyperlink rich value type (section <a href="#">2.3.6.1.5</a> )

This rich value type has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more information.

Flag	Default Value
ShowInCardView	True
ShowInDotNotation	True
ShowInAutoComplete	True

### 2.3.6.1.10 Stock History Cache Type

The **rich value type** for a stock history cache represents an optional cache of the historical stock data from the **service**. This rich value MAY not be persisted when saved. This cache exists for performance reasons only.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_stockhistorycache".

### 2.3.6.1.11 Web Image Type

The **rich value type** for a web image represents information for an image from a URL and associated optional properties.

This rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_webimage" and MUST have the following **key value pair (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"WebImageIdentifier"	i	An integer for a zero-based index. This index MUST reference a <b>CT_WebImageSupportingRichData</b> (section <a href="#">2.6.217</a> ).

This rich value type has the additional optional key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"Attribution"	spb	An index to a <b>supporting property bag</b> containing information about data source and license.
"Text"	s	String representation of the alt text associated with the image.
"ComputedImage"	b	Boolean value that when true indicates the image can be generated on demand.
"ImageSizing"	i	Integer value that indicates the dimension modes of the image. There are 4 supported values: 0, 1, 2, 3.  At 0, image fits to the cell and maintains its aspect ratio.  At 1, image fits to the cell and ignore its aspect ratio.  At 2, image maintains its original size and MAY exceed the cell boundary.  At 3, image size is customized by "ImageHeight" and "ImageWidth".
"ImageHeight"	d	Real number representation of the image height in pixels. This property SHOULD only be present when "ImageSizing" is set to 3.
"ImageWidth"	d	Real number representation of the image width in pixels. This



CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
		property SHOULD only be present when "ImageSizing" is set to 3
"CalcOrigin"	i	Integer value that indicates how the <b>rich value</b> was created.

This rich value type has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more information.

Flag	Default Value
ShowInCardView	True
ShowInDotNotation	True
ShowInAutoComplete	True

### 2.3.6.1.12 ExternalCodeServiceObject Type

The **rich value type** for an ExternalCodeServiceObject represents information about a Python object.

The rich value type is identified by having a **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute of "\_python" and MUST have the following **key value pairs (KVP)**:

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"Python_str"	s	String representation of the Python object
"Python_type"	s	Type of the Python object
"Python_typeName"	s	Class name of the Python object

The rich value type has the additional optional key value pairs (KVP):

CT_Key "n" attribute	CT_Key "t" attribute	CT_Value
"preview"	r	Index to the <b>rich value</b> used for preview of Python object
"basicValue"	s or n or b or i	Value of fallback for rich value

This rich value type has the following **rich value key flag** definitions for any other key value pairs (KVP). These rich value key flag definitions do not apply to the **rich value keys** listed above. See section [2.3.6.3](#) for more information.

Flag	Default Value
ShowInCardView	True
ShowInDotNotation	True
ShowInAutoComplete	True

### 2.3.6.2 Supporting Property Bags

Each **supporting property bag** is comprised of a set of **key value pairs (KVP)**.

The set of key value pairs (KVP) is defined in **CT\_SupportingPropertyBag** (section [2.6.188](#)) for the values and **CT\_SupportingPropertyBagStructure** (section [2.6.195](#)) for the keys.

Supporting property bags can be the data portion of a key value pair (KVP) in a **rich value** to give extra information.

### 2.3.6.3 Special Keys and Key Flags

All **rich value keys** that begin with a non-alphanumeric ASCII character MAY be used internally to define behavior.

The following rich value keys define special behavior.

Key name	Key definitions
"_Attribution"	This key MUST reference a <b>supporting property bag</b> that contains information about the source and license attribution.
"_CanonicalPropertyNames"	This key MUST reference a supporting property bag that contains <b>key value pairs (KVP)</b> of strings. The <b>supporting property bag key</b> in each pair contains a key that is localized. The corresponding value contains a string representation of the key that is not locale-specific.
"_ClassificationId"	This key references a string value used to apply a Windows Information Protection (WIP) policy.
"_CRID"	Some <b>rich value types</b> MAY put limitations on what type this key MUST reference. See individual rich value type descriptions (under section <a href="#">2.3.6.1</a> ) for any limitations. If this key is a part of a <b>rich value</b> with an unknown rich value type (for more information see section <a href="#">2.3.6.1.3.8</a> ), this rich value MUST be preserved.
"_Display"	This key MUST reference a supporting property bag that contains information that can be used to determine how the rich value is displayed.
"_DisplayString"	This key MUST reference a string that can be shown in the <b>cell</b> .
"_Flags"	This key MUST reference a supporting property bag that contains key value pairs (KVP) containing rich value keys and supporting property bags containing associated <b>rich value key flags</b> , which define behavior for the associated rich value key value pair (KVP).
"_Format"	This key MUST reference a supporting property bag that is a list of indices to a <b>CT_RichStyle</b> (section <a href="#">2.6.170</a> ). The supporting property bag key of the key value pair (KVP) in the supporting property bag determines which rich value key the <b>CT_RichStyle</b> is associated with.
"_Icon"	This key contains a value that describes the icon that can be used in render.
"_Provider"	This key MUST reference a supporting property bag that contains information about the service provider.
"_Self"	This key SHOULD NOT exist in the file and will be removed when the file is saved. When a supporting property bag references this rich value key, it indicates the supporting property bag references the rich value itself, and not a key value pair (KVP) of the rich value.
"_SubLabel"	This key MUST reference a supporting property bag that contains key value pairs (KVP) containing rich value keys and supporting property bags containing strings, which define the label that can be used to describe the associated rich value key value pair (KVP).
"_ViewInfo"	This key MUST reference a supporting property bag that contains information that MAY be used to customize rich value visualizations.

The following rich value key prefix defines special behavior.

Prefix name	Key definitions
"_rvRel"	A rich value key with this prefix MUST reference a <b>CT_RichValueRelRelationship</b> (section <a href="#">2.6.241</a> ).

The following supporting property bag key defines special behavior.

Key name	Key definitions
"^Order"	This supporting property bag key is associated with a <b>supporting property bag array</b> of strings that SHOULD be comprised of rich value keys in the associated rich value and can be used to display the rich value key value pairs (KVP) in a different order.

Rich value keys with defined behavior for all rich value types are listed in **CT\_RichValueGlobalType** (section [2.6.179](#)).

Rich value keys with defined behavior for a particular rich value type are listed in **CT\_RichValueTypes** (section [2.6.186](#)). The rich value type can be identified by matching the **CT\_RichValueType** (section [2.6.182](#)) **name** attribute to the **CT\_RichValueStructure** (section [2.6.180](#)) **t** attribute.

Both **CT\_RichValueGlobalType** and **CT\_RichValueTypes** contain **CT\_RichValueType** (section 2.6.182), which defines the rich value key flags and their values for each of the reserved rich value keys.

Rich value key flags are associated with key value pairs (KVP) and control particular behavior. Any flags that are absent are treated as having a value of false unless the rich value type has a different default for that rich value key flag. See sections under section 2.3.6.1 for specific type definitions.

Rich value key flags are listed here:

Flag name	Flag definitions
ShowInCardView	False indicates that we hide this key value pair (KVP) in the default Card View
ShowInDotNotation	False indicates that we hide this key value pair (KVP) from <b>formulas</b> and the <b>object model</b>
ShowInAutoComplete	False indicates that we hide this key value pair (KVP) from <b>AutoComplete, sort, filter</b> , and Find
ExcludeFromFile	True indicates that we do not write this key value pair (KVP) into the file, it only exists in memory
ExcludeFromCalcComparison	True indicates that we exclude this key value pair (KVP) when comparing rich values.

**CT\_RichValueType** information that is not recognized at runtime will be persisted unless the associated rich value type is removed. **CT\_RichValueType** information that contradicts runtime expectations will be ignored and will not be persisted.

### 2.3.6.4 Rich Styles and Properties

**Rich values** MAY contain particular properties that are used to define the **style** for a given **key value pair (KVP)**. See **CT\_RichFormatProperties** (section [2.6.167](#)) and the "\_Format" **rich value key** (section [2.3.6.3](#)) for more information.

Property Name	Definition
IsHeroFlag	True indicates that the related key value pair (KVP) is the hero image for the rich value. This MAY be emphasized.
IsTitleFlag	True indicates that the related key value pair (KVP) is

Property Name	Definition
	the title for the rich value. This MAY be used for visualizing the rich value.
IsPrimaryFlag	True indicates that the related key value pair (KVP) is the primary for the rich value. This MAY be emphasized.
IsSecondaryFlag	True indicates that the related key value pair (KVP) is the secondary for the rich value. This MAY be emphasized.
IsFooterFlag	True indicates that the related key value pair (KVP) is the footer for the rich value. This MAY be used for visualizing the rich value.
IsCellDisplayFlag	True indicates that the related <b>rich value data</b> MAY be shown in the <b>cell</b> .

### 2.3.7 Threaded Comments

Threaded comments represent a collaborative annotation system that replaces and/or works in addition to legacy comments ([ISO/IEC29500-1:2016] section 18.7). The **comment threads** attached to and associated with **cells** in a **worksheet** are stored separately from other cell content. A comment thread attached to a cell is comprised of a top-level **threaded comment** and its replies, if there are any, to provide annotations, assumptions, instructions, reminders, feedback, collaborative discussion among coauthors, and so forth. A threaded comment specified by complex type **CT\_ThreadedComment** (section 2.6.205) contains information about the author, **mentions** in the comment, and its parent if it is not a top-level comment.

#### 2.3.7.1 Persons

Information about people who have authored and/or have been mentioned in **threaded comments** is specified by complex type **CT\_Person** (section 2.6.203), and is stored separately from the comments.

When a user creates a threaded comment, a person element of **CT\_Person** (section 2.6.203) is generated for the author if it is their first threaded comment in this **workbook**. To associate the author to the comment, the **id** of the person element MUST correspond to the **personId** of the **threadedComment** element specified by complex type **CT\_ThreadedComment** (section 2.6.205).

When a user creates a **mention** within a comment, a person element of **CT\_Person** is generated for the person mentioned if it's the first time the person is mentioned. The **providerId** of the person element MUST be set to "PeoplePicker". To associate the person to the mention, the **id** of the person element MUST correspond to the **mentionpersonId** of the **mention** element specified by complex type **CT\_Mention** (section 2.6.202).

#### 2.3.7.2 Mentions

A **mention** is a portion of the text in a **threaded comment** associated with a person's information. The **startIndex** and the **length** attributes of **CT\_Mention** (section 2.6.202) specify a range in the **text** element of **CT\_ThreadedComment** (section 2.6.205) as the mention text.

#### 2.3.7.3 Legacy Comment Placeholders

To integrate with legacy **comments** ([ISO/IEC29500-1:2016] section 18.7) and aid backward compatibility, a legacy comment placeholder is created along with each top-level **threaded comment**. This legacy comment MAY contain information about threaded comment compatibilities. This comment SHOULD NOT be displayed unless the file is opened in a version that does not support

threaded comments. The **uid** ([ISO/IEC29500-1:2016] section 18.7.3) of the comment SHOULD correspond to the **id** attribute of the associated threaded comment specified by **CT\_ThreadedComment** (section 2.6.205). Additionally, the **author** of the comment MUST contain "tc={uid}", where {uid} is the corresponding threaded comment **id**. The **ref** attribute specified in **comment**([ISO/IEC29500-1:2016] section 18.7.3) SHOULD correspond to the **ref** attribute specified in **CT\_ThreadedComment**. If the **ref** attributes don't match, the **ref** specified in legacy comment placeholder will be used while displaying the threaded comment.

### 2.3.7.3.1 Reconciliation

After all parts are loaded, reconciliation will be done in two steps.

1. Enumerate all top-level **threaded comments** in **comment threads** in the entire **workbook** to adjust their location or delete them.
  - If the corresponding placeholder is at a different location, adjust the comment thread to the location of the first placeholder that corresponds to the comment.
  - If the corresponding placeholder is not found, delete the comment thread.
2. Enumerate all placeholders.
  - If any comment thread has more than one placeholder, copy it for each additional placeholder. Each copied threaded comment, including top-level comment and reply, is assigned a new unique identifier.
  - If a placeholder has no corresponding comment thread, remove the placeholder.

The following table shows how comment loading is handled if changes were made in a previous version of Excel.

Situation	Description	Reconciliation
Move	Corresponding placeholder is at a different location	Change the <b>ref</b> of all the <b>threaded comments</b> in the <b>comment thread</b> to the location of the placeholder.
Delete	Corresponding placeholder is not found	Delete the entire <b>comment thread</b> .
Copy	Multiple corresponding placeholders are found	Copy the entire <b>comment thread</b> for each additional placeholder and assign a new unique id.
Orphan	Placeholder with no corresponding <b>comment thread</b> are found	Delete the placeholder.

### 2.3.8 Named Sheet Views

Named sheet views represent a stored collection of sort and/or filter settings for the **AutoFilters** found on a specific sheet.

A **named sheet view** is associated with **worksheet**, and is made up of a set of **nsvfilters**, with each nsvfilter being associated with a single AutoFilter on the worksheet. A named sheet view only stores sort and/or filter settings that are associated with an AutoFilter and does not include other content.

### 2.3.8.1 Table Filters and Worksheet Filters

Each **AutoFilter** is described by a **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section A.2), and those can be contained within a **CT\_Table** ([\[ISO/IEC29500-1:2016\]](#) section A.2) element or within a **CT\_Worksheet** ([\[ISO/IEC29500-1:2016\]](#) section A.2) element.

When **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section A.2) that describes the AutoFilter is contained within a **CT\_Table** ([\[ISO/IEC29500-1:2016\]](#) section A.2) element then the AutoFilter is considered to be owned by that **table**.

When the **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section A.2) that describes the AutoFilter is contained within a **CT\_Worksheet** ([\[ISO/IEC29500-1:2016\]](#) section A.2) element then the AutoFilter is considered to be owned by that **worksheet**.

### 2.3.8.2 Reconciliation

When loading a file, each **CT\_NsvFilter** (section [2.6.212](#)) needs to be matched with a specific **AutoFilter**. And beyond that each **columnFilter** and **sortRule** within the **nsvfilter** needs to be matched with specific columns within that AutoFilter.

After all parts are loaded this reconciliation is done as sequence of checks in priority order. The match with the highest priority SHOULD be taken. If all checks are exhausted with no match being found the **nsvfilter** SHOULD be dropped. Similarly, if a specific **columnFilter** or **sortRule** element cannot match to a specific column then those elements SHOULD be dropped.

To connect a **CT\_NsvFilter** (section [2.6.212](#)) with to a specific AutoFilter the priority sequence of checks is as follows

1. A match exists between the **filterId** attribute on the **CT\_NsvFilter** (section [2.6.212](#)) and a **uid** (section [2.5.10](#)) attribute stored on a **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section A.2).
2. The **tableId** attribute on the **CT\_NsvFilter** (section [2.6.212](#)) is not equal to 0 AND there is a table owned AutoFilter (as explained in section [2.3.8.1](#)) such that the **tableId** attribute matches the **id** attribute on that **CT\_Table** ([\[ISO/IEC29500-1:2016\]](#) section A.2)
3. The **tableId** attribute on the **CT\_NsvFilter** (section [2.6.212](#)) is 0 AND there is a worksheet owned AutoFilter (as explained in section [2.3.8.1](#))

To map each **columnFilter** element within **CT\_NsvFilter** (section [2.6.212](#)) to a specific column the sequence of checks is as follows

1. The matched AutoFilter is table owned (as explained in section [2.3.8.1](#)) and the **CT\_Table** ([\[ISO/IEC29500-1:2016\]](#) section A.2) describing that **table** contains a **tableColumn** element which specifies **uid** (section [2.5.8](#)) attribute that matches **id** attribute on **CT\_ColumnFilter** (section [2.6.209](#)). In this case **id** attribute on the matching **CT\_TableColumn** ([\[ISO/IEC29500-1:2016\]](#) section A.2) identifies the column this **columnFilter** element applies to.
2. The **ref** attribute on the **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section A.2) that describes the matched AutoFilter specifies a range large enough for the **colId** attribute on **CT\_ColumnFilter** (section [2.6.209](#)) to be a column within that range. In this case the **colId** identifies the column this **columnFilter** element applies to.

To map each **sortRule** element within **CT\_SortRules** (section [2.6.214](#)) to a specific column the sequence of checks is as follows

1. The matched AutoFilter is table owned (as explained in section [2.3.8.1](#)) and the **CT\_Table** ([\[ISO/IEC29500-1:2016\]](#) section A.2) describing that table contains a **tableColumn** element which specifies **uid** (section [2.5.8](#)) attribute that matches **id**

attribute on **CT\_SortRule** (section [2.6.213](#)). In this case **id** attribute on the matching **CT\_TableColumn** ([ISO/IEC29500-1:2016] section A.2) identifies the column this **sortRule** element applies to.

2. The **ref** attribute on the **CT\_AutoFilter** ([ISO/IEC29500-1:2016] section A.2) that describes the matched AutoFilter specifies a range large enough for the **colId** attribute on **CT\_SortRule** (section 2.6.213) to be a column within that range. In this case the **colId** identifies the column this **sortRule** element applies to.

### 2.3.9 Feature Property Bag

A feature property bag described by [CT\\_FeaturePropertyBag](#) (section 2.6.233) is comprised of a type, optional attributes, and an unbounded number of **key value pairs (KVP)**.

The types of feature property bags and their required key value pairs (KVP) are specified in the sub-sections of this section.

#### 2.3.9.1 XFComplements

This type is identified by having a **CT\_FeaturePropertyBag** (section [2.6.233](#)) **type** attribute of "XFComplements" and MUST contain the following **key value pair (KVP)**:

Value Type	Key Name "k"	Child Elements
<b>CT_FeaturePropertyBag</b> (section 2.6.233) <b>a</b> element of type <b>CT_ArrayFeatureProperty</b> (section <a href="#">2.6.229</a> )	"MappedFeaturePropertyBags"	Value contains one or more <b>CT_ArrayFeatureProperty</b> (section 2.6.229) <b>bagId</b> elements that reference to feature property bags of type <b>XFComplement</b> (section <a href="#">2.3.9.2</a> ).

Each **CT\_XFComplement** (section [2.6.238](#)) **i** value MUST reference the zero-based index into the value of key "MappedFeaturePropertyBags".

#### 2.3.9.2 XFComplement

This type is identified by having a **CT\_FeaturePropertyBag** (section [2.6.233](#)) **type** attribute of "XFComplement" and contains additional styles information for an **xf** ([\[ISO/IEC29500-1:2016\]](#) section 18.8.45).

The XFComplement type MUST contain the following **key value pair (KVP)**:

Value Type	Key Name "k"	Value
<b>CT_FeaturePropertyBag</b> (section 2.6.233) <b>bagId</b> element of type <b>CT_BagFeatureProperty</b> (section <a href="#">2.6.230</a> )	"XFControls"	Value contains a reference to a feature property bag of type <b>XFControls</b> (section <a href="#">2.3.9.3</a> )

Each **XFComplement** is referenced by the values of the key "MappedFeaturePropertyBags" (section [2.3.9.1](#)) by zero-based index.

#### 2.3.9.3 XFControls

This type is identified by having a **CT\_FeaturePropertyBag** (section [2.6.233](#)) **type** attribute of "XFControls" and contains Cell Control style information for an **xf** ([\[ISO/IEC29500-1:2016\]](#) section 18.8.45).

A type **XFControls** feature property bag MUST contain the following **key value pair (KVP)**:

Value Type	Key Name "k"	Value
<b>CT_FeaturePropertyBag</b> (section 2.6.233) <b>bagId</b> element of type <b>CT_BagFeatureProperty</b> (section 2.6.230)	"CellControl"	Value contains a reference to another feature property bag of type <b>Checkbox</b> (section 2.3.9.4)

Each **XFControls** is referenced by the value of the key "XFControls" in an **XFComplement** (section 2.3.9.2) feature property bag.

### 2.3.9.4 Checkbox

This type is identified by having a **CT\_FeaturePropertyBag** (section 2.6.233) **type** attribute of "Checkbox" and specifies a checkbox Cell Control.

Each **Checkbox** is referenced from the value of the key "CellControl" in an **XFControls** (section 2.3.9.3) feature property bag.

### 2.3.9.5 DXFComplements

This type is identified by having a **CT\_FeaturePropertyBag** (section 2.6.233) **type** attribute of "DXFComplements" and MUST contain the following **key value pair (KVP)**:

Value Type	Key Name "k"	Child Elements
<b>CT_FeaturePropertyBag</b> (section 2.6.233) <b>a</b> element of type <b>CT_ArrayFeatureProperty</b> (section 2.6.229)	"MappedFeaturePropertyBags"	Value contains one or more <b>CT_ArrayFeatureProperty</b> (section 2.6.229) <b>bagId</b> elements that reference to feature property bags of type <b>XFComplement</b> (section 2.3.9.2).

Each **CT\_DXFComplement** (section 2.6.255) **i** value MUST reference the zero-based index into the value of key "MappedFeaturePropertyBags".

## 2.3.10 Python in Excel

Python in Excel enables the execution of code written in the Python programming language within Excel. The **Python environment** as specified in section 2.3.10.1 is the computational environment that provides necessary initial resources and setup to execute this code. A Python entry in a cell consists of two components, a **PY function** (section 2.3.10.2) and a **Python script** (section 2.3.10.3) referenced by the PY function. The Python script encodes optional parameters passed into the PY function as specified in **Parameter reference encoding** (section 2.3.10.4).

### 2.3.10.1 Python environment

The Python environment is a set of resources that we require for execution of code written in the Python programming language within Excel. The environment definition MUST include a **GUID** that identifies a unique programming environment as specified in **CT\_PythonEnvironmentDefinition** (section 2.6.250). It MUST also include code in the Python programming language as specified in **CT\_PythonInitialization** (section 2.6.251) that is executed to initialize the Python environment. It MAY include a Boolean value as specified in **CT\_PythonInitialization** (section 2.6.251), that if present and set to true specifies that the code to initialize the Python environment has been modified by the user.



### 2.3.10.2 Python Function

A PY function as specified in section [2.2.3](#) enables the Python programming code to be added to Excel.

The first parameter of the function MUST be a 0-based index referencing a **CT\_PythonScript** element that indicates the **Python script** for this function as specified in section [2.6.252](#).

The second parameter of the function MUST take value either 0 or 1.

The function MUST pass the first two parameters. The function can have other optional parameters that if passed, can be referenced by the corresponding **Python script** (section [2.3.10.3](#)).

### 2.3.10.3 Python Script

Each of the **CT\_PythonScript** elements, as specified in section [2.6.252](#) indicates the **Python script** corresponding to a PY function. Any references to the optional parameter passed in a Python function are encoded as specified in section [2.3.10.4](#). A **CT\_PythonScripts** element as specified in section [2.6.253](#) holds the Python scripts corresponding to all PY functions in the workbook.

### 2.3.10.4 Parameter reference encoding

Any references to an optional parameter of the Python function are encoded as %Px% where x specifies the 0-based index of a parameter in the Python function. For example, if the third parameter is to be referenced it would be encoded as %P2%.

## 2.4 Global Elements

### 2.4.1 pivotTableReference

A **pivotTableReference** element is a [CT\\_PivotTableReference](#) type element, as specified in section 2.6.87, that specifies a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) part identifier for the **workbook**. The PivotTable specified by this element MUST be a [Non-Worksheet PivotTable](#). See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

### 2.4.2 pivotTableServerFormats

A **pivotTableServerFormats** is a [CT\\_PivotTableServerFormats](#) element that specifies collection of numeric formats specified by elements of complex type **CT\_ServerFormat** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.86), for a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) that is specified by a [pivotTableReference](#) element in the extension of a **workbook**. See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#). If the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) is not a [Non-Worksheet PivotTable](#), MUST NOT be specified.

### 2.4.3 f

*Target namespace:* <http://schemas.microsoft.com/office/excel/2006/main>

*Referenced by:* [CT\\_WebExtension](#), [CT\\_CfRule](#), [CT\\_Cfvo](#), [CT\\_DataValidationFormula](#), [CT\\_SparklineGroup](#), [CT\\_Sparkline](#), [CT\\_PivotUserEdit](#)

The **f** element is an **ST\_Formula** element, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.18.35, that specifies a generic **formula** that adheres to section [2.2.2](#).

An application can adjust the **cell references** within this formula when the **worksheet** layout changes, even when the containing **ext** element, as specified in [ISO/IEC29500-1:2016] section 18.2.7, is not recognized by the application. See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="f" type="x:ST_Formula"/>
```

See section [5.1](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.4 ref

*Target namespace:* <http://schemas.microsoft.com/office/excel/2006/main>

The **ref** element is a **CT\_Ref** type element, as specified in section [2.6.146](#), that specifies a **cell reference**.

An application can adjust this cell reference when the **worksheet** layout changes, even when the containing **ext** element, as specified in [ISO/IEC29500-1:2016] section 18.2.7, is not recognized by the application. See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ref" type="CT_Ref"/>
```

See section [5.1](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.5 sqref

*Target namespace:* <http://schemas.microsoft.com/office/excel/2006/main>

*Referenced by:* [CT\\_ConditionalFormatting](#), [CT\\_DataValidation](#), [CT\\_Sparkline](#), [CT\\_IgnoredError](#), [CT\\_ProtectedRange](#)

A **sqref** element is a **CT\_Sqref** type element, as specified in section [2.6.147](#), that specifies a list of **cell references**.

An application can adjust these cell references when the **worksheet** layout changes, even when the containing **ext** element, as specified in [ISO/IEC29500-1:2016] section 18.2.7, is not recognized by the application. See [ISO/IEC29500-3:2015] section 10.1.2 for more information about how extension lists are used.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="sqref" type="CT_Sqref"/>
```

See section [5.1](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.4.6 conditionalFormattings

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **conditionalFormattings** element is a **CT\_ConditionalFormattings** type element, as specified in section [2.6.1](#), that specifies **conditional formatting** information for the **worksheet**. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="conditionalFormattings" type="CT_ConditionalFormattings"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.7 dataValidations

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

The **dataValidations** element is a **CT\_DataValidations** type element, as specified in section [2.6.3](#), that specifies a group of **data validation** items on the **sheet**. This element also specifies data validation properties of a sheet that are used by the application user interface. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataValidations" type="CT_DataValidations"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.8 sparklineGroups

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **sparklineGroups** element is a **CT\_SparklineGroups** type element, as specified in section [2.6.6](#), that specifies the groups of **sparklines** on the **sheet**. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="sparklineGroups" type="CT_SparklineGroups"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.9 slicerList

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **slicerList** element is a **CT\_SlicerRefs** type element, as specified in section [2.6.11](#), that specifies a list of slicer, as specified in section [2.3.2](#), part identifiers for the **worksheet**. See section [2.2.4.12](#) for

how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicerList" type="CT_SlicerRefs"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.10 protectedRanges

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **protectedRanges** element is a **CT\_ProtectedRanges** type element, as specified in section [2.6.55](#), that specifies a group of protected **ranges** on the **sheet**. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="protectedRanges" type="CT_ProtectedRanges"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.11 ignoredErrors

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

An **ignoredErrors** element is a **CT\_IgnoredErrors** type element, as specified in section [2.6.53](#), that specifies a list of **cell ranges** and the types of cell errors that are to be ignored for each of those specific cell ranges. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ignoredErrors" type="CT_IgnoredErrors"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.12 pivotCaches

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **pivotCaches** element is a **CT\_PivotCaches** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies a list of **PivotTable**, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **PivotCache** identifier elements. The list of elements specifies the PivotTable **PivotCaches** used by slicer caches, as specified in section [2.1.4](#), with **OLAP** slicer source data, as specified in section [2.3.2.1.1](#). See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotCaches" type="x:CT_PivotCaches"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.13 slicerCaches

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **slicerCaches** element is a **CT\_SlicerCaches** type element, as specified in section [2.6.13](#), that specifies a group of slicer cache, as specified in section [2.1.4](#), identifiers for the **workbook**. See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicerCaches" type="CT_SlicerCaches"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.14 workbookPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **workbookPr** element is a **CT\_WorkbookPr** element, as specified in section [2.6.10](#), that specifies additional properties for a **workbook**. See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="workbookPr" type="CT_WorkbookPr"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.15 calculatedMember

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **calculatedMember** element is a **CT\_CalculatedMember** type element, as specified in section [2.6.15](#), that specifies extended properties of a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **OLAP calculated** member. See section [2.2.4.6](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="calculatedMember" type="CT_CalculatedMember"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.4.16 cacheHierarchy

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **cacheHierarchy** element is a **CT\_CacheHierarchy** type element, as specified in section [2.6.24](#), that specifies the extended properties of a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, named set. See section [2.2.4.6](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="cacheHierarchy" type="CT_CacheHierarchy"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.17 dataField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **dataField** element is a **CT\_DataField** type element, as specified in section [2.6.25](#), that specifies extended information about a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, data **field** item. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataField" type="CT_DataField"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.18 pivotField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **pivotField** element is a **CT\_PivotField** element, as specified in section [2.6.31](#), that specifies properties of a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **field**. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotField" type="CT_PivotField"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.19 pivotTableDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **pivotTableDefinition** element is a **CT\_PivotTableDefinition** type element, as specified in section [2.6.32](#), that specifies additional properties of the PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#)

section 18.10, view. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [ISO/IEC29500-1:2016].

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotTableDefinition" type="CT_PivotTableDefinition"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.20 pivotCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **pivotCacheDefinition** element is a **CT\_PivotCacheDefinition** type element, as specified in section [2.6.33](#), that specifies the extended properties of a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **PivotCache** definition. See section [2.2.4.6](#) for how this element integrates with the Office Open XML file formats specified in [ISO/IEC29500-1:2016].

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotCacheDefinition" type="CT_PivotCacheDefinition"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.21 connection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **connection** element is a **CT\_Connection** type element, as specified in section [2.6.34](#), that specifies the extended properties of an external connection, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.13. If this element exists, the **type** attribute of the ancestor **CT\_Connection** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, **MUST** be equal to "5". See section [2.2.4.1](#) for how this element integrates with the Office Open XML file formats specified in [ISO/IEC29500-1:2016].

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="connection" type="CT_Connection"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.22 table

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **table** element is a **CT\_Table** type element, as specified in section [2.6.35](#), that specifies alternate text properties for the table. See section [2.2.4.10](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="table" type="CT_Table"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.23 slicerStyles

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **slicerStyles** element is a **CT\_SlicerStyles** type element, as specified in section [2.6.51](#), that specifies a group of slicer styles, as specified in section [2.3.2.4](#). See section [2.2.4.9](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicerStyles" type="CT_SlicerStyles"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.24 dxfs

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **dxfs** element is a **CT\_Dxfs** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies the list of style differential formats (DXFs), as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.8. See section [2.2.4.9](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dxfs" type="x:CT_Dxfs"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.25 oleItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

An **oleItem** element is a **CT\_OleItem** type element, as specified in section [2.6.46](#), that specifies an **Object Linking and Embedding (OLE)** data item, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.14, with associated cached values. See section [2.2.4.3](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="oleItem" type="CT_OleItem"/>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).



## 2.4.26 pivotHierarchy

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **pivotHierarchy** element is a **CT\_PivotHierarchy** type element, as specified in section [2.6.47](#), that specifies multiple data items based on the same **OLAP measure** that exists in a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, view. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotHierarchy" type="CT_PivotHierarchy"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.27 cacheField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

The **cacheField** element is a **CT\_CacheField** type element, as specified in section [2.6.48](#), that specifies that duplicate **OLAP measures** exist in a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **PivotCache** definition. See section [2.2.4.6](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="cacheField" type="CT_CacheField"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.28 id

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

An **id** element is an **ST\_Guid** element, as specified in [\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4, that specifies an identifier for a **conditional formatting** rule. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="id" type="x:ST_Guid"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.29 iconFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

An **iconFilter** element is a **CT\_IconFilter** type element, as specified in section [2.6.57](#), that specifies the properties of an **icon filter**. See section [2.2.4.5](#), section [2.2.4.10](#), and section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="iconFilter" type="CT_IconFilter"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.30 filter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **filter** element is a **CT\_Filter** type element, as specified in section [2.6.58](#), that specifies the properties of a **filter**. See section [2.2.4.5](#), section [2.2.4.10](#), and section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="filter" type="CT_Filter"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.31 customFilters

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **customFilters** element is a **CT\_CustomFilters** type element, as specified in section [2.6.59](#), that specifies the properties of **custom filters**. See section [2.2.4.5](#), section [2.2.4.10](#), and section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="customFilters" type="CT_CustomFilters"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.32 sortCondition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **sortCondition** element is a **CT\_SortCondition** type element, as specified in section [2.6.61](#), that specifies a **sort condition** to apply to a **range**. See section [2.2.4.5](#), section [2.2.4.7](#), section [2.2.4.10](#), and section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="sortCondition" type="CT_SortCondition"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.33 sourceConnection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_CacheSourceExt](#)

A **sourceConnection** element is a **CT\_SourceConnection** type element, as specified in section [2.6.62](#), that specifies the name of a connection of the cache source element on a pivot cache. See section [2.2.4.6](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="sourceConnection" type="CT_SourceConnection"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.34 formControlPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **formControlPr** element is a **CT\_FormControlPr** type element, as specified in section [2.6.65](#), that specifies properties of form control objects. This element is the **root element** of the control properties part, as specified in section [2.1.1](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="formControlPr" type="CT_FormControlPr"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.35 dataStoreItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **dataStoreItem** element is a **CT\_DataStoreItem** type element, as specified in section [2.6.66](#), that specifies properties for an embedded custom data part, as specified in section [2.1.2](#). This element is the **root element** of the custom data properties part, as specified in section [2.1.3](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataStoreItem" type="CT_DataStoreItem"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.36 slicers

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **slicers** element is a **CT\_Slicers** type element, as specified in section [2.6.67](#), that specifies all the slicer views, as specified in section [2.3.2.2](#), on the **sheet**. This element is the **root element** of the slicers part, as specified in section [2.3.2](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicers" type="CT_Slicers"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.37 slicer

*Target namespace:* <http://schemas.microsoft.com/office/drawing/2010/slicer>

A **slicer** element is a **CT\_Slicer** type element, as specified in section [2.6.69](#), that specifies which slicer view, as specified in section [2.3.2.2](#), is associated with this drawing element. See section [2.2.4.2](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicer" type="CT_Slicer"/>
```

See section [5.2](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.38 slicerCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

A **slicerCacheDefinition** element is a **CT\_SlicerCacheDefinition** type element, as specified in section [2.6.70](#), that specifies a slicer cache, as specified in section [2.3.2.1](#). This element is the **root element** of the slicer cache part.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicerCacheDefinition" type="CT_SlicerCacheDefinition"/>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.39 pivotCaches

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **pivotCaches** element is a **CT\_PivotCaches** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2 that specifies a list of **PivotTable**, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **PivotCache** identifier elements. The list of elements specifies the PivotTable **PivotCaches**. See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#). The **pivotCacheDefinition** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.67) element identified by the [relationship](#) identifier in the **CT\_PivotCache** ([\[ISO/IEC29500-4:2016\]](#) section A.2) child element of this element, MUST satisfy the following criteria.

- There MUST be a [CT\\_PivotCacheIdVersion](#) element in the extension of the element **pivotCacheDefinition**.

- The **type** attribute of the **CT\_CacheSource** ([ISO/IEC29500-4:2016] section A.2) child element of the element **pivotCacheDefinition**, MUST have the value **external** specified by **ST\_SourceType** ([ISO/IEC29500-1:2016] 18.18.75).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotCaches" type="x:CT_PivotCaches"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.40 pivotTableReferences

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **pivotTableReferences** element is a [CT\\_PivotTableReferences](#) element, as specified in section 2.6.86, that specifies a list of PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) part identifiers for the **workbook**. See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotTableReferences" type="CT_PivotTableReferences"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.41 queryTable

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **CT\_QueryTable** element (section [2.6.88](#)) that specifies extended properties of a **query table** ([\[ISO/IEC29500-1:2016\]](#) section 18.12).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="queryTable" type="CT_QueryTable"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.42 webExtensions

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_WebExtensions](#) element that specifies a group of [CT\\_WebExtension](#) elements that specify Bindings on the Web Extensions, as specified by [\[MS-OWEXML\]](#) section 1.3, on the **worksheet**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="webExtensions" type="CT_WebExtensions"/>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.43 connection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_Connection](#) element that specifies the extended properties of an external connection.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="connection" type="CT_Connection"/>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.44 calculatedMember

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_CalculatedMemberExt](#)

A [CT\\_CalculatedMember](#) (section [2.6.93](#)) element that specifies a definition for a custom member or measure that is applied to a pivot table.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="calculatedMember" type="CT_CalculatedMember"/>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.45 pivotTableUISettings

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_PivotTableUISettings](#) element that specifies state of the **PivotTable field list** for this PivotTable ([ISO/IEC29500-1:2016] section 18.10).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotTableUISettings" type="CT_PivotTableUISettings"/>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.46 pivotFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_PivotFilter](#) element that specifies the extended properties of a **filter (PivotTable Advanced Filter)**, as specified in ([ISO/IEC29500-1:2016] section 18.10.1.33). See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [ISO/IEC29500-1:2016].

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotFilter" type="CT_PivotFilter"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.47 slicerCaches

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_SlicerCaches](#) element that specifies a group of slicer cache, as specified in section [2.1.4](#), identifiers for the **workbook**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicerCaches" type="x14:CT_SlicerCaches"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.48 tableSlicerCache

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_TableSlicerCache](#) element that specifies a table **data source** for the [slicer cache](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="tableSlicerCache" type="CT_TableSlicerCache"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.49 timelineCacheRefs

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **timelineCacheRefs** element is a **CT\_TimelineCacheRefs** type element, as specified in section [2.6.98](#), that specifies a group of **Timeline Cache** (section [2.3.5.1](#)) identifiers for the **workbook**. See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timelineCacheRefs" type="CT_TimelineCacheRefs"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.50 timelineRefs

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **timelineRefs** element is a **CT\_TimelineRefs** type element, as specified in section [2.6.100](#), that specifies a list of Timeline (section [2.3.5](#)) part identifiers for the **worksheet**. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timelineRefs" type="CT_TimelineRefs"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.51 timelineCachePivotCaches

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **timelineCachePivotCaches** element is a **CT\_PivotCaches** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2 that specifies a list of **PivotTable**, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **PivotCache** identifier elements. The list of elements specifies the PivotTable **PivotCaches**. This element MUST be associated with a Timeline (section [2.3.5](#)). See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timelineCachePivotCaches" type="x:CT_PivotCaches"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.52 cacheHierarchy

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **CT\_CacheHierarchy** element that specifies the extended properties of an **OLAP measure**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="cacheHierarchy" type="CT_CacheHierarchy"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.53 slicerCacheHideItemsWithNoData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **CT\_SlicerCacheHideNoData** element that specifies the extended properties of a  **slicer cache**, as specified in section 2.3.2.1. If this element exists, the **non-OLAP slicer items** that have no data in its ancestor slicer cache are not displayed and the **OLAP slicer items** that have no data are not displayed for the **OLAP levels** specified by the **uniqueName** attribute of the **CT\_SlicerCacheOlapLevelName** element.



The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicerCacheHideItemsWithNoData" type="CT_SlicerCacheHideNoData"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.54 timelineStyles

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **timelineStyles** element is a **CT\_TimelineStyles** type element, as specified in section [2.6.105](#), that specifies a group of timeline styles, as specified in section [2.3.5.4](#). See section [2.2.4.9](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timelineStyles" type="CT_TimelineStyles"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.55 dxfs

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **dxfs** element is a **CT\_Dxfs** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies the list of style differential formats (DXFs), as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.8. See section [Styles](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dxfs" type="x:CT_Dxfs"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.56 timelinePivotCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **timelinePivotCacheDefinition** element is a **CT\_TimelinePivotCacheDefinition** element that specifies the extended properties of a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, **PivotCache** definition. See section [2.2.4.6](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timelinePivotCacheDefinition" type="CT_TimelinePivotCacheDefinition"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.57 timelines

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **timelines** element is a **CT\_Timelines** type element, as specified in section [2.6.110](#), that specifies all the Timeline views (section [2.3.5.2](#)), on the **sheet**. This element is the **root element** of the Timelines part (section [2.3.5](#)).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timelines" type="CT_Timelines"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.58 timelineCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **timelineCacheDefinition** element is a **CT\_TimelineCacheDefinition** type element, as specified in section [2.6.112](#), that specifies a Timeline cache (section [2.3.5.1](#)). This element is the **root element** of the Timeline cache part.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timelineCacheDefinition" type="CT_TimelineCacheDefinition"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.59 workbookPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **workbookPr** element is a **CT\_WorkbookPr** (section [2.6.117](#)) element that specifies additional properties for a **workbook**. See section [2.2.4.11](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="workbookPr" type="CT_WorkbookPr"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.60 slicerCachePivotTables

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **CT\_SlicerCachePivotTables** element (section [2.6.72](#)) that specifies a group of **CT\_SlicerCachePivotTable** elements (section [2.6.73](#)) that specify the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views that are filtered by the slicer cache (section [2.1.4](#)). The PivotTables specified by the **CT\_SlicerCachePivotTable** (section [2.6.73](#)) child elements of this element **MUST** be Non-Worksheet PivotTables (section [2.3.3](#)).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="slicerCachePivotTables" type="x14:CT_SlicerCachePivotTables"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.61 cachedUniqueNames

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_CachedUniqueNames](#) element that specifies the **MDX unique names** for PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache items in this **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache **field**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="cachedUniqueNames" type="CT_CachedUniqueNames"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.62 dataModel

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_DataModel](#) element that specifies properties of **spreadsheet data model**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataModel" type="CT_DataModel"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.63 pivotTableData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **pivotTableData** element is a [CT\\_PivotTableData](#) element that specifies the **PivotValues** of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10), specified by the [pivotTableReference](#) element in the extension of a **workbook**. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#). If the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) is not a [Non-Worksheet PivotTable](#), MUST NOT be specified.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotTableData" type="CT_PivotTableData"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.64 pivotCacheIdVersion

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A [CT\\_PivotCacheIdVersion](#) element that specifies the extended properties of a PivotTable ([ISO/IEC29500-1:2016] section 18.10) **PivotCache Definition**. If this element exists, there MUST be a preceding [CT\\_PivotCacheDefinition](#) element and the **pivotCacheId** attribute of the preceding [CT\\_PivotCacheDefinition](#) element MUST be equal to one of the following:-

- The **cacheId** attribute of the [CT\\_PivotTableData](#) element in the PivotTable part that specifies a [Non-Worksheet PivotTable](#).
- The **pivotCacheId** attribute of the [CT\\_TimelineState](#) (section [2.6.116](#)) child element of a [CT\\_TimelineCacheDefinition](#) (section [2.6.112](#)) element that specifies a [Timeline cache](#).

See section [2.2.4.6](#) for how this element integrates with the Office Open XML file formats specified in [ISO/IEC29500-1:2016].

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotCacheIdVersion" type="CT_PivotCacheIdVersion"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.65 timeslicer

*Target namespace:* <http://schemas.microsoft.com/office/drawing/2012/timeslicer>

A [CT\\_Timeline](#) element that specifies which [timeline view](#) is associated with this drawing element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="timeslicer" type="CT_Timeline"/>
```

See section [5.7](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.66 list

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2011/1/ac>

An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) element that specifies the first formula in the DataValidation dropdown used for custom or list type data validation. Only used when items need to be quoted.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="list" type="x:ST_Xstring"/>
```

See section [5.6](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.67 absPath

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac>

A [CT\\_AbsolutePath](#) element that specifies the absolute path to the workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="absPath" type="CT_AbsolutePath"/>
```

See section [5.9](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.68 dataField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **dataField** element is a **CT\_DataField** type element, as specified in section [2.6.141](#), that specifies extended information about a PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, data **field** item. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataField" type="CT_DataField"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.69 survey

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A **survey** element is a **CT\_Survey** type element, as specified in section [2.6.142](#), that specifies the properties of a survey associated with a Table ([\[ISO/IEC29500-1:2016\]](#) section 18.5). This element is the **root element** of the Survey part (section [2.1.9](#))

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="survey" type="CT_Survey"/>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.4.70 contentPart

*Target namespace:* <http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing>

A [CT\\_ContentPart](#) element that specifies a reference to **XML** content.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="contentPart" type="CT_ContentPart"/>
```

See section [5.8](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.71 modelTimeGroupings

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2014/11/main>

A **CT\_ModelTimeGroupings** (section [2.6.154](#)) element that specifies the data model time groupings in this workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="modelTimeGroupings" type="CT_ModelTimeGroupings"/>
```

See section [5.10](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.72 revisionPtr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2014/revision>

A **CT\_RevisionPtr** element that specifies metadata supporting runtime scenarios for Microsoft Excel. It MUST be ignored and MUST NOT be saved by all others.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="revisionPtr" type="CT_RevisionPtr"/>
```

See section [5.15](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.73 pivotTableDefinition16

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout>

A **CT\_PivotTableDefinition16** element that specifies additional properties of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotTableDefinition16" type="CT_PivotTableDefinition16"/>
```

See section [5.19](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.74 arrayData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

A **CT\_ArrayData** element that specifies arrays in **rich values** called **rich arrays**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="arrayData" type="CT_ArrayData"/>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.4.75 richStyleSheet

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

A [CT\\_RichStylesheet](#) element that specifies the collection of **dxfs**, as specified in section [2.4.55](#), **CT\_RichFormatProperties**, as specified in section [2.6.167](#), and **CT\_RichStyles**, as specified in section [2.6.172](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="richStyleSheet" type="CT_RichStylesheet"/>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.4.76 rvb

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

A [CT\\_RichValueBlock](#) element that specifies the index to the **rich value**, as specified in section [2.6.176](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="rvb" type="CT_RichValueBlock"/>
```

See section [5.21](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.4.77 rvData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

A [CT\\_RichValueData](#) element that specifies **rich value data**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="rvData" type="CT_RichValueData"/>
```

See section [5.21](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.4.78 rvStructures

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

A [CT\\_RichValueStructures](#) element that specifies **rich value** structures, which contain lists of **rich value keys** and the **data types** for the corresponding **rich value data**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="rvStructures" type="CT_RichValueStructures"/>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.79 rvTypesInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

A [CT\\_RichValueTypesInfo](#) element that specifies information related to **rich value types**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="rvTypesInfo" type="CT_RichValueTypesInfo"/>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.80 spbStructures

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

A [CT\\_SupportingPropertyBagStructures](#) element that specifies **supporting property bag** structures, which contain lists of **supporting property bag keys** and the **data types** for the corresponding **supporting property bag data**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="spbStructures" type="CT_SupportingPropertyBagStructures"/>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.81 supportingPropertyBags

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

A [CT\\_SupportingPropertyBags](#) element that specifies **supporting property bag data**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="supportingPropertyBags" type="CT_SupportingPropertyBags"/>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.4.82 calcFeatures

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures>



A [CT\\_CalcFeatures](#) element that specifies a list of **CT\_CalcFeature** elements (section [2.6.199](#)). These elements add granularity to the version of the calc engine along with the **calcId** ([\[ISO/IEC29500-1:2016\]](#) section 18.2.2).

Each **CT\_CalcFeature** element contains the name of a calculation engine feature that was present when the workbook was **calculated**. This is used with the **calcId** to determine the version of the calculation engine. When a workbook is opened, the application will recalculate if the **calcId** value is at least 179016 and any of the features present in the current version of the calculation engine are not represented in this element. See **CalcPr** ([\[ISO/IEC29500-1:2016\]](#) section 18.2.2) for more information about the calculation engine. See **CT\_CalcFeature** for a list of calculation engine features.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="calcFeatures" type="CT_CalcFeatures"/>
```

See section [5.22](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.83 filterColumn

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

A [CT\\_RichFilterColumn](#) element that specifies **filter** information associated with **rich values**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="filterColumn" type="CT_RichFilterColumn"/>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.84 richSortCondition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

A [CT\\_RichSortCondition](#) element that specifies **sort conditions** associated with **rich values**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="richSortCondition" type="CT_RichSortCondition"/>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.85 personList

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

A [CT\\_PersonList](#) element that specifies a list of person information associated with a collection of **threaded comments** and **mentions**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="personList" type="CT_PersonList"/>
```

See section [5.23](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.86 ThreadedComments

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

A [CT\\_ThreadedComments](#) element that specifies a collection of **threaded comments** on the associated sheet.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ThreadedComments" type="CT_ThreadedComments"/>
```

See section [5.23](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.87 dynamicArrayProperties

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray>

A [CT\\_DynamicArrayProperties](#) element that specifies properties of a **dynamic array**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dynamicArrayProperties" type="CT_DynamicArrayProperties"/>
```

See section [5.25](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.88 namedSheetViews

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews>

A [CT\\_NamedSheetViews](#) element that specifies a collection of **named sheet views**

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="namedSheetViews" type="CT_NamedSheetViews"/>
```

See section [5.26](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.89 externalLinksPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops>

A [CT\\_ExternalLinksPr](#) element that specifies extended properties applicable to all external links of this workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="externalLinksPr" type="CT_ExternalLinksPr"/>
```

See section [5.27](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.90 webImagesSrd

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage>

A [CT\\_WebImagesSupportingRichData](#) element that specifies properties for web image rich values. For more information see section [2.3.6.1.11](#).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="webImagesSrd" type="CT_WebImagesSupportingRichData"/>
```

See section [5.28](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.91 implicitMeasureSupport

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020>

A boolean ([XMLSCHEMA2/2] section 3.2.2) element that specifies whether the **data connection** associated with this pivot cache supports the use of measures defined by the client.

Value	Meaning
"true"	The data connection associated with this pivot cache supports client defined measures.
"false"	The data connection associated with this pivot cache does not support client defined measures.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="implicitMeasureSupport" type="xsd:boolean"/>
```

See section [5.29](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.92 refreshIntervals

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh>

A [CT\\_RichValueRefreshIntervals](#) element that specifies a collection of refresh intervals for the **rich value type** specified in the **CT\_RichValueType** (section [2.6.182](#)).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="refreshIntervals" type="CT_RichValueRefreshIntervals"/>
```

See section [5.31](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.93 dataFieldFutureData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020>

A [CT\\_DataFieldFutureData](#) element that specifies extended information about a **PivotTable data field**, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10. See section [2.2.4.5](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="dataFieldFutureData" type="CT_DataFieldFutureData"/>
```

See section [5.29](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.94 ignorableAfterVersion

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020>

A [CT\\_Ignorable](#) element that specifies that the parent element SHOULD be ignored if the [CT\\_PivotCacheIdVersion](#) of the associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **PivotCache** definition is greater than or equal to the value specified.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="ignorableAfterVersion" type="CT_Ignorable"/>
```

See section [5.29](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.95 cacheVersionInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo>

A [CT\\_CacheVersionInfo](#) element that specifies versioning information about the associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **PivotCache**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="cacheVersionInfo" type="CT_CacheVersionInfo"/>
```

See section [5.32](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.96 pivotVersionInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo>

A [CT\\_PivotVersionInfo](#) element that specifies versioning information about the associated PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="pivotVersionInfo" type="CT_PivotVersionInfo"/>
```

See section [5.32](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.97 alternateUrls

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021>

A [CT\\_ExternalBookAlternateUrls](#) element that represent additional Urls and Ids to the external book which is supplying data to the current workbook

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="alternateUrls" type="CT_ExternalBookAlternateUrls"/>
```

See section [5.34](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.98 FeaturePropertyBags

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

A [CT\\_FeaturePropertyBags](#) element that specifies a list of [CT\\_FeaturePropertyBag](#) elements and [CT\\_BagExtensions](#) elements.

See section [2.3.9](#) for more information about feature property bag.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="FeaturePropertyBags" type="CT_FeaturePropertyBags"/>
```

See section [5.36](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.99 xfComplement

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_XfComplementExt](#)

A [CT\\_XfComplement](#) element that specifies an **xf** ([\[ISO/IEC29500-1:2016\]](#) section 18.8.10) has an implicit relationship to a feature property bag of type **XfComplements** (section [2.3.9.1](#)). This element indicates that a **Feature Property Bag** part (section [2.1.22](#)) **MUST** be present in the package.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="xfComplement" type="CT_XfComplement"/>
```

See section [5.36](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.4.100 richValueRels

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel>

A [CT\\_RichValueRels](#) element that specifies a list of **rich value** relationships.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="richValueRels" type="CT_RichValueRels"/>
```

See section [5.35](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.101 externalCodeService

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService>

*Referenced by:* [CT\\_ExternalCodeServiceExt](#)

A [CT\\_ExternalCodeService](#) element that specifies properties related to an **external code service**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="externalCodeService" type="CT_ExternalCodeService"/>
```

See section [5.38](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.102 python

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/python>

A [CT\\_Python](#) element that specifies the **Python scripts** added to the workbook and information about the Python environment used to execute these Python scripts.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="python" type="CT_Python"/>
```

See section [5.39](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.4.103 DXFComplement

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_DXFComplementExt](#)

A [CT\\_DXFComplement](#) element that specifies a **dxf** ([\[ISO/IEC29500-1:2016\]](#) section 18.8.14) has an implicit relationship to a feature property bag of type **DXfComplements** (section [2.3.9.5](#)). This element indicates that a **Feature Property Bag** part (section [2.1.22](#)) **MUST** be present in the package.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="DXFComplement" type="CT_DXFComplement"/>
```

See section [5.36](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.104 aggregationInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation>

A [CT\\_AggregationInfo](#) element that specifies the **aggregation function** for the **PivotTable data field**. If this element is present, the **subtotal** attribute of the associated **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data **field** item ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.22) SHOULD [<6>](#) be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="aggregationInfo" type="CT_AggregationInfo"/>
```

See section [5.40](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

#### 2.4.105 featureSupportInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation>

A [CT\\_FeatureSupport](#) element that specifies versioning information for the **PivotTable field** that if supported allows the associated PivotTable field to be ignored. If this element is present, the associated **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **field** SHOULD [<7>](#) be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this element.

```
<xsd:element name="featureSupportInfo" type="CT_FeatureSupport"/>
```

See section [5.40](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.5 Global Attributes

### 2.5.1 coauthVersionLast

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/revision6>

*Referenced by:* [CT\\_RevisionPtr](#)

An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that SHOULD be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="coauthVersionLast" type="xsd:unsignedInt"/>
```

See section [5.14](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.5.2 coauthVersionMax

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/revision6>

*Referenced by:* [CT\\_RevisionPtr](#)

An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that SHOULD be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="coauthVersionMax" type="xsd:unsignedInt"/>
```

See section [5.14](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.5.3 dyDescent

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac>

The **dyDescent** attribute is a **double** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.2.5, that specifies the vertical distance in **pixels** from the bottom of the **cells** in the current **row** to the typographical baseline of the cell content if, hypothetically, the **zoom level** for the **sheet** containing this row is 100 percent and the cell has bottom-alignment formatting. See section [2.2.4.12](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#). The **dyDescent** attribute has a side effect; it sets the **customHeight** attribute to true even if the **customHeight** attribute is explicitly set to false.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="dyDescent" type="xsd:double"/>
```

See section [5.5](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.5.4 formatCode16

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2015/02/main>

The **formatCode16** attribute [<8>](#) is an ST\_Xstring ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the number format codes for this number format. If present, the **formatCode16** attribute takes precedence over the **formatCode** attribute ([\[ISO/IEC29500-1:2016\]](#) section 18.8.31).

The contents of the **formatCode16** attribute are identical to that of the **formatCode** attribute ([\[ISO/IEC29500-1:2016\]](#) section 18.8.31), with the following modifications to the "International Considerations" therein. The syntax for the **formatCode16** attribute's currency and locale/date system/number system information is [ $\$$ <currency string>-<culture info>[,<calendar type and numeral system>]].

The currency string is the string to use as a currency symbol.

The culture info is a culture tag, which can be either an IETF language tag ([\[RFC5646\]](#)) or one of the following private use namespace tags.

Value	Meaning
x-sysdate	System long date format. Cannot be combined with other



Value	Meaning
	culture tags.
x-systime	System time format. Cannot be combined with other culture tags.
x-euro1	Trailing generic Euro currency. Cannot be combined with other culture tags.
x-euro2	Leading generic Euro currency. Cannot be combined with other culture tags.
x-genlower	Use genitive lowercase form for any full month names in the format (Russian language only). Append to IETF language tag, for example, "ru-RU-x-genlower".
x-genupper	Use genitive uppercase form for any full month names in the format (Russian language only). Append to IETF language tag, for example, "ru-RU-x-genupper".
x-nomlower	Use nominative lowercase form for any full month names in the format (Russian language only). Append to IETF language tag, for example, "ru-RU-x-nomlower".
x-xbt1	Trailing Bitcoin currency. Cannot be combined with other culture tags.
x-xbt2	Leading Bitcoin currency. Cannot be combined with other culture tags.

The optional calendar type and numeral system data is a 16-bit number in hexadecimal form that is placed after a culture tag, separated by a comma. The contents are defined by the **formatCode** attribute ([ISO/IEC29500-1:2016] section 18.8.31), with the following modification: The calendar type is stored in byte 0 (the least significant byte) and the numeral system is stored in byte 1 (the most significant byte).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="formatCode16" type="x:ST_Xstring"/>
```

See section [5.11](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.5.5 knownFonts

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac>

The **knownFonts** attribute is a **Boolean** attribute, as specified in ([XMLSCHEMA2/2] section 3.2.2, that specifies the typographical descent information that is stored in the **workbook**. See section [2.2.4.9](#) for how this element integrates with the Office Open XML file formats specified in [ISO/IEC29500-1:2016].

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="knownFonts" type="xsd:boolean"/>
```

See section [5.5](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.5.6 misleadingFormat

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/08/main>

A boolean ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from the possibly misleading number formatting of numeric formula results.

Value	Meaning
"true"	Ignore errors arising from the possibly misleading number formatting of numeric formula results.
"false"	Do not ignore errors arising from the possibly misleading number formatting of numeric formula results.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="misleadingFormat" type="xsd:boolean"/>
```

See section [5.24](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.5.7 uid

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2015/revision2>

*Referenced by:* [CT\\_SparklineGroup](#)

An ST\_Guid ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a unique identifier associated with the referencing type.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="uid" type="x:ST_Guid"/>
```

See section [5.16](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.5.8 uid

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/revision3>

An ST\_Guid ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a unique identifier associated with the referencing type.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="uid" type="x:ST_Guid"/>
```

See section [5.17](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.5.9 uid

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/revision9>

An ST\_Guid ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a unique identifier associated with the referencing type.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="uid" type="x:ST_Guid"/>
```

See section [5.13](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.5.10 uid

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2014/revision>

*Referenced by:* [CT DataValidation](#)

An ST\_Guid ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies a unique identifier associated with the referencing type.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="uid" type="x:ST_Guid"/>
```

See section [5.15](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.5.11 uid

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/revision10>

*Referenced by:* [CT SlicerCacheDefinition](#), [CT Slicer](#), [CT Timeline](#), [CT TimelineCacheDefinition](#)

An ST\_Guid ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies a unique identifier associated with the referencing type.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="uid" type="x:ST_Guid"/>
```

See section [5.12](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.5.12 uid

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/revision6>

An ST\_Guid ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies a unique identifier associated with the referencing type.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="uid" type="x:ST_Guid"/>
```

See section [5.14](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.5.13 uidLastSave

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/revision10>

*Referenced by:* [CT\\_RevisionPtr](#)

An ST\_Guid ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that SHOULD be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this attribute.

```
<xsd:attribute name="uidLastSave" type="x:ST_Guid"/>
```

See section [5.12](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6 Complex Types

### 2.6.1 CT\_ConditionalFormattings

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [conditionalFormattings](#)

The **CT\_ConditionalFormattings** complex type specifies **conditional formatting** information for the **worksheet**.

*Child Elements:*

**conditionalFormatting:** A **CT\_ConditionalFormatting** element (section [2.6.2](#)) that specifies the conditional formatting properties for a **range**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ConditionalFormattings">
  <xsd:sequence>
    <xsd:element name="conditionalFormatting" type="CT_ConditionalFormatting" minOccurs="1"
      maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.2 CT\_ConditionalFormatting

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_ConditionalFormattings](#)

The **CT\_ConditionalFormatting** complex type specifies **conditional formatting** properties for a **range**.

*Child Elements:*

**cfRule:** A **CT\_CfRule** element (section [2.6.27](#)) that specifies a conditional formatting rule for this range.

**xm:sqref:** A **sqref** element (section [2.4.5](#)) that specifies the range this conditional formatting applies to.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**pivot:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether this conditional formatting is applied only to a **PivotTable**. MUST be a value from the following table.

Value	Meaning
"true"	The area specified by <b>sqref</b> only includes cells that are part of a PivotTable data area.
"false"	The area specified by <b>sqref</b> includes cells that are not part of a PivotTable data area.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ConditionalFormatting">
  <xsd:sequence>
    <xsd:element name="cfRule" type="CT_CfRule" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element ref="xm:sqref" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" minOccurs="0" type="x:CT_ExtensionList"/>
  </xsd:sequence>
  <xsd:attribute name="pivot" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.3 CT\_DataValidations

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [dataValidations](#)

**CT\_DataValidations** is a complex type that specifies a group of **data validation** items on the **sheet**. MUST contain less than or equal to 65,534 elements. This complex type also specifies data validation properties of a sheet that are used by the application UI.

*Child Elements:*

**dataValidation:** A **CT\_DataValidation** element (section [2.6.5](#)) that specifies the properties for a single data validation item defined on a **range** of the sheet.

*Attributes:*

**disablePrompts:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether all data validation input prompts are disabled for this sheet.

Value	Meaning
"true"	All data validation input prompts are disabled for this sheet.

Value	Meaning
"false"	The data validation input prompts are enabled for this sheet.

**xWindow:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the x-coordinate, relative to the application window, of the upper-left corner of the data validation input prompt, measured in pixels. This value MUST be less than or equal to 65,535. <9>

**yWindow:** An **unsignedInt** attribute that specifies the y-coordinate, relative to the application window, of the upper-left corner of the data validation input prompt, measured in pixels. This value MUST be less than or equal to 65,535. <10>

**count:** An **unsignedInt** attribute that specifies the number of **dataValidation** child elements of this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataValidations">
  <xsd:sequence>
    <xsd:element name="dataValidation" type="CT_DataValidation" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="disablePrompts" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="xWindow" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="yWindow" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
```

See section 5.4 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.4 CT\_DataValidationFormula

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_DataValidation](#)

**CT\_DataValidationFormula** is a complex type that specifies a **formula** used in **data validation**.

*Child Elements:*

**xm:f:** An **f** element (section 2.4.3) that specifies a formula for the data validation. The formula MUST adhere to the grammar provided in section 2.2.2, with the following restrictions:

- MUST NOT use the ref-infix-operator, local-cell-reference, bang-reference, bang-name, array-constant, sheet-range-reference, py-params, lambda-params, or structure-reference production rules.
- MUST be an external-cell-reference if used by the **formula1** element of the ancestor **CT\_DataValidation** element (section 2.6.5), and the **formula1** element of the ancestor **CT\_DataValidation** element uses the external-cell-reference production rule, and the **type** attribute of the ancestor **CT\_DataValidation** element is "list".
- MUST NOT be an external-cell-reference that references more than one cell if used by the **formula1** element of the ancestor **CT\_DataValidation** element and the **type** attribute of the ancestor **CT\_DataValidation** element is not "list".

- MUST NOT be an external-cell-reference that references more than one cell if used by the **formula2** element of the ancestor **CT\_DataValidation** element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataValidationFormula">
  <xsd:sequence>
    <xsd:element ref="xm:f" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.5 CT\_DataValidation

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_DataValidations](#)

**CT\_DataValidation** is a complex type that specifies **data validation** for a **range** on this **sheet**.

*Child Elements:*

**formula1:** A **CT\_DataValidationFormula** element (section [2.6.4](#)) that specifies the first **formula** for the data validation.

- If **operator** is "between" or "notBetween" and **type** is not "custom", "list", or "none", this formula is used as the lesser of two bounding values and MUST exist.
- If **operator** is not "between" or "notBetween", or **type** is "custom", this formula is the only formula and MUST exist.
- If **operator** is not "between" or "notBetween", or **type** is "custom" or "list", either formula is the only formula and MUST exist or **CT\_DataValidation** MUST have a **list** (section [2.4.66](#)) child element.
- If the **type** is "none", this formula MUST NOT exist.

**formula2:** A **CT\_DataValidationFormula** element that specifies the second formula for the data validation.

- If **operator** is "between" or "notBetween" and **type** is not "custom", "list", or "none", this formula is used as the greater of two bounding values and MUST exist.
- If **operator** is not "between" or "notBetween", or **type** is "custom", "list", or "none", this formula MUST NOT exist.

**xm:sqref:** A **sqref** element (section [2.4.5](#)) that specifies ranges to which data validation is applied.

*Attributes:*

**type:** An **ST\_DataValidationType** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.21) attribute that specifies the type of data validation.

**errorStyle:** An **ST\_DataValidationErrorStyle** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.18) attribute that specifies the style of error alert used for this data validation.

**imeMode:** An **ST\_DataValidationImeMode** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.19) attribute that specifies the **Input Method Editor (IME)** mode enforced by this data validation.

**operator:** An **ST\_DataValidationOperator** ([ISO/IEC29500-1:2016] section 18.18.20) attribute that specifies the relational operator used with this data validation. If **type** is "custom", "list", or "none", the value of the **operator** attribute is undefined and MUST be ignored.

**allowBlank:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the data validation treats empty or blank entries as valid.

Value	Meaning
"true"	The data validation treats empty or blank entries as valid.
"false"	The data validation treats empty or blank entries as invalid.

**showDropDown:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to display the drop-down combo box for a list type data validation.

Value of showDropDown	Value of type	Meaning
"true"	list	Displays the drop-down combo box.
"false"	list	Suppresses the drop-down combo box.

**showInputMessage:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to display the input prompt message.

Value	Meaning
"true"	Display the input prompt message.
"false"	Suppress the input prompt message.

**showErrorMessage:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to display the error alert message.

Value	Meaning
"true"	Display the error alert message.
"false"	Suppress the error alert message.

**errorTitle:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the text of the title bar of the error alert. The length of this string MUST be less than or equal to 32 characters.

**error:** An **ST\_Xstring** attribute that specifies the message text of the error alert. The length of this string MUST be less than or equal to 225 characters.

**promptTitle:** An **ST\_Xstring** attribute that specifies the text of the title bar of the input prompt. The length of this string MUST be less than or equal to 32 characters.

**prompt:** An **ST\_Xstring** attribute that specifies the message text of the input prompt. This string MUST be less than or equal to 255 characters.



**xr:uid:** An ST\_Guid ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a unique identifier associated with this data validation rule

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataValidation">
  <xsd:sequence>
    <xsd:element name="formula1" type="CT_DataValidationFormula" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="formula2" type="CT_DataValidationFormula" minOccurs="0"
maxOccurs="1"/>
    <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="type" type="x:ST_DataValidationType" use="optional" default="none"/>
  <xsd:attribute name="errorStyle" type="x:ST_DataValidationErrorStyle" use="optional"
default="stop"/>
  <xsd:attribute name="imeMode" type="x:ST_DataValidationImeMode" use="optional"
default="noControl"/>
  <xsd:attribute name="operator" type="x:ST_DataValidationOperator" use="optional"
default="between"/>
  <xsd:attribute name="allowBlank" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="showDropDown" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="showInputMessage" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="showErrorMessage" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="errorTitle" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="error" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="promptTitle" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="prompt" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute ref="xr:uid"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.6 CT\_SparklineGroups

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [sparklineGroups](#)

**CT\_SparklineGroups** is a complex type that specifies the groups of **sparklines** on the **sheet**. MUST contain fewer than  $2^{31}$  elements.

*Child Elements:*

**sparklineGroup:** A **CT\_SparklineGroup** element (section [2.6.7](#)) that specifies properties for a single sparkline group.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SparklineGroups">
  <xsd:sequence>
    <xsd:element name="sparklineGroup" type="CT_SparklineGroup" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.7 CT\_SparklineGroup

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_SparklineGroups](#)

**CT\_SparklineGroup** is a complex type that specifies properties for a **sparkline** group.

Child Elements:

**colorSeries:** A **CT\_Color** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies the color for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**colorNegative:** A **CT\_Color** element that specifies the color of the negative **data points** for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**colorAxis:** A **CT\_Color** element that specifies the color of the horizontal axis for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**colorMarkers:** A **CT\_Color** element that specifies the color of the **data markers** for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**colorFirst:** A **CT\_Color** element that specifies the color of the first data point for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**colorLast:** A **CT\_Color** element that specifies the color of the last data point for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**colorHigh:** A **CT\_Color** element that specifies the color of the highest data point for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**colorLow:** A **CT\_Color** element that specifies the color of the lowest data point for each sparkline in this sparkline group. The **auto** attribute of the **CT\_Color** element MUST NOT exist.

**xm:f:** An **f** element (section [2.4.3](#)) that specifies the date **range** for the sparkline group. The syntax, as specified in section [2.2.2](#), for this **f** element is the following:

```
sparklinegroup-formula = single-sheet-area / [single-sheet-prefix / book-prefix] name
```

Additionally, if a single-sheet-area is specified, that single-sheet-area MUST contain **cells** from either a single **row** or a single **column**.

**sparklines:** A **CT\_Sparklines** element (section [2.6.8](#)) that specifies properties for individual sparklines.

Attributes:

**manualMax:** A **double** ([\[XMLSCHEMA2/2\]](#) section 3.2.5) attribute that specifies the maximum for the vertical axis that is shared across all sparklines in this sparkline group. This attribute MUST NOT exist if **maxAxisType** does not equal "custom".

**manualMin:** A **double** attribute that specifies the minimum for the vertical axis that is shared across all sparklines in this sparkline group. This attribute MUST NOT exist if **minAxisType** does not equal "custom".

**lineWeight:** A **double** attribute that specifies the line weight for each sparkline in the sparkline group, where the line weight is measured in **points**. MUST be greater than or equal to zero, and MUST be less than or equal to 1584.

**type:** An **ST\_SparklineType** attribute (section [2.7.5](#)) that specifies the type of the sparkline group.

**dateAxis:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this sparkline group uses a date axis.

Value of dateAxis	Meaning
"false"	No date axis is specified for this sparkline group.
"true"	A date axis is specified for this sparkline group.

**displayEmptyCellsAs:** An **ST\_DisbBlanksAs** attribute (section [2.7.3](#)) that specifies how empty cells are plotted.

**markers:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether data markers are displayed for each sparkline in this sparkline group.

Value	Meaning
"true"	Data markers are displayed for each sparkline in this sparkline group.
"false"	No data marker is displayed for sparkline in this sparkline group.

**high:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the data points with the highest value are formatted differently for each sparkline in this sparkline group.

Value	Meaning
"true"	Data points with the highest value are formatted differently for each sparkline in this sparkline group.
"false"	No data point with the highest value is formatted for sparkline in this sparkline group.

**low:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the data points with the lowest value are formatted differently for each sparkline in this sparkline group.

Value	Meaning
"true"	Data points with the lowest value are formatted differently for each sparkline in this sparkline group.
"false"	No data point with the lowest value is formatted for sparkline in this sparkline group.

**first:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the first data point is formatted differently for each sparkline in this sparkline group.

Value	Meaning
"true"	The first data point is formatted differently for each sparkline in this sparkline group.
"false"	The first data point is not formatted for sparkline in this sparkline group.

**last:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the last data point is formatted differently for each sparkline in this sparkline group.

Value	Meaning
"true"	The last data point is formatted differently for each sparkline in this sparkline group.
"false"	The last data point is not formatted for sparkline in this sparkline group.

**negative:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the negative data points are formatted differently for each sparkline in this sparkline group.

Value	Meaning
"true"	The negative data point is formatted differently for each sparkline in this sparkline group.
"false"	The negative data point is not formatted for sparkline in this sparkline group.

**displayXAxis:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the horizontal axis is displayed for each sparkline in this sparkline group.

Value	Meaning
"true"	The horizontal axis is displayed for each sparkline in this sparkline group.
"false"	No horizontal axis is displayed for sparkline in this sparkline group.

**displayHidden:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether data in **hidden** cells are plotted for the sparklines in this sparkline group.

Value	Meaning
"true"	Data in hidden cells are plotted for the sparklines in this sparkline group.
"false"	Data in hidden cells are not plotted for the sparklines in this sparkline group.

**minAxisType:** An **ST\_SparklineAxisMinMax** attribute (section [2.7.4](#)) that specifies how the vertical axis minimums for the sparklines in this sparkline group are calculated.

**maxAxisType:** An **ST\_SparklineAxisMinMax** attribute that specifies how the vertical axis maximums for the sparklines in this sparkline group are calculated.

**rightToLeft:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether each sparkline in the sparkline group is displayed in a **right-to-left** manner.

Value	Meaning
"true"	Each sparkline in the sparkline group is displayed in a right-to-left manner.
"false"	Not all sparklines in the sparkline group is displayed in a right-to-left manner.

**xr2:uid:** An ST\_Guid ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies the unique id of the sparkline group. If any instance of this type specifies this attribute, then all instances MUST specify it, and the values MUST be distinct.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SparklineGroup">
  <xsd:sequence>
    <xsd:element name="colorSeries" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element name="colorNegative" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element name="colorAxis" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element name="colorMarkers" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element name="colorFirst" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element name="colorLast" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element name="colorHigh" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element name="colorLow" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
    <xsd:element ref="xm:f" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="sparklines" type="CT_Sparklines" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="manualMax" type="xsd:double" use="optional"/>
  <xsd:attribute name="manualMin" type="xsd:double" use="optional"/>
  <xsd:attribute name="lineWeight" type="xsd:double" use="optional" default="0.75"/>
  <xsd:attribute name="type" type="ST_SparklineType" use="optional" default="line"/>
  <xsd:attribute name="dateAxis" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="displayEmptyCellsAs" type="ST_DispBlanksAs" use="optional"
  default="zero"/>
  <xsd:attribute name="markers" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="high" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="low" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="first" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="last" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="negative" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="displayXAxis" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="displayHidden" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="minAxisType" type="ST_SparklineAxisMinMax" use="optional"
  default="individual"/>
  <xsd:attribute name="maxAxisType" type="ST_SparklineAxisMinMax" use="optional"
  default="individual"/>
  <xsd:attribute name="rightToLeft" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute ref="xr2:uid"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.8 CT\_Sparklines

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SparklineGroup](#)

**CT\_Sparklines** is a complex type that specifies a list of individual **sparklines** in a sparkline group. MUST contain fewer than 2<sup>31</sup> elements.

*Child Elements:*

**sparkline:** A **CT\_Sparkline** element (section [2.6.9](#)) that specifies properties for an individual sparkline.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_Sparklines">
  <xsd:sequence>
    <xsd:element name="sparkline" type="CT_Sparkline" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.9 CT\_Sparkline

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_Sparklines](#)

**CT\_Sparkline** is a complex type that specifies information for a single **sparkline**.

*Child Elements:*

**xm:f:** An **f** element (section [2.4.3](#)) that specifies the data **range** for this sparkline. The syntax, specified in section [2.2.2](#), for this element is the following:

```
sparkline-formula = single-sheet-area / [single-sheet-prefix / book-prefix] name
```

Additionally, if a single-sheet-area is specified, that single-sheet-area MUST contain **cells** from either a single **row** or a single **column**.

**xm:sqref:** A **sqref** element (section [2.4.5](#)) that specifies the cell in which the sparkline is located. This **sqref** element MUST contain exactly one **ref** element (section [2.4.4](#)) that MUST specify exactly one cell.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_Sparkline">
  <xsd:sequence>
    <xsd:element ref="xm:f" minOccurs="0" maxOccurs="1"/>
    <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.10 CT\_WorkbookPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [workbookPr](#)

**CT\_WorkbookPr** is a complex type that specifies additional properties for a **workbook**.

*Attributes:*

**defaultImageDpi:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the resolution in which images in the workbook is saved, in DPI ([ISO/IEC29500-1:2016] section 18.2.24), when the **autoCompressPictures** attribute of the **WorkbookPr** ([ISO/IEC29500-1:2016] section 18.2.28) element is "true" and the **CT\_UseLocalDpi** ([MS-ODRAWXML] section 2.3.1.13)

element of the drawings part ([ISO/IEC29500-1:2016] section 12.3.8) corresponding to the image being saved is "false". MUST be equal to "96", "150", or "220".

**discardImageEditData:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether all **CT\_Photo** ([MS-ODRAWXML] section 2.3.1.9) elements and cropped out areas of images in the workbook are not saved.

Value	Meaning
"true"	All <b>CT_Photo</b> elements and cropped out areas of images in the workbook are not saved.
"false"	All <b>CT_Photo</b> elements and cropped out areas of images in the workbook are saved.

**accuracyVersion:** An **unsignedInt** attribute that specifies how functions are calculated in the workbook. SHOULD be equal to zero ("0").<11>

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_WorkbookPr">
  <xsd:attribute name="defaultImageDpi" type="xsd:unsignedInt" default="220"/>
  <xsd:attribute name="discardImageEditData" type="xsd:boolean" default="false"/>
  <xsd:attribute name="accuracyVersion" type="xsd:unsignedInt" default="0"/>
</xsd:complexType>
```

See section 5.4 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.11 CT\_SlicerRefs

*Target namespace:* http://schemas.microsoft.com/office/spreadsheetml/2009/9/main

*Referenced by:* [slicerList](#)

**CT\_SlicerRefs** is a complex type that specifies a list of slicer (section 2.3.2) part identifiers for the **worksheet**. MUST contain exactly one slicer part identifier.

*Child Elements:*

**slicer:** A **CT\_SlicerRef** element (section 2.6.12) that specifies the slicer part identifier for the worksheet.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerRefs">
  <xsd:sequence>
    <xsd:element name="slicer" type="CT_SlicerRef" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section 5.4 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.12 CT\_SlicerRef

*Target namespace:* http://schemas.microsoft.com/office/spreadsheetml/2009/9/main

Referenced by: [CT\\_SlicerRefs](#)

A complex type that specifies a [relationship](#) identifier of the part that contains the [slicers](#) in this **worksheet**.

*Attributes:*

**r:id:** An **ST\_RelationshipId** ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) attribute that specifies a relationship identifier of the part that contains the slicers in this worksheet.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerRef">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.13 CT\_SlicerCaches

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [slicerCaches](#), [slicerCaches](#)

A complex type that specifies a list of [slicer cache](#) part identifiers for the **workbook**. MUST contain fewer than  $2^{31}$  elements.

*Child Elements:*

**slicerCache:** A [CT\\_SlicerCache](#) element that specifies a slicer cache part identifier in this workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCaches">
  <xsd:sequence>
    <xsd:element name="slicerCache" type="CT_SlicerCache" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.14 CT\_SlicerCache

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_SlicerCaches](#)

A complex type that specifies a [relationship](#) identifier to a [slicer cache](#) part in this **workbook**.

*Attributes:*

**r:id:** An **ST\_RelationshipId** ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) attribute that specifies a relationship identifier to a slicer cache part in this workbook.



The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCache">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.15 CT\_CalculatedMember

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [calculatedMember](#)

A complex type that specifies extended properties of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) OLAP calculated member.

*Child Elements:*

**tupleSet:** A **CT\_TupleSet** element (section [2.6.16](#)) that specifies **OLAP tuples** within this **OLAP named set**.

*Attributes:*

**displayFolder:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the display folder of this **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) named set. The length of this value **MUST** be less than 65,536 characters. This attribute **MUST NOT** exist if the **set** attribute in the ancestor **CT\_CalculatedMember** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element is zero ("0").

**flattenHierarchies:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether to display members from different **OLAP levels** of the same PivotTable cache hierarchy of this **PivotTable** named set in the same **PivotTable field**. This attribute **MUST NOT** exist if the **set** attribute in the ancestor **CT\_CalculatedMember** element is zero ("0").

Value	Meaning
"0"	Each member from a different level of the same PivotTable cache hierarchy of this <b>PivotTable</b> named set is displayed in a separate <b>PivotTable</b> field.
"1"	All members from different levels of the same PivotTable cache hierarchy of this <b>PivotTable</b> named set are displayed in the same <b>PivotTable</b> field.

**dynamicSet:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether this **PivotTable** named set is a dynamic OLAP named set. This attribute **MUST NOT** exist if the **set** attribute in the ancestor **CT\_CalculatedMember** element is zero ("0").

Value	Meaning
"0"	This <b>PivotTable</b> named set is a static OLAP named set.
"1"	This <b>PivotTable</b> named set is a dynamic OLAP named set.

**hierarchizeDistinct:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to automatically order and remove duplicates from this **PivotTable** named set. This attribute MUST NOT exist if the **set** attribute in the ancestor **CT\_CalculatedMember** element is zero ("0").

Value	Meaning
"0"	Do not automatically order and remove duplicates from this <b>PivotTable</b> named set.
"1"	Automatically order and remove duplicates from this <b>PivotTable</b> named set.

**mdxLong:** An **ST\_Xstring** attribute that specifies **Multidimensional Expressions (MDX)** of the PivotTable OLAP calculated member. The length of this attribute MUST be 0 or it MUST be greater than 32,767 characters and less than 1,073,741,823 characters. If this value is greater than 32,767 characters, the length of the **mdx** attribute in the ancestor **CT\_CalculatedMember** element MUST be "1" and the first character of the **mdx** attribute MUST be equal to " ", the space character (0x0020).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CalculatedMember">
  <xsd:sequence>
    <xsd:element name="tupleSet" minOccurs="0" maxOccurs="1" type="CT_TupleSet"/>
  </xsd:sequence>
  <xsd:attribute name="displayFolder" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="flattenHierarchies" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="dynamicSet" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="hierarchizeDistinct" type="xsd:boolean" use="optional"
  default="true"/>
  <xsd:attribute name="mdxLong" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section 5.4 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.16 CT\_TupleSet

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_CalculatedMember](#)

A complex type that specifies an **OLAP named set**.

*Child Elements:*

**headers:** A [CT\\_TupleSetHeaders](#) element that specifies the **MDX unique names** of the **OLAP hierarchies** and the MDX unique names of the **OLAP levels** specified by this OLAP named set.

**rows:** A [CT\\_TupleSetRows](#) element that specifies the **OLAP tuples** specified by this OLAP named set.

*Attributes:*

**rowCount:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of OLAP tuples specified by this OLAP named set. MUST equal the number of [CT\\_TupleSetRow](#) elements within the **rows** element. **rowCount** \* **columnCount** MUST be less than or equal to 3,000.

**columnCount:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of MDX unique names of the **OLAP hierarchies** and the MDX unique names of the OLAP

levels specified by this OLAP named set. MUST equal the number of [CT\\_TupleSetHeader](#) elements within the **headers** element. **rowCount** \* **columnCount** MUST be less than or equal to 3,000.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TupleSet">
  <xsd:sequence>
    <xsd:element name="headers" type="CT_TupleSetHeaders" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="rows" type="CT_TupleSetRows" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="rowCount" type="xsd:unsignedInt" use="optional" default="1"/>
  <xsd:attribute name="columnCount" type="xsd:unsignedInt" use="optional" default="1"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.17 CT\_TupleSetHeaders

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TupleSet](#)

A complex type that specifies the **MDX unique names** of the **OLAP hierarchies** and the MDX unique names of the **OLAP levels** of the **OLAP named set**.

*Child Elements:*

**header:** [CT\\_TupleSetHeader](#) elements that specify the MDX unique names of the OLAP hierarchies and the MDX unique names of the OLAP levels of the OLAP named set. The number of these elements MUST be equal to the value of the **columnCount** attribute in the **CT\_TupleSet** element that is the ancestor of this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TupleSetHeaders">
  <xsd:sequence>
    <xsd:element name="header" type="CT_TupleSetHeader" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.18 CT\_TupleSetHeader

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TupleSetHeaders](#)

A complex type that specifies the **MDX unique name** of the **OLAP hierarchy** and the MDX unique name of the **OLAP level** of the OLAP named set that is specified by the [CT\\_TupleSet](#) element that is an ancestor of this element.

*Attributes:*

**uniqueName:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the MDX unique name of the OLAP level. MUST be less than or equal to 65,535 characters in length.

**hierarchyName:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the MDX unique name of the OLAP hierarchy. MUST be less than or equal to 65,535 characters in length.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TupleSetHeader">
  <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="hierarchyName" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.19 CT\_TupleSetRows

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TupleSet](#)

A complex type that specifies the **OLAP tuples** for this **OLAP named set**.

*Child Elements:*

**row:** [CT\\_TupleSetRow](#) elements that specify the OLAP tuples for this OLAP named set. The number of these elements MUST be equal to the value of the **rowCount** attribute in the parent **CT\_TupleSet** element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TupleSetRows">
  <xsd:sequence>
    <xsd:element name="row" type="CT_TupleSetRow" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.20 CT\_TupleSetRow

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TupleSetRows](#)

A complex type that specifies an **OLAP tuple** for this **OLAP named set**.

*Child Elements:*

**rowItem:** [CT\\_TupleSetRowItem](#) elements that specify the **OLAP members** that are part of the OLAP tuple that is specified by this **CT\_TupleSetRow** element. The number of these elements MUST be equal to value of the **columnCount** attribute in the [CT\\_TupleSet](#) element that is an ancestor of this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TupleSetRow">
```

```

    <xsd:sequence>
      <xsd:element name="rowItem" type="CT_TupleSetRowItem" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.21 CT\_TupleSetRowItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT TupleSetRow](#)

A complex type that specifies an **OLAP member** that is part of an **OLAP tuple**.

*Attributes:*

**u:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the **MDX unique name** of this OLAP member. MUST be less than or equal to 65,535 characters in length.

**d:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies a display name for this OLAP member. MUST be less than or equal to 65,535 characters in length.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_TupleSetRowItem">
  <xsd:attribute name="u" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="d" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.22 CT\_SetLevels

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT CacheHierarchy](#)

A complex type that specifies a list of **CT\_SetLevel** elements that specify the **OLAP levels** of the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set.

*Child Elements:*

**setLevel:** A **CT\_SetLevel** element that specifies an OLAP level of the PivotTable ([ISO/IEC29500-1:2016] section 18.10) cache hierarchy of the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set.

*Attributes:*

**count:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of child **setLevel** elements of this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_SetLevels">

```

```

<xsd:sequence>
  <xsd:element name="setLevel" minOccurs="1" maxOccurs="unbounded" type="CT_SetLevel"/>
</xsd:sequence>
<xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.23 CT\_SetLevel

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SetLevels](#)

A complex type that specifies an **OLAP level** of the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) cache hierarchy of a **PivotTable** named set.

*Attributes:*

**hierarchy:** An **int** ([XMLSCHEMA2/2] section 3.3.17) attribute that specifies a reference to the PivotTable cache hierarchy. MUST be a value from the following table.

Value	Meaning
"-2"	The PivotTable measure cache hierarchy is used.
"-1"	No PivotTable cache hierarchy is used.
Greater than or equal to zero	A zero-based PivotTable cache hierarchy index. The referenced <b>CT_CacheHierarchy</b> ([ISO/IEC29500-4:2016] section A.2) element specifies the PivotTable cache hierarchy that is used. MUST be less than the number of <b>CT_CacheHierarchy</b> elements within the <b>CT_CacheHierarchies</b> ([ISO/IEC29500-1:2016] section 18.10) element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_SetLevel">
  <xsd:attribute name="hierarchy" use="required" type="xsd:int"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.24 CT\_CacheHierarchy

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [cacheHierarchy](#)

This complex type specifies the extended properties of a **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set. When an element of this type is present, the **set** attribute of the ancestor **cacheHierarchy** element of type **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) MUST be "true".

*Child Elements:*

**setLevels:** A [CT\\_SetLevels](#) element that specifies the **OLAP levels** of the hierarchy that is used by this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set.

*Attributes:*

**flattenHierarchies:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether to display members from different levels of the same **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) cache hierarchy of this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set in the same **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) **field**. MUST be "false" if **ignore** is "true". If a [CT\\_CalculatedMember](#) element that corresponds to the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set exists, this attribute MUST be equal to the **flattenHierarchies** attribute of the **CT\_CalculatedMember** element.

<b>ignore</b>	<b>flattenHierarchies</b>	<b>Meaning</b>
"true"	"false"	The ancestor <b>cacheHierarchy</b> element of type <b>CT_CacheHierarchy</b> ([ISO/IEC29500-4:2016] section A.2) of this <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set is discarded.
"false"	"false"	Each member from a different level of the same <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) cache hierarchy of this <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set is displayed in a separate <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) field.
"false"	"true"	All members from different levels of the same <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) cache hierarchy of this <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set are displayed in the same <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) field.

**measuresSet:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set contains one or more **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) measure cache hierarchies. MUST be "false" if **ignore** is "true".

<b>ignore</b>	<b>measuresSet</b>	<b>Meaning</b>
"true"	"false"	The ancestor <b>cacheHierarchy</b> element of type <b>CT_CacheHierarchy</b> ([ISO/IEC29500-4:2016] section A.2) of this <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set is discarded.
"false"	"false"	The <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set

ignore	measureSet	Meaning
		does not contain PivotTable ([ISO/IEC29500-1:2016] section 18.10) measure cache hierarchies.
"false"	"true"	The <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set contains PivotTable ([ISO/IEC29500-1:2016] section 18.10) measure cache hierarchies.

**hierarchizeDistinct:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to automatically order and remove duplicates from this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set. MUST be "false" if **ignore** is "true". If a **CT\_CalculatedMember** element that corresponds to the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) named set exists, this attribute MUST be equal to **hierarchizeDistinct** attribute of the **CT\_CalculatedMember** element.

ignore	hierarchizeDistinct	Meaning
"true"	"false"	The ancestor <b>cacheHierarchy</b> element of type <b>CT_CacheHierarchy</b> ([ISO/IEC29500-4:2016] section A.2) of this PivotTable ([ISO/IEC29500-1:2016] section 18.10) named set is discarded.
"false"	"false"	Do not automatically order and remove duplicates from this <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set.
"false"	"true"	Automatically order and remove duplicates from this <b>PivotTable</b> ([ISO/IEC29500-1:2016] section 18.10) named set.

**ignore:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the ancestor **cacheHierarchy** element of type **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) SHOULD <12> be discarded. If **ignore** is "true", the ancestor **cacheHierarchy** element of type **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) MUST have the following attribute values:

Field	Value
<b>measure</b>	"true"
<b>set</b>	"false"
<b>attribute</b>	"false"
<b>measures</b>	"false"
<b>oneField</b>	"false"
<b>time</b>	"false"
<b>keyAttribute</b>	"false"



Field	Value
<b>memberValueDatatype</b>	MUST NOT be specified.
<b>unbalanced</b>	MUST NOT be specified.
<b>unbalancedGroup</b>	MUST NOT be specified.
<b>hidden</b>	"false"
<b>count</b>	"0"
<b>parentSet</b>	MUST NOT be specified.
<b>dimensionUniqueName</b>	MUST NOT be specified.
<b>defaultMemberUniqueName</b>	MUST NOT be specified.
<b>allUniqueName</b>	MUST NOT be specified.
<b>allCaption</b>	MUST NOT be specified.
<b>displayFolder</b>	MUST NOT be specified.
<b>measureGroup</b>	MUST NOT be specified.
<b>uniqueName</b>	"DummyN", where <i>N</i> is the text string representing in decimal form the zero-based index of the ancestor <b>CT_CacheHierarchy</b> ([ISO/IEC29500-4:2016] section A.2) element within the group of <b>CT_CacheHierarchy</b> ([ISO/IEC29500-4:2016] section A.2) elements that have a descendent <b>CT_CacheHierarchy</b> element with the <b>ignore</b> attribute equal to "true".

Within the **CT\_CacheHierarchies** ([ISO/IEC29500-4:2016] section A.2) element, all **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) elements that have a **descendant CT\_CacheHierarchy** element with the **ignore** attribute equal to "true" MUST follow all other **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) elements without a descendant **CT\_CacheHierarchy** element or with a descendant **CT\_CacheHierarchy** element with the **ignore** attribute equal to "false".

If this attribute is "true", there MUST exist a **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element with an **fld** attribute equal to the zero-based index of a **CT\_CacheField** ([ISO/IEC29500-4:2016] section A.2) element in the list of **CT\_CacheField** ([ISO/IEC29500-4:2016] section A.2) elements specified by **CT\_CacheFields** ([ISO/IEC29500-4:2016] section A.2) with a **hierarchy** attribute that specifies the ancestor **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2). Additionally, that **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element MUST have a descendant **CT\_DataField** element with a **sourceField** attribute specified.

For more details, see **CT\_DataField**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CacheHierarchy">
  <xsd:sequence>
    <xsd:element name="setLevels" minOccurs="0" maxOccurs="1" type="CT_SetLevels"/>
  </xsd:sequence>
  <xsd:attribute name="flattenHierarchies" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="measuresSet" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="hierarchizeDistinct" type="xsd:boolean" use="optional"
default="true"/>
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
```

</xsd:complexType>

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.25 CT\_DataField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [dataField](#)

This complex type specifies extended information about a **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) data **field** item ([ISO/IEC29500-1:2016] section 18.10.1.22).

*Attributes:*

**pivotShowAs:** An [ST\\_PivotShowAs](#) attribute that specifies the data display format for this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) data field item. If this attribute is specified, the **showDataAs** attribute of the ancestor **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element MUST NOT be specified. If this attribute is equal to "percentOfParent", "percentOfRunningTotal", "rankAscending", or "rankDescending", the **baseField** attribute of the ancestor **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element MUST be greater than or equal to 0.

**sourceField:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the zero-based index of the **CT\_PivotField** ([ISO/IEC29500-4:2016] section A.2) element in the list of **CT\_PivotField** ([ISO/IEC29500-4:2016] section A.2) elements specified by the **CT\_PivotFields** ([ISO/IEC29500-4:2016] section A.2) element that this data item summarizes.

If an **OLAP measure** is summarized in a PivotTable ([ISO/IEC29500-1:2016] section 18.10) as a data field item ([ISO/IEC29500-1:2016] section 18.10.1.22) more than one time, data field items ([ISO/IEC29500-1:2016] section 18.10.1.22) that specify that OLAP measure after the first data field item ([ISO/IEC29500-1:2016] section 18.10.1.22) that specifies that OLAP measure MUST have a **descendant CT\_DataField** element with a **sourceField** specified.

If this attribute is specified, the **CT\_PivotField** ([ISO/IEC29500-4:2016] section A.2) element specified by the **fld** attribute of the ancestor **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element MUST have a descendant [CT\\_PivotField](#) element with an **ignore** attribute equal to "true".

If this attribute is specified, the **CT\_CacheField** ([ISO/IEC29500-4:2016] section A.2) element with a zero-based index in the list of **CT\_CacheField** ([ISO/IEC29500-4:2016] section A.2) elements specified by the **CT\_CacheFields** ([ISO/IEC29500-4:2016] section A.2) element equal to the **fld** attribute of the ancestor **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element that exists in the Pivot Table Cache Definition part ([ISO/IEC29500-1:2016] section 12.3.12) specified by the **cacheId** attribute of the **CT\_PivotTableDefinition** ([ISO/IEC29500-4:2016] section A.2) element that is the ancestor of this element MUST have a descendant [CT\\_CacheField](#) element. The **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) element specified by the **hierarchy** attribute of that **CT\_CacheField** ([ISO/IEC29500-4:2016] section A.2) element MUST have a descendant [CT\\_CacheHierarchy](#) element with an **ignore** attribute equal to "true". The **CT\_PivotHierarchy** ([ISO/IEC29500-4:2016] section A.2) element with a zero-based index in the list of **CT\_PivotHierarchy** ([ISO/IEC29500-4:2016] section A.2) elements specified by the **CT\_PivotHierarchies** ([ISO/IEC29500-4:2016] section A.2) element in this part that is equal to the zero-based index of that **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) element in the list of **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) elements specified by the **CT\_CacheHierarchies** ([ISO/IEC29500-4:2016] section A.2) element MUST have a descendant [CT\\_PivotHierarchy](#) element.

If this attribute is specified, the **fld** attribute of the ancestor **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element SHOULD [<13>](#) be ignored.

This attribute MUST NOT be specified for non-**OLAP** PivotTables ([ISO/IEC29500-1:2016] section 18.10).

**uniqueName:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the unique name for duplicated OLAP measures. MUST be unique within this part. MUST be less than or equal to 65,535 characters in length.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataField">
  <xsd:attribute name="pivotShowAs" type="ST_PivotShowAs" use="optional"/>
  <xsd:attribute name="sourceField" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.26 CT\_Cfvo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_ColorScale](#), [CT\\_DataBar](#), [CT\\_IconSet](#)

This complex type specifies a Conditional Formatting Value Object (CFVO) that specifies how to calculate a value from the **range** of cells to which a **conditional formatting** rule applies.

*Child Elements:*

**xm:f:** An **f** element that specifies the formula that is evaluated and compared to the **cell value** by the comparison method specified by **gte**. The formula MUST adhere to the grammar provided in [Formulas](#), with the following restrictions:

- MUST NOT use the ref-infix-operator, book-prefix, local-cell-reference, bang-reference, bang-name, array-constant, sheet-range-reference or structure-reference production rules.
- MUST NOT use the A1-relative-column production rule except from the A1-absolute-column production rule, and it MUST NOT use the A1-relative-row production rule except from the A1-absolute-row production rule.
- MUST NOT match the single-sheet-area production rule.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**type:** An [ST\\_CfvoType](#) attribute that specifies how the CFVO value is determined:

- If this **CT\_Cfvo** element is a child of a **CT\_ColorScale** and specifies the beginning of the **color scale**, this attribute MUST NOT be max.
- If this **CT\_Cfvo** element is a child of a **CT\_ColorScale** and specifies the end of the color scale, this attribute MUST NOT be min.
- If this **CT\_Cfvo** element is a child of a **CT\_ColorScale** and specifies the midpoint of the color scale, this attribute MUST NOT be max and MUST NOT be min.
- If this **CT\_Cfvo** element is a child of a **CT\_DataBar** and specifies the cell value for the min length of the **data bar**, this attribute MUST NOT be max or autoMax.

- If this **CT\_Cfvo** element is a child of a **CT\_DataBar** and specifies the cell value for the max length of the data bar, this attribute **MUST NOT** be min or autoMin.
- If this **CT\_Cfvo** element is not a child of a **CT\_DataBar**, this attribute **MUST NOT** be autoMin and **MUST NOT** be autoMax.
- If this **CT\_Cfvo** element is a child of a **CT\_IconSet** record, this value **MUST NOT** be max or min.
- If the value is max, min, autoMax, or autoMin, **f** **MUST NOT** be present.

**gte:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the **CT\_Cfvo** will use greater-than or greater-than-or-equal-to when applying conditional formatting rules. If this **CT\_Cfvo** element is a child of something other than a **CT\_IconSet** element, this attribute **MUST NOT** be present. The value of this attribute is interpreted as follows:

Value	Meaning
"false"	Greater-than is used when applying conditional formatting rules.
"true"	Greater-than-or-equal-to is used when applying conditional formatting rules.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Cfvo">
  <xsd:sequence>
    <xsd:element ref="xm:f" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="type" type="ST_CfvoType" use="required"/>
  <xsd:attribute name="gte" type="xsd:boolean" use="optional" default="true"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.27 CT\_CfRule

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_ConditionalFormatting](#)

This complex type specifies a **conditional formatting** rule for a **range**.

*Child Elements:*

**xm:f:** **f** elements that specify the **formulas** in the conditional formatting rule. The formulas **MUST** adhere to the grammar specified in [Formulas](#), with the following restrictions:

- The formula **MUST NOT** conform to the ref-infix-operator, book-prefix, local-cell-reference, array-constant, bang-reference, bang-name, sheet-range-reference, or structure-reference production rules.
- The formula **MUST NOT** match the single-sheet-area production rule.

The following table explains how to interpret the formulas.

Value of type	Interpretation of the formulas in f
cellIs	<b>f</b> elements that specify the formulas, numeric values, or <b>cell</b> references that specify the

Value of type	Interpretation of the formulas in f
	operands for the <b>ST_ConditionalFormattingOperator</b> ([ISO/IEC29500-1:2016] section 18.18.15) specified by <b>operator</b> . If <b>operator</b> is "between" or "notBetween", <b>f</b> MUST contain two formulas; otherwise, <b>f</b> MUST contain one formula.
expression	An <b>f</b> element that specifies a formula. When the formula returns zero, conditional formatting is not displayed. When the formula returns a nonzero value, conditional formatting is displayed.
colorScale, dataBar, iconSet	An <b>f</b> element that specifies a formula. When the formula returns zero, conditional formatting is not displayed. When the formula returns a nonzero value, or is not present, conditional formatting is displayed.
containsText, notContainsText, beginsWith, endsWith, containsBlanks, notContainsBlanks, containsErrors, notContainsErrors	An <b>f</b> element that specifies a formula that implements the operation specified by <b>type</b> . When the formula returns zero, conditional formatting is not displayed. When the formula returns a nonzero value, conditional formatting is displayed.

**colorScale:** A [CT\\_ColorScale](#) element that specifies a **color scale**.

**dataBar:** A [CT\\_DataBar](#) element that specifies a **data bar**.

**iconSet:** A [CT\\_IconSet](#) element that specifies an **icon set**.

**dx:** A [CT\\_Dxf](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies the differential formatting ([ISO/IEC29500-1:2016] section M.2.7.3.8) applied to the range. If **type** is "colorScale", "dataBar", or "iconSet", or the **priority** attribute does not exist, this element MUST NOT exist.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**type:** An [ST\\_CfType](#) ([ISO/IEC29500-1:2016] section 18.18.12) attribute that specifies the way conditional formatting is displayed in the range.

If and only if **type** is "colorScale", a **colorScale** child element MUST exist in this element.

If and only if **type** is "dataBar", a **dataBar** child element MUST exist in this element.

If and only if **type** is "iconSet", an **iconSet** child element MUST exist in this element.

**priority:** An [int](#) ([XMLSCHEMA2/2] section 3.3.17) attribute that specifies the relative priority of this rule compared to the other rules in this **sheet**, or whether this **CT\_CfRule** specifies extension information for a conditional formatting data bar rule as specified by the associated **CT\_CfRule** ([ISO/IEC29500-4:2016] section A.2) element. MUST be greater than 0.

If **priority** exists, rules are applied in order from the smallest **priority** to the largest **priority** and it MUST NOT duplicate a **priority** value in any other **CT\_CfRule** or **CT\_CfRule** ([ISO/IEC29500-4:2016] section A.2) element that exists in the same **worksheet** part.

If **priority** does not exist, this **CT\_CfRule** specifies extension information for a conditional formatting data bar rule, and the **dataBar** child element MUST exist and describe this additional information. The **id** attribute is used to identify the associated **CT\_CfRule** ([ISO/IEC29500-4:2016] section A.2), and the **priority** attribute of this **CT\_CfRule** ([ISO/IEC29500-4:2016] section A.2) specifies the relative

priority of this rule. If neither the **priority** attribute nor the **id** attribute exists in this element, or if **id** exists but there exists no **CT\_CfRule** ([ISO/IEC29500-4:2016] section A.2) element containing a matching **GUID**, this record and the succeeding dataBar child element MUST be ignored. If the **priority** attribute exists in this element, **id** MUST be ignored.

**stopIfTrue:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether evaluation of additional conditional formatting rules is skipped for a cell if this rule evaluates to "true" for that cell.

Value	Meaning
"true"	Evaluation of additional conditional formatting rules is skipped for a cell if this rule evaluates to "true" for that cell.
"false"	Evaluation of additional conditional formatting rules is not skipped for a cell if this rule evaluates to "true" for that cell.

**aboveAverage:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the conditional formatting rule is applied to cells with values above or below the average value of other cells in the range as specified by the following table. This attribute MUST NOT exist if **type** is not equal to "aboveAverage".

Value	Meaning
"true"	The conditional formatting rule is applied to cells with values above the average value of all cells in the range.
"false"	The conditional formatting rule is applied to cells with values below the average value of all cells in the range.

**percent:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the conditional formatting rule is applied to a percentage of cells as specified by the following table. This attribute MUST NOT exist if **type** is not equal to "top10".

Value	Meaning
"true"	<b>rank</b> specifies the percentage of cells in the range to which conditional formatting is applied.
"false"	The conditional formatting rule is applied to the number of cells specified by <b>rank</b> .

**bottom:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies how the conditional formatting rule is applied as specified by the following table. This attribute MUST NOT exist if **type** is not equal to "top10".

Value	Meaning
"true"	Conditional formatting is applied to cells whose value is in the bottom end of the range specified by <b>percent</b> and <b>rank</b> .
"false"	Conditional formatting is applied to cells whose value is in the top end of the range specified by <b>percent</b> and <b>rank</b> .

**operator:** An **ST\_ConditionalFormattingOperator** ([ISO/IEC29500-1:2016] section 18.18.15) attribute that specifies the type of value comparison used for this conditional formatting rule. This attribute MUST NOT exist if **type** is not equal to "cellIs".

**text:** A **string** ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies a text value used for this conditional formatting rule. This attribute MUST NOT exist if type is not equal to "beginsWith", "containsText", "endsWith", or "notContainsText".

**timePeriod:** An **ST\_TimePeriod** ([ISO/IEC29500-1:2016] section 18.18.82) attribute that specifies the time period used for this conditional formatting rule. This attribute **MUST NOT** exist if **type** is not equal to "timePeriod".

**rank:** An **unsignedInt** ([XMLSCHEMA2/2]section 3.3.22) attribute that specifies how many cells are formatted by this conditional formatting rule. The value of **percent** specifies whether **rank** is a percentage or a quantity of cells. When **percent** is "true", **rank** **MUST** be greater than or equal to zero and less than or equal to 100. Otherwise, **rank** **MUST** be greater than or equal to 1 and less than or equal to 1,000. This attribute **MUST NOT** exist if **type** is not equal to "top10".

**stdDev:** An **int** ([XMLSCHEMA2/2]section 3.3.17) attribute that specifies the number of standard deviations above or below the average to format in the conditional formatting rule. This attribute **MUST NOT** exist if **type** is not equal to "aboveAverage" or if **equalAverage** is "true".

**equalAverage:** A **Boolean** ([XMLSCHEMA2/2]section 3.2.2) attribute that specifies, together with **aboveAverage**, how the conditional formatting rule is applied as specified by the following table. This attribute **MUST NOT** exist if **type** is not equal to "aboveAverage".

Value of equalAverage	Value of aboveAverage	Meaning
"true"	"true"	Conditional formatting is applied to cells whose value is equal to or above the average value of cells in the range.
"true"	"false"	Conditional formatting is applied to cells whose value is equal to or below the average value of cells in the range.
"false"	"true"	Conditional formatting is applied to cells whose value is above the average value of all cells in the range plus <b>stdDev</b> and multiplied by the standard deviation of all cells in the range.
"false"	"false"	Conditional formatting is applied to cells whose value is below the average value of all cells in the range minus <b>stdDev</b> and multiplied by the standard deviation of all cells in the range.

**activePresent:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that **MUST** be "true" if, and only if, a formula is present in **f** and **type** is "colorScale", "dataBar", or "iconSet".

**id:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that identifies this conditional formatting rule. If the priority attribute does not exist, and this attribute exists, this attribute is used to match this **CT\_CfRule** element to the corresponding **CT\_CfRule** ([ISO/IEC29500-4:2016] section A.2) element. If neither the priority attribute nor this attribute exists, this **CT\_CfRule** and its child **CT\_DataBar** element **MUST** be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CfRule">
  <xsd:sequence>
    <xsd:element ref="xm:f" minOccurs="0" maxOccurs="3"/>
    <xsd:element name="colorScale" type="CT_ColorScale" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="dataBar" type="CT_DataBar" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="iconSet" type="CT_IconSet" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="dxf" type="x:CT_Dxf" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="type" type="x:ST_CfType" use="optional"/>
  <xsd:attribute name="priority" type="xsd:int" use="optional"/>
  <xsd:attribute name="stopIfTrue" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="aboveAverage" type="xsd:boolean" use="optional" default="true"/>

  <xsd:attribute name="percent" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="bottom" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="operator" type="x:ST_ConditionalFormattingOperator" use="optional"/>
</xsd:complexType>
```

```

<xsd:attribute name="text" type="xsd:string" use="optional"/>
<xsd:attribute name="timePeriod" type="x:ST_TimePeriod" use="optional"/>
<xsd:attribute name="rank" type="xsd:unsignedInt" use="optional"/>
<xsd:attribute name="stdDev" type="xsd:int" use="optional"/>
<xsd:attribute name="equalAverage" type="xsd:boolean" use="optional" default="false"/>
<xsd:attribute name="activePresent" type="xsd:boolean" use="optional" default="false"/>
<xsd:attribute name="id" type="x:ST_Guid" use="optional"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.28 CT\_IconSet

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_CfRule](#)

A complex type that specifies the properties of a **conditional formatting** rule that uses an **icon set**. The first **cfvo** element following this element **MUST** be ignored. There **MUST** be greater than or equal to three **cfvo** elements and **MUST** be less than or equal to five **cfvo** elements following this complex type.

*Child Elements:*

**cfvo:** A [CT\\_Cfvo](#) element that specifies a threshold value between each **icon** in the icon set.

**cfIcon:** A [CT\\_CfIcon](#) element that specifies a particular icon to use within an icon set. This element **MUST** be present if and only if **custom** equals "true".

*Attributes:*

**iconSet:** An [ST\\_IconSetType](#) attribute that specifies the icon set used.

**showValue:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the **cells** in the applied **range** display the icon and **cell value**, or the icon only.

Value	Meaning
"true"	The icon and cell value are shown in the cell.
"false"	Only the icon is shown in the cell.

**percent:** Undefined and **MUST** be ignored.

**reverse:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the icons in the icon set specified in **iconSet** are shown in reverse order. If **custom** equals "true" this value **MUST** be ignored.

Value	Meaning
"true"	The icons specified in <b>iconSet</b> are shown in reverse order.
"false"	The icons specified in <b>iconSet</b> are shown in the order defined by the icon set.

**custom:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether a custom set of icons is used. If this value is "true", there **MUST** be the same number of **cfIcon** elements as **cfvo** elements and the icons specified by the **cfIcon** elements are used rather than those specified by **iconSet**. If this value is "false", there **MUST** be 0 **cfIcon** elements.

Value	Meaning
-------	---------



Value	Meaning
"false"	No custom set of icons is used.
"true"	A custom set of icons is used.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_IconSet">
  <xsd:sequence>
    <xsd:element name="cfvo" type="CT_Cfvo" minOccurs="2" maxOccurs="unbounded"/>
    <xsd:element name="cfIcon" type="CT_CfIcon" minOccurs="0" maxOccurs="5"/>
  </xsd:sequence>
  <xsd:attribute name="iconSet" type="ST_IconSetType" use="optional"
    default="3TrafficLights1"/>
  <xsd:attribute name="showValue" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="percent" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="reverse" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="custom" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.29 CT\_ColorScale

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_CfRule](#)

A complex type that specifies a **color scale** used in **conditional formatting**.

*Child Elements:*

**cfvo:** A [CT\\_Cfvo](#) element that specifies the **cell** values corresponding to the interpolation colors of the color scale. The **CT\_ColorScale** MUST have either two or three child **CT\_Cfvo** elements.

If there are two child **CT\_Cfvo** elements present, the first child **CT\_Cfvo** element specifies the cell value corresponding to the beginning color of the color scale. The second child **CT\_Cfvo** element specifies the cell value corresponding to the end color of the color scale.

If there are three child **CT\_Cfvo** elements present, the first child **CT\_Cfvo** element specifies the cell value corresponding to the beginning color of the color scale. The second child **CT\_Cfvo** element specifies the cell value corresponding to the midpoint color of the color scale. The third child **CT\_Cfvo** element specifies the cell value corresponding to the end color of the color scale.

**color:** A **CT\_Color** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies the interpolation colors of the color scale for the **cfvo** element at the same corresponding position. The **CT\_ColorScale** MUST have either two or three child **CT\_Color** ([\[ISO/IEC29500-4:2016\]](#) section A.2) elements, and the number of child elements MUST equal the number of **CT\_Cfvo** child elements.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ColorScale">
  <xsd:sequence>
    <xsd:element name="cfvo" type="CT_Cfvo" minOccurs="2" maxOccurs="unbounded"/>
    <xsd:element name="color" type="x:CT_Color" minOccurs="2" maxOccurs="unbounded"/>
  </xsd:sequence>
```

</xsd:complexType>

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.30 CT\_DataBar

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_CfRule](#)

A complex type that specifies a **data bar** used in **conditional formatting**.

*Child Elements:*

**cfvo:** A **CT\_Cfvo** element (section [2.6.26](#)) that specifies the **cell** values corresponding to the min/max length of the data bar. If there exist **CT\_Cfvo** ([\[ISO/IEC29500-4:2016\]](#) section A.2) elements in this **sheet** that are child elements of a **CT\_DataBar** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that is a child of a **CT\_CfRule** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that is a parent of a **CT\_ExtensionList** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element with a child **CT\_Extension** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that has a child **ST\_Guid** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element equal to the **id** attribute of this complex type's parent **CT\_CfRule** element (section 2.6.27), those **CT\_Cfvo** elements SHOULD [<14>](#) be ignored. The first child **CT\_Cfvo** element specifies the **condition** corresponding to the min length of the data bar. The second child **CT\_Cfvo** element specifies the condition corresponding to the max length of the data bar.

**fillColor:** A **CT\_Color** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies the fill color of the data bar. This element MUST exist if and only if the **priority** attribute of the **CT\_CfRule** that is a parent of this complex type exists.

**borderColor:** A **CT\_Color** element that specifies the border color of the data bar. This element MUST exist if and only if **border** equals "true".

**negativeFillColor:** A **CT\_Color** element that specifies the negative fill color of the data bar. This element MUST exist if and only if **negativeBarColorSameAsPositive** equals "false".

**negativeBorderColor:** A **CT\_Color** element that specifies the negative border color of the data bar. This element MUST exist if and only if **negativeBarBorderColorSameAsPositive** equals "false" and **border** equals "true".

**axisColor:** A **CT\_Color** element that specifies the axis color of the data bar. This element MUST exist if and only if **axisPosition** does not equal "none".

*Attributes:*

**minLength:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the length of the shortest data bar in this conditional formatting **range**, expressed as a percentage of the width of the cell containing the data bar. MUST be greater than or equal to zero and less than or equal to **maxLength**. If, in this same **worksheet** part, there exists a **CT\_ExtensionList** element that is a descendent of a **CT\_CfRule** with a child **CT\_Extension** element with the child **ST\_Guid** element equal to the **id** attribute of the **CT\_CfRule** element that is a parent of this element, and the **minLength** attribute of this element is zero ("0") and the **maxLength** attribute of this element is "100", the **minLength** attribute of the **CT\_DataBar** element that is a descendent of the **CT\_CfRule** element that is a parent of the **CT\_ExtensionList** element that is a parent of the **CT\_Extension** element with the child **ST\_Guid** element equal to the **id** attribute of the **CT\_CfRule** element that is a parent of this element MUST be "10". If in this same worksheet part there exists an **CT\_ExtensionList** element that is a descendent of a **CT\_CfRule** with a child **CT\_Extension** element with the child **ST\_Guid** element equal to the **id** attribute of the **CT\_CfRule** element that is a parent of

this element, and the **minLength** attribute of this element is not zero ("0") or the **maxLength** attribute of this element is not "100", the **minLength** attribute of the **CT\_DataBar** element that is a descendent of the **CT\_CfRule** element that is a parent of the **CT\_ExtensionList** element that is a parent of the **CT\_Extension** element with the child **ST\_Guid** element that is equal to the **id** attribute of the **CT\_CfRule** element that is a parent of this element MUST be equal to this complex type's **minLength**.

**maxLength**: An **unsignedInt** attribute that specifies the length of the longest data bar in this conditional formatting range, expressed as a percentage of the width of the cell being formatted. MUST be greater than or equal to **minLength** and less than or equal to 100. If in this same worksheet part there exists a **CT\_ExtensionList** element that is a descendent of a **CT\_CfRule** with a child **CT\_Extension** element with the child **ST\_Guid** element equal to the **id** attribute of the **CT\_CfRule** element that is a parent of this element, and the **minLength** attribute of this element is zero ("0") and the **maxLength** attribute of this element is "100", the **maxLength** attribute of the **CT\_DataBar** element that is a descendent of the **CT\_CfRule** element that is a parent of the **CT\_ExtensionList** element that is a parent of the **CT\_Extension** element with the child **ST\_Guid** element that is equal to the **id** attribute of the **CT\_CfRule** element that is a parent of this element MUST be "90". If, in this same worksheet part, there exists a **CT\_ExtensionList** element that is a descendent of a **CT\_CfRule** with a child **CT\_Extension** element with the child **ST\_Guid** element equal to the **id** attribute of the **CT\_CfRule** element that is a parent of this element, and the **minLength** attribute of this element is not zero ("0") or the **maxLength** attribute of this element is not "100", the **maxLength** attribute of the **CT\_DataBar** element that is a descendent of the **CT\_CfRule** element that is a parent of the **CT\_ExtensionList** element that is a parent of the **CT\_Extension** element with the child **ST\_Guid** element that is equal to the **id** attribute of the **CT\_CfRule** element that is a parent of this element MUST be equal to this record's **maxLength**.

**showValue**: A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the cells in the conditional formatting range display both the data bar and the numeric value or only the data bar. The following table describes its possible values.

Value	Meaning
"false"	Only the data bar is displayed in the cell.
"true"	Both the data bar and the numeric value are displayed in the cell.

**border**: A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the data bar has a border.

Value	Meaning
"true"	The data bar has a border.
"false"	The data bar has no border.

**gradient**: A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the data bar has a gradient fill. The following table describes its possible values.

Value	Meaning
"false"	The data bar fill is a solid color.
"true"	The data bar fill is a gradient.

**direction:** An **ST\_DataBarDirection** attribute section [2.7.7](#)) that specifies the direction of the data bar.

**negativeBarColorSameAsPositive:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the data bar has a negative bar color that is different from the positive bar color.

**negativeBarBorderColorSameAsPositive:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the data bar has a negative border color that is different from the positive border color.

**axisPosition:** An **ST\_DataBarAxisPosition** attribute (section [2.7.8](#)) that specifies the axis position for the data bar.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataBar">
  <xsd:sequence>
    <xsd:element name="cfvo" type="CT_Cfvo" minOccurs="2" maxOccurs="2"/>
    <xsd:element name="fillColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="borderColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="negativeFillColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="negativeBorderColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="axisColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="minLength" type="xsd:unsignedInt" use="optional" default="10"/>
  <xsd:attribute name="maxLength" type="xsd:unsignedInt" use="optional" default="90"/>
  <xsd:attribute name="showValue" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="border" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="gradient" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="direction" type="ST_DataBarDirection" use="optional"
default="context"/>
  <xsd:attribute name="negativeBarColorSameAsPositive" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="negativeBarBordercolorSameAsPositive" type="xsd:boolean"
use="optional" default="true"/>
  <xsd:attribute name="axisPosition" type="ST_DataBarAxisPosition" use="optional"
default="automatic"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.31 CT\_PivotField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [pivotField](#)

This complex type specifies additional properties of a PivotTable ([ISO/IEC29500-1:2016] section 18.10) **field**.

*Attributes:*

**fillDownLabels:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the PivotTable ([ISO/IEC29500-1:2016] section 18.10) item labels are repeated for this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) field. This attribute is ignored when the **compact** attribute and the **outline** attribute of the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) field are "true". This attribute is ignored if the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) field is not on the PivotTable ([ISO/IEC29500-1:2016] section 18.10) **row** axis or the PivotTable ([ISO/IEC29500-1:2016] section 18.10) **column** axis. This value MUST be one of the following:

Value	Meaning
"false"	The item labels are not repeated.
"true"	The item labels are repeated for each nested item.

**ignore:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) field SHOULD [<15>](#) be ignored.

If this attribute is "true", the ancestor **CT\_PivotField** ([ISO/IEC29500-4:2016] section A.2) MUST have only the following attributes specified, and these attributes MUST have the following values.

Name	Value
<b>compact</b>	"false"
<b>dataField</b>	"true"
<b>defaultSubtotal</b>	"false"
<b>dragOff</b>	"false"
<b>dragToCol</b>	"false"
<b>dragToData</b>	"false"
<b>dragToPage</b>	"false"
<b>dragToRow</b>	"false"
<b>includeNewItemInFilter</b>	"true"
<b>itemPageCount</b>	"false"
<b>outline</b>	"false"
<b>showAll</b>	"false"
<b>subtotalTop</b>	"false"
<b>topAutoShow</b>	"false"

If this attribute is equal to "true", there MUST exist a **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element with an **fld** attribute that specifies this PivotTable ([ISO/IEC29500-1:2016] section 18.10) field. Additionally, that **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element MUST have a **descendant CT\_DataField** element with a **sourceField** attribute specified.

For more details, see CT\_DataField.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT PivotField">
  <xsd:attribute name="fillDownLabels" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.32 CT\_PivotTableDefinition

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [pivotTableDefinition](#)

This element specifies additional properties of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view.

Child Elements:

**pivotEdits:** A [CT\\_PivotEdits](#) element that specifies a collection of [PivotTable What-if Analysis](#) edits.

**pivotChanges:** A [CT\\_PivotChanges](#) element that specifies a collection of PivotTable What-if Analysis changes.

**conditionalFormats:** A [CT\\_ConditionalFormats](#) element that specifies a collection of conditional formats applied to the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view.

Attributes:

**fillDownLabelsDefault:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies the behavior of **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **fields** that are not a part of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view if they are later added to a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view. MUST be a value from the following table.

Value	Meaning
"false"	Specifies that <b>PivotTable</b> ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) fields added to the PivotTable ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) view behave as if the <b>fillDownLabels</b> attribute of the <a href="#">CT_PivotField</a> elements associated with those <b>PivotTable</b> ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) fields are set to "false".
"true"	Specifies that <b>PivotTable</b> ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) fields added to the PivotTable ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) view behave as if the <b>fillDownLabels</b> attribute of the <b>CT_PivotField</b> elements associated with those <b>PivotTable</b> ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) fields are set to "true".

**visualTotalsForSets:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether **hidden** PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) items will be included when calculating totals for **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) named sets. MUST be a value from the following table.

Value	Meaning
"false"	Include hidden PivotTable ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) items in the set totals.
"true"	Do not include hidden PivotTable ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) items in the set totals.

**calculatedMembersInFilters:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) OLAP-calculated members participate in PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) manual filters and PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) advanced filters.

Value	Meaning
"false"	PivotTable ([ISO/IEC29500-1:2016] section 18.10) OLAP-calculated members do not participate in PivotTable ([ISO/IEC29500-1:2016] section 18.10) manual filters and PivotTable ([ISO/IEC29500-1:2016] section 18.10) advanced filters.
"true"	PivotTable ([ISO/IEC29500-1:2016] section 18.10) OLAP-calculated members participate in PivotTable ([ISO/IEC29500-1:2016] section 18.10) manual filters and PivotTable ([ISO/IEC29500-1:2016] section 18.10) advanced filters as do other PivotTable ([ISO/IEC29500-1:2016] section 18.10) items.

**altText:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the alternate text for the PivotTable ([ISO/IEC29500-1:2016] section 18.10) view. The string **MUST** be less than or equal to 2,000 characters in length.

**altTextSummary:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the alternate text summary for the PivotTable ([ISO/IEC29500-1:2016] section 18.10) view. This string **MUST** be less than or equal to 2,000 characters in length.

**enableEdit:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether PivotTable what-if analysis is enabled for the current PivotTable ([ISO/IEC29500-1:2016] section 18.10) view.

**autoApply:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether PivotTable what-if analysis values are automatically allocated.

**allocationMethod:** An **ST\_AllocationMethod** attribute that specifies the allocation method to use for PivotTable what-if analysis.

**weightExpression:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the **Multidimensional Expressions (MDX)** of the weight expression for weighted allocations of PivotTable what-if analysis values. This string **MUST** be less than or equal to 65,535 characters in length.

**hideValuesRow:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the values **row** in the PivotTable ([ISO/IEC29500-1:2016] section 18.10) report is visible.

Value	Meaning
"false"	The values row in the PivotTable ([ISO/IEC29500-1:2016] section 18.10) report is visible.
"true"	The values row in the PivotTable ([ISO/IEC29500-1:2016] section 18.10) report is not visible.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotTableDefinition">
  <xsd:sequence>
    <xsd:element name="pivotEdits" type="CT_PivotEdits" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="pivotChanges" type="CT_PivotChanges" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="conditionalFormats" type="CT_ConditionalFormats" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
```

```

</xsd:sequence>
<xsd:attribute name="fillDownLabelsDefault" type="xsd:boolean" use="optional"
default="false"/>
<xsd:attribute name="visualTotalsForSets" type="xsd:boolean" use="optional"
default="false"/>
<xsd:attribute name="calculatedMembersInFilters" type="xsd:boolean" use="optional"
default="false"/>
<xsd:attribute name="altText" type="x:ST_Xstring" use="optional"/>
<xsd:attribute name="altTextSummary" type="x:ST_Xstring" use="optional"/>
<xsd:attribute name="enableEdit" type="xsd:boolean" use="optional" default="false"/>
<xsd:attribute name="autoApply" type="xsd:boolean" use="optional" default="false"/>
<xsd:attribute name="allocationMethod" type="ST_AllocationMethod" use="optional"
default="equalAllocation"/>
<xsd:attribute name="weightExpression" type="x:ST_Xstring" use="optional"/>
<xsd:attribute name="hideValuesRow" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.33 CT\_PivotCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [pivotCacheDefinition](#)

A complex type that specifies the extended properties of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **PivotCache** definition.

*Attributes:*

**slicerData:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the [Slicer Cache Relationship to PivotCache](#). MUST be "true" if the **OLAP** PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **PivotCache** definition is being referenced by a [slicer cache](#).

**pivotCacheId:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute which uniquely identifies this PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache. The value MUST be greater than or equal to 0. The value MUST NOT be 0 if there is a slicer cache that uses this PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache as a **data source**, or if there is a [CT\\_PivotCacheIdVersion](#) element that is preceded by this element.

**supportSubqueryNonVisual:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the OLAP **source data** of this PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) supports **hidden** PivotTable items.

**supportSubqueryCalcMem:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the OLAP source data of this PivotTable supports PivotTable calculated members in an **OLAP subselect** for filtering.

Value	Meaning
"true"	The OLAP source data of this PivotTable supports PivotTable calculated members in an OLAP subselect for filtering.
"false"	The OLAP source data of this PivotTable does not support PivotTable calculated members in an OLAP subselect for filtering.

**supportAddCalcMems:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) calculated members are shown for filtering.



The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotCacheDefinition">
  <xsd:attribute name="slicerData" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="supportSubqueryNonVisual" type="xsd:boolean" use="optional"
  default="false"/>
  <xsd:attribute name="supportSubqueryCalcMem" type="xsd:boolean" use="optional"
  default="false"/>
  <xsd:attribute name="supportAddCalcMems" type="xsd:boolean" use="optional"
  default="false"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.34 CT\_Connection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [connection](#)

A complex type that specifies the extended properties of an external connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13).

*Child Elements:*

**calculatedMembers:** A **CT\_CalculatedMembers** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies a list of PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) OLAP-calculated members associated with this external connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13). If this external connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13) is associated with a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache, the list MUST NOT exist. If this element exists, the ancestor **CT\_connection** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element of this element MUST have a child **CT\_OlapPr** ([\[ISO/IEC29500-1:2016\]](#) section 18.13.5) element.

*Attributes:*

**culture:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the language associated with this external connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13). The length of this string MUST be less than 85 characters. If the length of this string is greater than 0, the contents of this string SHOULD [<16>](#) be a language tag as specified by [\[RFC3066\]](#). If this attribute is not present, the **data connection** is using the server language.

**embeddedDataId:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies an embedded [Custom Data](#) part. The length of this value MUST be less than 65,536 characters. If the length of this string is greater than 0, the contents of this string MUST be equal to the **id** attribute of a [CT\\_DatastoreItem](#) element, in a [Custom Data Properties](#) part in this package ([\[ISO/IEC29500-1:2016\]](#) section 9).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Connection">
  <xsd:sequence>
    <xsd:element name="calculatedMembers" type="x:CT_CalculatedMembers" minOccurs="0"
    maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="culture" use="optional" type="x:ST_Xstring"/>
  <xsd:attribute name="embeddedDataId" use="optional" type="x:ST_Xstring"/>
</xsd:complexType>
```

```
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.35 CT\_Table

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [table](#)

A complex type that specifies alternate text properties for the table.

*Attributes:*

**altText:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the alternate text for the table. The string **MUST** be less than or equal to 25,000 characters in length.

**altTextSummary:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the alternate text summary for the table. The string **MUST** be less than or equal to 50,000 characters in length.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Table">
  <xsd:attribute name="altText" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="altTextSummary" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.36 CT\_CfIcon

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_IconSet](#)

A complex type that specifies a single **icon** of an **icon set**.

*Attributes:*

**iconSet:** An **ST\_IconSetType** attribute that specifies the icon set.

**iconId:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the icon to be used. If the icon set specified by **iconSet** has three icons, this value **MUST** be less than or equal to 2. If the icon set specified by **iconSet** has four icons, this value **MUST** be less than or equal to 3. If the icon set specified by **iconSet** has five icons, this value **MUST** be less than or equal to 4. If **iconSet** equals "NoIcons", this value **MUST** be 0.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CfIcon">
  <xsd:attribute name="iconSet" type="ST_IconSetType" use="required"/>
  <xsd:attribute name="iconId" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.37 CT\_PivotEdits

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotTableDefinition](#)

A complex type that specifies user inputs related to [PivotTable what-if analysis](#) in single **cells** of the PivotTable ([ISO/IEC29500-1:2016] section 18.10) data area. It also specifies the collections of **MDX unique names** that identify the values in the **OLAP data source**, and specifies the PivotTable ([ISO/IEC29500-1:2016] section 18.10) rules that can be used to identify the cells in the PivotTable ([ISO/IEC29500-1:2016] section 18.10) data area.

*Child Elements:*

**pivotEdit:** A [CT\\_PivotEdit](#) element that specifies user input, related to PivotTable what-if analysis, in a single cell of the PivotTable ([ISO/IEC29500-1:2016] section 18.10) data area, and specifies the collection of MDX unique names that identifies the value in the OLAP data source, and specifies a PivotTable ([ISO/IEC29500-1:2016] section 18.10) rule that can be used to identify the cell in the PivotTable ([ISO/IEC29500-1:2016] section 18.10) data area.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotEdits">
  <xsd:sequence>
    <xsd:element name="pivotEdit" minOccurs="1" maxOccurs="unbounded" type="CT_PivotEdit"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.38 CT\_PivotEdit

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotEdits](#)

A complex type that specifies user input, related to [PivotTable what-if analysis](#), in a single **cell** of the PivotTable ([ISO/IEC29500-1:2016] section 18.10) data area.

*Child Elements:*

**userEdit:** A [CT\\_PivotUserEdit](#) element that specifies the user input value or **formula** that replaces the original cell value, in a single cell of the PivotTable ([ISO/IEC29500-1:2016] section 18.10) data area.

**tupleItems:** A [CT\\_TupleItems](#) element that specifies the **MDX unique names** that identify the value in the **OLAP data source** that was changed using PivotTable what-if analysis.

**pivotArea:** A [CT\\_PivotArea](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies a PivotTable ([ISO/IEC29500-1:2016] section 18.10) rule that can be used to identify the cell in the PivotTable ([ISO/IEC29500-1:2016] section 18.10) data area.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotEdit">
  <xsd:sequence>
    <xsd:element name="userEdit" type="CT_PivotUserEdit" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="tupleItems" type="CT_TupleItems" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="pivotArea" type="x:CT_PivotArea" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.39 CT\_PivotChanges

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotTableDefinition](#)

A complex type that specifies the values used for [PivotTable what-if analysis](#) calculations and specifies the allocation methods for how to apply the values. It also specifies the collections of **MDX unique names** that identify the original values in the **OLAP data source** that were changed.

*Child Elements:*

**pivotChange:** A [CT\\_PivotChange](#) element that specifies the value used for PivotTable what-if analysis calculation and specifies the allocation method for how to apply the value. It also specifies a collection of MDX unique names that identifies the original value in the OLAP data source that was changed.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotChanges">
  <xsd:sequence>
    <xsd:element name="pivotChange" minOccurs="1" maxOccurs="unbounded"
type="CT_PivotChange"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.40 CT\_PivotChange

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotChanges](#)

A complex type that specifies the value used for [PivotTable what-if analysis](#) calculation and specifies the allocation method for how to apply the value. It also specifies a collection of **MDX unique names** that identifies the original value in the **OLAP data source** that was changed.

*Child Elements:*

**editValue:** A [CT\\_PivotEditValue](#) element that specifies the value that replaces the original value in the OLAP data source for the PivotTable what-if analysis.

**tupleItems:** A [CT\\_TupleItems](#) element that specifies the MDX unique names that identify the value in the OLAP data source that was changed using PivotTable what-if analysis.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) that specifies future extensibility for this element.

*Attributes:*

**allocationMethod:** An [ST\\_AllocationMethod](#) attribute that specifies the allocation method, used by PivotTable what-if analysis, to change the value in the OLAP data source.

**weightExpression:** An [ST\\_Xstring](#) ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the **OLAP weight expression** for PivotTable what-if analysis. The **weightExpression** MUST NOT exist if **allocationMethod** equals equalAllocation or equals equalIncrement. The **weightExpression** MUST be greater than or equal to 0 and less than or equal to 65,535 characters in length.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotChange">
  <xsd:sequence>
    <xsd:element name="editValue" type="CT_PivotEditValue" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="tupleItems" type="CT_TupleItems" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="allocationMethod" type="ST_AllocationMethod"
    default="equalAllocation"/>
  <xsd:attribute name="weightExpression" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.41 CT\_PivotUserEdit

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotEdit](#)

A complex type that specifies user input, related to [PivotTable what-if analysis](#), in a single **cell** of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data area.

*Child Elements:*

**xm:f:** An **f** element that specifies a **formula**. The formula MUST adhere to the grammar provided in [Formulas](#), with the following restriction: The **formula** MUST NOT use the bang-reference or bang-name production rules.

**editValue:** A [CT\\_PivotEditValue](#) element that specifies the user input value that replaces the original cell value, in a single cell of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data area.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotUserEdit">
  <xsd:choice minOccurs="1" maxOccurs="1">
    <xsd:element ref="xm:f" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="editValue" type="CT_PivotEditValue" minOccurs="1" maxOccurs="1"/>
  </xsd:choice>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.42 CT\_PivotEditValue

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotUserEdit](#), [CT\\_PivotChange](#)

A complex type that specifies the value type of the user input in the single **cell** of the PivotTable, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.10, data area, or value type of the value that replaces the original value in the **OLAP data source** for PivotTable what-if analysis, as specified in section [2.3.1](#).

*Attributes:*

**valueType:** An **ST\_PivotEditValueType** attribute, as specified in section [2.7.11](#), that specifies the type of the value of the user input or the type of the value that replaces the original value in the OLAP data source.

The length of the string **MUST** be greater than zero and **MUST** be less than 32,768 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotEditValue">
  <xsd:simpleContent>
    <xsd:extension base="x:ST_Xstring">
      <xsd:attribute name="valueType" use="required" type="ST_PivotEditValueType"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.43 CT\_TupleItems

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotEdit](#), [CT\\_PivotChange](#)

A complex type that specifies the **MDX unique names** that identify the value in the **OLAP data source** using PivotTable what-if analysis, as specified in section [2.3.1](#).

*Child Elements:*

**tupleItem:** An **ST\_Xstring** element, as specified in [\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19, that specifies an MDX unique name. The number of these elements **MUST** be greater than zero and **MUST** be less than  $2^{31}$ . The length of each **ST\_Xstring** **MUST** be greater than zero and **MUST** be less than or equal to 65,535 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TupleItems">
  <xsd:sequence>
    <xsd:element name="tupleItem" type="x:ST_Xstring" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.44 CT\_SlicerStyle

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SlicerStyles](#)

**CT\_SlicerStyle** specifies table style elements, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.8, of the slicer style, as specified in section [2.3.2.4](#), that are specific to slicers, as specified in section [2.3.2](#).

*Child Elements:*

**slicerStyleElements:** A **CT\_SlicerStyleElements**, as specified in section [2.6.52](#), that specifies table style elements of the slicer style that are specific to slicers. There MUST NOT be more than one **CT\_SlicerStyleElements** in this element.

*Attributes:*

**name:** A **string** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.2.1, that specifies the name of the user-defined table style that this slicer style is based upon. The length of the **string** MUST be greater than or equal to 1 character and less than or equal to 255 characters. This **string** MUST be unique within the **CT\_SlicerStyle** elements in the **Styles** part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.20. This **string** MUST match the **name** attribute of a **CT\_TableStyle** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, in the **Styles** part. In the **CT\_TableStyle** element with a **name** attribute that matches this **string**, the **pivot** attribute MUST equal "false" and the **table** attribute MUST equal "false".

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerStyle">
  <xsd:sequence>
    <xsd:element name="slicerStyleElements" type="CT_SlicerStyleElements" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.45 CT\_SlicerStyleElement

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SlicerStyleElements](#)

A complex type that specifies a table style element, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.8, of a slicer style, as specified in section [2.3.2.4](#).

*Attributes:*

**type:** An **ST\_SlicerStyleType** attribute, as specified in section [2.7.13](#), that specifies the type of the table style element. This attribute MUST be unique within the parent **CT\_SlicerStyleElements** complex type.

**dxfid:** An **ST\_DxfId** attribute, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.18.25, that specifies a zero-based index for the list of elements specified by the **dxfs** global element, as specified

in section [2.4.24](#). The specified **CT\_Dxf** complex type, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, specifies the formatting to use with this table style element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerStyleElement">
  <xsd:attribute name="type" type="ST_SlicerStyleType" use="required"/>
  <xsd:attribute name="dxfId" type="x:ST_DxfId" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.46 CT\_OleItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [oleItem](#)

**OleItem** is a complex type that specifies an OLE data item, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.14, with associated cached values.

*Child Elements:*

**values:** A **CT\_DdeValues** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies the cached values.

*Attributes:*

**name:** An **ST\_Xstring** attribute, as specified in [\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19, that specifies the name of the OLE data item.

**icon:** A **Boolean** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.2.2, that specifies whether the OLE data item is represented as an icon.

Value	Meaning
"false"	The OLE data item is not represented as an icon.
"true"	The OLE data item is represented as an icon.

**advise:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the application requests that the **OLE data source**, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.14, provides notifications when the **source data** changes.

Value	Meaning
"false"	The application does not request to be notified when the source data changes.
"true"	The application requests to be notified when the source data changes.

**preferPic:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the OLE data item is an image.



Value	Meaning
"false"	The OLE data item is not an image.
"true"	The OLE data item is an image.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OleItem">
  <xsd:sequence>
    <xsd:element name="values" type="x:CT_DdeValues" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="icon" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="advise" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="preferPic" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.47 CT\_PivotHierarchy

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [pivotHierarchy](#)

A complex type that specifies whether the ancestor **CT\_PivotHierarchy** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, SHOULD [<17>](#) be ignored.

The ancestor **CT\_PivotHierarchy** element has the following restrictions on attributes.

Name	Value
<b>caption</b>	MUST NOT be specified.
<b>dragOff</b>	MUST equal "false".
<b>dragToCol</b>	MUST equal "false".
<b>dragToData</b>	MUST equal "true".
<b>dragToPage</b>	MUST equal "false".
<b>dragToRow</b>	MUST equal "false".
<b>includeNewItemInFilter</b>	MUST equal "true".
<b>multipleItemSelectionAllowed</b>	MUST NOT be specified.
<b>outline</b>	MUST NOT be specified.
<b>showInFieldList</b>	MUST NOT be specified.
<b>subtotalTop</b>	MUST NOT be specified.

The ancestor **CT\_PivotHierarchy** element has the following restrictions on child elements.

Child element	Restriction
<b>CT_PivotHierarchy</b> (this element)	Exactly 1 MUST exist.
<b>CT_Members</b> ([ISO/IEC29500-4:2016] section A.2)	MUST NOT exist.
<b>CT_MemberProperties</b> ([ISO/IEC29500-4:2016] section A.2)	MUST NOT exist.

If this element exists, there MUST exist a **CT\_DataField** element, as specified in [ISO/IEC29500-4:2016] section A.2, with an **fld** attribute equal to the zero-based index of a **CT\_CacheField** element, as specified in [ISO/IEC29500-4:2016] section A.2, in the list of **CT\_CacheField** elements specified by **CT\_CacheFields**, as specified in [ISO/IEC29500-4:2016] section A.2, with a **hierarchy** attribute that specifies a **CT\_CacheHierarchy**, as specified in [ISO/IEC29500-4:2016] section A.2, with a zero-based index in the list of **CT\_CacheHierarchy** elements specified by the **CT\_CacheHierarchies** element, as specified in [ISO/IEC29500-4:2016] section A.2, equal to the zero-based index of the ancestor **CT\_PivotHierarchy** element in the list of **CT\_PivotHierarchy** elements specified by **CT\_PivotHierarchies**, as specified in [ISO/IEC29500-4:2016] section A.2. Additionally, that **CT\_DataField** element MUST have a **descendant CT\_DataField** element, as specified in section [2.6.25](#), with a **sourceField** attribute specified.

For more details, see section 2.6.25.

*Attributes:*

**ignore:** A **Boolean** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.2.2, that MUST be "true" and MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotHierarchy">
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.48 CT\_CacheField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [cacheField](#)

This complex type specifies the ancestor **CT\_CacheField** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that SHOULD [<18>](#) be ignored.

The following table lists the restrictions on attributes of the ancestor **CT\_CacheField** element.

Name	Value
<b>caption</b>	MUST NOT be specified.
<b>databaseField</b>	MUST NOT be specified.
<b>formula</b>	MUST NOT be specified.
<b>level</b>	MUST equal "32767".
<b>mappingCount</b>	MUST NOT be specified.

Name	Value
<b>memberPropertyField</b>	MUST NOT be specified.
<b>numFmtId</b>	MUST equal zero ("0").
<b>propertyName</b>	MUST NOT be specified.
<b>serverField</b>	MUST NOT be specified.
<b>sqlType</b>	MUST NOT be specified.
<b>uniqueList</b>	MUST NOT be specified.

The following table lists the restrictions on child elements of the ancestor **CT\_CacheField** element.

Child element	Restriction
<b>CT_CacheField</b> (this element)	Exactly 1 MUST exist.
<b>CT_FieldGroup</b> ([ISO/IEC29500-4:2016] section A.2)	MUST NOT exist.
<b>CT_X</b> ([ISO/IEC29500-4:2016] section A.2)	MUST NOT exist.
<b>CT_SharedItems</b> ([ISO/IEC29500-4:2016] section A.2)	MUST NOT exist.

If this element exists, there MUST exist a **CT\_DataField** ([ISO/IEC29500-4:2016] section A.2) element with an **fld** attribute equal to the zero-based index of the ancestor **CT\_CacheField** element in the list of **CT\_CacheField** elements specified by **CT\_CacheFields** ([ISO/IEC29500-4:2016] section A.2). Additionally, that **CT\_DataField** element MUST have a **descendant CT\_DataField** element (section [2.6.25](#)) with a **sourceField** attribute specified.

For more details, see [CT\\_DataField](#)

*Attributes:*

**ignore:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that MUST be "true" and MUST be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CacheField">
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.49 CT\_ConditionalFormats

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_PivotTableDefinition](#)

This complex type specifies a collection of conditional formats applied to the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view.

*Child Elements:*

**conditionalFormat:** A [CT\\_ConditionalFormat](#) element that specifies the **conditional formatting** applied to the PivotTable ([ISO/IEC29500-1:2016] section 18.10) view.

*Attributes:*

**count:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of **conditionalFormat** child elements of this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ConditionalFormats">
  <xsd:sequence>
    <xsd:element name="conditionalFormat" minOccurs="1" maxOccurs="unbounded"
type="CT_ConditionalFormat"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.50 CT\_ConditionalFormat

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_ConditionalFormats](#)

This complex type specifies the scope, type, and priority of **conditional formatting** applied to this **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) view.

*Child Elements:*

**pivotAreas:** A **CT\_PivotAreas** ([ISO/IEC29500-4:2016] section A.2) element that specifies a set of PivotTable areas this conditional formatting applies to.

**extLst:** A **CT\_ExtensionList** ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**scope:** An **ST\_Scope** ([ISO/IEC29500-1:2016] section 18.18.67) attribute that specifies the scope of this conditional formatting.

**type:** An **ST\_Type** ([ISO/IEC29500-1:2016] section 18.18.84) attribute that MUST NOT be present or MUST be equal to "none".

**priority:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the priority of the PivotTable conditional formatting. This value MUST be greater than or equal to 1. If this attribute is present, there MUST exist a **CT\_CfRule** with a **priority** attribute equal to the value of this **field** and it MUST be the same **CT\_CfRule** element that is specified by **id**. The **CT\_CfRule** specified by this value MUST have an ancestor **CT\_ConditionalFormatting** element with a **pivot** attribute equal to "true".

**id:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a particular **CT\_CfRule**. There MUST exist a **CT\_CfRule** with an **id** attribute equal to this value and it MUST be the same **CT\_CfRule** element that is specified by **priority**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT ConditionalFormat">
  <xsd:sequence>
    <xsd:element name="pivotAreas" type="x:CT_PivotAreas" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" minOccurs="0" maxOccurs="1" type="x:CT_ExtensionList"/>
  </xsd:sequence>
  <xsd:attribute name="scope" type="x:ST_Scope" default="selection" use="optional"/>
  <xsd:attribute name="type" type="x:ST_Type" default="none" use="optional"/>
  <xsd:attribute name="priority" use="optional" type="xsd:unsignedInt"/>
  <xsd:attribute name="id" type="x:ST_Guid" use="required"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.51 CT\_SlicerStyles

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [slicerStyles](#)

A complex type that specifies a group of [slicer styles](#) and the default slicer style to apply to [slicers](#).

*Child Elements:*

**slicerStyle:** A [CT\\_SlicerStyle](#) element that specifies a slicer style.

*Attributes:*

**defaultSlicerStyle:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the default slicer style to apply to slicers. The length of the string **MUST** be greater than or equal to 1 character and less than or equal to 255 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_SlicerStyles">
  <xsd:sequence>
    <xsd:element name="slicerStyle" type="CT_SlicerStyle" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="defaultSlicerStyle" type="xsd:string" use="required"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.52 CT\_SlicerStyleElements

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SlicerStyle](#)

A complex type that specifies the list of table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements of a [slicer style](#) that are specific to [slicers](#).

*Child Elements:*

**slicerStyleElement:** A [CT\\_SlicerStyleElement](#) element that specifies a table style ([ISO/IEC29500-1:2016] section 18.8) element of a slicer style that is specific to slicers.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerStyleElements">
  <xsd:sequence>
    <xsd:element name="slicerStyleElement" type="CT_SlicerStyleElement" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.53 CT\_IgnoredErrors

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [ignoredErrors](#)

A complex type that specifies a list of **cell ranges** and the types of cell errors that are to be ignored for each of those specific cell ranges.

*Child Elements:*

**ignoredError:** A [CT\\_IgnoredError](#) element that specifies the types of cell errors that are to be ignored for a specific cell range.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_IgnoredErrors">
  <xsd:sequence>
    <xsd:element name="ignoredError" type="CT_IgnoredError" minOccurs="0"
maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.54 CT\_IgnoredError

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_IgnoredErrors](#)

A complex type that specifies the types of **cell** errors that are to be ignored for a specific cell **range**. This complex type is equivalent to **CT\_IgnoredError** ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.50), but allows the **sqref** child element to have greater than or equal to 8,192 [ref](#) child elements.

*Child Elements:*

**xm:sqref:** A [sqref](#) element that specifies the range where cell errors have been ignored. This **sqref** MUST have greater than or equal to 8,192 **ref** child elements.

*Attributes:*

**evalError:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore calculation errors.

Value	Meaning
"true"	Ignore calculation errors.
"false"	Do not ignore calculation errors.

**twoDigitTextYear:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from the formatting of date/time values.

Value	Meaning
"true"	Ignore errors arising from the formatting of data/time values.
"false"	Do not ignore errors arising from the formatting of date/time values.

**numberStoredAsText:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from the formatting of numeric values.

Value	Meaning
"true"	Ignore errors arising from the formatting of numeric values.
"false"	Do not ignore errors arising from the formatting of numeric values.

**formula:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from formulas that are inconsistent with formulas ([ISO/IEC29500-1:2016] section 18.17) in neighboring cells.

Value	Meaning
"true"	Ignore errors arising from formulas that are inconsistent with formulas ([ISO/IEC29500-1:2016] section 18.17) in neighboring cells.
"false"	Do not ignore errors arising from formulas that are inconsistent with formulas ([ISO/IEC29500-1:2016] section 18.17) in neighboring cells.

**formulaRange:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from formulas ([ISO/IEC29500-1:2016] section 18.17) that contain references to less than the entirety of a range containing contiguous data.

Value	Meaning
"true"	Ignore errors arising from formulas ([ISO/IEC29500-1:2016] section 18.17) that contain references to less than the entirety of a range containing contiguous data.
"false"	Do not ignore errors arising from formulas ([ISO/IEC29500-1:2016] section 18.17) that contain references to less than the entirety of a range containing contiguous data.

**unlockedFormula:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from unprotected formulas ([ISO/IEC29500-1:2016] section 18.17).

Value	Meaning
"true"	Ignore errors arising from unprotected formulas ([ISO/IEC29500-1:2016] section 18.17).
"false"	Do not ignore errors arising from unprotected formulas ([ISO/IEC29500-1:2016] section 18.17).

**emptyCellReference:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from references to empty cells.

Value	Meaning
"true"	Ignore errors arising from references to empty cells.
"false"	Do not ignore errors arising from references to empty cells.

**listDataValidation:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from **data validation**.

Value	Meaning
"true"	Ignore errors arising from data validation.
"false"	Do not ignore errors arising from data validation.

**calculatedColumn:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to ignore errors arising from **calculated column** formulas ([ISO/IEC29500-1:2016] section 18.17).

Value	Meaning
"true"	Ignore errors arising from calculated column formulas ([ISO/IEC29500-1:2016] section 18.17).
"false"	Do not ignore errors arising from calculated column formulas ([ISO/IEC29500-1:2016] section 18.17).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT IgnoredError">
  <xsd:sequence>
    <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="evalError" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="twoDigitTextYear" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="numberStoredAsText" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="formula" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="formulaRange" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```



```

    <xsd:attribute name="unlockedFormula" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="emptyCellReference" type="xsd:boolean" use="optional"
    default="false"/>
    <xsd:attribute name="listDataValidation" type="xsd:boolean" use="optional"
    default="false"/>
    <xsd:attribute name="calculatedColumn" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.55 CT\_ProtectedRanges

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [protectedRanges](#)

A complex type that specifies a group of protected **ranges** on the **sheet**. MUST contain fewer than 2<sup>31</sup> elements.

*Child Elements:*

**protectedRange:** A [CT\\_ProtectedRange](#) element that specifies the properties for a single protected range.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_ProtectedRanges">
  <xsd:sequence>
    <xsd:element name="protectedRange" type="CT_ProtectedRange" minOccurs="1"
    maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.56 CT\_ProtectedRange

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_ProtectedRanges](#)

A complex type that specifies a **cell range** to be unprotected. The cell range is editable with a password or proper **credentials** when **sheet protection** is on and the cell is **locked**.

*Child Elements:*

**xm:sqref:** A [sqref](#) element that specifies the cell range to be unprotected.

*Attributes:*

**password:** An **ST\_UnsignedShortHex** ([ISO/IEC29500-4:2016] section 15.8.2) attribute that specifies the verifier value of the password required for editing the cell range. If the value is 0x0000, then there is no password.

The verifier value is calculated in two stages. First, the provided **Unicode** password string is converted to a new character string in the ANSI code page of the current system by using the algorithm specified in the **revisionsPassword** attribute in [ISO/IEC29500-4:2016] section 15.3.3. Second, this string is

input into the **XOR obfuscation** algorithm specified in [\[MS-OFFCRYPTO\]](#) section 2.3.7.1 to produce a 16-bit password verifier value.

This attribute MUST NOT be present if **algorithmName** is present.

**algorithmName:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the name of the **hash** algorithm used to calculate **hashValue**. If this attribute is present, **hashValue**, **saltValue**, and **spinCount** MUST also be present. This attribute MUST NOT be present if **password** is present.

**hashValue:** A **base64Binary** ([\[XMLSCHEMA2/2\]](#) section 3.2.16) attribute that specifies the hash value for the password required to edit this range. This value will be compared with the resulting hash value after hashing the user-supplied password by using the algorithm specified by **algorithmName**, and if the two values match, the protection will no longer be enforced.

Password hashes are computed by the algorithm specified in [\[MS-OFFCRYPTO\]](#) section 2.4.2.4. Under circumstances as specified in [\[MS-OFFCRYPTO\]](#) section 1.3.4, the password is first converted to a 16-bit verifier value and reinterpreted as a single Unicode character, which is then passed to the algorithm specified in [\[MS-OFFCRYPTO\]](#) section 2.4.2.4. There is no way to determine which method was used to generate a hash without knowledge of the password; it is necessary to compute both hashes to verify the password.

This attribute MUST be present if and only if **algorithmName** is present.

**saltValue:** A **base64Binary** ([\[XMLSCHEMA2/2\]](#) section 3.2.16) attribute that specifies the **salt** used to calculate **hashValue**. This attribute MUST be present if and only if **algorithmName** is present.

**spinCount:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the number of times that the hash function was iterated over the password to generate the **hashValue**. It MUST NOT be greater than 10,000,000. This attribute MUST be present if and only if **algorithmName** is present.

**name:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the title of the cell range. The value MUST be unique for the sheet. The number of characters in the string MUST be greater than or equal to 1, and less than or equal to 255. The string MUST conform to the following **Augmented Backus-Naur Form (ABNF)** ([\[RFC5234\]](#)) grammar:

```
string = name-start-character *name-character
name-start-character = "_" / "\" / Unicode-character
name-character = name-start-character / Unicode-space / Unicode-digit / "?" / "."
```

The following points summarize this grammar:

- Unicode-character is any code point that is a character as defined by the Unicode character properties, [\[UNICODE5.1\]](#) chapter 4.
- Unicode-digit is any code point that is a digit as defined by the Unicode character properties, [\[UNICODE5.1\]](#) chapter 4.
- Unicode-space is any code point that is a space as defined by the Unicode character properties, [\[UNICODE5.1\]](#) chapter 4.

**securityDescriptor:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that describes a **security descriptor** ([\[MS-AZOD\]](#) section [1.1.1.3](#)) that lists users who can edit the cell range without providing the password.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_ProtectedRange">
  <xsd:sequence maxOccurs="1">
    <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="password" type="x:ST_UnsignedShortHex" use="optional"/>
  <xsd:attribute name="algorithmName" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="hashValue" type="xsd:base64Binary" use="optional"/>
  <xsd:attribute name="saltValue" type="xsd:base64Binary" use="optional"/>
  <xsd:attribute name="spinCount" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="securityDescriptor" type="xsd:string" use="optional"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.57 CT\_IconFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [iconFilter](#)

This complex type specifies the **icon set** and particular **icon** within that set to **filter** by. **Rows** with a cell icon that do not match these criteria will be hidden when the filter is applied.

*Attributes:*

**iconSet:** An [ST\\_IconSetType](#) attribute that specifies the icon set used as the filter criteria.

**iconId:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the index of the icon to be used as filter criteria. If **iconSet** is "NoIcons", this value MUST be 0 and this record does not specify a filter and MUST be ignored. If **iconSet** is not "NoIcons", this value MUST be greater than or equal to 0. If the icon set specified by **iconSet** has three icons, this value MUST be less than or equal to 2. If the icon set specified by **iconSet** has four icons, this value MUST be less than or equal to 3. If the icon set specified by **iconSet** has five icons, this value MUST be less than or equal to 4.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_IconFilter">
  <xsd:attribute name="iconSet" type="ST_IconSetType" use="required"/>
  <xsd:attribute name="iconId" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.58 CT\_Filter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [filter](#)

This complex type specifies a **filter** criterion. **Rows** that contain a **cell** within the filter **range** that have value **val** will not be hidden by this **filter** criterion. Rows that do not contain such a cell inside a **filters** element ([ISO/IEC29500-1:2016] section 18.3.2.8) will be hidden.

*Attributes:*

**val:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the value to be used as a filter criterion. The length of this value MUST be less than 65536 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Filter">
  <xsd:attribute name="val" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.59 CT\_CustomFilters

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [customFilters](#)

This complex type specifies custom **filter** criteria. **Rows** that contain a **cell** within the filter **range** such that the value does not meet the custom filter criteria will be hidden.

*Child Elements:*

**customFilter:** A **CT\_CustomFilter** element that specifies a custom filter criterion.

*Attributes:*

**and:** A Boolean ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies the relationship between custom filter criterion. This attribute only applies when there are two criteria.

Value	Meaning
"false"	The two criteria are related by an OR relationship. That is, for a cell value to meet the custom filter criteria, at least one criterion specified by the <b>customFilter</b> child elements MUST be met.
"true"	The two criteria are related by an AND relationship. That is, for a cell value to meet the custom filter criteria, both criteria specified by the <b>customFilter</b> child elements MUST be met.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CustomFilters">
  <xsd:sequence>
    <xsd:element name="customFilter" type="CT_CustomFilter" minOccurs="1" maxOccurs="2"/>
  </xsd:sequence>
  <xsd:attribute name="and" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.60 CT\_CustomFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_CustomFilters](#)

This complex type specifies a custom **filter** criterion.

*Attributes:*

**operator:** An **ST\_FilterOperator** ([ISO/IEC29500-1:2016] section 18.18.31) attribute that specifies the operator of the custom filter criterion.

**val:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the value to be used as a custom filter criterion. The length of this value MUST be less than 65536 characters.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CustomFilter">
  <xsd:attribute name="operator" type="x:ST_FilterOperator" default="equal" use="optional"/>
  <xsd:attribute name="val" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section 5.4 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.61 CT\_SortCondition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_RichSortCondition](#), [sortCondition](#), [CT\\_SortRule](#)

A complex type that specifies a **sort condition** to apply to a **range**.

*Attributes:*

**descending:** A boolean ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies the direction of the **sort**.

Value	Meaning
"false"	If <b>sortBy</b> is "value", sort in ascending order. If <b>sortBy</b> is "cellColor" or "fontColor", cells in which the cell color or cell font color specified by <b>dxflId</b> occurs are ordered at the top of the range. If <b>sortBy</b> is "icon", cells in which the icon specified by <b>iconSet</b> and <b>iconId</b> occurs are ordered at the top of the range.
"true"	If <b>sortBy</b> is "value", sort in descending order. If <b>sortBy</b> is "cellColor" or "fontColor", cells in which the cell color or cell font color specified by <b>dxflId</b> occurs are ordered at the bottom of the range. If <b>sortBy</b> is "icon", cells in which the icon specified by <b>iconSet</b> and <b>iconId</b> occurs are ordered at the bottom of the range.

**sortBy:** An **ST\_SortBy** ([ISO/IEC29500-1:2016] section 18.18.72) attribute that specifies how the cells in a range are sorted.

**ref:** An **ST\_Ref** ([ISO/IEC29500-1:2016] section 18.18.62) attribute that specifies the **row** or **column** to which this sort condition applies. This value MUST be contained within the **ref** in the **sortState** ([ISO/IEC29500-1:2016] section 18.3.1.92) element that precedes this element. If the **sortState.columnSort** attribute that precedes this element is "false", this value specifies the column to which this sort condition applies and there MUST be only a single column specified by **ref**. If the **sortState.columnSort** attribute that precedes this element is "true", this value specifies the row to which this sort condition applies and there MUST be only a single row specified by **ref**.

**customList:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies a comma-delimited list of strings that specifies a custom **sort order**. The order of strings in the list specifies the sort order. When a cell value matches a string in the list, it is sorted ahead of the cell values that match a later string in the list, and so on for each cell in the range. MUST be ignored if **sortBy** is not equal to "value".

**dxfid**: An **ST\_DxfId** ([ISO/IEC29500-1:2016] section 18.18.25) attribute that specifies the format identifier when **sortBy** equals "cellColor" or **sortBy** equals "fontColor". MUST NOT be present if **sortBy** equals "icon" or "value".

**iconSet**: An **ST\_IconSetType** attribute that specifies the icon set when **sortBy** equals "icon". The absence of this attribute means no icon. MUST NOT be present if **sortBy** is not equal to "icon".

**iconId**: An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the zero-based index of an icon in an **icon set**. If the icon set specified by **iconSet** has three icons, this value MUST be less than or equal to 2. If the icon set specified by **iconSet** has four icons, this value MUST be less than or equal to 3. If the icon set specified by **iconSet** has five icons, this value MUST be less than or equal to 4. The absence of this attribute means no icon. MUST NOT be present if **sortBy** is not equal to "icon".

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SortCondition">
  <xsd:attribute name="descending" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="sortBy" type="x:ST_SortBy" use="optional" default="value"/>
  <xsd:attribute name="ref" type="x:ST_Ref" use="required"/>
  <xsd:attribute name="customList" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="dxfid" type="x:ST_DxfId" use="optional"/>
  <xsd:attribute name="iconSet" type="ST_IconSetType" use="optional" default="3Arrows"/>
  <xsd:attribute name="iconId" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.62 CT\_SourceConnection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_CacheSourceExt](#), [sourceConnection](#)

A complex type that stores the connection, which is specified by the **CT\_Connection** element as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that is associated with this pivot cache. The pivot cache MUST be associated with either an **OLAP slicer cache** or a **Non-Worksheet PivotTable**.

*Attributes:*

**name**: An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the connection, which is specified by the **name** attribute of **CT\_Connection** ([ISO/IEC29500-4:2016] section A.2) for the connection that is associated with this pivot cache. The length, in characters, of this value MUST be less than 65,536.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SourceConnection">
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.63 CT\_ListItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_ListItems](#)

A complex type that stores a single item for a list box or a drop-down form **control** [<19>](#).

*Attributes:*

**val:** A **string** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.2.1, that specifies the data for a single item.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ListItem">
  <xsd:attribute name="val" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.64 CT\_ListItems

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_FormControlPr](#)

A complex type that contains a list of items of type **CT\_ListItem**, as specified in section [2.6.63](#), to populate a list box or a drop-down form **control**. When present, the **FmlaRange** attribute of **CT\_FormControlPr**, as specified in section 2.6.65, takes precedence over this element. This element is valid only for list box and drop-down form control.

*Child Elements:*

**item:** A **CT\_ListItem** element that contains a single data item for a list box or drop-down form control.

**extLst:** A **CT\_ExtensionList** element, as specified in ([\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ListItems">
  <xsd:sequence>
    <xsd:element name="item" type="CT_ListItem" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.65 CT\_FormControlPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [formControlPr](#)

A complex type that stores a form control's properties.

*Child Elements:*

**itemLst:** A **CT\_ListItems** element, as specified in section [2.6.64](#), that specifies a list of items to populate a list box or drop-down form control.

**extLst:** A **CT\_ExtensionList** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies future extensibility for this element.

*Attributes:*

**objectType:** An **ST\_ObjectType** attribute that specifies the form control object type.

**checked:** An **ST\_Checked** attribute that specifies whether a check box is selected or a radio button is selected. This attribute only applies to check box and radio button form controls.

**colored:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether a drop-down object has a color applied to it. This attribute only applies to drop-down form controls.

Value	Meaning
"true"	A drop-down object has a color applied to it.
"false"	A drop-down object has no color applied to it.

**dropLines:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the number of lines in the drop-down before scroll bars are added. This attribute only applies to drop-down form controls. This value **MUST** be at least 0 and at most 30000.

**dropStyle:** An **ST\_DropStyle** attribute that specifies the style of the drop-down. This attribute only applies to drop-down form controls.

**dx:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the width of the scroll bar in pixels. This attribute only applies to list boxes, scroll bars, spin boxes and drop-downs [<20>](#).

**firstButton:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the object is the first button in a set of radio buttons. This attribute only applies to radio button form controls.

Value	Meaning
"true"	The object is the first button in a set of radio buttons.
"false"	The object is not the first button in a set of radio buttons.

**fmlaGroup:** An **ST\_Formula** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.35) attribute that specifies the cell an object in a group box is linked to. This attribute overrides the attribute **fmlaLink** for any radio buttons within a group box. This attribute only applies to group box form controls. The application can choose to remove and not save this element and use the attribute **fmlaLink** of the first radio button in the group. This attribute **MUST** be a **cell reference** (see [\[ISO/IEC29500-1:2016\]](#) section 18.17.2.3).

**fmlaLink:** An **ST\_Formula** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.35) attribute that specifies the **cell** the object is linked to. This attribute only applies to check boxes, radio buttons, scroll bars, spin boxes, drop-downs and list boxes. The value in the linked cell and the index of the selected item in the object are linked together. This link is ignored if the form control allows multiple selections. This attribute **MUST** be a cell reference (see [\[ISO/IEC29500-1:2016\]](#) section 18.17.2.3).

**fmlaRange:** An **ST\_Formula** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.35) attribute that specifies the range of **source data** cells. This is used to populate a list box or a drop-down form control [<21>](#). This



attribute only applies to list box and drop-down form controls. This attribute MUST be a cell reference (see [ISO/IEC29500-1:2016] section 18.17.2.3).

**fmlaTxbx:** An **ST\_Formula** ([ISO/IEC29500-1:2016] section 18.18.35) attribute that specifies the source data cell that the form **control** object's data is linked to. Any cell **range** can be specified but only the first cell in the range is considered. This attribute applies only to label and edit box form controls. This attribute MUST be a cell reference (see [ISO/IEC29500-1:2016] section 18.17.2.3).

**horiz:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the scroll bar is horizontal. This attribute only applies to scroll bar form controls.

**inc:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the change in the current value of a scroll bar or a spin box form control as a result of on an increment click. If present, it MUST be at least 0 and at most 30000. This attribute applies only to scroll bar or spin box form controls.

**justLastX:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the last line in text is justified when in an East Asian alignment<22>.

Value	Meaning
"true"	The last line in text is justified when in an East Asian alignment.
"false"	the last line in text is not justified when in an East Asian alignment.

**lockText:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the object's text is locked. This attribute applies only to button, radio button, check box and label form controls.

Value	Meaning
"true"	The object's text is locked.
"false"	The object's text is not locked.

**max:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the maximum value generated by the scroll bar (when scrolled all the way down) or by the spin box. It MUST be at least 0 and at most 30000. This attribute only applies to scroll bars and spin boxes.

**min:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the minimum value generated by the scroll bar (when scrolled all the way up) or by the spin box. It MUST be at least 0 and at most 30000. This attribute only applies to scroll bars and spin box.

**multiSel:** A **string** ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the indices of selected items as a comma-delimited list. The list indices are one-based. This attribute is valid only if the attribute **selType** has the value "multi". This attribute applies only to list box form controls.

**noThreeD:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether 3-D effects are disabled. This attribute only applies to check box, radio button, group box, scroll bar, drop-down, list box, and spin box form controls.

Value	Meaning
"true"	The 3-D effects are disabled.
"false"	The 3-D effects are enabled.

**noThreeD2:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether 3-D effects are disabled. This element is used for drop-downs and list boxes<23>.

Value	Meaning
"true"	The 3-D effects are disabled.
"false"	The 3-D effects are enabled.

**page:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of items to move the scroll bar or spin box on a page click. It **MUST** be at least 0 and at most 30000<24>.

**sel:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the index of the selected item. The list indices are one-based. If set to a value of 0, no items are selected. This attribute applies only to list box and drop-down form controls.

**seltype:** An **ST\_SelType** attribute that specifies the selection type for the list box. This attribute applies only to list box form controls.

**textHAlign:** An **ST\_TextHAlign** attribute that specifies the horizontal text alignment for the object<25>.

**textVAlign:** An **ST\_TextVAlign** attribute that specifies the vertical text alignment for the object<26>.

**val:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of top **rows** currently hidden in the scroll bar. If omitted, the value is assumed to be 0. Those rows are hidden but still accessible by clicking the scroll bar buttons. The number of top hidden rows can change as the user interacts with the scroll bar. This attribute only applies to scroll bar, spin box, list box, and drop-down form controls.

**widthMin:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the smallest width allowed for the drop-down box window in screen **pixels**. This attribute only applies for drop-down form controls.

**editVal:** An **ST\_EditValidation** attribute that specifies how the edit box content is validated if the application chooses to validate it. This attribute only applies to edit box form controls.

**multiLine:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the form control is multiline. This attribute only applies to edit box form controls. This attribute only works when the form control is run in a dialog box.

Value	Meaning
"true"	The form control is multiline.
"false"	The form control is singleline.

**verticalBar:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the control has a vertical scroll bar. This attribute only applies to edit box form controls. This attribute only works when the form control is run in a dialog box.

Value	Meaning
"true"	The control has a vertical scroll bar.
"false"	The control has no vertical scroll bar.

**passwordEdit:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the edit box control stores a password. In this case the control will display \* for every character on it. This attribute only applies to edit box form controls. This attribute only works when the control is run in a dialog box.

Value	Meaning
"true"	The edit box control stores a password.
"false"	The edit box control does not store password.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_FormControlPr">
  <xsd:sequence>
    <xsd:element name="itemLst" type="CT_ListItems" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="objectType" type="ST_ObjectType" use="optional"/>
  <xsd:attribute name="checked" type="ST_Checked" use="optional"/>
  <xsd:attribute name="colored" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="dropLines" type="xsd:unsignedInt" use="optional" default="8"/>
  <xsd:attribute name="dropStyle" type="ST_DropStyle" use="optional"/>
  <xsd:attribute name="dx" type="xsd:unsignedInt" use="optional" default="80"/>
  <xsd:attribute name="firstButton" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="fmlaGroup" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="fmlaLink" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="fmlaRange" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="fmlaTxbx" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="horiz" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="inc" type="xsd:unsignedInt" use="optional" default="1"/>
  <xsd:attribute name="justLastX" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="lockText" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="max" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="min" type="xsd:unsignedInt" use="optional" default="0"/>
  <xsd:attribute name="multiSel" type="xsd:string" use="optional"/>
  <xsd:attribute name="noThreeD" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="noThreeD2" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="page" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="sel" type="xsd:unsignedInt" use="optional"/>

  <xsd:attribute name="seltype" type="ST_SelType" use="optional" default="single"/>
  <xsd:attribute name="textHAlign" type="ST_TextHAlign" use="optional" default="left"/>
  <xsd:attribute name="textVAlign" type="ST_TextVAlign" use="optional" default="top"/>
  <xsd:attribute name="val" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="widthMin" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="editVal" type="ST_EditValidation" use="optional"/>
  <xsd:attribute name="multiLine" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="verticalBar" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="passwordEdit" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.66 CT\_DatastoreItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [datastoreItem](#)

A complex type that specifies properties for an embedded custom data part.

*Child Elements:*

**extLst:** A **CT\_ExtensionList** element, as specified in ([\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies future extensibility for this element.

*Attributes:*

**id:** An **ST\_Xstring** attribute, as specified in ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19, that specifies the identifier for the associated [Custom Data](#) storage. The value of the string is used to identify the associated Custom Data storage, and the value of the string **MUST** be unique for each Custom Data storage in the workbook. The length of this value **MUST** be less than 65536 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DatastoreItem">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.67 CT\_Slicers

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [slicers](#)

A complex type that specifies a list of **CT\_Slicer** elements, as specified in section [2.6.69](#). The list of **CT\_Slicer** elements specifies all [slicer views](#) on the **worksheet**.

*Child Elements:*

**slicer:** A **CT\_Slicer** element that specifies a slicer view on the worksheet.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Slicers">
  <xsd:sequence>
    <xsd:element name="slicer" type="CT_Slicer" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.68 CT\_Slicer

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT Slicers](#)

A complex type that specifies a slicer view, as specified in section [2.3.2.2](#), in this **worksheet**.

Child Elements:

**extLst**: A **CT\_ExtensionList** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies future extensibility for this element.

Attributes:

**name**: An **ST\_Xstring** attribute, as specified in [\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19, that specifies the name of the slicer view. MUST be a unique case-insensitive name within the scope of this **workbook**. The length of this attribute MUST be greater than or equal to 1 character and MUST be less than or equal to 32767 characters.

**xr10:uid**: An **ST\_Guid** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies the unique id of the slicer view. If any instance of this type specifies this attribute, then all instances MUST specify it, and the values MUST be distinct.

**cache**: An **ST\_Xstring** attribute that specifies the name of the slicer cache, as specified in section [2.3.2.1](#), that this slicer view is associated with. There MUST be a **CT\_SlicerCacheDefinition** element, as specified in section [2.6.70](#), within this workbook with the **name** attribute equal to the value of this attribute.

**caption**: An **ST\_Xstring** attribute that specifies the caption of the slicer view. If this string exists, the length MUST be greater than or equal to 1 character.

**startItem**: An **unsignedInt** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.3.22, that specifies the zero-based index of the first slicer item, as specified in section [2.3.2.1.6](#), displayed by the slicer view.

**columnCount**: An **unsignedInt** attribute that specifies the number of **columns** in the slicer view. MUST be greater than or equal to 1 and MUST be less than or equal to 20000.

**showCaption**: A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the caption is displayed.

Value	Meaning
"true"	The caption is displayed.
"false"	The caption is suppressed.

**level**: An **unsignedInt** attribute that specifies the **OLAP level** of the **OLAP hierarchy** of the [slicer source data](#) used by this slicer view.

If the slicer source data is **OLAP**, the value MUST be greater than or equal to 0 and MUST be less than **count** of the [CT\\_OlapSlicerCacheLevelsData](#) element specified by the **CT\_SlicerCacheDefinition** element specified by **cache**. If the OLAP hierarchy has an **OLAP All level**, the value MUST NOT be 0.

If the slicer source data is non-OLAP, this attribute MUST NOT exist.

**style**: An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the [slicer style](#) of the slicer view. If this **field** exists, this string MUST match the **name** attribute of a

**CT\_SlicerStyle** element within this workbook or **MUST** be equal to one of the built-in slicer style names:

Built-in slicer style names
SlicerStyleLight1
SlicerStyleLight2
SlicerStyleLight3
SlicerStyleLight4
SlicerStyleLight5
SlicerStyleLight6
SlicerStyleOther1
SlicerStyleOther2
SlicerStyleDark1
SlicerStyleDark2
SlicerStyleDark3
SlicerStyleDark4
SlicerStyleDark5
SlicerStyleDark6

**lockedPosition:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the slicer view is locked.

Value	Meaning
"true"	The slicer view is locked.
"false"	The slicer view is not locked.

**rowHeight:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the **row** height of the slicer view in **English Metric Units (EMUs)**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Slicer">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute ref="xr10:uid" use="optional"/>
  <xsd:attribute name="cache" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="caption" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="startItem" type="xsd:unsignedInt" use="optional" default="0"/>
  <xsd:attribute name="columnCount" type="xsd:unsignedInt" use="optional" default="1"/>
  <xsd:attribute name="showCaption" type="xsd:boolean" use="optional" default="true"/>
</xsd:complexType>
```

```

<xsd:attribute name="level" type="xsd:unsignedInt" use="optional" default="0"/>
<xsd:attribute name="style" type="x:ST_Xstring" use="optional"/>
<xsd:attribute name="lockedPosition" type="xsd:boolean" use="optional" default="false"/>
<xsd:attribute name="rowHeight" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.69 CT\_Slicer

*Target namespace:* <http://schemas.microsoft.com/office/drawing/2010/slicer>

*Referenced by:* [slicer](#)

This complex type specifies which [slicer view](#) is associated with this drawing element.

*Child Elements:*

**extLst:** A **CT\_OfficeArtExtensionList** ([\[ISO/IEC29500-4:2016\]](#) section A.5.1) element that specifies future extensibility for this element.

*Attributes:*

**name:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the slicer view that is associated with this drawing element. The value of this attribute **MUST** match the value of the **name** attribute of a **slicer** element within the **CT\_Slicers** element for the current **worksheet**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_Slicer">
  <xsd:sequence>
    <xsd:element name="extLst" type="a:CT_OfficeArtExtensionList" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>

```

See section [5.2](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.70 CT\_SlicerCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [slicerCacheDefinition](#)

A complex type that specifies a [slicer cache](#).

*Child Elements:*

**pivotTables:** A **CT\_SlicerCachePivotTables** element (section [2.6.72](#)) that specifies a group of **CT\_SlicerCachePivotTable** elements (section [2.6.73](#)) that specify the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views that are filtered by the slicer cache (section [2.1.4](#)).

**data:** A **CT\_SlicerCacheData** element (section [2.6.71](#)) that specifies a **data source** for the slicer cache.

**extLst:** A **CT\_ExtensionList** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies future extensibility for this element.

*Attributes:*

**name:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the slicer cache. MUST adhere to the name production rule provided in section [2.2.2](#). MUST be a unique case-insensitive name within the scope of **defined names**.

**xr10:uid:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies the unique id of the slicer cache. If any instance of this type specifies this attribute, then all instances MUST specify it, and the values MUST be distinct.

**sourceName:** An **ST\_Xstring** attribute that specifies the **MDX unique name** or **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) cache **field** of the associated PivotTable **PivotCache** used by the slicer cache.

- If the slicer source data (section [2.3.2.1.1](#)) is a non-**OLAP** data source, the value of this attribute MUST be equal to the **name** attribute of a **CT\_CacheField** ([ISO/IEC29500-4:2016] section A.2) element in the list of cache fields, as specified in section [2.3.2.1.2](#), and specify a **PivotTable** cache field. The specified **CT\_CacheField** MUST have a **serverField** attribute equal to "false". The **includeNewItemsInFilter** attributes of the **CT\_PivotField** ([ISO/IEC29500-4:2016] section A.2) elements of all included **CT\_CacheField** elements MUST be equal.
- If the slicer source data is an OLAP data source, the value MUST be equal to the value of the **uniqueName** attribute in one of the **CT\_CacheHierarchy** ([ISO/IEC29500-4:2016] section A.2) elements within the associated OLAP pivot cache, as specified in section [2.3.2.1.4](#), and specify a MDX unique name. The following attributes of the **CT\_CacheHierarchy** element MUST be "false": **measure**, **set**, and **measures**. The **CT\_PivotHierarchy** ([ISO/IEC29500-4:2016] section A.2) element with a zero-based index in the list of **CT\_PivotHierarchy** elements specified by the **CT\_PivotHierarchies** ([ISO/IEC29500-4:2016] section A.2) equal to the zero-based index of the **CT\_CacheHierarchy** element in the list of **CT\_CacheHierarchy** elements specified by **CT\_CacheHierarchies** ([ISO/IEC29500-4:2016] section A.2) MUST have an **includeNewItemsInFilter** attribute equal to "false".

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCacheDefinition">
  <xsd:sequence>
    <xsd:element name="pivotTables" type="CT_SlicerCachePivotTables" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="data" type="CT_SlicerCacheData" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute ref="xr10:uid" use="optional"/>
  <xsd:attribute name="sourceName" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.71 CT\_SlicerCacheData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SlicerCacheDefinition](#)

A complex type that specifies a **data source** for the [slicer cache](#).

*Child Elements:*

**olap:** A [CT\\_OlapSlicerCache](#) element that specifies an OLAP data source.



**tabular:** A [CT\\_TabularSlicerCache](#) element that specifies a non-OLAP data source.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCacheData">
  <xsd:choice minOccurs="1" maxOccurs="1">
    <xsd:element name="olap" type="CT_OlapSlicerCache" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="tabular" type="CT_TabularSlicerCache" minOccurs="1" maxOccurs="1"/>
  </xsd:choice>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.72 CT\_SlicerCachePivotTables

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [slicerCachePivotTables](#), [CT\\_SlicerCacheDefinition](#)

A complex type that specifies a group of [CT\\_SlicerCachePivotTable](#) elements that specify the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views that are filtered by the [slicer cache](#).

*Child Elements:*

**pivotTable:** A [CT\\_SlicerCachePivotTable](#) element that specifies the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view that is filtered. The list of **pivotTable** child elements MUST NOT contain duplicates. The **showCalcMbrs** attribute of all [CT\\_PivotTableDefinition](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) elements associated with PivotTables ([\[ISO/IEC29500-1:2016\]](#) section 18.10) that are specified by **pivotTable** child elements MUST have the same value.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCachePivotTables">
  <xsd:sequence>
    <xsd:element name="pivotTable" type="CT_SlicerCachePivotTable" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.73 CT\_SlicerCachePivotTable

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SlicerCachePivotTables](#)

A complex type that specifies a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view filtered by a [slicer cache](#).

*Attributes:*

**tabId:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the **unique identifier (UID)** of the **worksheet** that contains the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view specified by the **name** attribute. MUST match the **sheetId** of an existing **sheet**

([\[ISO/IEC29500-4:2016\]](#) section A.2) element within the **workbook**. MUST be ignored if the PivotTable specified by the name attribute is a [Non-Worksheet PivotTable](#).

**name:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the name of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) view on the worksheet specified by **tabId** or a Non-Worksheet PivotTable. MUST match the **name** attribute of an existing [pivotTableDefinition](#) element in the worksheet. The **createdVersion** attribute of the **CT\_PivotTableDefinition** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that defines the specified PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) MUST be greater than or equal to 3. **Field showCalcMbrs** of all PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) MUST have the same value. Field **calculatedMembersInFilters** of [CT\\_PivotTableDefinition](#) of all PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) MUST have the same value.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCachePivotTable">
  <xsd:attribute name="tabId" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.74 CT\_OlapSlicerCacheItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCacheRange](#)

This element specifies an [OLAP slicer item](#) of the **OLAP level** in the **OLAP hierarchy** specified by the ancestor [CT\\_OlapSlicerCacheLevelData](#) element. This element contains a list of all ancestor **OLAP members** of this OLAP slicer item in the OLAP hierarchy.

*Child Elements:*

**p:** A [CT\\_OlapSlicerCacheItemParent](#) element that specifies the OLAP members that are ascendants of the OLAP slicer item specified by this element. The first element in this list specifies the OLAP member that is the parent of the OLAP slicer item specified by this element. Each subsequent element in this list specifies an ascendant OLAP member in the next level up the OLAP hierarchy.

*Attributes:*

**n:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the **MDX unique name** of the OLAP member associated with the OLAP slicer item specified by this element.

**c:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the caption of the OLAP slicer item specified by this element.

**nd:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the OLAP slicer item specified by this element has no data associated with it. This attribute MUST NOT exist if the **crossFilter** attribute of the ancestor element **CT\_OlapSlicerCacheLevelData** is "none". For more information, see [Slicer Cross Filtering](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OlapSlicerCacheItem">
  <xsd:sequence>
```

```

    <xsd:element name="p" type="CT_OlapSlicerCacheItemParent" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="c" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="nd" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.75 CT\_OlapSlicerCacheItemParent

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCacheItem](#), [CT\\_OlapSlicerCacheSelection](#)

This element specifies an ancestor **OLAP member** of the OLAP member specified by **CT\_OlapSlicerCacheItem** or **CT\_OlapSlicerCacheSelection** element that contains this element.

*Attributes:*

**n:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the **MDX unique name** of the OLAP member specified by this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_OlapSlicerCacheItemParent">
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.76 CT\_OlapSlicerCacheRange

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCacheRanges](#)

A complex type that specifies a collection of cached [OLAP slicer items](#) in the **OLAP level** specified by the ancestor [CT\\_OlapSlicerCacheLevelData](#) element.

*Child Elements:*

**i:** A [CT\\_OlapSlicerCacheItem](#) element that specifies an OLAP slicer item in the OLAP level specified by the **CT\_OlapSlicerCacheLevelData** element that is part of this range. The number of **CT\_OlapSlicerCacheItem** child elements **MUST** be greater than 0 and equal to or less than 1,000.

*Attributes:*

**startItem:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the zero-based index of the **OLAP member** on this OLAP level for the first item in this range. The order of the OLAP slicer item is determined by the current **sort order** and current [slicer cross filtering](#) setting applied to all OLAP slicer items on this OLAP level. The value of the starting position **MUST** be 0 or **MUST** be a multiple of 1,000. See [Slicer Items](#) for more information.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_OlapSlicerCacheRange">
  <xsd:sequence>
    <xsd:element name="i" type="CT_OlapSlicerCacheItem" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="startItem" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.77 CT\_OlapSlicerCacheRanges

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCacheLevelData](#)

A complex type that specifies the cached [OLAP slicer items](#) for the **OLAP level** specified by the **CT\_OlapSlicerCacheLevelData** element.

*Child Elements:*

**range:** A [CT\\_OlapSlicerCacheRange](#) element that specifies a range of OLAP slicer items for this OLAP level within the **OLAP hierarchy** specified by this [slicer cache](#).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_OlapSlicerCacheRanges">
  <xsd:sequence>
    <xsd:element name="range" type="CT_OlapSlicerCacheRange" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.78 CT\_OlapSlicerCacheLevelData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCacheLevelsData](#)

A complex type that specifies the properties of an **OLAP level** in the **OLAP hierarchy** specified by this [slicer cache](#) and specifies the **OLAP members** that are cached for this OLAP level within the OLAP hierarchy specified by this slicer cache.

*Child Elements:*

**ranges:** A [CT\\_OlapSlicerCacheRanges](#) element that specifies cached [OLAP slicer items](#) for the OLAP level specified by this element.

*Attributes:*

**uniqueName:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the **MDX unique name** of the OLAP level specified by this element within the OLAP hierarchy specified with this slicer cache. The length of this string **MUST** be at least 1 character and **MUST NOT** exceed 32,767 characters.

**sourceCaption:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the caption of the OLAP level specified by this element within the OLAP hierarchy specified with this cache. The length of this string MUST NOT exceed 65,535 characters.

**count:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the total number of OLAP members in the OLAP **data source** in this OLAP level within the OLAP hierarchy specified by this slicer cache. The default value is zero.

**sortOrder:** An **ST\_OlapSlicerCacheSortOrder** attribute that specifies how the OLAP slicer items for the OLAP level specified by this element are sorted in the [slicer view](#).

**crossFilter:** An **ST\_SlicerCacheCrossFilter** attribute that specifies how the OLAP slicer items that are used in [slicer cross filtering](#) are displayed.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OlapSlicerCacheLevelData">
  <xsd:sequence>
    <xsd:element name="ranges" type="CT_OlapSlicerCacheRanges" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="sourceCaption" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="sortOrder" type="ST_OlapSlicerCacheSortOrder" use="optional"
  default="natural"/>
  <xsd:attribute name="crossFilter" type="ST_SlicerCacheCrossFilter" use="optional"
  default="showItemsWithDataAtTop"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.79 CT\_OlapSlicerCacheLevelsData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCache](#)

A complex type that specifies a list of **OLAP levels** of the **OLAP hierarchy** specified by this [slicer cache](#).

*Child Elements:*

**level:** A **CT\_OlapSlicerCacheLevelData** element that specifies properties of an OLAP level in the OLAP hierarchy specified by this slicer cache.

*Attributes:*

**count:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of **level** child elements of this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OlapSlicerCacheLevelsData">
  <xsd:sequence>
    <xsd:element name="level" type="CT_OlapSlicerCacheLevelData" minOccurs="1"
  maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
```

```
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.80 CT\_OlapSlicerCache

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SlicerCacheData](#)

A complex type that specifies the associated **OLAP** PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache, and specifies [OLAP Slicer Items](#). See [Slicer Cache Relationship to PivotCache](#) for more details.

*Child Elements:*

**levels:** A [CT\\_OlapSlicerCacheLevelsData](#) element that specifies a list of **OLAP levels** of the OLAP **hierarchy** specified by this [slicer cache](#).

**selections:** A [CT\\_OlapSlicerCacheSelections](#) element that specifies a list of OLAP Slicer Items that are selected.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**pivotCacheId:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the associated OLAP PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache. MUST be equal to the **pivotCacheId** attribute of an existing [CT\\_PivotCacheDefinition](#) element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OlapSlicerCache">
  <xsd:sequence>
    <xsd:element name="levels" type="CT_OlapSlicerCacheLevelsData" minOccurs="1"
maxOccurs="1"/>
    <xsd:element name="selections" type="CT_OlapSlicerCacheSelections" minOccurs="1"
maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.81 CT\_OlapSlicerCacheSelections

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCache](#)

A complex type that specifies the [OLAP slicer items](#) that are selected in the [slicer cache](#).

*Child Elements:*

**selection:** A [CT\\_OlapSlicerCacheSelection](#) element that specifies an OLAP slicer item that is selected in the slicer cache.

*Attributes:*

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the number of **selection** child elements of this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OlapSlicerCacheSelections">
  <xsd:sequence>
    <xsd:element name="selection" type="CT_OlapSlicerCacheSelection" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.82 CT\_OlapSlicerCacheSelection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCacheSelections](#)

A complex type that specifies an individual [OLAP slicer item](#) that is selected for filtering. This complex type also specifies the ancestor **OLAP members** of the OLAP member associated with the OLAP slicer item in the **OLAP hierarchy**.

*Child Elements:*

**p:** A [CT\\_OlapSlicerCacheItemParent](#) element that specifies OLAP members that are the ancestors of the OLAP member associated with the OLAP slicer item specified by this element. The first element in this list specifies the OLAP member that is the parent of the OLAP member associated with the OLAP slicer item specified by this element. Each subsequent element in this list specifies an ancestor OLAP member in the next level up the OLAP hierarchy, excluding the **OLAP All member**.

*Attributes:*

**n:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the **MDX unique name** of the OLAP member associated with the OLAP slicer item specified by this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OlapSlicerCacheSelection">
  <xsd:sequence>
    <xsd:element name="p" type="CT_OlapSlicerCacheItemParent" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.83 CT\_TabularSlicerCache

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_SlicerCacheData](#)

A complex type that specifies [non-OLAP slicer items](#) that are cached within this [slicer cache](#) and properties of the slicer cache specific to non-OLAP slicer items.

Child Elements:

**items:** A [CT\\_TabularSlicerCacheItems](#) element that specifies non-OLAP slicer items that are cached within this slicer cache.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

Attributes:

**pivotCacheId:** An [unsignedInt](#) ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the associated non-[OLAP](#) PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache. MUST match the [pivotCacheId](#) attribute of an existing [CT\\_PivotCacheDefinition](#) element.

**sortOrder:** An [ST\\_TabularSlicerCacheSortOrder](#) attribute that specifies how the non-OLAP slicer items are sorted in the [slicer view](#).

**customListSort:** A [Boolean](#) ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether [custom lists](#) are used when sorting the non-OLAP slicer items.

Value	Meaning
"false"	Custom lists are not used when sorting the non-OLAP slicer items.
"true"	Custom lists are used when sorting the non-OLAP slicer items.

**showMissing:** A [Boolean](#) ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether non-OLAP slicer items that correspond to unused PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache items that existed previously, but are no longer present in the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) [source data](#), are displayed.

Value	Meaning
"false"	The unused non-OLAP slicer items are not displayed.
"true"	The unused non-OLAP slicer items are displayed.

**crossFilter:** An [ST\\_SlicerCacheCrossFilter](#) attribute that specifies how the non-OLAP slicer items that are used in [slicer cross filtering](#) are displayed.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TabularSlicerCache">
  <xsd:sequence>
    <xsd:element name="items" type="CT_TabularSlicerCacheItems" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```



```

</xsd:sequence>
<xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="required"/>
<xsd:attribute name="sortOrder" type="ST_TabularSlicerCacheSortOrder" use="optional"
default="ascending"/>
<xsd:attribute name="customListSort" type="xsd:boolean" use="optional" default="true"/>
<xsd:attribute name="showMissing" type="xsd:boolean" use="optional" default="true"/>
<xsd:attribute name="crossFilter" type="ST_SlicerCacheCrossFilter" use="optional"
default="showItemsWithDataAtTop"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.84 CT\_TabularSlicerCacheItems

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TabularSlicerCache](#)

A complex type that specifies [non-OLAP slicer items](#) that are cached within this [slicer cache](#).

*Child Elements:*

**i:** A [CT\\_TabularSlicerCacheItem](#) element that specifies a non-OLAP slicer item that is cached within this slicer cache. All [CT\\_TabularSlicerCacheItem](#) elements within this slicer cache MUST have unique **x** attributes. At least one [CT\\_TabularSlicerCacheItem](#) element MUST have **s** attribute be "true".

*Attributes:*

**count:** An [unsignedInt](#) ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of **i** child elements of this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_TabularSlicerCacheItems">
  <xsd:sequence>
    <xsd:element name="i" type="CT_TabularSlicerCacheItem" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.85 CT\_TabularSlicerCacheItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TabularSlicerCacheItems](#)

A complex type that specifies a [non-OLAP slicer item](#) that is cached within this [slicer cache](#).

*Attributes:*

**x:** An [unsignedInt](#) ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies an index of the associated PivotTable ([ISO/IEC29500-1:2016](#) section 18.10) cache item in the associated **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) cache **field**. MUST be within the range of items as specified by the **count** attribute of the [CT\\_PivotCacheRecords](#) ([ISO/IEC29500-4:2016](#) section

A.2) element of the associated non-**OLAP** PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache specified by the **pivotCacheId** attribute of the [CT\\_TabularSlicerCache](#) element that is an ancestor of this element.

**s**: A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether a non-OLAP slicer item is **selected**.

Value	Meaning
"true"	A non-OLAP slicer item is selected.
"false"	A non-OLAP slicer item is not selected.

**nd**: A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether a non-OLAP slicer item does not have data associated with it. This attribute **MUST NOT** exist if the **crossFilter** attribute of the **CT\_TabularSlicerCache** element is equal to "none". For more information, see [Slicer Cross Filtering](#).

Value	Meaning
"true"	A non-OLAP slicer item does not have data associated with it.
"false"	A non-OLAP slicer item has data associated with it.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT TabularSlicerCacheItem">
  <xsd:attribute name="x" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="s" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="nd" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.86 CT\_PivotTableReferences

*Target namespace:* http://schemas.microsoft.com/office/spreadsheetml/2010/11/main

*Referenced by:* [pivotTableReferences](#)

A complex type that specifies a list of PivotTable ([ISO/IEC29500-1:2016] section 18.10) part identifiers for [Non-Worksheet PivotTables](#). **MUST** contain fewer than 2<sup>31</sup> elements.

*Child Elements:*

**pivotTableReference:** A [CT\\_PivotTableReference](#) element that specifies a PivotTable part identifier of a Non-Worksheet PivotTable.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotTableReferences">
  <xsd:sequence>
```

```

    <xsd:element name="pivotTableReference" type="CT_PivotTableReference" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.87 CT\_PivotTableReference

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_PivotTableReferences](#)

A complex type that specifies a [relationship](#) identifier to a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) part in this **workbook**. The PivotTable specified by the element **pivotTableDefinition** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.73) identified by this type MUST be a [Non-Worksheet PivotTable](#) and MUST satisfy the following criteria.

- The **ref** attribute of the child element **location** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.49) MUST begin with "A1".
- The **enableEdit** attribute of the **CT\_PivotTableDefinition** element, as specified in section [2.6.32](#), MUST NOT exist or MUST be "false" if exists; **CT\_PivotEdits** and **CT\_PivotChanges** elements MUST NOT exist in this part.
- The PivotTable name specified by the **name** attribute of the element **pivotTableDefinition** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.73), MUST be unique among all the PivotTables in the workbook.
- There MUST be a child **CT\_PivotCache** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element within the **pivotCaches** element, specified by section [2.4.39](#), with the attribute **cacheID** having the same value as the **cacheId** attribute of the element **pivotTableDefinition** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.73).
- The PivotTable MUST NOT have **CT\_ConditionalFormats** element as specified by section [2.6.49](#).

*Attributes:*

**r:id:** An **ST\_RelationshipId** ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) attribute that specifies a relationship identifier to a PivotTable part in this workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_PivotTableReference">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>

```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.88 CT\_QueryTable

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [queryTable](#)

A complex type that specifies extended properties of a **query table** ([\[ISO/IEC29500-1:2016\]](#) section 18.12).

*Attributes:*

**clipped:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether a query table ([ISO/IEC29500-1:2016] section 18.12) did not fit to worksheet and was clipped.

Value	Meaning
"true"	A query table ([ISO/IEC29500-1:2016] section 18.12) did not fit to the worksheet and was clipped.
"false"	A query table ([ISO/IEC29500-1:2016] section 18.12) did not fit to the worksheet and was not clipped.

**sourceDataName:** A **string** ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the name of the primary **data connection** for the query table. For more details, see **connection** ([ISO/IEC29500-1:2016] section 18.13.1)

**drillThrough:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether a query table ([ISO/IEC29500-1:2016] section 18.12) is a result of **drillthrough** operation on **OLAP data source**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_QueryTable">
  <xsd:attribute name="clipped" use="optional" default="false" type="xsd:boolean"/>
  <xsd:attribute name="sourceDataName" type="xsd:string" use="optional"/>
  <xsd:attribute name="drillThrough" use="optional" default="false" type="xsd:boolean"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.89 CT\_WebExtensions

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [webExtensions](#)

A complex type that specifies a list of [CT\\_WebExtension](#) elements. The list of CT\_WebExtension elements specifies all the bindings for web extensions, as specified by [\[MS-OWEXML\]](#) section 1.3, on the **worksheet**.

*Child Elements:*

**webExtension:** A CT\_WebExtension element that specifies a binding for a web extension, as specified by [\[MS-OWEXML\]](#) section 1.3, on the worksheet.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_WebExtensions">
  <xsd:sequence>
    <xsd:element name="webExtension" type="CT_WebExtension" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.90 CT\_WebExtension

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_WebExtensions](#)

A complex type that specifies a binding for a web extension, as specified by [\[MS-OWEXML\]](#) section 1.3, on the [worksheet](#).

*Child Elements:*

**xm:f:** An [f](#) element that specifies the data range for the Binding. The formula MUST adhere to the grammar specified in Section [Formulas](#), with the following restrictions:

- MUST follow the ref-nospace-expression rule.
- MUST NOT use the bang-reference, bang-name, sheet-range-reference, or local-cell-reference production rules.

*Attributes:*

**appRef:** An [ST\\_Xstring](#) ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies a unique identifier for a binding for a web extension. This value MUST be equal to the **appref field** of a **CT\_OsfWebExtensionBinding** element as specified by [\[MS-OWEXML\]](#) section 2.2.3.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_WebExtension">
  <xsd:sequence>
    <xsd:element ref="xm:f" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="appRef" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.91 CT\_Connection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [connection](#)

A complex type that specifies the extended properties of an external connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13). See section [2.2.4.1](#) for how this element integrates with the Office Open XML file formats specified in [\[ISO/IEC29500-1:2016\]](#).

*Child Elements:*

**textPr:** A [CT\\_TextPr](#) ([\[ISO/IEC29500-4:2016\]](#) section 18.13.12) element that specifies properties for data model data source text importation.

If this element is present, then the **type** attribute of the ancestor **CT\_Connection** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, MUST be equal to "103".

**modelTextPr:** A [CT\\_ModelTextPr](#) element that specifies a data model data source text importation ([\[MS-XLSB\]](#) section 2.2.8.9.4) properties in addition to those specified in **textPr** element.

If this element is present, then:

- the **type** attribute of the ancestor **CT\_Connection** element, as specified in [ISO/IEC29500-4:2016] section A.2, MUST be equal to "103".
- Ancestor **CT\_Connection** element MUST contain **textPr** element.

**rangePr:** A [CT\\_RangePr](#) element that specifies data model data source Worksheet Data connection ([MS-XLSB] section 2.2.8.9.3) properties.

If this element is present, then the **type** attribute of the ancestor **CT\_Connection** element, as specified in [ISO/IEC29500-4:2016] section A.2, MUST be equal to "102".

**oledbPr:** A [CT\\_OledbPr](#) element that specifies data model data source OLE DB connection ([MS-XLSB] section 2.2.8.9.1) properties.

If this element is present, then the **type** attribute of the ancestor **CT\_Connection** element, as specified in [ISO/IEC29500-4:2016] section A.2, MUST be equal to "100".

**dataFeedPr:** A [CT\\_DataFeedPr](#) element that specifies data model data source Data Feed connection ([MS-XLSB] section 2.2.8.9.2) properties.

If this element is present, then the **type** attribute of the ancestor **CT\_Connection** element, as specified in [ISO/IEC29500-4:2016] section A.2, MUST be equal to "101".

*Attributes:*

**id:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the identifier of the Data Model data source. The string MUST be less than or equal to 65535 characters in length. The string length MUST be equal to zero characters if the **model** attribute equals "true".

**model:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this connection is a connection to the **spreadsheet data model**. If this element equals "true", the **type** attribute of the ancestor **CT\_Connection** element, as specified in [ISO/IEC29500-4:2016] section A.2, MUST be equal to "5".

**excludeFromRefreshAll:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this connection is not to be refreshed on Refresh All.

Value	Meaning
"true"	This connection is not to be refreshed on Refresh All.
"false"	This connection is to be refreshed on Refresh All.

**autoDelete:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this connection will be automatically deleted when all data features which use it are deleted.

Value	Meaning
"true"	This connection will be automatically deleted when all data features that use it are deleted.
"false"	This connection will not be automatically deleted when all data features that use it are deleted.

**usedByAddin:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this connection is used by an addin component and will not be deleted with any data feature that uses it.

Value	Meaning
"true"	This connection is used by an addin component.
"false"	This connection is not used by an addin component.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Connection">
  <xsd:sequence>
    <xsd:element name="textPr" minOccurs="0" maxOccurs="1" type="x:CT_TextPr"/>
    <xsd:element name="modelTextPr" minOccurs="0" maxOccurs="1" type="CT_ModelTextPr"/>
    <xsd:element name="rangePr" minOccurs="0" maxOccurs="1" type="CT_RangePr"/>
    <xsd:element name="oledbPr" minOccurs="0" maxOccurs="1" type="CT_OledbPr"/>
    <xsd:element name="dataFeedPr" minOccurs="0" maxOccurs="1" type="CT_DataFeedPr"/>
  </xsd:sequence>
  <xsd:attribute name="id" use="required" type="x:ST_Xstring"/>
  <xsd:attribute name="model" type="xsd:boolean" default="false" use="optional"/>
  <xsd:attribute name="excludeFromRefreshAll" type="xsd:boolean" default="false"
use="optional"/>
  <xsd:attribute name="autoDelete" type="xsd:boolean" default="false" use="optional"/>
  <xsd:attribute name="usedByAddin" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.92 CT\_CalculatedMemberExt

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

This element adds an element for supporting new properties for calculated members.

*Child Elements:*

**calculatedMember:** A **CT\_CalculatedMember** (section [2.6.93](#)) element that specifies a definition for a custom member or measure that is applied to a pivot table.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CalculatedMemberExt">
  <xsd:sequence>
    <xsd:element ref="calculatedMember" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.93 CT\_CalculatedMember

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_CalculatedMemberExt](#), [calculatedMember](#)

This element adds new properties for supporting calculated members.

*Attributes:*

**measureGroup:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the measure group that this calculated member is associated with if **measure** is TRUE.

**numberFormat:** An **ST\_CalcMemNumberFormat** (see section 2.7.25) attribute that specifies the formatting type of the calculated member.

**measure:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this calculated member is also a calculated measure.

Value	Meaning
"true"	This calculated member is also a calculated measure.
"false"	This calculated member is not a calculated measure.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CalculatedMember">
  <xsd:attribute name="measureGroup" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="numberFormat" type="ST_CalcMemNumberFormat" use="optional"
  default="default"/>
  <xsd:attribute name="measure" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section 5.3 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.94 CT\_FieldListActiveTabTopLevelEntity

*Target namespace:* http://schemas.microsoft.com/office/spreadsheetml/2010/11/main

*Referenced by:* [CT\\_PivotTableUISettings](#)

A complex type which specifies a top level object in the hierarchy of objects displayed in the **PivotTable field list**.

*Attributes:*

**name:** A **string** ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies name of the object in the PivotTable field list.

**type:** An **unsignedInt** attribute that specifies the type of this top level object. MUST be specified. MUST be one of the values in the following table:

Value	Object Type
0	OLAP Dimension. The <b>name</b> attribute of this element MUST be the <b>MDX unique name</b> of the <b>dimension</b> .
1	Workbook Table. The <b>name</b> attribute of this element MUST be the name of the workbook table.



The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_FieldListActiveTabTopLevelEntity">
  <xsd:attribute name="name" use="required" type="xsd:string"/>
  <xsd:attribute name="type" use="optional" default="0" type="xsd:unsignedInt"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.95 CT\_PivotFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [pivotFilter](#)

A complex type that specifies the extended properties of a **CT\_PivotFilter** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element.

*Attributes:*

**useWholeDay:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the **filter** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.33) element extended by this type uses whole days in its filtering criteria. MUST be false for **filters** for which the value of the attribute **type** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.33) is not one of the values mentioned in the table below. MUST be true if the value of the **name** attribute of the containing **CT\_PivotTableDefinition** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element is equal to the value of the **name** (section [2.6.114](#)) attribute of at least one **CT\_TimelineCachePivotTable** (section 2.6.114) element in the **Timeline cache** (section [2.1.7](#)) and the value of the attribute **type** of the containing **filter** element is one of the following.

Enumeration Value
dateBetween (Date Between)
dateEqual (Date Equals)
dateNewerThan (Date Newer Than)
dateNewerThanOrEqual (Date Newer Than or Equal To)
dateNotBetween (Date Not Between)
dateNotEqual (Date Does Not Equal)
dateOlderThan (Date Older Than)
dateOlderThanOrEqual (Date Older Than Or Equal)
lastMonth (Last Month)
lastQuarter (Last Quarter)
lastWeek (Last Week)
lastYear (Last Year)
M1 (Dates in January)
M10 (Dates in October)

Enumeration Value
M11 (Dates in November)
M12 (Dates in December)
M2 (Dates in February)
M3 (Dates in March)
M4 (Dates in April)
M5 (Dates in May)
M6 (Dates in June)
M7 (Dates in July)
M8 (Dates in August)
M9 (Dates in September)
nextMonth (Next Month)
nextQuarter (Next Quarter)
nextWeek (Next Week)
nextYear (Next Year)
percent (Percent)
Q1 (First Quarter)
Q2 (Second Quarter)
Q3 (Third Quarter)
Q4 (Fourth Quarter)
sum (Sum)
thisMonth (This Month)
thisQuarter (This Quarter)
thisWeek (This Week)
thisYear (This Year)
today (Today)
tomorrow (Tomorrow)

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT PivotFilter">
  <xsd:attribute name="useWholeDay" type="xsd:boolean" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.96 CT\_PivotTableUISettings

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [pivotTableUISettings](#)

Specifies state for user interface used to construct and manipulate a PivotTable.

*Child Elements:*

**activeTabTopLevelEntity:** A [CT\\_FieldListActiveTabTopLevelEntity](#) element that specifies a **field** that appears in the user's working set of fields in the **PivotTable field list**.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**sourceDataName:** An [ST\\_Xstring](#) ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the primary **data connection** for the **PivotTable**. See **connection** ([ISO/IEC29500-1:2016] section 18.13.1)

**relNeededHidden:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the user closed the relationship warning for this PivotTable.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotTableUISettings">
  <xsd:sequence>
    <xsd:element name="activeTabTopLevelEntity" type="CT_FieldListActiveTabTopLevelEntity"
      minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="sourceDataName" type="xsd:string" use="optional"/>
  <xsd:attribute name="relNeededHidden" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.97 CT\_TableSlicerCache

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [tableSlicerCache](#)

A complex type that specifies properties of the [slicer cache](#) specific to table slicer items.

*Child Elements:*

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**tableId:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the associated **Table** ([ISO/IEC29500-1:2016] section 18.5.1.2). MUST match **id** attribute of an existing **Table** ([ISO/IEC29500-1:2016] section 18.5.1.2) element.

**column:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies associated **Table Column** ([ISO/IEC29500-1:2016] section 18.5.1.3). MUST match **id** attribute of an existing **tableColumn** element representing a **column** in **Table** specified by the **tableId** attribute.

**sortOrder:** An [ST\\_TabularSlicerCacheSortOrder](#) attribute that specifies how the table slicer items are sorted in the [slicer view](#).

**customListSort:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether **custom lists** are used when sorting the table slicer items.

Value	Meaning
"false"	Custom lists are not used when sorting the table slicer items.
"true"	Custom lists are used when sorting the table slicer items.

**crossFilter:** An [ST\\_SlicerCacheCrossFilter](#) attribute that specifies how the table slicer items that are used in [slicer cross filtering](#) are displayed.

The following W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TableSlicerCache">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="tableId" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="column" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="sortOrder" type="x14:ST_TabularSlicerCacheSortOrder" use="optional"
  default="ascending"/>
  <xsd:attribute name="customListSort" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="crossFilter" type="x14:ST_SlicerCacheCrossFilter" use="optional"
  default="showItemsWithDataAtTop"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)).

## 2.6.98 CT\_TimelineCacheRefs

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [timelineCacheRefs](#)

A complex type that specifies a list of [Timeline cache](#) part identifiers for the **workbook**. MUST contain fewer than  $2^{31}$  elements.

*Child Elements:*

**timelineCacheRef:** A [CT\\_TimelineCacheRef](#) element that specifies a Timeline cache part identifier in this workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineCacheRefs">
  <xsd:sequence>
    <xsd:element name="timelineCacheRef" type="CT_TimelineCacheRef" minOccurs="1"
    maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

```
</xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.99 CT\_TimelineCacheRef

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineCacheRefs](#)

A complex type that specifies a **Relationship** (section [1.4](#)) identifier to a **Timeline Cache** (section [2.3.5.1](#)) part in this **workbook**.

*Attributes:*

**r:id:** An **ST\_RelationshipId** ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) attribute that specifies a **Relationship** (section 1.4) identifier to a **Timeline Cache** (section 2.3.5.1) part in this workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineCacheRef">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.100 CT\_TimelineRefs

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [timelineRefs](#)

**CT\_TimelineRefs** is a complex type that specifies a list of Timeline (section [2.3.5](#)) part identifiers for the **worksheet**. MUST contain exactly one Timeline part identifier.

*Child Elements:*

**timelineRef:** A **CT\_TimelineRef** element (section [2.6.101](#)) that specifies the Timeline (section 2.3.5) part identifier for the worksheet.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineRefs">
  <xsd:sequence>
    <xsd:element name="timelineRef" type="CT_TimelineRef" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.101 CT\_TimelineRef

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineRefs](#)

A complex type that specifies a [relationship](#) identifier of the part that contains the [Timelines](#) in this **worksheet**.

*Attributes:*

**r:id:** An **ST\_RelationshipId** ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) attribute that specifies a relationship identifier of the part that contains the Timelines in this worksheet.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineRef">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.102 CT\_CacheHierarchy

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [cacheHierarchy](#)

**CT\_CacheHierarchy** is a complex type which specifies additional properties for an **OLAP measure**.

*Attributes:*

**aggregatedColumn:** An **int** attribute that specifies the zero-based index of PivotTable cache hierarchy which corresponds to this OLAP measure. The referenced **CT\_CacheHierarchy** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element specifies the PivotTable cache hierarchy that this OLAP measure aggregates. **MUST** only be specified if the **measure** attribute of this cache hierarchy is "true". The value **MUST** match the index of an existing cache hierarchy in **CT\_CacheHierarchies** ([\[ISO/IEC29500-4:2016\]](#)) collection or be equal -1 if this OLAP measure is not an implicit measure which aggregates a cache hierarchy.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CacheHierarchy">
  <xsd:attribute name="aggregatedColumn" use="required" type="xsd:int"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.103 CT\_SlicerCacheHideNoData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [slicerCacheHideItemsWithNoData](#)

A complex type that specifies the extended properties of a [slicer cache](#), as specified in section 2.3.2.1.

*Child Elements:*

**slicerCacheOlapLevelName:** A [CT\\_SlicerCacheOlapLevelName](#) element that specifies the properties of an **OLAP level** in the **OLAP hierarchy** specified by the ancestor slicer cache. [slicer items](#) with no data in this **OLAP level** are not displayed.

*Attributes:*

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the number of **slicerCacheOlapLevelName** child elements of this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCacheHideNoData">
  <xsd:sequence>
    <xsd:element name="slicerCacheOlapLevelName" type="CT_SlicerCacheOlapLevelName"
minOccurs="0" maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional" default="0"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.6.104 CT\_SlicerCacheOlapLevelName

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_SlicerCacheHideNoData](#)

A complex type that specifies the properties of an **OLAP level** in the **OLAP hierarchy** specified by the ancestor [slicer cache](#). [slicer items](#) with no data in this **OLAP level** are not displayed.

*Attributes:*

**uniqueName:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the **MDX unique name** of the OLAP level specified by this element within the OLAP hierarchy specified with this slicer cache. The length of this string **MUST** be at least 1 character and **MUST NOT** exceed 32,767 characters.

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the total number of hidden slicer items in this OLAP level within the OLAP hierarchy specified by this slicer cache.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SlicerCacheOlapLevelName">
  <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.6.105 CT\_TimelineStyles

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [timelineStyles](#)

A complex type that specifies a group of [Timeline Styles](#) and the default Timeline Style to apply to [Timelines](#).

*Child Elements:*

**timelineStyle:** A [CT\\_TimelineStyle](#) element that specifies a Timeline Style.

*Attributes:*

**defaultTimelineStyle:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the default Timeline Style to apply to Timelines. The length of the string **MUST** be greater than or equal to 1 character and less than or equal to 255 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineStyles">
  <xsd:sequence>
    <xsd:element name="timelineStyle" type="CT_TimelineStyle" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="defaultTimelineStyle" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.106 CT\_TimelineStyleElements

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineStyle](#)

A complex type that specifies the list of table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements of a [Timeline Style](#) that are specific to [Timelines](#).

*Child Elements:*

**timelineStyleElement:** A [CT\\_TimelineStyleElement](#) element that specifies a table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) element of a timeline style that is specific to timelines.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineStyleElements">
  <xsd:sequence>
    <xsd:element name="timelineStyleElement" type="CT_TimelineStyleElement" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.107 CT\_TimelineStyle

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineStyles](#)



**CT\_TimelineStyle** specifies table style elements, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.8, of the timeline style, as specified in section [Timeline Styles](#), that are specific to timelines, as specified in section [Timelines](#).

*Child Elements:*

**timelineStyleElements:** A [CT\\_TimelineStyleElements](#), as specified in section [Timeline Style Elements](#), that specifies table style elements of the timeline style that are specific to timelines. There MUST NOT be more than one **CT\_TimelineStyleElements** in this element.

*Attributes:*

**name:** A **string** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.2.1, that specifies the name of the user-defined table style that this timeline style is based upon. The length of the **string** MUST be greater than or equal to 1 character and less than or equal to 255 characters. This **string** MUST be unique within the **CT\_TimelineStyle** elements in the **Styles** part, as specified in [\[ISO/IEC29500-1:2016\]](#) section 12.3.20. This **string** MUST match the **name** attribute of a **CT\_TableStyle** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, in the **Styles** part. In the **CT\_TableStyle** element with a **name** attribute that matches this **string**, the **pivot** attribute MUST equal "false" and the **table** attribute MUST equal "false".

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineStyle">
  <xsd:sequence>
    <xsd:element name="timelineStyleElements" type="CT_TimelineStyleElements" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.108 CT\_TimelineStyleElement

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineStyleElements](#)

A complex type that specifies a table style element, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.8, of a timeline style, as specified in section [Timeline Styles](#).

*Attributes:*

**type:** An [ST\\_TimelineStyleType](#) attribute that specifies the type of the table style element. This attribute MUST be unique within the parent **CT\_TimelineStyleElements** complex type.

**dxfid:** An **ST\_DxfId** attribute, as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.18.25, that specifies a zero-based index for the list of elements specified by the **dxfs** global element, as specified in section [2.4.55](#). The specified **CT\_Dxf** complex type, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, specifies the formatting to use with this table style element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineStyleElement">
  <xsd:attribute name="type" type="ST_TimelineStyleType" use="required"/>
  <xsd:attribute name="dxfid" type="x:ST_DxfId" use="optional"/>
</xsd:complexType>
```

```
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.109 CT\_TimelinePivotCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [timelinePivotCacheDefinition](#)

A complex type that specifies the extended properties of a PivotTable ([ISO/IEC29500-1:2016] section 18.10) **PivotCache** definition.

*Attributes:*

**timelineData:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the [Timeline Cache Relationship to PivotCache](#). MUST be "true" if the **OLAP** PivotTable ([ISO/IEC29500-1:2016] section 18.10) **PivotCache** definition is being referenced by a [timeline cache](#).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelinePivotCacheDefinition">
  <xsd:attribute name="timelineData" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.110 CT\_Timelines

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [timelines](#)

A complex type that specifies a list of **CT\_Timeline** elements, as specified in section [2.6.111](#). The list of **CT\_Timeline** elements specifies all [Timeline views](#) on the **worksheet**.

*Child Elements:*

**timeline:** A **CT\_Timeline** element that specifies a Timeline view on the worksheet.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Timelines">
  <xsd:sequence>
    <xsd:element name="timeline" type="CT Timeline" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.111 CT\_Timeline

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

Referenced by: [CT Timelines](#)

The **CT\_Timeline** complex type specifies a **Timeline view** (section [2.3.5.2](#)) in this **worksheet**.

*Child Elements:*

**extLst:** A **CT\_ExtensionList** element, as specified in [\[ISO/IEC29500-4:2016\]](#) section A.2, that specifies future extensibility for this element.

*Attributes:*

**name:** An **ST\_Xstring** attribute, as specified in [\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19, that specifies the name of the **Timeline view**. This element **MUST** be a unique case-insensitive name within the scope of this **workbook**. The length of this attribute **MUST** be greater than or equal to one character and **MUST** be less than or equal to 32767 characters.

**xr10:uid:** An **ST\_Guid** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies the unique id of the **Timeline view**. If any instance of this type specifies this attribute, then all instances **MUST** specify it, and the values **MUST** be distinct.

**cache:** An **ST\_Xstring** attribute that specifies the name of the **Timeline cache** (section [2.3.5.1](#)) that this **Timeline view** is associated with. There **MUST** be a **CT\_TimelineCacheDefinition** element (section [2.6.112](#)) within this workbook with the **name** attribute equal to the value of this attribute.

**caption:** An **ST\_Xstring** attribute that specifies the caption of the **Timeline view**. If this string exists, the length **MUST** be greater than or equal to one character.

**showHeader:** A **Boolean** attribute, as specified in [\[XMLSCHEMA2/2\]](#) section 3.2.2, that specifies whether the header is displayed.

Value	Meaning
"true"	The header is displayed.
"false"	The header is suppressed.

**showSelectionLabel:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the selection label is displayed.

Value	Meaning
"true"	The selection label is displayed.
"false"	The selection label is suppressed.

**showTimeLevel:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the time level is displayed.

Value	Meaning
"true"	The time level is displayed.
"false"	The time level is suppressed.

**showHorizontalScrollbar:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the horizontal scrollbar is displayed.

Value	Meaning
"true"	The horizontal scrollbar is displayed.
"false"	The horizontal scrollbar is suppressed.

**level:** An **unsignedInt** attribute, as specified in [XMLSCHEMA2/2] section 3.3.22, that specifies the current time level of the **Timeline** (section [2.3.5](#)). This element **MUST** be a value from the following table:

Value	Meaning
0	Year
1	Quarter
2	Month
3	Day

**selectionLevel:** An **unsignedInt** attribute that specifies the time level at which the current selection was made for the **Timeline**. This element **MUST** be a value from the following table:

Value	Meaning
0	Year
1	Quarter
2	Month
3	Day

**scrollPosition:** A **dateTime** attribute ([XMLSCHEMA2/2] section 3.2.7) that specifies the start date of the timespan scrolling position of the **Timeline**.

**style:** An **ST\_Xstring** attribute ([ISO/IEC29500-1:2016] section 22.9.2.19) that specifies the **Timeline style** (section [2.3.5.4](#)) of the **Timeline view**. If this **field** exists, this string **MUST** match the **name** attribute of a **CT\_TimelineStyle** element (section [2.6.107](#)) within this workbook or **MUST** be equal to one of the built-in **Timeline style** names:

Built-in Timeline style names
TimelineStyleLight1
TimelineStyleLight2
TimelineStyleLight3
TimelineStyleLight4

Built-in Timeline style names
TimelineStyleLight5
TimelineStyleLight6
TimelineStyleDark1
TimelineStyleDark2
TimelineStyleDark3
TimelineStyleDark4
TimelineStyleDark5
TimelineStyleDark6

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Timeline">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute ref="xr10:uid" use="optional"/>
  <xsd:attribute name="cache" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="caption" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="showHeader" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="showSelectionLabel" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="showTimeLevel" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="showHorizontalScrollbar" type="xsd:boolean" use="optional"
  default="true"/>
  <xsd:attribute name="level" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="selectionLevel" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="scrollPosition" type="xsd:dateTime" use="optional"/>
  <xsd:attribute name="style" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.112 CT\_TimelineCacheDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [timelineCacheDefinition](#)

A complex type that specifies a [Timeline cache](#).

*Child Elements:*

**pivotTables:** A **CT\_TimelineCachePivotTables** element (section [2.6.113](#)) that specifies a group of **CT\_TimelineCachePivotTable** elements (section [2.6.114](#)) that specify the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views and [Non-Worksheet PivotTables](#) that are filtered by the **Timeline cache** (section [2.1.7](#)).

**state:** A **CT\_TimelineState** element (section [2.6.116](#)) that specifies the information used for display in the **Timeline view** (section [2.3.5.2](#)).

**timelinePivotFilter:** A [CT\\_TimelinePivotFilter](#) element (section 2.6.118) that specifies the filter used by the Timeline Cache (section 2.1.7) to filter PivotTable ([ISO/IEC29500-1:2016] section 18.10) views and Non-Worksheet PivotTables. This element MUST exist only if the **filterType** attribute of the CT\_TimelineState (section 2.6.116) element of the Timeline Cache has a value that is not one of the following:

Enumeration Value	Description
dateBetween (Date Between)	Indicates the "between" filter for date values.
dateEqual (Date Equals)	Indicates the "equals" filter for date values.
unknown	Indicates the absence of a filter for date values.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**name:** An [ST\\_Xstring](#) ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the **Timeline cache** (section 2.3.5.1). MUST adhere to the name production rule provided in section [2.2.2](#). MUST be a unique case-insensitive name within the scope of **defined names**.

**xr10:uid:** An [ST\\_Guid](#) ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies the unique id of the **Timeline cache** (section 2.3.5.1). If any instance of this type specifies this attribute, then all instances MUST specify it, and the values MUST be distinct

**sourceName:** An [ST\\_Xstring](#) attribute that specifies the **MDX unique name** of the key **attribute** of the associated **OLAP hierarchy** if the **Timeline source data** (section [2.3.5.1.1](#)) is an **OLAP data source**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineCacheDefinition">
  <xsd:sequence>
    <xsd:element name="pivotTables" type="CT_TimelineCachePivotTables" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="state" type="CT_TimelineState" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="timelinePivotFilter" minOccurs="0" maxOccurs="1"
type="CT_TimelinePivotFilter"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute ref="xr10:uid" use="optional"/>
  <xsd:attribute name="sourceName" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.113 CT\_TimelineCachePivotTables

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineCacheDefinition](#)

A complex type that specifies a group of [CT\\_TimelineCachePivotTable](#) elements that specify the PivotTable ([ISO/IEC29500-1:2016] section 18.10) views and Charts ([ISO/IEC29500-1:2016] section 21.2) based on [Non-Worksheet PivotTables](#) that are filtered by the [Timeline cache](#).

*Child Elements:*

**pivotTable:** A CT\_TimelineCachePivotTable element that specifies the PivotTable ([ISO/IEC29500-1:2016] section 18.10) view or a Non-Worksheet PivotTable that is filtered. The list of **pivotTable** child elements MUST NOT contain duplicates.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineCachePivotTables">
  <xsd:sequence>
    <xsd:element name="pivotTable" type="CT_TimelineCachePivotTable" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.114 CT\_TimelineCachePivotTable

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineCachePivotTables](#)

A complex type that specifies a PivotTable ([ISO/IEC29500-1:2016] section 18.10) view filtered by a [Timeline cache](#).

*Attributes:*

**tabId:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the **unique identifier (UID)** of the **worksheet** that contains the PivotTable ([ISO/IEC29500-1:2016] section 18.10) view specified by the **name** attribute. MUST match the **sheetId** of an existing **sheet** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element within the **workbook**. MUST be equal to the decimal equivalent of 0xFFFFFFFF if the PivotTable specified by the name attribute is a [Non-Worksheet PivotTable](#).

**name:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the PivotTable ([ISO/IEC29500-1:2016] section 18.10) view on the worksheet specified by **tabId**. MUST match the **name** attribute of an existing [pivotTableDefinition](#) element in the worksheet. The **createdVersion** attribute of the **CT\_PivotTableDefinition** ([ISO/IEC29500-4:2016] section A.2) element that defines the specified PivotTable ([ISO/IEC29500-1:2016] section 18.10) MUST be greater than or equal to 3.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineCachePivotTable">
  <xsd:attribute name="tabId" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.115 CT\_TimelineRange

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineState](#)

A complex type that specifies the date **range** for a CT\_TimelineState element that is the parent of this element.

*Attributes:*

**startDate:** A **dateTime** ([XMLSCHEMA2/2] section 3.2.7) attribute that specifies the start value of the date range.

**endDate:** A **dateTime** attribute that specifies the end value of the date range.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineRange">
  <xsd:attribute name="startDate" type="xsd:dateTime" use="required"/>
  <xsd:attribute name="endDate" type="xsd:dateTime" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.116 CT\_TimelineState

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineCacheDefinition](#)

The **CT\_TimelineState** complex type specifies the **Timeline state** (section [2.3.5.1.4](#)) of the **Timeline cache** (section [2.3.5.1](#)).

*Child Elements:*

**selection:** A **CT\_TimelineRange** element (section [2.6.115](#)) that specifies the start and end dates that are selected in the **Timeline view** (section [2.3.5.2](#)). The start and end dates in the selection element **MUST** be interpreted as **dateTime** values ([XMLSCHEMA2/2] section 3.2.7).

**bounds:** A **CT\_TimelineRange** element that specifies the minimum and maximum dates available for display in the **Timeline view**. The minimum and maximum dates in the bounds element **MUST** be interpreted as **dateTime** values ([XMLSCHEMA2/2] section 3.2.7).

**extLst:** A **CT\_ExtensionList** element ([ISO/IEC29500-4:2016] section A.2) that specifies future extensibility for this element.

*Attributes:*

**singleRangeFilterState:** A **Boolean** attribute ([XMLSCHEMA2/2] section 3.2.2) that specifies whether the filtering state of the **Timeline** (section [2.3.5](#)) is a contiguous date range.

Value	Meaning
"true"	The filtering state of the Timeline is a contiguous date range.
"false"	The filtering state of the Timeline is not a contiguous date range.



**minimalRefreshVersion:** An **unsignedInt** attribute ([XMLSCHEMA2/2] section 3.3.22) that specifies the minimum application version required to refresh the **Timeline cache**.

**lastRefreshVersion:** An **unsignedInt** attribute that specifies the application version that last refreshed the **Timeline cache**.

**pivotCacheId:** An **unsignedInt** attribute that specifies the associated **OLAP** PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache. This element **MUST** be equal to the **pivotCacheId** attribute of an existing **CT\_PivotCacheDefinition** element (section 2.6.33).

**filterType:** An **ST\_PivotFilterType** attribute ([ISO/IEC29500-1:2016] section 18.18.59) that specifies type of the **filter** ([ISO/IEC29500-1:2016] section 18.10.1.33) used in the **Timeline**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelineState">
  <xsd:sequence>
    <xsd:element name="selection" type="CT_TimelineRange" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="bounds" type="CT_TimelineRange" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="singleRangeFilterState" type="xsd:boolean" use="optional"
  default="true"/>
  <xsd:attribute name="minimalRefreshVersion" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="lastRefreshVersion" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="filterType" use="required" type="x:ST_PivotFilterType"/>
</xsd:complexType>
```

See section 5.3 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.117 CT\_WorkbookPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [workbookPr](#)

**CT\_WorkbookPr** is a complex type that specifies additional properties for a **workbook**.

*Attributes:*

**chartTrackingRefBase:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies how **data point** properties and datalabels in all charts ([ISO/IEC29500-1:2016] section 21.2) in this workbook behave.

Value	Meaning
True	Datapoint properties and datalabels ([MS-ODRAWXML] section 2.2.1.2) in all charts ([ISO/IEC29500-1:2016] section 21.2) in this workbook follow their reference.
False	Datapoint properties and datalabels ([MS-ODRAWXML] section 2.2.1.2) in all charts ([ISO/IEC29500-1:2016] section 21.2) in this workbook follow their position in the chart.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_WorkbookPr">
  <xsd:attribute name="chartTrackingRefBase" type="xsd:boolean" default="false"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.118 CT\_TimelinePivotFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineCacheDefinition](#)

A complex type that specifies the filter used by the Timeline Cache (section [2.1.7](#)) to filter PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) views and [Non-Worksheet PivotTables](#).

*Child Elements:*

**autoFilter:** A **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section 18.3.1.2) element that specifies the embedded auto filter of the filter.

*Attributes:*

**useWholeDay:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the **pivot filter** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.33) associated with either the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) or Non-Worksheet PivotTable (section 2.3.3) filtered by the Timeline Cache (section 2.1.7) uses whole days in its filtering criteria.

Value	Meaning
"true"	The pivot filter ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10.1.33) associated with either the PivotTable ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) or Non-Worksheet PivotTable (section 2.3.3) filtered by the Timeline Cache (section 2.1.7) uses whole days in its filtering criteria.
"false"	The pivot filter ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10.1.33) associated with either the PivotTable ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10) or Non-Worksheet PivotTable (section 2.3.3) filtered by the Timeline Cache (section 2.1.7) does not use whole days in its filtering criteria.

**fld:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the index of the **field** to which the **pivot filter** associated with this filter belongs to.

**id:** An **unsignedInt** attribute that specifies the unique identifier of the **pivot filter** associated with this filter as assigned by the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) or Non-Worksheet PivotTable (section 2.3.3) filtered by the Timeline Cache (section 2.1.7).

**name:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the name of the filter. This string **MUST** be less than or equal to 65,535 characters in length.

**description:** An **ST\_Xstring** attribute that specifies the description of the filter. This string **MUST** be less than or equal to 65,535 characters in length.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_TimelinePivotFilter">
```

```

<xsd:sequence>
  <xsd:element name="autoFilter" minOccurs="0" maxOccurs="1" type="x:CT_AutoFilter"/>
</xsd:sequence>
<xsd:attribute name="useWholeDay" type="xsd:boolean" use="optional" default="false"/>
<xsd:attribute name="fld" use="required" type="xsd:unsignedInt"/>
<xsd:attribute name="id" use="required" type="xsd:unsignedInt"/>
<xsd:attribute name="name" use="optional" type="x:ST_Xstring"/>
<xsd:attribute name="description" use="optional" type="x:ST_Xstring"/>
</xsd:complexType>

```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.119 CT\_ModelTextPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT Connection](#)

Specifies Model Data Source text importation ([MS-XLSB] section 2.2.8.9.4) properties in addition to those specified in **CT\_TextPr** ([ISO/IEC29500-1:2016] section A.2) element.

*Attributes:*

**headers:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether data imported by this connection has **column** headers.

Value	Meaning
"true"	Data imported by this connection has column headers.
"false"	Data imported by this connection does not have column headers.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_ModelTextPr">
  <xsd:attribute name="headers" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>

```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.120 CT\_RangePr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT Connection](#)

The **CT\_RangePr** complex type specifies properties of a Model Data Source Worksheet Data connection ([MS-XLSB] section 2.2.8.9.3).

*Attributes:*

**sourceName:** An attribute of type **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) that specifies the string identifier of the source cell range for this connection. The string length **MUST** be less than or equal to 65,535 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RangePr">
  <xsd:attribute name="sourceName" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.121 CT\_DbTable

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_DbTables](#)

The **CT\_DbTable** complex type specifies a single database table that is used by a Model Data Source **OLE DB** connection ([\[MS-XLSB\]](#) section 2.2.8.9.1) or Model Data Source Data Feed connection ([\[MS-XLSB\]](#) section 2.2.8.9.2).

*Attributes:*

**name:** An attribute of type **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) that specifies the database table name.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DbTable">
  <xsd:attribute name="name" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.122 CT\_DbTables

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_OleDbPr](#), [CT\\_DataFeedPr](#)

The **CT\_DbTables** complex type specifies the list of database tables that are used by a Model Data Source OLE DB connection ([\[MS-XLSB\]](#) section 2.2.8.9.1) or Model Data Source Data Feed connection ([\[MS-XLSB\]](#) section 2.2.8.9.2).

*Child Elements:*

**dbTable:** An element of type **CT\_DbTable** (section [2.6.121](#)) specifying a single database table that is used by this connection.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DbTables">
  <xsd:sequence>
    <xsd:element name="dbTable" minOccurs="1" maxOccurs="unbounded" type="CT_DbTable"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.123 CT\_DbCommand

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_OledbPr](#)

The **CT\_DbCommand** complex type specifies **OLE DB** command text that is used by a Model Data Source OLE DB connection ([\[MS-XLSB\]](#) section 2.2.8.9.1).

*Attributes:*

**text:** An attribute of type **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) that specifies OLE DB command text.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DbCommand">
  <xsd:attribute name="text" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.124 CT\_OledbPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_Connection](#)

The **CT\_OledbPr** complex type specifies properties of a Model Data Source OLE DB connection ([\[MS-XLSB\]](#) section 2.2.8.9.1).

*Child Elements:*

**dbTables:** An element of type **CT\_DbTables** (section [2.6.122](#)) specifying the list of database tables that are used by this connection.

**dbCommand:** An element of type **CT\_DbCommand** (section [2.6.123](#)) specifying **OLE DB** command text that is used by this connection.

*Attributes:*

**connection:** An attribute of type **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) that specifies the OLE DB connection string.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_OledbPr">
  <xsd:choice minOccurs="1" maxOccurs="1">
    <xsd:element name="dbTables" type="CT_DbTables"/>
    <xsd:element name="dbCommand" type="CT_DbCommand"/>
  </xsd:choice>
  <xsd:attribute name="connection" use="optional" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.125 CT\_DataFeedPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT Connection](#)

Specifies properties of a Model Data Source Data Feed connection ([\[MS-XLSB\]](#) section 2.2.8.9.2).

*Child Elements:*

**dbTables:** A [CT\\_DbTables](#) element that specifies the list of database tables used by this connection.

*Attributes:*

**connection:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies connection string.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataFeedPr">
  <xsd:sequence>
    <xsd:element name="dbTables" type="CT_DbTables" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="connection" use="required" type="x:ST Xstring"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.126 CT\_CachedUniqueNames

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [cachedUniqueNames](#)

A complex type that specifies the **MDX unique names** for PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache items in this **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache **field**. MUST NOT exist if the **model** attribute of [CT Connection](#) element of connection ([\[ISO/IEC29500-1:2016\]](#) section 18.13.1) associated with this PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) pivot cache is not equal to "true".

*Child Elements:*

**cachedUniqueName:** A [CT\\_CachedUniqueName](#) element that specifies the MDX unique name for a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache item.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CachedUniqueNames">
  <xsd:sequence>
    <xsd:element name="cachedUniqueName" minOccurs="1" maxOccurs="unbounded"
type="CT_CachedUniqueName"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.127 CT\_CachedUniqueName

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_CachedUniqueNames](#)

A complex type that specifies the **MDX unique name** for a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache item.

*Attributes:*

**index:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies an index of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache item in this **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) cache **field**. MUST be less than **count** attributes of the **CT\_Items** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element specified by the ancestor **CT\_CacheField** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element. MUST be unique within parent **CT\_CachedUniqueNames** (section 2.6.126) collection.

**name:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the MDX unique name. MUST be less than or equal to 65,535 characters in length.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CachedUniqueName">
  <xsd:attribute name="index" use="required" type="xsd:unsignedInt"/>
  <xsd:attribute name="name" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.128 CT\_ModelTable

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_ModelTables](#)

Specifies properties of a single table in **spreadsheet data model**.

*Attributes:*

**id:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies unique id of the spreadsheet data model table.

**name:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies name of the spreadsheet data model table.

**connection:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies name of the workbook connection associated with this spreadsheet data model table.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ModelTable">
  <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="connection" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.129 CT\_ModelTables

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_DataModel](#)

Specifies tables in the **spreadsheet data model**.

*Child Elements:*

**modelTable:** A [CT\\_ModelTable](#) element that specifies properties of a single table in spreadsheet data model.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ModelTables">
  <xsd:sequence>
    <xsd:element name="modelTable" minOccurs="1" maxOccurs="unbounded" type="CT_ModelTable"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.130 CT\_ModelRelationship

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_ModelRelationships](#)

Specifies a single relationship in the **spreadsheet data model**.

*Attributes:*

**fromTable:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the name of the foreign key table for this relationship.

**fromColumn:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the foreign key table **column** for this relationship.

**toTable:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the primary key table for this relationship.

**toColumn:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the name of the primary key table column for this relationship.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ModelRelationship">
  <xsd:attribute name="fromTable" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="fromColumn" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="toTable" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="toColumn" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).



### 2.6.131 CT\_ModelRelationships

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_DataModel](#)

Specifies active relationships in the **spreadsheet data model**.

*Child Elements:*

**modelRelationship:** A [CT\\_ModelRelationship](#) element that specifies a single relationship in the spreadsheet data model.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ModelRelationships">
  <xsd:sequence>
    <xsd:element name="modelRelationship" minOccurs="1" maxOccurs="unbounded"
type="CT_ModelRelationship"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.132 CT\_DataModel

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [dataModel](#)

Specifies properties of a **spreadsheet data model**.

*Child Elements:*

**modelTables:** A [CT\\_ModelTables](#) (section [2.6.129](#)) element that specifies tables in the spreadsheet data model.

**modelRelationships:** A [CT\\_ModelRelationships](#) (section [2.6.131](#)) element that specifies active relationships in the spreadsheet data model.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**minVersionLoad:** An **unsignedByte** attribute that specifies the minimum application version required to load the spreadsheet data model in this workbook. This MUST be greater than or equal to 5.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataModel">
  <xsd:sequence>
    <xsd:element name="modelTables" minOccurs="0" maxOccurs="1" type="CT_ModelTables"/>
    <xsd:element name="modelRelationships" minOccurs="0" maxOccurs="1"
type="CT_ModelRelationships"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="minVersionLoad" type="xsd:unsignedByte" use="optional" default="5"/>
</xsd:complexType>
```

</xsd:complexType>

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.133 CT\_PivotTableData

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

Referenced by: [pivotTableData](#)

The **CT\_PivotTableData** complex type specifies the **PivotValues** (section [2.3.4](#)) of the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) that is specified by the **pivotTableReference** (section [2.4.1](#)) element in the extension of a **workbook** (section [2.2.4.11](#)).

Child Elements:

**pivotRow**: A **CT\_PivotRow** (section [2.6.134](#)) element that specifies a single **row** of **PivotValueCells** (section [2.3.4.1](#)) in an element of this type in the **PivotTable** ([ISO/IEC29500-1:2016] section 18.10) that is specified by the **pivotTableReference** (section 2.4.1) element in the extension of a workbook (section 2.2.4.11).

Attributes:

**rowCount**: An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of **pivotRow** child elements in an element of this type. This value MUST be equal to the value of the **count** attribute of the **rowItems** element, as specified in [ISO/IEC29500-1:2016] section 18.10.1.84.

**columnCount**: An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute specifying the number of **PivotValueCells** (section 2.3.4.1) that are specified by the **CT\_PivotValueCell** (section [2.6.135](#)) complex type in each of the **pivotRow** child elements of this type. This value MUST be equal to the value of the **count** attribute in the **pivotRow** element, as specified by the **CT\_PivotRow** (section 2.6.134) complex type. This value MUST be equal to the value of the **count** attribute of the **colItems**, ([ISO/IEC29500-1:2016] section 18.10.1.17) element.

**cacheId**: An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the associated **OLAP** PivotTable ([ISO/IEC29500-1:2016] section 18.10) PivotCache.

The OLAP PivotTable PivotCache that is specified by this attribute MUST be extended by an **ext** ([ISO/IEC29500-1:2016] section 18.2.7) element that has a structure specified by a **CT\_PivotCacheDefinition** (section [2.6.33](#)) element. The **pivotCacheId** attribute of such a **CT\_PivotCacheDefinition** element MUST be equal to this attribute.

The OLAP PivotTable PivotCache that is specified by this attribute MUST also be extended by an **ext** element that has structure specified by a **CT\_PivotCacheIdVersion** (section [2.6.138](#)) element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotTableData">
  <xsd:sequence>
    <xsd:element name="pivotRow" type="CT_PivotRow" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="rowCount" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="columnCount" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="cacheId" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.134 CT\_PivotRow

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_PivotTableData](#)

A complex type that specifies a single **row** of [PivotValueCells](#) in the `pivotTableData` element of a `PivotTable` ([ISO/IEC29500-1:2016] section 18.10) specified by the [pivotTableReference](#) element in the extension of a **workbook** as specified by section 2.2.4.11.

*Child Elements:*

**c:** A [CT\\_PivotValueCell](#) element that specifies a `PivotValueCell`.

*Attributes:*

**r:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the row index of this element. MUST be within the range of items as specified by the **rowCount** attribute of the complex type `CT_PivotTableData`.

**count:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of child elements of type `CT_PivotValueCell` in the current **pivotRow** element. MUST be less than or equal to the value specified by the **columnCount** attribute of complex type `CT_PivotTableData`.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotRow">
  <xsd:sequence>
    <xsd:element name="c" type="CT_PivotValueCell" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="r" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section 5.3 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.135 CT\_PivotValueCell

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_PivotRow](#)

A complex type that specifies a [PivotValueCell](#).

*Child Elements:*

**v:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) element that specifies the string representation of the [Value](#) of a `PivotValueCell`. The attribute **t** of the parent **CT\_PivotValueCell** element specifies how application interprets this element.

**x:** A [CT\\_PivotValueCellExtra](#) element that specifies the [server formatting](#) on the current **CT\_PivotValueCell** element.

*Attributes:*

**i:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the **column** index of the current **CT\_PivotValueCell** element. MUST be within the range of items as specified by the **columnCount** attribute of complex type [CT\\_PivotTableData](#).

**t:** An [ST\\_SXVCellType](#) attribute that specifies the type of the PivotValueCell represented by the parent element of this attribute.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotValueCell">
  <xsd:sequence>
    <xsd:element name="v" type="x:ST_Xstring" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="x" type="CT_PivotValueCellExtra" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="i" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="t" type="ST_SXVCellType" use="optional" default="n"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.136 CT\_PivotValueCellExtra

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_PivotValueCell](#)

A complex type that specifies the **server formatting** (section [2.3.4.1.2](#)) for a **CT\_PivotValueCell** element (section 2.6.135) that is the parent of this element.

*Attributes:*

**in:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies an index to the list of the numeric formats, specified by the **pivotTableServerFormats** element (section [2.4.2](#)) specified in the extension of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) specified by the **pivotTableReference** element (section [2.4.1](#)) in the extension of a **workbook** as specified in section [2.2.4.11](#). The value MUST be between zero and the **count** attribute of the **CT\_PivotTableServerFormats** element (section [2.6.137](#)).

**bc:** An **ST\_UnsignedIntHex** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.86) attribute that specifies the background color for the **CT\_PivotValueCell** element (section 2.6.135) that is a parent of this element. The color is specified as a hexadecimal value in RGB space.

**fc:** An **ST\_UnsignedIntHex** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.86) attribute that specifies the foreground color for the **CT\_PivotValueCell** element that is a parent of this element. The color is specified as a hexadecimal value in RGB space.

**i:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the **PivotValueCell** (section [2.3.4.1](#)) specified by **CT\_PivotValueCell**, that is a parent of this element, contains italic formatting. A value of one or true indicates this value contains italic formatting on the server.

**un:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the **PivotValueCell** specified by **CT\_PivotValueCell** that is a parent of this element contains underline formatting. A value of 1 or true indicates this value contains underline formatting on the server.

**st:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the **PivotValueCell** specified by **CT\_PivotValueCell** that is a parent of this element contains strikethrough formatting. A value of 1 or true indicates this value contains strikethrough formatting on the server.

**b:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the **PivotValueCell** specified by **CT\_PivotValueCell** that is a parent of this element contains bold formatting. A value of 1 or true indicates this value contains bold formatting on the server.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotValueCellExtra">
  <xsd:attribute name="in" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="bc" type="x:ST UnsignedIntHex" use="optional"/>
  <xsd:attribute name="fc" type="x:ST UnsignedIntHex" use="optional"/>
  <xsd:attribute name="i" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="un" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="st" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="b" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.137 CT\_PivotTableServerFormats

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

A complex type that specifies a list of **CT\_ServerFormat** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.86) elements in a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) that is specified by a [pivotTableReference](#) element in the extension of a **workbook**. MUST contain fewer than 2<sup>31</sup> elements.

*Child Elements:*

**serverFormat:** A **CT\_ServerFormat** ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.86) element that specifies the numeric format for one or more [PivotValueCells](#).

*Attributes:*

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the number of **serverFormat** child elements in the collection.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotTableServerFormats">
  <xsd:sequence>
    <xsd:element name="serverFormat" type="x:CT ServerFormat" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="count" use="required" type="xsd:unsignedInt"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.138 CT\_PivotCacheIdVersion

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [pivotCacheIdVersion](#)

A complex type that specifies the extended properties of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **PivotCache** definition.

*Attributes:*

**cacheIdSupportedVersion:** An **unsignedByte** ([XMLSCHEMA2/2] section 3.3.24) attribute that specifies minimum version of the application where this **pivotCacheId** attribute of an existing **CT\_PivotCacheDefinition** element is guaranteed to be unique.

**cacheIdCreatedVersion:** An **unsignedByte** ([XMLSCHEMA2/2] section 3.3.24) attribute that specifies the minimum version of the application where this **pivotCacheId** attribute of an existing **CT\_PivotCacheDefinition** element can be changed upon saving the **workbook**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotCacheIdVersion">
  <xsd:attribute name="cacheIdSupportedVersion" type="xsd:unsignedByte" use="required"/>
  <xsd:attribute name="cacheIdCreatedVersion" type="xsd:unsignedByte" use="required"/>
</xsd:complexType>
```

See section 5.3 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.139 CT\_Timeline

*Target namespace:* <http://schemas.microsoft.com/office/drawing/2012/timeslicer>

*Referenced by:* [timeslicer](#)

This complex type specifies which [timeline view](#) is associated with this drawing element.

*Child Elements:*

**extLst:** A **CT\_OfficeArtExtensionList** ([ISO/IEC29500-4:2016] section A.5.1) element that specifies future extensibility for this element.

*Attributes:*

**name:** A **string** ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the name of the timeline view (section 2.3.5.2) that is associated with this drawing element. The value of this attribute **MUST** match the value of the **name** attribute of a **timeline** element within the **CT\_Timelines** element (section 2.6.110) for the current **worksheet**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Timeline">
  <xsd:sequence>
    <xsd:element name="extLst" type="a:CT_OfficeArtExtensionList" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section 5.7 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.140 CT\_AbsolutePath

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac>

*Referenced by:* [absPath](#)

**CT\_AbsolutePath** is a complex type that specifies the absolute path to a workbook.

*Attributes:*

**url:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the URL string of the absolute path to the workbook.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_AbsolutePath">
  <xsd:attribute name="url" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
```

See section [5.9](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.141 CT\_DataField

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [dataField](#)

This complex type specifies extended information about a **PivotTable** ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data **field** item ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.22).

*Attributes:*

**isCountDistinct:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies that the aggregation function which applies to this data field item ([\[ISO/IEC29500-1:2016\]](#) section 18.10.1.22) is the count of unique values. If this value is true, the subtotal attribute is ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataField">
  <xsd:attribute name="isCountDistinct" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.142 CT\_Survey

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [survey](#)

**CT\_Survey** is a complex type that specifies the properties for a survey.

*Child Elements:*

**surveyPr:** A [CT\\_SurveyElementPr](#) element that specifies additional properties of the survey.

**titlePr:** A [CT\\_SurveyElementPr](#) element that specifies additional properties associated with the title of the survey.

**descriptionPr:** A [CT\\_SurveyElementPr](#) element that specifies additional properties associated with the description of the survey.

**questions:** A [CT\\_SurveyQuestions](#) element that specifies the set of survey question elements associated with this survey.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**id:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the **unique identifier (UID)** of the survey. This id **MUST** be unique within the **workbook**.

**guid:** An **ST\_Guid** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that identifies this survey.

**title:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the title of the survey.

**description:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the description of the survey.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Survey">
  <xsd:sequence>
    <xsd:element name="surveyPr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="titlePr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="descriptionPr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="questions" type="CT_SurveyQuestions" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="id" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="guid" type="x:ST_Guid" use="required"/>
  <xsd:attribute name="title" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="description" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.143 CT\_SurveyQuestions

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_Survey](#)

**CT\_SurveyQuestions** is a complex type that specifies a list of survey question elements present in a survey.

*Child Elements:*

**questionsPr:** A [CT\\_SurveyElementPr](#) element that specifies additional properties associated with the list of survey question elements.

**question:** A [CT\\_SurveyQuestion](#) element that specifies one survey question in the list.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SurveyQuestions">
  <xsd:sequence>
    <xsd:element name="questionsPr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="question" type="CT_SurveyQuestion" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
```



</xsd:complexType>

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.144 CT\_SurveyQuestion

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_SurveyQuestions](#)

**CT\_SurveyQuestion** is a complex type that specifies the properties of a survey question.

*Child Elements:*

**questionPr:** A [CT\\_SurveyElementPr](#) element that specifies additional properties associated with the survey question.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**binding:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the **unique identifier (UID)** of the Table Column ([ISO/IEC29500-1:2016] section 18.5.1.3) to which the survey question is bound. MUST match the **id** of an existing Table Column ([ISO/IEC29500-1:2016] section 18.5.1.3) element within the Table ([ISO/IEC29500-1:2016] section 18.5) with which the survey is associated.

**text:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the main text of the survey question.

**type:** An [ST\\_QuestionType](#) attribute that specifies the type of the survey question.

**format:** An [ST\\_QuestionFormat](#) attribute that specifies the format of answers to the survey question.

**helpText:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies additional descriptive text associated with the survey question.

**required:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether an answer for the survey question is required when filling in the corresponding survey.

Value	Meaning
"false"	The answer to the survey question is not required when filling in the survey.
"true"	The answer to the survey question is required when filling in the survey.

**defaultValue:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the default answer for the survey question.

**decimalPlaces:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of digits after the decimal to use in a numerical answer to a survey question. MUST be less than or equal to 15.

**rowSource:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the set of available answers for the survey question. The set of available answers is a semicolon delimited

list of values. The string MUST conform to the following **Augmented Backus-Naur Form (ABNF)** ([RFC5234]) grammar:

```
rowSource = [value] / *terminated-value value
terminated-value = value ";"
value = *value-char-with-quote / quoted-value
quoted-value = %x22 value-char-with-semicolon %x22
value-char-with-semicolon = value-char / ";"
value-char-with-quote = value-char / %x22
;value-char = as defined by the production Char in the [W3C-XML] section 2.2, but MUST NOT be
";" or %x22
```

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SurveyQuestion">
  <xsd:sequence>
    <xsd:element name="questionPr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="binding" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="text" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="type" type="ST_QuestionType" use="optional"/>
  <xsd:attribute name="format" type="ST_QuestionFormat" use="optional"/>
  <xsd:attribute name="helpText" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="required" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="defaultValue" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="decimalPlaces" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="rowSource" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section 5.3 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.145 CT\_SurveyElementPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_Survey](#), [CT\\_SurveyQuestions](#), [CT\\_SurveyQuestion](#)

**CT\_SurveyElementPr** is a complex type that specifies additional properties of a survey element.

*Child Elements:*

**extLst:** A **CT\_ExtensionList** ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**cssClass:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies a Cascading Style Sheet (CSS, [CSS-Level2-2009]) class name to apply to the survey element.

**bottom:** An **int** ([XMLSCHEMA2/2] section 3.3.17) attribute that specifies the bottom boundary of this survey element in pixels.

**top:** An **int** ([XMLSCHEMA2/2] section 3.3.17) attribute that specifies the top boundary of the survey element in pixels.

**left:** An **int** ([XMLSCHEMA2/2] section 3.3.17) attribute that specifies the left boundary of the survey element in pixels.

**right:** An **int** ([XMLSCHEMA2/2] section 3.3.17) attribute that specifies the right boundary of the survey element in pixels.

**width:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the width of the survey element in pixels.

**height:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the height of the survey element in pixels.

**position:** An [ST\\_SurveyPosition](#) attribute that specifies the type of positioning to be used on the survey element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SurveyElementPr">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="cssClass" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="bottom" type="xsd:int" use="optional"/>
  <xsd:attribute name="top" type="xsd:int" use="optional"/>
  <xsd:attribute name="left" type="xsd:int" use="optional"/>
  <xsd:attribute name="right" type="xsd:int" use="optional"/>
  <xsd:attribute name="width" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="height" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="position" type="ST_SurveyPosition" use="optional"/>
</xsd:complexType>
```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.146 CT\_Ref

*Target namespace:* <http://schemas.microsoft.com/office/excel/2006/main>

*Referenced by:* [ref](#)

**CT\_Ref** is a complex type that extends **ST\_Ref** ([ISO/IEC29500-1:2016] section 18.18.62) specifies a rectangular **range**.

*Attributes:*

**edited:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies that at least one cell in this range has been edited by an application version that is unable to read one or more ancestor records.

**adjusted:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this range has been adjusted by an application version that is unable to read one or more ancestor records.

**adjust:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether application versions that are unable to read one or more ancestor records will adjust this range if the contents of the **cells** that this range refers to are changed. MUST be TRUE if **adjusted** is TRUE.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Ref">
  <xsd:simpleContent>
    <xsd:extension base="ST_Ref">
      <xsd:attribute name="edited" type="xsd:boolean" use="optional"/>
      <xsd:attribute name="adjusted" type="xsd:boolean" use="optional"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

```

        <xsd:attribute name="adjust" type="xsd:boolean" use="optional"/>
    </xsd:extension>
</xsd:simpleContent>
</xsd:complexType>

```

See section [5.1](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.147 CT\_Sqref

*Target namespace:* <http://schemas.microsoft.com/office/excel/2006/main>

*Referenced by:* [sqref](#), [CT\\_ConditionalFormatting](#), [CT\\_DataValidation](#), [CT\\_Sparkline](#), [CT\\_IgnoredError](#), [CT\\_ProtectedRange](#)

**CT\_Sqref** is a complex type that extends **ST\_Sqref** ([ISO/IEC29500-1:2016] section 18.18.76) specifies a sequence of cell references.

*Attributes:*

**edited:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies that at least one cell in this **range** has been edited by an application version that is unable to read one or more ancestor records.

**split:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies that this range has been split.

**adjusted:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this range has been adjusted by an application version that is unable to read one or more ancestor records.

**adjust:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether application versions that are unable to read one or more ancestor records will adjust this range if the contents of the **cells** that this range refers to are changed. MUST be TRUE if **adjusted** is TRUE.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_Sqref">
  <xsd:simpleContent>
    <xsd:extension base="ST_Sqref">
      <xsd:attribute name="edited" type="xsd:boolean" use="optional"/>
      <xsd:attribute name="split" type="xsd:boolean" use="optional"/>
      <xsd:attribute name="adjusted" type="xsd:boolean" use="optional"/>
      <xsd:attribute name="adjust" type="xsd:boolean" use="optional"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>

```

See section [5.1](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.148 CT\_ApplicationNonVisualDrawingProps

*Target namespace:* <http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing>

*Referenced by:* [CT\\_ContentPart](#)

Non-visual ContentPart properties.

*Attributes:*

**macro:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that contains an XL macro string.

**fPublished:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that serves as a Flag to determine whether the shape will be published on XL server.

Value	Meaning
"true"	The shape will be published on XL server.
"false"	The shape will not be published on XL server.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ApplicationNonVisualDrawingProps">
  <xsd:attribute name="macro" type="xsd:string" use="optional"/>
  <xsd:attribute name="fPublished" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.8](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.149 CT\_CacheSourceExt

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Extended description of the data source whose data is stored in the pivot cache.

*Child Elements:*

**sourceConnection:** A [CT\\_SourceConnection](#) element that specifies the source connection of the pivot cache.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CacheSourceExt">
  <xsd:sequence>
    <xsd:element ref="sourceConnection" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.150 CT\_ContentPart

*Target namespace:* <http://schemas.microsoft.com/office/excel/2010/sheetDrawing>

*Referenced by:* [contentPart](#)

Specifies a reference to XML content in a format not specified in [\[ISO/IEC29500-1:2016\]](#).

*Child Elements:*

**nvContentPartPr:** A [CT\\_ContentPartNonVisual](#) element that specifies the non-visual properties of the content part.

**nvPr:** A [CT\\_ApplicationNonVisualDrawingProps](#) element that specifies non-visual drawing-specific properties.

**xfrm:** A CT\_Transform2D ([ISO/IEC29500-1:2016] section A.4.1) element that specifies the 2-D transform for the content part.

**extLst:** A CT\_OfficeArtExtensionList ([ISO/IEC29500-1:2016] section A.4.1) element that specifies future extensibility for this element.

*Attributes:*

**r:id:** An ST\_RelationshipId ([ISO/IEC29500-1:2016] section 22.8.2.1) attribute that specifies the relationship identifier to a content part.

**bwMode:** An ST\_BlackWhiteMode ([ISO/IEC29500-1:2016] section 20.1.10.10) attribute that specifies how to interpret color information contained within a content part to achieve a color, black and white, or grayscale rendering of the content part.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ContentPart">
  <xsd:sequence>
    <xsd:element name="nvContentPartPr" type="CT_ContentPartNonVisual" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="nvPr" type="CT_ApplicationNonVisualDrawingProps" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="xfrm" type="a:CT_Transform2D" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="a:CT_OfficeArtExtensionList" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute ref="r:id" use="required"/>
  <xsd:attribute name="bwMode" type="a:ST_BlackWhiteMode" use="optional" default="auto"/>
</xsd:complexType>
```

See section [5.8](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.151 CT\_ContentPartNonVisual

*Target namespace:* <http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing>

*Referenced by:* [CT\\_ContentPart](#)

Non-visual ContentPart properties.

*Child Elements:*

**cNvPr:** A CT\_NonVisualDrawingProps ([\[ISO/IEC29500-1:2016\]](#) section A.4.1) element that specifies non-visual drawing properties of the content part. This enables additional information that does not affect the appearance of the content part to be stored.

**cNvContentPartPr:** A CT\_NonVisualInkContentPartProperties ([\[MS-ODRAWXML\]](#) section 2.3.3.7) element that specifies non-visual **ink** properties of the content part. This enables additional information that does not affect the appearance of ink in the content part to be stored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ContentPartNonVisual">
  <xsd:sequence>
```

```

    <xsd:element name="cNvPr" type="a:CT_NonVisualDrawingProps" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="cNvContentPartPr" type="a14:CT_NonVisualInkContentPartProperties"
minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.8](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.152 CT\_CalculatedTimeColumn

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2014/11/main>

*Referenced by:* [CT\\_ModelTimeGrouping](#)

Specifies information about a single calculated time column.

*Attributes:*

**columnName:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the model column name for a specific time grouping granularity.

**columnId:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the model column immutable identifier for a specific time grouping.

**contentType:** An **ST\_ModelTimeGroupingContentType** attribute that specifies the type of content stored in this **calculated column**.

**isSelected:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether this grouping granularity was applied in the last time grouping selection.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_CalculatedTimeColumn">
  <xsd:attribute name="columnName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="columnId" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="contentType" type="ST_ModelTimeGroupingContentType" use="required"/>
  <xsd:attribute name="isSelected" type="xsd:boolean" use="required"/>
</xsd:complexType>

```

See section [5.10](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.153 CT\_ModelTimeGrouping

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2014/11/main>

*Referenced by:* [CT\\_ModelTimeGroupings](#)

Specifies information about a single data model time grouping.

*Child Elements:*

**calculatedTimeColumn:** A **CT\_CalculatedTimeColumn** (section [2.6.152](#)) element that specifies information about a data model time grouping **calculated column**.

*Attributes:*

**tableName:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the model table name for this time grouping.

**columnName:** An ST\_Xstring ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the model column name for this time grouping.

**columnId:** An ST\_Xstring ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the model column immutable identifier for this time grouping.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ModelTimeGrouping">
  <xsd:sequence>
    <xsd:element name="calculatedTimeColumn" minOccurs="1" maxOccurs="unbounded"
type="CT_CalculatedTimeColumn"/>
  </xsd:sequence>
  <xsd:attribute name="tableName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="columnName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="columnId" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.10](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.154 CT\_ModelTimeGroupings

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2014/11/main>

*Referenced by:* [modelTimeGroupings](#)

Specifies information about data model time groupings.

*Child Elements:*

**modelTimeGrouping:** A **CT\_ModelTimeGrouping** (section [2.6.153](#)) element that specifies information about data model single time grouping.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ModelTimeGroupings">
  <xsd:sequence>
    <xsd:element name="modelTimeGrouping" minOccurs="1" maxOccurs="unbounded"
type="CT_ModelTimeGrouping"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.10](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.155 CT\_RevisionPtr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2014/revision>

*Referenced by:* [revisionPtr](#)

This element specifies metadata supporting runtime scenarios for Microsoft Excel.

*Attributes:*

**revIDLastSave:** An [ST\\_Xrevid](#) attribute that SHOULD be ignored.



**documentId:** An ST\_Xstring ([[ISO/IEC29500-1:2016](#)] section 22.9.2.19) attribute that SHOULD be ignored.

**xr6:coauthVersionLast:** An unsignedInt ([[XMLSCHEMA2/2](#)] section 3.3.22) attribute that SHOULD be ignored.

**xr6:coauthVersionMax:** An unsignedInt ([[XMLSCHEMA2/2](#)] section 3.3.22) attribute that SHOULD be ignored.

**xr10:uidLastSave:** An ST\_Guid ([[ISO/IEC29500-1:2016](#)] section 22.9.2.4) attribute that SHOULD be ignored.

The following W3C XML Schema ([[XMLSCHEMA1/2](#)] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RevisionPtr">
  <xsd:attribute name="revIDLastSave" type="ST_Xrevid" use="required"/>
  <xsd:attribute name="documentId" type="x:ST_Xstring" use="required"/>
  <xsd:attribute ref="xr6:coauthVersionLast" use="optional" default="0"/>
  <xsd:attribute ref="xr6:coauthVersionMax" use="optional" default="0"/>
  <xsd:attribute ref="xr10:uidLastSave" use="optional"/>
</xsd:complexType>
```

See section [5.15](#) for the full W3C XML Schema ([[XMLSCHEMA1/2](#)] section 2.1).

## 2.6.156 CT\_PivotTableDefinition16

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout>

*Referenced by:* [pivotTableDefinition16](#)

This element specifies additional properties of a PivotTable ([[ISO/IEC29500-1:2016](#)] section 18.10) view.

*Attributes:*

**EnabledSubtotalsDefault:** A boolean ([[XMLSCHEMA2/2](#)] section 3.2.2) attribute that specifies whether subtotals are enabled by default for the PivotTable.

**SubtotalsOnTopDefault:** A boolean ([[XMLSCHEMA2/2](#)] section 3.2.2) attribute that specifies whether enabled subtotals are on the top of the PivotTable by default.

**InsertBlankRowDefault:** A boolean ([[XMLSCHEMA2/2](#)] section 3.2.2) attribute that specifies whether blank rows are inserted into the PivotTable by default.

The following W3C XML Schema ([[XMLSCHEMA1/2](#)] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotTableDefinition16">
  <xsd:attribute name="EnabledSubtotalsDefault" type="xsd:boolean" use="optional"
  default="true"/>
  <xsd:attribute name="SubtotalsOnTopDefault" type="xsd:boolean" use="optional"
  default="true"/>

  <xsd:attribute name="InsertBlankRowDefault" type="xsd:boolean" use="optional"
  default="false"/>
</xsd:complexType>
```

See section [5.19](#) for the full W3C XML Schema ([[XMLSCHEMA1/2](#)] section 2.1).

## 2.6.157 CT\_Array

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [CT\\_ArrayData](#)

This element specifies the properties of a single **rich array**.

Child Elements:

**v**: A [CT\\_ArrayValue](#) element that specifies a **data type** and value in the rich array. If the **c** attribute is not present, then the total number of **CT\_ArrayValue** elements MUST be equal to the **r** attribute. If the **c** attribute is present, then the total number of **CT\_ArrayValue** elements MUST be equal to the **r** attribute multiplied by the **c** attribute.

Certain data types indicate that the value represents an index as described in the table below.

Value	Meaning
"a"	The <b>CT_ArrayValue</b> identifies a rich array. This is a zero-based index. This index MUST reference a <b>CT_Array</b> that comes before the current <b>CT_Array</b> in the list specified in <b>CT_ArrayData</b> (section 2.6.158).
"r"	The <b>CT_ArrayValue</b> identifies a <b>CT_RichValue</b> specified in section 2.6.175. This is a zero-based index. This index MUST reference a <b>CT_RichValue</b> that comes before the <b>CT_RichValue</b> that contains the current <b>CT_Array</b> in the list specified in <b>CT_RichValueData</b> (section 2.6.177).

Attributes:

**r**: An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of rows for the rich array. This number MUST be less than or equal to 1048576.

**c**: An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of columns for the array. This number MUST be less than or equal to 16384.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Array">
  <xsd:sequence>
    <xsd:element name="v" minOccurs="1" maxOccurs="unbounded" type="CT_ArrayValue"/>
  </xsd:sequence>
  <xsd:attribute name="r" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="c" type="xsd:unsignedInt" use="optional" default="1"/>
</xsd:complexType>
```

See section 5.20 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.158 CT\_ArrayData

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [arrayData](#)

A complex type that specifies the values for **rich arrays**.

Child Elements:

**a:** A [CT\\_Array](#) element that specifies a single rich array.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**count:** An [unsignedInt](#) ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the count of rich arrays. The number of [CT\\_Array](#) elements MUST match this count. This count MUST be less than or equal to 2147483647.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ArrayData">
  <xsd:sequence>
    <xsd:element name="a" minOccurs="0" maxOccurs="unbounded" type="CT Array"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.159 CT\_ArrayValue

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_Array](#)

A complex type that specifies the value and type of an element in a **rich array**.

*Attributes:*

**t:** An [ST\\_ArrayValueType](#) attribute that specifies the **data type** of the rich array value.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ArrayValue">
  <xsd:simpleContent>
    <xsd:extension base="x:ST_Xstring">
      <xsd:attribute name="t" type="ST ArrayValueType" use="optional" default="d"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.160 CT\_CustomRichFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_CustomRichFilters](#)

A complex type that specifies a custom **filter** criterion that is associated with a **rich value**.

*Attributes:*

**key:** An **ST\_RichFilterKey** (section [2.7.38](#)) attribute that specifies the **rich value key** for which the filters is defined.

**operator:** An **ST\_FilterOperator** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.31) attribute that specifies the operator of the custom filter criterion.

**val:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the value to be used as a custom filter criterion. The length of this value **MUST** be less than 65536 characters.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CustomRichFilter">
  <xsd:complexContent>
    <xsd:extension base="x:CT_CustomFilter">
      <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.161 CT\_CustomRichFilters

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFilterColumn](#)

This complex type specifies custom **filter** criteria associated with **rich values**. **Rows** that contain a **cell** within the filter **range** such that the value does not meet the custom filter criteria will be hidden.

*Child Elements:*

**customFilter:** A [CT\\_CustomRichFilter](#) element that specifies custom filter criterion that is associated with a rich value.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**and:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies the relationship between custom filter criterion. This attribute only applies when there are two criteria:

Value	Meaning
"false"	The two criteria are related by an OR relationship. That is, for a cell value to meet the custom filter criteria, at least one criterion specified by the <b>customFilter</b> child elements <b>MUST</b> be met.
"true"	The two criteria are related by an AND relationship. That is, for a cell value to meet the custom filter criteria, both criteria specified by the <b>customFilter</b> child elements <b>MUST</b> be met.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CustomRichFilters">
  <xsd:sequence>
    <xsd:choice minOccurs="1" maxOccurs="2">
      <xsd:element name="customFilter" minOccurs="0" maxOccurs="1"
        type="CT_CustomRichFilter"/>
    </xsd:choice>
  </xsd:sequence>
</xsd:complexType>
```

```

    <xsd:element name="extLst" minOccurs="0" maxOccurs="1" type="x:CT_ExtensionList"/>
  </xsd:choice>
</xsd:sequence>
  <xsd:attribute name="and" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>

```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.162 CT\_DynamicRichFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFilterColumn](#)

This complex type specifies the dynamic **filter** criteria associated with **rich values**. These criteria are considered dynamic because they can change, either with the data itself (e.g., "above average") or with the current system date (e.g., show values for "today"). For any **cells** within the filter **range** whose values do not meet the specified criteria, the corresponding **rows** will be hidden from view when the filter is applied. This complex type extends the base type **CT\_DynamicFilter** ([ISO/IEC29500-1:2016] section 18.3.2.5)

*Attributes:*

**key:** An **ST\_RichFilterKey** (section [2.7.38](#)) attribute that specifies the **rich value key** for which the filters is defined.

**type:** An **ST\_DynamicFilterType** ([ISO/IEC29500-1:2016] section 18.18.26) attribute that specifies the type of dynamic filter.

**val:** A **double** ([XMLSCHEMA2/2] section 3.2.5) **attribute** that specifies a minimum value for dynamic filter. It is inclusive for today, yesterday, tomorrow, nextWeek, thisWeek, lastWeek, nextMonth, thisMonth, lastMonth, nextQuarter, thisQuarter, lastQuarter, nextYear, thisYear, lastYear, and yearToDate. The **val** attribute is not required for Q1, Q2, Q3, Q4, M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11 and M12. It is exclusive for aboveAverage and belowAverage.

**maxVal:** A **double** ([XMLSCHEMA2/2] section 3.2.5) attribute that specifies a maximum value for dynamic filter. It is exclusive and required for today, yesterday, tomorrow, nextWeek, thisWeek, lastWeek, nextMonth, thisMonth, lastMonth, nextQuarter, thisQuarter, lastQuarter, nextYear, thisYear, lastYear, and yearToDate.

**valIso:** A **dateTime** ([XMLSCHEMA2/2] section 3.2.7) attribute that specifies a minimum value for dynamic filter. (See description of the **maxValIso** attribute to understand when the **valIso** attribute is required.)

**maxValIso:** A **dateTime** ([XMLSCHEMA2/2] section 3.2.7) attribute that specifies a maximum value for dynamic filter. The **maxValIso** attribute is required for today, yesterday, tomorrow, nextWeek, thisWeek, lastWeek, nextMonth, thisMonth, lastMonth, nextQuarter, thisQuarter, lastQuarter, nextYear, thisYear, lastYear, and yearToDate.

The above criteria are based on a value range; that is, if today's date is September 22nd, then the range for thisWeek is the values greater than or equal to September 17 and less than September 24. In the thisWeek range, the lower value is expressed valIso. The higher value is expressed using the **maxValIso** attribute.

These dynamic filters do not require the **valIso** or **maxValIso** attributes:

Q1, Q2, Q3, Q4, M1, M2, M3, M4, M5, M6, M7, M8, M9, M10, M11 and M12.

The above criteria shall not specify the range using **valIso** and **maxValIso** because Q1 starts from M1 to M3, and M1 is January.

These types of dynamic filters use **valIso** and do not use **maxValIso**:

aboveAverage and belowAverage

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DynamicRichFilter">
  <xsd:complexContent>
    <xsd:extension base="x:CT_DynamicFilter">
      <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.163 CT\_Key

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [CT\\_RichValueStructure](#)

This complex type specifies the **rich value key**.

*Attributes:*

**n:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) **attribute** that specifies the name of the rich value key. This name is case insensitive and MUST be unique in the **CT\_RichValueStructure**. This string MUST be less than or equal to 255 characters in length.

**t:** An [ST\\_RichValueValueType](#) attribute that specifies the **data type** of the value associated with this key.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Key">
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="t" type="ST_RichValueValueType" use="optional" default="d"/>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.164 CT\_RichDateGroupItem

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFilters](#)

This complex type specifies a group of dates or times which are used in a **filter** criteria associated with **rich values**. This complex type extends the base type **CT\_DateGroupItem** ([\[ISO/IEC29500-1:2016\]](#) section 18.3.2.4).

*Attributes:*

**key:** An **ST\_RichFilterKey** (section [2.7.38](#)) attribute that specifies the **rich value key** for which the filters is defined.

**year:** An **unsignedShort** ([\[XMLSCHEMA2/2\]](#) section 3.3.23) attribute that specifies the year (4 digits).

**month:** An **unsignedShort** ([\[XMLSCHEMA2/2\]](#) section 3.3.23) attribute that specifies the month (1-12).

**day:** An **unsignedShort** ([\[XMLSCHEMA2/2\]](#) section 3.3.23) attribute that specifies the day (1-31).

**hour:** An **unsignedShort** ([\[XMLSCHEMA2/2\]](#) section 3.3.23) attribute that specifies the hour (0-23).

**minute:** An **unsignedShort** ([\[XMLSCHEMA2/2\]](#) section 3.3.23) attribute that specifies the minute (0-59).

**second:** An **unsignedShort** ([\[XMLSCHEMA2/2\]](#) section 3.3.23) attribute that specifies the second (0-59).

**dateTimeGrouping:** An **ST\_DateTimeGrouping** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.22) attribute that specifies the grouping level.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichDateGroupItem">
  <xsd:complexContent>
    <xsd:extension base="x:CT_DateGroupItem">
      <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.165 CT\_RichFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFilters](#)

This complex type specifies a **filter** criterion associated with **rich values**. **Rows** that contain a rich value within the filter **range** that have **key value pair (KVP)** with value **val** and key **key** will not be hidden by this filter criterion. Rows that do not contain such a rich value will be hidden.

*Attributes:*

**key:** An **ST\_RichFilterKey** (section [2.7.38](#)) attribute that specifies the **rich value key** for which the filters is defined.

**val:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the value to be used as a filter criterion. The length of this value **MUST** be less than 65536 characters.

**blank:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the filter criterion includes blank values.

**nodata:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the filter includes values that do not have the specified rich value key.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichFilter">
  <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
  <xsd:attribute name="val" type="x:ST Xstring" use="optional"/>
  <xsd:attribute name="blank" type="xsd:boolean" use="optional"/>
  <xsd:attribute name="nodata" type="xsd:boolean" use="optional"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.166 CT\_RichFilters

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFilterColumn](#)

This complex type specifies a **filter** with multiple criteria associated with **rich values**.

*Child Elements:*

**filter:** A [CT\\_RichFilter](#) element that specifies a filter criterion associated with rich values. **Rows** that contain a rich value within the filter **range** that have a **key value pair (KVP)** with value **val** and key **key** will not be hidden by this filter criterion. Rows that do not contain such a rich value will be hidden.

**dateGroupItem:** A [CT\\_RichDateGroupItem](#) element that specifies a group of dates or times which are used in a filter criteria associated with rich values.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichFilters">
  <xsd:sequence>
    <xsd:element name="filter" type="CT_RichFilter" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="dateGroupItem" type="CT_RichDateGroupItem" minOccurs="0"
maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.167 CT\_RichFormatProperties

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichStylesheet](#)

This complex type specifies a list of properties for **rich value** formats.

*Child Elements:*

**rPr:** A [CT\\_RichFormatProperty](#) element that specifies a property for rich value formats.



The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichFormatProperties">
  <xsd:sequence>
    <xsd:element name="rPr" minOccurs="1" maxOccurs="unbounded"
      type="CT_RichFormatProperty"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.168 CT\_RichFormatProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFormatProperties](#)

This complex type specifies a property for **rich value** formats.

*Attributes:*

**n:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the name of the property.

**t:** An [ST\\_RichFormatPropertyType](#) attribute that specifies the **data type** of the property.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichFormatProperty">
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="t" type="ST_RichFormatPropertyType" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.169 CT\_RichSortCondition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [richSortCondition](#), [CT\\_SortRule](#)

This complex type specifies **sort conditions** associated with **rich values**.

*Attributes:*

**richSortKey:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the **rich value key** for which the sort condition is defined. This string MUST be less than or equal to of 255 characters in length.

**descending:** A boolean ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies the direction of the **sort**.

Value	Meaning
"false"	If <b>sortBy</b> is "value", sort in ascending order. If <b>sortBy</b> is "cellColor" or "fontColor", cells in which the cell color or cell font color specified by <b>dxId</b> occurs are ordered at the top of the

Value	Meaning
	range. If <b>sortBy</b> is "icon", cells in which the icon specified by <b>iconSet</b> and <b>iconId</b> occurs are ordered at the top of the range.
"true"	If <b>sortBy</b> is "value", sort in descending order. If <b>sortBy</b> is "cellColor" or "fontColor", cells in which the cell color or cell font color specified by <b>dxId</b> occurs are ordered at the bottom of the range. If <b>sortBy</b> is "icon", cells in which the icon specified by <b>iconSet</b> and <b>iconId</b> occurs are ordered at the bottom of the range.

**sortBy:** An **ST\_SortBy** ([ISO/IEC29500-1:2016] section 18.18.72) attribute that specifies how the cells in a range are sorted.

**ref:** An **ST\_Ref** ([ISO/IEC29500-1:2016] section 18.18.62) attribute that specifies the **row** or **column** to which this sort condition applies. This value MUST be contained within the **ref** in the **sortState** ([ISO/IEC29500-1:2016] section 18.3.1.92) element that precedes this element. If the **sortState.columnSort** attribute that precedes this element is "false", this value specifies the column to which this sort condition applies and there MUST be only a single column specified by **ref**. If the **sortState.columnSort** attribute that precedes this element is "true", this value specifies the row to which this sort condition applies and there MUST be only a single row specified by **ref**.

**customList:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies a comma-delimited list of strings that specifies a custom **sort order**. The order of strings in the list specifies the sort order. When a cell value matches a string in the list, it is sorted ahead of the cell values that match a later string in the list, and so on for each cell in the range. MUST be ignored if **sortBy** is not equal to "value".

**dxId:** An **ST\_DxfId** ([ISO/IEC29500-1:2016] section 18.18.25) attribute that specifies the format identifier when **sortBy** equals "cellColor" or **sortBy** equals "fontColor". MUST NOT be present if **sortBy** equals "icon" or "value".

**iconSet:** An **ST\_IconSetType** attribute that specifies the icon set when **sortBy** equals "icon". The absence of this attribute means no icon. MUST NOT be present if **sortBy** is not equal to "icon".

**iconId:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the zero-based index of an icon in an **icon set**. If the icon set specified by **iconSet** has three icons, this value MUST be less than or equal to 2. If the icon set specified by **iconSet** has four icons, this value MUST be less than or equal to 3. If the icon set specified by **iconSet** has five icons, this value MUST be less than or equal to 4. The absence of this attribute means no icon. MUST NOT be present if **sortBy** is not equal to "icon".

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichSortCondition">
  <xsd:complexContent>
    <xsd:extension base="x2:CT_SortCondition">
      <xsd:attribute name="richSortKey" type="x:ST_Xstring" use="optional"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.170 CT\_RichStyle

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichStyles](#)

This complex type specifies a list of properties and optional style differential formats (DXFs) ([\[ISO/IEC29500-1:2016\]](#) section 18.8) associated with **rich values**.

*Child Elements:*

**rpv:** A [CT\\_RichStylePropertyValue](#) element that specifies the value of and identifier to the **CT\_RichFormatProperty** (section [2.6.168](#)).

*Attributes:*

**dxfid:** An **ST\_DxfId** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.25) attribute that specifies the identifier to **CT\_Dxfs** ([\[ISO/IEC29500-4:2016\]](#) section A.2) in the styles part. This is a zero-based index. See [\[ISO/IEC29500-1:2016\]](#) section 18.8.30 in Style for more information on formats. This simple type's contents are restricted by the **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) data type.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichStyle">
  <xsd:sequence>
    <xsd:element name="rpv" minOccurs="0" maxOccurs="unbounded"
type="CT_RichStylePropertyValue"/>
  </xsd:sequence>
  <xsd:attribute name="dxfid" type="x:ST_DxfId" use="optional"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.171 CT\_RichStylePropertyValue

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichStyle](#)

This complex type specifies the value of and identifier to a **CT\_RichFormatProperty** (section [2.6.168](#)).

*Attributes:*

**i:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) 3.3.22) attribute that specifies the identifier to a **CT\_RichFormatProperty**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichStylePropertyValue">
  <xsd:simpleContent>
    <xsd:extension base="xsd:string">
      <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.172 CT\_RichStyles

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichStylesheet](#)

This complex type specifies a list of **styles** associated with **rich values**.

*Child Elements:*

**rSty:** A [CT\\_RichStyle](#) element that specifies a list of properties and optional style differential formats (DXFs) ([\[ISO/IEC29500-1:2016\]](#) section 18.8) associated with rich values.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichStyles">
  <xsd:sequence>
    <xsd:element name="rSty" minOccurs="1" maxOccurs="unbounded" type="CT_RichStyle"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.173 CT\_RichStylesheet

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [richStyleSheet](#)

This complex type contains **style** information associated with **rich values**.

*Child Elements:*

**dxfs:** A [CT\\_Dxfs](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies the list of style differential formats (DXFs), as specified in [\[ISO/IEC29500-1:2016\]](#) section 18.8.

**richProperties:** A [CT\\_RichFormatProperties](#) element that specifies a list of properties for rich value formats.

**richStyles:** A [CT\\_RichStyles](#) element that specifies a list of styles associated with rich values.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichStylesheet">
  <xsd:sequence>
    <xsd:element name="dxfs" type="x:CT_Dxfs" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="richProperties" type="CT_RichFormatProperties" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="richStyles" type="CT_RichStyles" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.174 CT\_RichTop10

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFilterColumn](#)

This complex type specifies a **top N filter** or **bottom N filter**. This complex type extends the base type **CT\_Top10** ([\[ISO/IEC29500-1:2016\]](#) section 18.3.2.10).

*Attributes:*

**key:** An **ST\_RichFilterKey** (section [2.7.38](#)) attribute that specifies the **rich value key** for which the **filters** is defined.

**top:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether a top N filter or a bottom N filter is applied. True indicates a top N filter is applied. False indicates a bottom N filter is applied.

**percent:** A **Boolean** ([\[XMLSCHEMA2/2\]](#) section 3.2.2) attribute that specifies whether the top N filter or bottom N filter is based on a percentage of the total sum of values in the **column** or not. True indicates value filters by a percent value of the column. False indicates value filters by number of items.

**val:** A **double** ([\[XMLSCHEMA2/2\]](#) section 3.2.5) attribute that specifies the top or bottom value to use as the filter criteria.

**filterVal:** A **double** ([\[XMLSCHEMA2/2\]](#) section 3.2.5) attribute that specifies the actual cell value or **rich value data** in the range which is used to perform the comparison for this filter.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichTop10">
  <xsd:complexContent>
    <xsd:extension base="x:CT_Top10">
      <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.175 CT\_RichValue

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [CT\\_RichValueData](#)

This complex type specifies **rich value data** information for a single **rich value**.

*Child Elements:*

**fb:** A [CT\\_RichValueFallback](#) element that specifies the **rich value fallback**.

**v:** A [CT\\_Value](#) element that specifies a value contained in the rich value as part of a **key value pair (KVP)**. The **rich value key** and **data type** is determined by matching the index of the **CT\_Value**

with the index of the **CT\_Key** (section [2.6.163](#)) in the **CT\_RichValueStructure** (section [2.6.180](#)) identified by the **s** attribute.

Certain data types indicate that the value represents an index as described in the table below.

Value	Meaning
"a"	The <b>CT_Value</b> identifies a <b>CT_Array</b> specified in section <a href="#">2.6.157</a> . This is a zero-based index.
"r"	The <b>CT_Value</b> identifies a <b>CT_RichValue</b> specified in this section. This is a zero-based index. This index <b>MUST</b> reference a <b>CT_RichValue</b> that comes before the current <b>CT_RichValue</b> in the list specified in <b>CT_RichValueData</b> (section <a href="#">2.6.177</a> ).
"spb"	The <b>CT_Value</b> identifies a <b>CT_SupportingPropertyBag</b> specified in section <a href="#">2.6.188</a> . This is a zero-based index.

*Attributes:*

**s**: An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the identifier to the **CT\_RichValueStructure** (section [2.6.180](#)). This is a zero-based index.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValue">
  <xsd:sequence>
    <xsd:element name="fb" minOccurs="0" maxOccurs="1" type="CT_RichValueFallback"/>
    <xsd:element name="v" minOccurs="1" maxOccurs="unbounded" type="CT_Value"/>
  </xsd:sequence>
  <xsd:attribute name="s" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.176 CT\_RichValueBlock

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [rvb](#)

This complex type specifies the identifier for the **CT\_RichValue** (section [2.6.175](#)).

*Attributes:*

**i**: An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the identifier for the **CT\_RichValue** (section [2.6.175](#)). This is a zero-based index.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueBlock">
  <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.177 CT\_RichValueData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [rvData](#)

This complex type specifies a list of **rich value data** elements.

*Child Elements:*

**rv:** A [CT\\_RichValue](#) element that specifies rich value data information for a single **rich value**

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the count of **CT\_RichValue** elements. The number of **CT\_RichValue** elements MUST match this count. This count MUST be less than or equal to 2147483647.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueData">
  <xsd:sequence>
    <xsd:element name="rv" minOccurs="0" maxOccurs="unbounded" type="CT_RichValue"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.178 CT\_RichValueFallback

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [CT\\_RichValue](#)

This complex type specifies the **rich value fallback**.

*Attributes:*

**t:** An [ST\\_RichValueFallbackType](#) attribute that specifies the **data type** of the rich value fallback.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueFallback">
  <xsd:simpleContent>
    <xsd:extension base="xsd:string">
      <xsd:attribute name="t" type="ST_RichValueFallbackType" use="optional" default="n"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.179 CT\_RichValueGlobalType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichValueTypesInfo](#)

This complex type specifies information that applies to all **rich value types**.

*Child Elements:*

**keyFlags:** A [CT\\_RichValueTypeKeyFlags](#) element that specifies the values of **rich value key flags** that differ from the defaults for all rich value types. See sections under section [2.3.6.1](#) for specific type definitions.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueGlobalType">
  <xsd:sequence>
    <xsd:element name="keyFlags" minOccurs="0" maxOccurs="1"
      type="CT_RichValueTypeKeyFlags"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.180 CT\_RichValueStructure

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [CT\\_RichValueStructures](#)

This complex type specifies the structure for one or more **rich values**.

*Child Elements:*

**k:** A [CT\\_Key](#) element that specifies the **rich value key**.

*Attributes:*

**t:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the **rich value type**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueStructure">
  <xsd:sequence>
    <xsd:element name="k" minOccurs="1" maxOccurs="unbounded" type="CT_Key"/>
  </xsd:sequence>
  <xsd:attribute name="t" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).



## 2.6.181 CT\_RichValueStructures

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [rvStructures](#)

This complex type specifies the list of **rich value** structures.

*Child Elements:*

**s:** A [CT\\_RichValueStructure](#) element that specifies the structure for one or more rich values.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the count of **supporting property bag** child elements. The number of **CT\_RichValueStructure** elements MUST match this count. This count MUST be less than or equal to 2147483647.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueStructures">
  <xsd:sequence>
    <xsd:element name="s" minOccurs="0" maxOccurs="unbounded" type="CT_RichValueStructure"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.182 CT\_RichValueType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichValueTypes](#)

This complex type specifies information about a single **rich value type**.

*Child Elements:*

**keyFlags:** A [CT\\_RichValueTypeKeyFlags](#) element that specifies the set of **rich value key flags** that differ from defaults for the rich value type identified by the **name** attribute.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**name:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the rich value type. This string MUST be less than or equal to of 255 characters in length.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueType">
  <xsd:sequence>
```

```

    <xsd:element name="keyFlags" minOccurs="0" maxOccurs="1"
type="CT_RichValueTypeKeyFlags"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>

```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.183 CT\_RichValueTypeKeyFlags

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichValueGlobalType](#), [CT\\_RichValueType](#)

This complex type specifies a collection of **CT\_RichValueTypeReservedKey** elements.

*Child Elements:*

**key:** A [CT\\_RichValueTypeReservedKey](#) element that specifies a **rich value key** with **rich value key flags** that apply to it.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_RichValueTypeKeyFlags">
  <xsd:sequence>
    <xsd:element name="key" minOccurs="1" maxOccurs="unbounded"
type="CT_RichValueTypeReservedKey"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.184 CT\_RichValueTypeReservedKey

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichValueTypeKeyFlags](#)

This complex type specifies a **rich value key** with **rich value key flags** that apply to it.

*Child Elements:*

**flag:** A [CT\\_RichValueTypeReservedKeyFlag](#) element that specifies information for the rich value key flag.

*Attributes:*

**name:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the rich value key.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_RichValueTypeReservedKey">
  <xsd:sequence>
    <xsd:element name="flag" minOccurs="1" maxOccurs="unbounded"
type="CT_RichValueTypeReservedKeyFlag"/>

```

```
</xsd:sequence>
<xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.185 CT\_RichValueTypeReservedKeyFlag

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichValueTypeReservedKey](#)

This complex type specifies information for the **rich value key flag**.

*Attributes:*

**name:** A **string** ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the name of the rich value key flag.

**value:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies the value for the rich value key flag.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueTypeReservedKeyFlag">
  <xsd:attribute name="name" type="xsd:string" use="required"/>
  <xsd:attribute name="value" type="xsd:boolean" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.186 CT\_RichValueTypes

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichValueTypesInfo](#)

This complex type specifies a collection of elements that specify information about **rich value types**.

*Child Elements:*

**type:** A [CT\\_RichValueType](#) element that specifies information about a single rich value type.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueTypes">
  <xsd:sequence>
    <xsd:element name="type" minOccurs="0" maxOccurs="unbounded" type="CT_RichValueType"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.187 CT\_RichValueTypesInfo

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [rvTypesInfo](#)

This complex type specifies two groupings of information. One applies to all **rich value types**, and the other only applies to the identified rich value types.

Child Elements:

**global:** A [CT\\_RichValueGlobalType](#) element that specifies information that applies to all rich value types.

**types:** A [CT\\_RichValueTypes](#) element that specifies information about identified rich value types.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueTypesInfo">
  <xsd:sequence>
    <xsd:element name="global" minOccurs="0" maxOccurs="1" type="CT_RichValueGlobalType"/>
    <xsd:element name="types" minOccurs="0" maxOccurs="1" type="CT_RichValueTypes"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.188 CT\_SupportingPropertyBag

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [CT\\_SupportingPropertyBagData](#)

This complex type specifies **supporting property bag data** information for a single **supporting property bag**.

Child Elements:

**v:** A [CT\\_SupportingPropertyBagValue](#) element that specifies a value contained in the supporting property bag as part of a **key value pair (KVP)**. The **supporting property bag key** and **data type** is determined by matching the index of the [CT\\_SupportingPropertyBagValue](#) with the index of the [CT\\_SupportingPropertyBagKey](#) (section [2.6.193](#)) in the [CT\\_SupportingPropertyBagStructure](#) (section [2.6.195](#)) identified by the **s** attribute.

Certain data types indicate that the value represents an index as described in the table below.

Value	Meaning
"spb"	The <a href="#">CT_SupportingPropertyBagValue</a> identifies a <a href="#">CT_SupportingPropertyBag</a> specified in section <a href="#">2.6.188</a> . This is a zero-based index. This index MUST reference a <a href="#">CT_SupportingPropertyBag</a> that comes before the current <a href="#">CT_SupportingPropertyBag</a> in the list specified in <a href="#">CT_SupportingPropertyBagData</a> (section <a href="#">2.6.192</a> ).
"spba"	The <a href="#">CT_SupportingPropertyBagValue</a> identifies a <a href="#">CT_SupportingPropertyBagArray</a> specified in section <a href="#">2.6.189</a> . This is a zero-based index.

*Attributes:*

**s:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the identifier to the **CT\_SupportingPropertyBagStructure** (section 2.6.195). This is a zero-based index.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBag">
  <xsd:sequence>
    <xsd:element name="v" minOccurs="1" maxOccurs="unbounded"
type="CT_SupportingPropertyBagValue"/>
  </xsd:sequence>
  <xsd:attribute name="s" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.189 CT\_SupportingPropertyBagArray

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_SupportingPropertyBagArrayData](#)

This complex type specifies a collection of values and **data types** of elements in a **supporting property bag array**.

*Child Elements:*

**v:** A [CT\\_SupportingPropertyBagArrayValue](#) element that specifies the value and data type of a single element in a supporting property bag array.

*Attributes:*

**count:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the count of elements in the supporting property bag array. The number of **CT\_SupportingPropertyBagArrayValue** elements MUST match this count.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagArray">
  <xsd:sequence>
    <xsd:element name="v" minOccurs="1" maxOccurs="unbounded"
type="CT_SupportingPropertyBagArrayValue"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.190 CT\_SupportingPropertyBagArrayData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_SupportingPropertyBags](#)

This complex type specifies a list of **supporting property bag arrays**.

*Child Elements:*

**a:** A [CT\\_SupportingPropertyBagArray](#) element that specifies a collection of values and **data types** of elements in a supporting property bag array.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the count of supporting property bag arrays. The number of **CT\_SupportingPropertyBagArray** elements MUST match this count.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagArrayData">
  <xsd:sequence>
    <xsd:element name="a" minOccurs="0" maxOccurs="unbounded"
type="CT_SupportingPropertyBagArray"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.191 CT\_SupportingPropertyBagArrayValue

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_SupportingPropertyBagArray](#)

This complex type specifies the value and **data type** of an element in a **supporting property bag array**.

*Attributes:*

**t:** An [ST\\_SupportingPropertyBagArrayValueType](#) attribute that specifies the data type of the supporting property bag array value.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagArrayValue">
  <xsd:simpleContent>
    <xsd:extension base="x:ST_Xstring">
      <xsd:attribute name="t" type="ST_SupportingPropertyBagArrayValueType" use="optional"
default="d"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.192 CT\_SupportingPropertyBagData

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [CT\\_SupportingPropertyBags](#)

This complex type specifies a list of **supporting property bag data**.

Child Elements:

**spb:** A [CT\\_SupportingPropertyBag](#) element that specifies the supporting property bag data information for a single **supporting property bag**.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

Attributes:

**count:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the count of supporting property bags. The number of **CT\_SupportingPropertyBag** elements MUST match this count.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagData">
  <xsd:sequence>
    <xsd:element name="spb" minOccurs="0" maxOccurs="unbounded"
type="CT_SupportingPropertyBag"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.193 CT\_SupportingPropertyBagKey

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [CT\\_SupportingPropertyBagStructure](#)

This complex type specifies the **supporting property bag key**.

Attributes:

**n:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) attribute that specifies the name of the key. This name is case sensitive and MUST be unique in the **CT\_SupportingPropertyBagStructure**.

**t:** An [ST\\_SupportingPropertyBagValueType](#) attribute that specifies the data type of the value associated with this key.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagKey">
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="t" type="ST_SupportingPropertyBagValueType" use="optional"
default="d"/>
</xsd:complexType>
```

```
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.194 CT\_SupportingPropertyBags

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [supportingPropertyBags](#)

This complex type specifies a list of **supporting property bag data**.

*Child Elements:*

**spbArrays:** A [CT\\_SupportingPropertyBagArrayData](#) element that specifies a list of **supporting property bag arrays**.

**spbData:** A [CT\\_SupportingPropertyBagData](#) element that specifies a list of supporting property bag data.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBags">
  <xsd:sequence>
    <xsd:element name="spbArrays" minOccurs="0" maxOccurs="1"
type="CT_SupportingPropertyBagArrayData"/>
    <xsd:element name="spbData" minOccurs="1" maxOccurs="1"
type="CT_SupportingPropertyBagData"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.195 CT\_SupportingPropertyBagStructure

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_SupportingPropertyBagStructures](#)

This complex type specifies the **supporting property bag** structure for one or more supporting property bags.

*Child Elements:*

**k:** A [CT\\_SupportingPropertyBagKey](#) element that specifies the **supporting property bag key**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagStructure">
  <xsd:sequence>
    <xsd:element name="k" minOccurs="1" maxOccurs="unbounded"
type="CT_SupportingPropertyBagKey"/>
  </xsd:sequence>
</xsd:complexType>
```



See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.196 CT\_SupportingPropertyBagStructures

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [spbStructures](#)

This complex type specifies a list of **supporting property bag** structures.

*Child Elements:*

**s:** A [CT\\_SupportingPropertyBagStructure](#) element that specifies the supporting property bag structure for one or more supporting property bags.

**extLst:** A [CT\\_ExtensionList](#) ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**count:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the count of supporting property bag structures. The number of **CT\_SupportingPropertyBagStructure** elements MUST match this count.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagStructures">
  <xsd:sequence>
    <xsd:element name="s" minOccurs="0" maxOccurs="unbounded"
type="CT_SupportingPropertyBagStructure"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.197 CT\_SupportingPropertyBagValue

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_SupportingPropertyBag](#)

This complex type specifies the **supporting property bag data**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SupportingPropertyBagValue">
  <xsd:simpleContent>
    <xsd:extension base="x:ST_Xstring"/>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.198 CT\_Value

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [CT\\_RichValue](#)

This complex type specifies the **rich value data**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Value">
  <xsd:simpleContent>
    <xsd:extension base="x:ST_Xstring"/>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.199 CT\_CalcFeature

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures>

*Referenced by:* [CT\\_CalcFeatures](#)

This complex type specifies the name of a calculation engine feature that was present when the workbook was **calculated**.

*Attributes:*

**name:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the calculation engine feature.

Name	Calculation Engine Feature
"microsoft.com:RD"	Rich data (section <a href="#">2.3.6</a> ) was present in the calculation engine
"microsoft.com:FV"	_FV or FIELDVALUE functions were present in the calculation engine
"microsoft.com:Single"	The SINGLE function was present in the calculation engine
"Microsoft.com:LET_WF"	The LET function was present in the calculation engine

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CalcFeature">
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.22](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.200 CT\_CalcFeatures

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures>

Referenced by: [calcFeatures](#)

This element specifies a list of **CT\_CalcFeature** elements (section [2.6.199](#)).

*Child Elements:*

**feature:** A CT\_CalcFeature element that specifies a calculation engine feature.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CalcFeatures">
  <xsd:sequence>
    <xsd:element name="feature" minOccurs="1" maxOccurs="unbounded" type="CT_CalcFeature"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.22](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.201 CT\_RichFilterColumn

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [filterColumn](#)

This complex type specifies **filter** information associated with **rich values**.

*Child Elements:*

**filters:** A [CT\\_RichFilters](#) element that specifies a filter with multiple criteria associated with rich values.

**top10:** A [CT\\_RichTop10](#) element that specifies a **top N filter** or **bottom N filter**.

**customFilters:** A [CT\\_CustomRichFilters](#) element that specifies custom filter criteria associated with rich values. **Rows** that contain a **cell** within the filter **range** such that the value does not meet the custom filter criteria will be hidden.

**dynamicFilter:** A [CT\\_DynamicRichFilter](#) element that specifies the dynamic filter criteria associated with rich values. These criteria are considered dynamic because they can change, either with the data itself (e.g., "above average") or with the current system date (e.g., show values for "today"). For any cells within the filter range whose values do not meet the specified criteria, the corresponding rows will be hidden from view when the filter is applied.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichFilterColumn">
  <xsd:choice minOccurs="0" maxOccurs="1">
    <xsd:element name="filters" type="CT_RichFilters"/>
    <xsd:element name="top10" type="CT_RichTop10"/>
    <xsd:element name="customFilters" type="CT_CustomRichFilters"/>
    <xsd:element name="dynamicFilter" type="CT_DynamicRichFilter"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList"/>
  </xsd:choice>
</xsd:complexType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.202 CT\_Mention

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

*Referenced by:* [CT\\_ThreadedCommentMentions](#)

This complex type specifies the properties of a **mention** in a **threaded comment**.

*Attributes:*

**mentionpersonId:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a unique identifier for the person mentioned. This attribute MUST correspond to the **id** specified in **CT\_Person** (section [2.6.203](#)).

**mentionId:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a unique identifier for this mention.

**startIndex:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the index in comment text where the mention starts.

**length:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the number of characters in the mention from **startIndex**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Mention">
  <xsd:attribute name="mentionpersonId" type="x:ST_Guid" use="required"/>
  <xsd:attribute name="mentionId" type="x:ST_Guid" use="required"/>
  <xsd:attribute name="startIndex" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="length" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.23](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.203 CT\_Person

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

*Referenced by:* [CT\\_PersonList](#)

This complex type specifies the information about an author of a comment or a person mentioned in a comment.

*Child Elements:*

**extLst:** A **CT\_ExtensionList** ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**displayName:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the display name of the person.

**id:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies a unique identifier for the person.

**userId:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies a provider issued user identifier for the person.

**providerId:** An **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) attribute that specifies the provider type of the person's information.

This table lists example values of the **providerId** attribute and the corresponding meanings of the **userId** attribute.

Identity Provider	providerId value	userId value	Description of userId value
No Provider	"None"	"Name"	Author's name
Active Directory	"AD"	SID	Active Directory Security Identifier (as specified in <a href="#">[MS-DTYP] section 2.4.2</a> )
Windows Live ID	"Windows Live"	CID	A 64-bit signed decimal that uniquely identifies a user on Windows Live.
Office 365	"AD"	O365ID	A string that uniquely identifies a user. It SHOULD be comprised of three individual values separated by a "::<" character delimiter.
People Picker	"PeoplePicker"	"Email address"	An <b>email address</b> provided by People Picker

The following W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Person">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="displayName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="id" type="x:ST_Guid" use="required"/>
  <xsd:attribute name="userId" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="providerId" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.23](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)).

## 2.6.204 CT\_PersonList

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

*Referenced by:* [personList](#)

This complex type specifies a collection of persons.

*Child Elements:*

**person:** A [CT\\_Person](#) element that specifies each person's information in the collection.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-4:2016\] section A.2](#)) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_PersonList">
  <xsd:sequence>
    <xsd:element name="person" type="CT_Person" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.23](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.205 CT\_ThreadedComment

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

*Referenced by:* [CT\\_ThreadedComments](#)

This complex type specifies the properties of a **threaded comment**.

*Child Elements:*

**text:** An **ST\_Xstring** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) element that specifies the unformatted text of this comment.

**mentions:** A [CT\\_ThreadedCommentMentions](#) element that specifies a list of **mentions** in this comment.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**ref:** An **ST\_Ref** (section [2.7.1](#)) attribute that specifies the reference to the cell that this threaded comment is anchored to.

**dt:** A **dateTime** ([\[XMLSCHEMA2/2\]](#) section 3.2.7) attribute that specifies the UTC time that the comment was authored for the first time.

**personId:** An **ST\_Guid** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies a unique identifier for the comment author. This attribute MUST correspond to the **id** specified in **CT\_Person** (section [2.6.203](#)).

**id:** An **ST\_Guid** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies a unique identifier for this threaded comment.

**parentId:** An **ST\_Guid** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies the **id** of the parent comment of this comment in the **comment thread**.

**done:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies a flag to track resolving status of the comment.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_ThreadedComment">
  <xsd:sequence>
    <xsd:element name="text" type="x:ST_Xstring" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="mentions" type="CT_ThreadedCommentMentions" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="extLst" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="ref" type="x:ST_Ref" use="optional"/>

```

```

<xsd:attribute name="dT" type="xsd:dateTime" use="optional"/>
<xsd:attribute name="personId" type="x:ST_Guid" use="required"/>
<xsd:attribute name="id" type="x:ST_Guid" use="required"/>
<xsd:attribute name="parentId" type="x:ST_Guid" use="optional"/>
<xsd:attribute name="done" type="xsd:boolean" use="optional"/>
</xsd:complexType>

```

See section [5.23](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.206 CT\_ThreadedCommentMentions

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

*Referenced by:* [CT\\_ThreadedComment](#)

This complex type specifies a collection of **mentions** in a **threaded comment**.

*Child Elements:*

**mention:** A [CT\\_Mention](#) element that specifies each mention in the collection and its properties.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_ThreadedCommentMentions">
  <xsd:sequence>
    <xsd:element name="mention" type="CT_Mention" minOccurs="0" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.23](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.207 CT\_ThreadedComments

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments>

*Referenced by:* [ThreadedComments](#)

This complex type specifies a collection of **threaded comment** in a **comment thread**.

*Child Elements:*

**threadedComment:** A [CT\\_ThreadedComment](#) element that specifies each threaded comment in the comment thread and its properties.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-4:2016\]](#) section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_ThreadedComments">
  <xsd:sequence>
    <xsd:element name="threadedComment" type="CT_ThreadedComment" minOccurs="0"
maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>

```

```
</xsd:complexType>
```

See section [5.23](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.208 CT\_DynamicArrayProperties

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray>

*Referenced by:* [dynamicArrayProperties](#)

This complex type defines properties related to a **dynamic array**.

*Child Elements:*

**extLst:** A **CT\_ExtensionList** ([ISO/IEC29500-4:2016] section A.2) element that specifies future extensibility for this element.

*Attributes:*

**fDynamic:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies a flag indicating the presence of a dynamic array.

**fCollapsed:** A **Boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute which MUST be ignored and MUST be 0.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DynamicArrayProperties">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="fDynamic" type="xsd:boolean" use="optional"/>
  <xsd:attribute name="fCollapsed" type="xsd:boolean" use="optional"/>
</xsd:complexType>
```

See section [5.25](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.209 CT\_ColumnFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews>

*Referenced by:* [CT\\_NsvFilter](#)

This complex type defines filter criteria that is used on a specific column as part of a **named sheet view**

*Child Elements:*

**dx:** A **CT\_Dxf** ([ISO/IEC29500-1:2016] section A.2). If the **filter** element within this type includes a **colorFilter** ([ISO/IEC29500-1:2016] section 18.3.2.1) then this element MUST be present and MUST be used in place of the one referenced by the **dxId** attribute on the **colorFilter**. If the **filter** element within this type does NOT include a **colorFilter** ([ISO/IEC29500-1:2016] section 18.3.2.1) then this element MUST be omitted.

**filter:** A **CT\_FilterColumn** ([ISO/IEC29500-1:2016] section A.2). Defines the filter conditions to apply.



**extLst:** A **CT\_ExtensionList** ([ISO/IEC29500-1:2016] section A.2) that specifies future extensibility for this element.

*Attributes:*

**colId:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the zero-based index of the column that this filter is applied to. When loading this element **colId** and **id** SHOULD be considered as described in section 2.3.8.2.

**id:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies the unique id of the column this filter is applied to. When loading this element **colId** and **id** SHOULD be considered as described in section 2.3.8.2.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ColumnFilter">
  <xsd:sequence>
    <xsd:element name="dxfl" type="x:CT_Dxfl" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="filter" minOccurs="0" maxOccurs="unbounded" type="x:CT_FilterColumn"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attributeGroup ref="AG_ColumnId"/>
</xsd:complexType>
```

See section 5.26 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.210 CT\_NamedSheetView

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews>

*Referenced by:* [CT\\_NamedSheetViews](#)

This complex type specifies the properties of a **named sheet view**

*Child Elements:*

**nsvFilter:** A [CT\\_NsvFilter](#) element that specifies the sort and/or filter criteria to be applied to a specified **AutoFilter**

**extLst:** A **CT\_ExtensionList** ([ISO/IEC29500-1:2016] section A.2) that specifies future extensibility for this element

*Attributes:*

**name:** A **string** ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the name of the named sheet view. The value of this attribute MUST be unique among elements within a **CT\_NamedSheetViews** (section 2.6.211)

The number of characters in the string MUST be greater than or equal to 1 and less than or equal to 127. The string MUST conform to the following **Augmented Backus-Naur Form (ABNF)** ([RFC5234]) grammar:

```
string = name-character-special [*name-character name-character-special]
whitespace = %x09-%x0D / " "
name-character-special = character ; MUST NOT be ";" or whitespace
; character = as defined by the production of Char in the [W3C-XML] section 2.2

name-character = name-character-special / " "
```

Values beginning with "\_xlnsv." are reserved for future use.

**id:** An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies the unique id of this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_NamedSheetView">
  <xsd:sequence>
    <xsd:element name="nsvFilter" type="CT_NsvFilter" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
  <xsd:attribute name="id" type="x:ST_Guid" use="required"/>
</xsd:complexType>
```

See section 5.26 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.211 CT\_NamedSheetViews

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews>

*Referenced by:* [namedSheetViews](#)

This complex type specifies a collection of **named sheet views**.

*Child Elements:*

**namedSheetView:** A [CT\\_NamedSheetView](#) element that specifies a single named sheet view.

**extLst:** A **CT\_ExtensionList** ([ISO/IEC29500-1:2016] section A.2) that specifies future extensibility for this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_NamedSheetViews">
  <xsd:sequence>
    <xsd:element name="namedSheetView" type="CT_NamedSheetView" minOccurs="0"
maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section 5.26 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.212 CT\_NsvFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews>

*Referenced by:* [CT\\_NamedSheetView](#)

This complex type specifies the sort and/or filter criteria to be applied to a single **AutoFilter**.

*Child Elements:*

**columnFilter:** A [CT\\_ColumnFilter](#) element that specifies filter criteria to apply to a specific column in the AutoFilter.

**sortRules:** A [CT\\_SortRules](#) element that specifies the sort criteria to apply to the AutoFilter.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-1:2016\]](#) section A.2) that specifies future extensibility for this element.

*Attributes:*

**filterId:** An **ST\_Guid** ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies the unique id of the AutoFilter object this element applies to. The value of this attribute SHOULD match a **uid** (section [2.5.10](#)) attribute stored on the **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section A.2) that describes the AutoFilter associated with this element.

Use of this attribute during load is described in section [2.3.8.2](#).

**ref:** An **ST\_Ref** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.62) attribute that specifies the location of the AutoFilter object that this element applies to. The value of this attribute SHOULD match the **ref** attribute on the **CT\_AutoFilter** ([\[ISO/IEC29500-1:2016\]](#) section A.2) that describes the AutoFilter associated with this element.

This attribute is currently unused.

**tableId:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the **id** of the **table** that contains the AutoFilter associated with this element.

If the AutoFilter is table owned (as explained in section [2.3.8.1](#)) then this value SHOULD match the **id** attribute on the **CT\_Table** ([\[ISO/IEC29500-1:2016\]](#) section A.2) element that describes the owning table.

If the AutoFilter is worksheet owned (as explained in section [2.3.8.1](#)) then this value SHOULD be 0.

Use of this attribute during load is described in section [2.3.8.2](#)

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_NsvFilter">
  <xsd:sequence>
    <xsd:element name="columnFilter" minOccurs="0" maxOccurs="unbounded"
type="CT_ColumnFilter"/>
    <xsd:element name="sortRules" minOccurs="0" maxOccurs="1" type="CT_SortRules"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="filterId" type="x:ST_Guid" use="required"/>
  <xsd:attribute name="ref" type="x:ST_Ref" use="optional"/>
  <xsd:attribute name="tableId" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
```

See section [5.26](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.213 CT\_SortRule

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews>

*Referenced by:* [CT\\_SortRules](#)

This complex type specifies the sort criteria to be applied to a single column as part of a **named sheet view**.

*Child Elements:*

**dxfl**: A **CT\_Dxfl** ([ISO/IEC29500-1:2016] section A.2). If the **sortCondition** element within this type specifies a **dxflId** attribute then this element MUST be present and MUST be used in place of the one referenced by that **dxflId** attribute. If the **sortCondition** element within this type does NOT specify a **dxflId** attribute then this element MUST be omitted.

**sortCondition**: A **CT\_SortCondition** element that specifies the **sort condition** to apply to the column.

**richSortCondition**: A **CT\_RichSortCondition** element that specifies the sort condition associated with **rich values**. To apply to the column.

*Attributes:*

**colId**: An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the zero-based index of the column that this filter is applied to. When loading this element **colId** and **id** SHOULD be considered as described in section 2.3.8.2.

**id**: An **ST\_Guid** ([ISO/IEC29500-1:2016] section 22.9.2.4) attribute that specifies the unique id of the column this filter is applied to. When loading this element **colId** and **id** SHOULD be considered as described in section 2.3.8.2.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SortRule">
  <xsd:sequence>
    <xsd:element name="dxfl" type="x:CT_Dxfl" minOccurs="0" maxOccurs="1"/>
    <xsd:choice minOccurs="0" maxOccurs="1">
      <xsd:element name="sortCondition" minOccurs="0" maxOccurs="1"
type="xl4:CT_SortCondition"/>
      <xsd:element name="richSortCondition" minOccurs="0" maxOccurs="1"
type="xlrd2:CT_RichSortCondition"/>
    </xsd:choice>
  </xsd:sequence>
  <xsd:attributeGroup ref="AG_ColumnId"/>
</xsd:complexType>
```

See section 5.26 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.214 CT\_SortRules

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews>

*Referenced by:* [CT\\_NsvFilter](#)

This complex type specifies an ordered collection of sort criteria to apply as part of a **named sheet view**.

*Child Elements:*

**sortRule**: A **CT\_SortRule** element that specifies the sort criteria to apply on a single column.

**extLst**: A **CT\_ExtensionList** ([ISO/IEC29500-1:2016] section A.2) that specifies future extensibility for this element.

*Attributes:*

**sortMethod**: An **ST\_SortMethod** ([ISO/IEC29500-1:2016] section A.2) attribute that specifies the sort ordering to use. Behavior of this attribute is equivalent to the **sortMethod** attribute contained on the **sortState** element as specified by [ISO/IEC29500-1:2016] section 18.3.1.92.

**caseSensitive:** A **boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether sort is case sensitive or not.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_SortRules">
  <xsd:sequence>
    <xsd:element name="sortRule" minOccurs="0" maxOccurs="64" type="CT_SortRule"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="sortMethod" type="x:ST_SortMethod" use="optional" default="none"/>
  <xsd:attribute name="caseSensitive" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.26](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.215 CT\_ExternalLinksPr

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops>

*Referenced by:* [externalLinksPr](#)

Extended properties applicable to all external links of this workbook.

*Attributes:*

**autoRefresh:** A **boolean** ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether to refresh external links periodically.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ExternalLinksPr">
  <xsd:attribute name="autoRefresh" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.27](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.216 CT\_WebImagesSupportingRichData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage>

*Referenced by:* [webImagesSrd](#)

This complex type specifies a list of sets of properties associated with web image rich values. For more information see section [2.3.6.1.11](#).

*Child Elements:*

**webImageSrd:** A [CT\\_WebImageSupportingRichData](#) element that specifies a set of properties for a web image **rich value**.

**extLst:** A CT\_ExtensionList ([ISO/IEC29500-1:2016] section A.2) that specifies future extensibility for this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_WebImageSupportingRichData">
  <xsd:sequence>
    <xsd:element name="webImageSrd" minOccurs="0" maxOccurs="unbounded"
type="CT_WebImageSupportingRichData"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.28](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.217 CT\_WebImageSupportingRichData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage>

*Referenced by:* [CT\\_WebImageSupportingRichData](#)

This complex type specifies a set of properties for a web image **rich value**.

*Child Elements:*

**address:** A [CT\\_WebImageSupportingRichDataRelationship](#) element that specifies the relationship ID for the hyperlink address.

**moreImagesAddress:** A [CT\\_WebImageSupportingRichDataRelationship](#) element that specifies the relationship ID for the hyperlink to more images.

**blip:** A [CT\\_WebImageSupportingRichDataRelationship](#) element that specifies the relationship ID for the **BLIP**.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_WebImageSupportingRichData">
  <xsd:sequence>
    <xsd:element name="address" minOccurs="1" maxOccurs="1"
type="CT_WebImageSupportingRichDataRelationship"/>
    <xsd:element name="moreImagesAddress" minOccurs="0" maxOccurs="1"
type="CT_WebImageSupportingRichDataRelationship"/>
    <xsd:element name="blip" minOccurs="0" maxOccurs="1"
type="CT_WebImageSupportingRichDataRelationship"/>
  </xsd:sequence>
</xsd:complexType>

```

See section [5.28](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.218 CT\_WebImageSupportingRichDataRelationship

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage>

*Referenced by:* [CT\\_WebImageSupportingRichData](#)

This complex type specifies a relationship to a web image **rich value** property.

*Attributes:*

**r:id:** An **ST\_RelationshipId** ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) attribute that specifies the ID of the relationship.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_WebImageSupportingRichDataRelationship">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
```

See section [5.28](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.219 CT\_CommentHyperlink

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2>

*Referenced by:* [CT\\_ThreadedComments2Ext](#)

**This complex type specifies the properties of hyperlinked text in this threaded comment**

*Child Elements:*

**extLst:** A CT\_ExtensionList ([\[ISO/IEC29500-1:2016\]](#) section A.2) element that specifies future extensibility for this element

*Attributes:*

**startIndex:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the index in comment text where this hyperlink starts.

**length:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the number of characters in this hyperlink from **startIndex**.

**url:** An ST\_Xstring ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.19) element that specifies the URL of this hyperlink.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CommentHyperlink">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="startIndex" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="length" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="url" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.30](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.220 CT\_ThreadedComments2Ext

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2>

This complex type specifies the information for hyperlinks for this threaded comment.

*Child Elements:*

**checksum:** An **unsignedInt** ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies the CRC32 ([\[MS-OSHARED\]](#) section 2.4.3.2) checksum of the full plain text of this threaded comment.

**hyperlink:** A [CT\\_CommentHyperlink](#) element that specifies the hyperlink.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ThreadedComments2Ext">
  <xsd:sequence>
    <xsd:element name="checksum" type="xsd:unsignedInt" minOccurs="1" maxOccurs="1"/>
    <xsd:sequence>
      <xsd:element name="hyperlink" type="CT CommentHyperlink" minOccurs="0"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.30](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.221 CT\_RichValueRefreshInterval

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh>

*Referenced by:* [CT\\_RichValueRefreshIntervals](#)

This complex type specifies the refresh interval for the given **resourceID** attribute.

*Attributes:*

**resourceIdInt:** An **int** ([\[XMLSCHEMA2/2\]](#) section 3.3.17) attribute that specifies the numeric ID for specifying the rich values that this interval applies to. Either **resourceIdInt** or **resourceIdStr** MUST be included. Both MAY be included.

**resourceIdStr:** A **string** ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the string ID for specifying the rich values that this interval applies to. Either **resourceIdInt** or **resourceIdStr** MUST be included. Both MAY be included.

**interval:** An **int** ([\[XMLSCHEMA2/2\]](#) section 3.3.17) attribute that specifies the refresh interval in seconds for the **resourceID**.

Value	Description
-1	Refresh on load only.
0	No automatic refresh.
Any other value	Time in seconds, MAY be overridden by the <b>service</b> .

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueRefreshInterval">
  <xsd:attribute name="resourceIdInt" type="xsd:int" use="optional"/>
  <xsd:attribute name="resourceIdStr" type="xsd:string" use="optional"/>
  <xsd:attribute name="interval" type="xsd:int" use="required"/>
</xsd:complexType>
```

See section [5.31](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).



## 2.6.222 CT\_RichValueRefreshIntervals

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh>

*Referenced by:* [refreshIntervals](#)

Specifies a collection of refresh intervals.

*Child Elements:*

**refreshInterval:** A [CT\\_RichValueRefreshInterval](#) element that specifies the refresh interval.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueRefreshIntervals">
  <xsd:sequence>
    <xsd:element name="refreshInterval" minOccurs="1" maxOccurs="unbounded"
type="CT_RichValueRefreshInterval"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.31](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.223 CT\_DataFieldFutureData

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020>

*Referenced by:* [dataFieldFutureData](#)

Specifies a source field for the parent **PivotTable data field** that SHOULD only be used for the specified version of the PivotTable or later.

*Attributes:*

**version:** An unsignedByte attribute that specifies a minimum version of the PivotTable for which this record SHOULD be honored.

**sourceField:** An unsignedInt attribute that specifies the index of the source PivotField for this data field.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DataFieldFutureData">
  <xsd:attribute name="version" type="xsd:unsignedByte" use="required"/>
  <xsd:attribute name="sourceField" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.29](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.224 CT\_Ignorable

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020>

*Referenced by:* [ignorableAfterVersion](#)

Specifies that the parent object can be ignored if the PivotTable is greater than or equal to a certain version.

*Attributes:*

**version:** An unsignedByte attribute that specifies a minimum version of the PivotTable for which this object SHOULD be ignored.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Ignorable">
  <xsd:attribute name="version" type="xsd:unsignedByte" use="required"/>
</xsd:complexType>
```

See section [5.29](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.225 CT\_CacheVersionInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo>

*Referenced by:* [cacheVersionInfo](#)

Specifies versioning information about the features related to this PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache.

*Child Elements:*

**requiredFeature:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) element that specifies the name of a feature which is required to be supported in order to refresh the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache. If the specified feature is not supported or understood, refresh SHOULD be disabled.

**lastRefreshFeature:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) element that specifies the name of a feature was used during the most recent refresh of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) PivotCache.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_CacheVersionInfo">
  <xsd:sequence>
    <xsd:element name="requiredFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
    <xsd:element name="lastRefreshFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.32](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.226 CT\_PivotVersionInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo>

*Referenced by:* [pivotVersionInfo](#)

Specifies versioning information about the features related to this PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10).

*Child Elements:*

**requiredFeature:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) element that specifies the name of a feature that is required to be supported to allow updating the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10).

**lastUpdateFeature:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) element that specifies the name of a feature which was used during the most recent update of the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PivotVersionInfo">
  <xsd:sequence>
    <xsd:element name="requiredFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
    <xsd:element name="lastUpdateFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.32](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.227 CT\_AlternateUrl

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021>

*Referenced by:* [CT\\_ExternalBookAlternateUrls](#)

This element represents an additional Url to the external workbook which is supplying data to the current workbook.

*Attributes:*

**r:id:** An ST\_RelationshipId ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) relationship to the external workbook file path

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_AlternateUrl">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
```

See section [5.34](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.228 CT\_ExternalBookAlternateUrls

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021>

*Referenced by:* [alternateUrls](#)

This element represents additional Urls and Ids to the external workbook which is supplying data to the current workbook.

*Child Elements:*

**absoluteUrl:** A [CT\\_AlternateUrl](#) element that represent an absolute form Url to the external workbook

**relativeUrl:** A [CT\\_AlternateUrl](#) element that represent a relative form Url to the external workbook

*Attributes:*

**driveId:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that is provided by and targets the service.

**itemId:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that is provided by and targets the service.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ExternalBookAlternateUrls">
  <xsd:sequence>
    <xsd:element name="absoluteUrl" type="CT_AlternateUrl" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="relativeUrl" type="CT_AlternateUrl" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="driveId" use="optional" type="xsd:string"/>
  <xsd:attribute name="itemId" use="optional" type="xsd:string"/>
</xsd:complexType>
```

See section [5.34](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.229 CT\_ArrayFeatureProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBag](#)

A **CT\_ArrayFeatureProperty** is a **key value pair (KVP)** where the value is a list of any number of child elements in any order. The order of elements in **CT\_ArrayFeatureProperty** is preserved.

*Child Elements:*

**bagId:** An unsignedInt ([\[XMLSCHEMA2/2\]](#) section 3.3.22) element that specifies a zero-based index to another [CT\\_FeaturePropertyBag](#) element of the ancestor [CT\\_FeaturePropertyBags](#) element.

**i:** An integer ([\[XMLSCHEMA2/2\]](#) section 3.3.13) element that specifies an integer value.

**s:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) element that specifies string value.

**b:** A boolean ([\[XMLSCHEMA2/2\]](#) section 3.2.2) element that specifies boolean value.

**d:** A double ([\[XMLSCHEMA2/2\]](#) section 3.2.5) element that specifies a double value.

**rel:** An [ST\\_RelationshipId](#) ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) element that specifies the ID of the **Relationship** (section [1.4](#)).

*Attributes:*

**k:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the key for the **CT\_ArrayFeatureProperty** key value pair (KVP).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_ArrayFeatureProperty">
  <xsd:choice minOccurs="0" maxOccurs="unbounded">
    <xsd:element name="bagId" type="xsd:unsignedInt"/>
    <xsd:element name="i" type="xsd:integer"/>
    <xsd:element name="s" type="xsd:string"/>
    <xsd:element name="b" type="xsd:boolean"/>
    <xsd:element name="d" type="xsd:double"/>
    <xsd:element name="rel" type="r:ST_RelationshipId"/>
  </xsd:choice>
  <xsd:attribute name="k" type="xsd:string" use="required"/>
</xsd:complexType>

```

See section [5.36](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.230 CT\_BagFeatureProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBag](#)

This complex type specifies a **key value pair (KVP)** that references another CT\_FeaturePropertyBag element. The value is an unsigned int ([XMLSCHEMA2/2] section 3.3.22) that specifies a zero-based index to another CT\_FeaturePropertyBag element of the ancestor [CT\\_FeaturePropertyBags](#) element. This index **MUST** be less than the parent CT\_FeaturePropertyBag element position in the list specified in [CT\\_FeaturePropertyBags](#).

*Attributes:*

**k:** A string ([XMLSCHEMA2/2]\_section 3.2.1) attribute that specifies the name of the key for the key value pair (KVP).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```

<xsd:complexType name="CT_BagFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:unsignedInt">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>

```

See section [5.36](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.231 CT\_BoolFeatureProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBag](#)

This complex type specifies a **key value pair (KVP)** with a value of type Boolean ([XMLSCHEMA2/2] section 3.2.2).

*Attributes:*

**k:** A string ([XMLSCHEMA2/2]\_section 3.2.1) attribute that specifies the name of the key for the key value pair (KVP).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_BoolFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:boolean">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.232 CT\_DecimalFeatureProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBag](#)

This complex type specifies a **key value pair (KVP)** with a value of type double ([\[XMLSCHEMA2/2\]](#) section 3.2.5).

*Attributes:*

**k:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the key for the key value pair (KVP).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DecimalFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:double">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.233 CT\_FeaturePropertyBag

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBags](#)

This complex type specifies a feature property bag and contains any number and combination of **key value pairs (KVP)**.

*Child Elements:*

**a:** A [CT\\_ArrayFeatureProperty](#) element that specifies a key value pair (KVP) whose value is an array.

**bagId:** A [CT\\_BagFeatureProperty](#) element that specifies a key value pair (KVP) whose value is an unsigned int ([\[XMLSCHEMA2/2\]](#) section 3.3.22) that specifies a zero-based index to another CT\_FeaturePropertyBag element of the parent CT\_FeaturePropertyBags element.

**i:** A [CT\\_IntFeatureProperty](#) element that specifies a key value pair (KVP) whose value is an integer ([\[XMLSCHEMA2/2\]](#) section 3.3.13).

**s:** A [CT\\_StringFeatureProperty](#) element that specifies a key value pair (KVP) whose value is a string ([XMLSCHEMA2/2] section 3.2.1).

**b:** A [CT\\_BoolFeatureProperty](#) element that specifies a key value pair (KVP) whose value is a boolean ([XMLSCHEMA2/2] section 3.2.2).

**d:** A [CT\\_DecimalFeatureProperty](#) element that specifies a key value pair (KVP) whose value is a double ([XMLSCHEMA2/2] section 3.2.5).

**rel:** A [CT\\_RelFeatureProperty](#) element that specifies a key value pair (KVP) whose value is a ST\_RelationshipId ([ISO/IEC29500-1:2016](#) section 22.8.2.1).

*Attributes:*

**type:** A string ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the type of the feature property bag. A list of feature property bag types can be found in section [2.3.9](#).

**extRef:** A string ([XMLSCHEMA2/2] section 3.2.1) attribute that is unused.

**bagExtId:** An unsigned int ([XMLSCHEMA2/2] section 3.3.22) that specifies a zero-based index to a [CT\\_BagExtensions](#) element position in the parent CT\_FeaturePropertyBags element.

**att:** A string ([XMLSCHEMA2/2] section 3.2.1) attribute that is unused.

The following W3C XML Schema ([XMLSCHEMA1/2](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_FeaturePropertyBag">
  <xsd:choice minOccurs="0" maxOccurs="unbounded">
    <xsd:element name="a" type="CT_ArrayFeatureProperty"/>
    <xsd:element name="bagId" type="CT_BagFeatureProperty"/>
    <xsd:element name="i" type="CT_IntFeatureProperty"/>
    <xsd:element name="s" type="CT_StringFeatureProperty"/>
    <xsd:element name="b" type="CT_BoolFeatureProperty"/>
    <xsd:element name="d" type="CT_DecimalFeatureProperty"/>
    <xsd:element name="rel" type="CT_RelFeatureProperty"/>
  </xsd:choice>
  <xsd:attribute name="type" type="xsd:string" use="required"/>
  <xsd:attribute name="extRef" type="xsd:string" use="optional"/>
  <xsd:attribute name="bagExtId" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="att" type="xsd:string" use="optional"/>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.234 CT\_FeaturePropertyBags

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [FeaturePropertyBags](#)

A complex type that specifies a list of feature property bags and future extensibility.

*Child Elements:*

**bagExt:** A [CT\\_BagExtensions](#) element referenced by a [CT\\_FeaturePropertyBag](#) **bagExtId** attribute of a sibling **bag** element.

**bag:** A CT\_FeaturePropertyBag element that specifies a feature property bag.

**extLst:** A **CT\_ExtensionList** ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) element that specifies future extensibility.

*Attributes:*

**count:** An unsigned int ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies a count of CT\_FeaturePropertyBag elements.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_FeaturePropertyBags">
  <xsd:sequence>
    <xsd:element name="bagExt" type="CT_BagExtensions" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="bag" type="CT_FeaturePropertyBag" minOccurs="0"
maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.235 CT\_IntFeatureProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBag](#)

This complex type specifies a **key value pair (KVP)** with a value of type integer ([\[XMLSCHEMA2/2\]](#) section 3.3.13).

*Attributes:*

**k:** A string ([\[XMLSCHEMA2/2\]](#) section 3.2.1) attribute that specifies the name of the key for the key value pair (KVP).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_IntFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:integer">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.236 CT\_RelFeatureProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBag](#)

This complex type specifies a **key value pair (KVP)** with a value of type ST\_RelationshipId ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1). The value is the ID of the **Relationship** (section [1.4](#)).



*Attributes:*

**k:** A string ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the name of the key for the key value pair (KVP).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RelFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="r:ST_RelationshipId">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section 5.36 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.237 CT\_StringFeatureProperty

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBag](#)

This complex type specifies a **key value pair (KVP)** with a value of type string ([XMLSCHEMA2/2] section 3.2.1).

*Attributes:*

**k:** A string ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies the name of the key for the key value pair (KVP).

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_StringFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:string">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
```

See section 5.36 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.238 CT\_XfComplement

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_XfComplementExt](#), [xfComplement](#)

A complex type that specifies a relationship to a [CT\\_FeaturePropertyBag](#) element of type **XFComplements** (section 2.3.9.1).

*Attributes:*

**i:** An unsigned int ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies a zero-based index into a [CT\\_ArrayFeatureProperty](#) element of a CT\_FeaturePropertyBag element, with key "MappedFeaturePropertyBags" in a feature property bag of type "XFComplements" (section 2.3.9.1).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_XfComplement">
  <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.239 CT\_XfComplementExt

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

A complex type that contains a [CT\\_XfComplement](#) element.

*Child Elements:*

**xfComplement:** A CT\_XfComplement element that references a feature property bag.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_XfComplementExt">
  <xsd:sequence>
    <xsd:element ref="xfComplement" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.240 CT\_BagExtensions

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_FeaturePropertyBags](#)

This complex type specifies a CT\_ExtensionList ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) element. Elements of this type are referenced by [CT\\_FeaturePropertyBag](#) **bagExtId** attributes.

*Child Elements:*

**extLst:** A CT\_ExtensionList ([\[ISO/IEC29500-1:2016\]](#) section 18.2.10) element that specifies future extensibility.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_BagExtensions">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.241 CT\_RichValueRelRelationship

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel>

*Referenced by:* [CT\\_RichValueRels](#)

This complex type specifies a relationship ([\[ISO/IEC29500-1:2016\]](#) section 9.2) for a **rich value** property.

*Attributes:*

**r:id:** An **ST\_RelationshipId** ([\[ISO/IEC29500-1:2016\]](#) section 22.8.2.1) attribute that specifies the ID of the relationship ([\[ISO/IEC29500-1:2016\]](#) section 9.2).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueRelRelationship">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
```

See section [5.35](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.242 CT\_RichValueRels

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel>

*Referenced by:* [richValueRels](#)

This complex type specifies a list of **rich value** relationships.

*Child Elements:*

**rel:** A [CT\\_RichValueRelRelationship](#) element that specifies a relationship ID ([\[ISO/IEC29500-1:2016\]](#) section 9.2) for a rich value property.

**extLst:** A [CT\\_ExtensionList](#) ([\[ISO/IEC29500-1:2016\]](#) section A.2) that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_RichValueRels">
  <xsd:sequence>
    <xsd:element name="rel" minOccurs="0" maxOccurs="unbounded"
      type="CT_RichValueRelRelationship"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.35](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.243 CT\_MsForm

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/msForms>

*Referenced by:* [CT\\_MsFormsExt](#)

A complex type that specifies information about a Microsoft form.

*Child Elements:*

**syncedQuestionId:** An ST\_Xstring element that specifies a Microsoft form question ID that has been synced to the table.

**extLst:** A CT\_ExtensionList element that specifies future extensibility.

*Attributes:*

**id:** An ST\_Xstring attribute that specifies the ID of the connected Microsoft form.

**isFormConnected:** A boolean attribute that specifies whether the Microsoft form is still connected to the table.

**maxResponseId:** An int attribute that specifies the ID of the most recently synced Microsoft form response.

**latestEventMarker:** An ST\_Xstring attribute that specifies a marker of the most recently synced Microsoft form event.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_MsForm">
  <xsd:sequence>
    <xsd:element name="syncedQuestionId" type="x:ST_Xstring" minOccurs="0"
maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="isFormConnected" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="maxResponseId" type="xsd:int" use="optional"/>
  <xsd:attribute name="latestEventMarker" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
```

See section [5.37](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.244 CT\_MsFormsExt

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/msForms>

A complex type that specifies information about a Microsoft form.

*Child Elements:*

**msForm:** A [CT\\_MsForm](#) element that specifies information about a Microsoft form.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_MsFormsExt">
  <xsd:sequence>
    <xsd:element name="msForm" type="CT_MsForm" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.37](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.245 CT\_QuestionExt

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/msForms>

A complex type that specifies information about a question in a Microsoft form.

*Child Elements:*

**question:** A [CT\\_Question](#) element that specifies information about a Microsoft form question.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_QuestionExt">
  <xsd:sequence>
    <xsd:element name="question" type="CT_Question" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.37](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.246 CT\_Question

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/msForms>

*Referenced by:* [CT\\_QuestionExt](#)

A complex type that specifies information about a question in a Microsoft form.

*Child Elements:*

**extLst:** A CT\_ExtensionList element that specifies future extensibility.

*Attributes:*

**id:** An ST\_Xstring attribute that specifies the ID of the Microsoft form question.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Question">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
```

See section [5.37](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.6.247 CT\_ExternalCodeService

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService>

*Referenced by:* [CT\\_ExternalCodeServiceExt](#), [externalCodeService](#)

A complex type that specifies properties related to an **external code service**.

*Attributes:*

**autoShow:** An unsignedInt ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the auto show setting for the user interface.

**timeout:** An unsignedInt ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the maximum length of time, in seconds, allotted for a formula that depends on an external code service to complete.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ExternalCodeService">
  <xsd:attribute name="autoShow" type="xsd:unsignedInt" default="1"/>
  <xsd:attribute name="timeout" type="xsd:unsignedInt"/>
</xsd:complexType>
```

See section 5.38 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.248 CT\_ExternalCodeServiceExt

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService>

A complex type that contains a [CT\\_ExternalCodeService](#) element.

*Child Elements:*

**externalCodeService:** A CT\_ExternalCodeService element that specifies properties related to an **external code service**.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_ExternalCodeServiceExt">
  <xsd:sequence>
    <xsd:element ref="externalCodeService" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section 5.38 for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.249 CT\_Python

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/python>

*Referenced by:* [python](#)

This complex type specifies a collection of the **Python scripts** added to the workbook and information about the Python environment used to execute these Python scripts.

*Child Elements:*

**environmentDefinition:** A [CT\\_PythonEnvironmentDefinition](#) element that specifies the details for the Python environment used to execute the Python scripts.

**pythonScripts:** A [CT\\_PythonScripts](#) element that specifies a collection of Python scripts in the workbook.

**extLst:** A CT\_ExtensionList ([ISO/IEC29500-1:2016] section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_Python">
  <xsd:sequence>
    <xsd:element name="environmentDefinition" minOccurs="0" maxOccurs="1"
type="CT_PythonEnvironmentDefinition"/>
    <xsd:element name="pythonScripts" minOccurs="0" maxOccurs="1" type="CT_PythonScripts"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.39](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.250 CT\_PythonEnvironmentDefinition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/python>

*Referenced by:* [CT\\_Python](#)

The complex type that specifies information about the Python environment.

*Child Elements:*

**initialization:** A [CT\\_PythonInitialization](#) element that specifies the **Python script** used to initialize the Python environment specified by the **id** attribute.

**extLst:** A CT\_ExtensionList ([\[ISO/IEC29500-1:2016\]](#) section A.2) element that specifies future extensibility for this element.

*Attributes:*

**id:** An ST\_Guid ([\[ISO/IEC29500-1:2016\]](#) section 22.9.2.4) attribute that specifies a unique identifier for the Python environment.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PythonEnvironmentDefinition">
  <xsd:sequence>
    <xsd:element name="initialization" type="CT_PythonInitialization" minOccurs="0"
maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0"/>
  </xsd:sequence>
  <xsd:attribute name="id" type="x:ST_Guid"/>
</xsd:complexType>
```

See section [5.39](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.251 CT\_PythonInitialization

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/python>

*Referenced by:* [CT\\_PythonEnvironmentDefinition](#)

The complex type that specifies information about the **Python script** used to initialize the Python environment.

*Child Elements:*

**code:** An ST\_Xstring ([ISO/IEC29500-1:2016] section 22.9.2.19) element that specifies the Python script to initialize the Python environment.

*Attributes:*

**userModified:** A Boolean ([XMLSCHEMA2/2] section 3.2.2) attribute that specifies whether the Python script to initialize the Python environment specified by the **code** element has been modified by the user.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PythonInitialization">
  <xsd:sequence>
    <xsd:element name="code" type="x:ST_Xstring" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="userModified" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
```

See section [5.39](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.252 CT\_PythonScript

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/python>

*Referenced by:* [CT\\_PythonScripts](#)

The complex type specifies a **Python script**.

*Child Elements:*

**code:** An ST\_Xstring ([ISO/IEC29500-1:2016] section 22.9.2.19) element that specifies the Python script passed into a PY function (section [2.3.10.2](#)). If the code references any optional parameters passed in the PY function the encoding is as specified in **Parameter reference encoding** (section [2.3.10.4](#)).

**extLst:** A CT\_ExtensionList ([ISO/IEC29500-1:2016] section A.2) element that specifies future extensibility for this element.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PythonScript">
  <xsd:sequence>
    <xsd:element name="code" type="x:ST_Xstring" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.39](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.6.253 CT\_PythonScripts

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/python>

*Referenced by:* [CT\\_Python](#)

The complex type specifies a collection of **Python scripts**.



*Child Elements:*

**pythonScript:** A [CT\\_PythonScript](#) element that specifies a Python script.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_PythonScripts">
  <xsd:sequence minOccurs="1" maxOccurs="unbounded">
    <xsd:element name="pythonScript" type="CT_PythonScript"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.39](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.254 CT\_DXFComplementExt

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

A complex type that contains a [CT\\_DXFComplement](#) element.

*Child Elements:*

**DXFComplement:** A [CT\\_DXFComplement](#) element that references a feature property bag.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DXFComplementExt">
  <xsd:sequence>
    <xsd:element ref="DXFComplement" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.6.255 CT\_DXFComplement

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag>

*Referenced by:* [CT\\_DXFComplementExt](#), [DXFComplement](#)

A complex type that specifies a relationship to a [CT\\_FeaturePropertyBag](#) element of type **DXFComplements** (section [2.3.9.5](#)).

*Attributes:*

**i:** An unsigned int ([\[XMLSCHEMA2/2\]](#) section 3.3.22) attribute that specifies a zero-based index into a [CT\\_ArrayFeatureProperty](#) element of a [CT\\_FeaturePropertyBag](#) element, with key "MappedFeaturePropertyBags" in a feature property bag of type "DXFComplements" (section [2.3.9.5](#)).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_DXFComplement">
  <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.36](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.256 CT\_AggregationInfo

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation>

*Referenced by:* [aggregationInfo](#)

This complex type specifies extended information about a **PivotTable data field** item ([ISO/IEC29500-1:2016] section 18.10.1.22).

*Attributes:*

**aggregationType:** An [ST\\_AggregationType](#) attribute that specifies the **aggregation type** applied to the PivotTable data field if the type is not covered in the subtotal attribution in PivotTable data field.

**sourceField:** An **unsignedInt** ([XMLSCHEMA2/2] section 3.3.22) attribute that specifies the zero-based index of the **CT\_PivotField** ([ISO/IEC29500-4:2016] section A.2) element in the list of **CT\_PivotField** ([ISO/IEC29500-4:2016] section A.2) elements specified by the **CT\_PivotFields** ([ISO/IEC29500-4:2016] section A.2) element that this data item summarizes.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_AggregationInfo">
  <xsd:attribute name="aggregationType" type="ST_AggregationType" use="required"/>
  <xsd:attribute name="sourceField" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
```

See section [5.40](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.6.257 CT\_FeatureSupport

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation>

*Referenced by:* [featureSupportInfo](#)

Specifies a feature name for use in versioning in a PivotTable ([ISO/IEC29500-1:2016] section 18.10).

*Attributes:*

**featureName:** A string ([XMLSCHEMA2/2] section 3.2.1) attribute that specifies a feature name.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this complex type.

```
<xsd:complexType name="CT_FeatureSupport">
  <xsd:attribute name="featureName" type="xsd:string" use="required"/>
</xsd:complexType>
```

See section [5.40](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

## 2.7 Simple Types

### 2.7.1 ST\_Ref

*Target namespace:* <http://schemas.microsoft.com/office/excel/2006/main>

Referenced by: [CT\\_Ref](#), [ST\\_Sqref](#)

This simple type specifies a reference to a **range of cells**.

This simple type is identical to the **ST\_Ref** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.62) simple type with the following exception: This simple type MUST have the following grammar.

```
(A1-cell [":" A1-cell]) / ref-constant
```

The **ABNF** ([\[RFC5234\]](#)) definitions for A1-cell and ref-constant are specified in [Formulas](#).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_Ref">  
  <xsd:restriction base="xsd:string"/>  
</xsd:simpleType>
```

See section [5.1](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.2 ST\_Sqref

*Target namespace:* <http://schemas.microsoft.com/office/excel/2006/main>

Referenced by: [CT\\_Sqref](#)

This simple type specifies a list of **cell ranges**.

This simple type is identical to the **ST\_Sqref** ([\[ISO/IEC29500-1:2016\]](#) section 18.18.76) simple type with the following exceptions:

- MUST contain zero or more values of type [ST\\_Ref](#).
- If the value contains an **ST\_Ref** of value "#REF!", then it MUST be the only value in the list.
- The number of cell references in this simple type MUST be less than 2,147,483,647.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_Sqref">  
  <xsd:list itemType="ST_Ref"/>  
</xsd:simpleType>
```

See section [5.1](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.3 ST\_DisbBlanksAs

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_SparklineGroup](#)

This simple type specifies how empty **cells** are plotted for all **sparklines** in the sparkline group.

Value	Meaning
span	Empty cells are plotted as interpolated.
gap	Empty cells are not plotted.
zero	Empty cells are plotted as zero.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_DisplanksAs">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="span"/>
    <xsd:enumeration value="gap"/>
    <xsd:enumeration value="zero"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

#### 2.7.4 ST\_SparklineAxisMinMax

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SparklineGroup](#)

This simple type specifies information about how the vertical axis minimum or maximum is computed for this **sparkline** group.

Value	Meaning
individual	Specifies that the vertical axis minimum or maximum for each sparkline in this sparkline group is calculated automatically such that the <b>data point</b> with the <b>minimum</b> or maximum value can be displayed in the <b>plot area</b> .
group	Specifies that the vertical axis minimum or maximum is shared across all sparklines in this sparkline group and is calculated automatically such that the data point with the minimum or maximum value can be displayed in the plot area.
custom	Specifies that the vertical axis minimum or maximum for each sparkline in this sparkline group is specified by the <b>manualMin</b> attribute or the <b>manualMax</b> attribute of CT_SparklineGroup.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_SparklineAxisMinMax">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="individual"/>
    <xsd:enumeration value="group"/>
    <xsd:enumeration value="custom"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.7.5 ST\_SparklineType

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_SparklineGroup](#)

This simple type specifies the type of the **sparkline** group.

Value	Meaning
line	Line sparklines.
column	<b>Column</b> sparklines.
stacked	100% stacked column sparklines.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_SparklineType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="line"/>
    <xsd:enumeration value="column"/>
    <xsd:enumeration value="stacked"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.7.6 ST\_PivotShowAs

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

Referenced by: [CT\\_DataField](#)

This simple type specifies the display format values for a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) **field**.

Value	Meaning
percentOfParent	Percentage of parent total.
percentOfParentRow	Percentage of parent <b>row</b> total.
percentOfParentCol	Percentage of parent <b>column</b> total.
percentOfRunningTotal	Percentage of running total.
rankAscending	Rank ascending.
rankDescending	Rank descending.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_PivotShowAs">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="percentOfParent"/>
    <xsd:enumeration value="percentOfParentRow"/>
    <xsd:enumeration value="percentOfParentCol"/>
    <xsd:enumeration value="percentOfRunningTotal"/>
    <xsd:enumeration value="rankAscending"/>
    <xsd:enumeration value="rankDescending"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.7 ST\_DataBarDirection

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_DataBar](#)

A simple type that specifies the direction of the **data bar**.

Value	Meaning
context	The direction of the data bar is determined by context.
leftToRight	The data bar is displayed in a <b>left-to-right</b> manner.
rightToLeft	The data bar is displayed in a <b>right-to-left</b> manner.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_DataBarDirection">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="context"/>
    <xsd:enumeration value="leftToRight"/>
    <xsd:enumeration value="rightToLeft"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.8 ST\_DataBarAxisPosition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_DataBar](#)

A simple type that specifies the axis position for the **data bar**.

Value	Meaning
automatic	The axis position for the data bar is calculated automatically.
middle	The axis position for the data bar is the midpoint of the cell.

Value	Meaning
none	There is no axis for the data bar.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_DataBarAxisPosition">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="automatic"/>
    <xsd:enumeration value="middle"/>
    <xsd:enumeration value="none"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.9 ST\_CfvoType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_Cfvo](#)

This simple type specifies how the Conditional Formatting Value Object (CFVO) value is determined. In the following table, X represents a parameter value. The value of X is determined by the value of the **f** element in the parent **CT\_Cfvo** element. If the **f** element in the parent **CT\_Cfvo** element is absent, then the value of X is 0. MUST be a value from the following table.

Value	Meaning
num	X
percent	The minimum value in the <b>range of cells</b> that the <b>conditional formatting</b> rule applies to plus X percent of the difference between the maximum and minimum values in the range of cells that the conditional formatting rule applies to.  For example, if the min and max values in the range are 1 and 10 respectively, and X is 10, then the CFVO value is 1.9.
max	The maximum value from the range of cells that the conditional formatting rule applies to.
min	The minimum value from the range of cells that the conditional formatting rule applies to.
formula	X, or if the <b>f</b> element is formed by the numerical-constant rule alone in the grammar provided in <a href="#">Formulas</a> , the formula is ignored and X is 0.
percentile	The minimum value of the cell that is in the X percentile of the range of cells that the conditional formatting rule applies to.
autoMin	The smaller of zero or the minimum value from the range of cells that the conditional formatting rule applies to.
autoMax	The larger of zero or the maximum value from the range of cells that the conditional formatting rule applies to.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_CfvoType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="num"/>
    <xsd:enumeration value="percent"/>
    <xsd:enumeration value="max"/>
    <xsd:enumeration value="min"/>
    <xsd:enumeration value="formula"/>
    <xsd:enumeration value="percentile"/>
    <xsd:enumeration value="autoMin"/>
    <xsd:enumeration value="autoMax"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.10 ST\_IconSetType





*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_RichSortCondition](#), [CT\\_SortCondition](#), [CT\\_IconFilter](#), [CT\\_IconSet](#), [CT\\_CfIcon](#)

A simple type that specifies an **icon set**.

Value	Meaning
3Arrows	
3ArrowsGray	
3Flags	
3TrafficLights1	
3TrafficLights2	
3Signs	
3Symbols	
3Symbols2	
4Arrows	
4ArrowsGray	



Value	Meaning
4RedToBlack	
4Rating	
4TrafficLights	
5Arrows	
5ArrowsGray	
5Rating	
5Quarters	
3Stars	
3Triangles	
5Boxes	
NoIcons	No icon set

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_IconSetType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="3Arrows"/>
    <xsd:enumeration value="3ArrowsGray"/>
    <xsd:enumeration value="3Flags"/>
    <xsd:enumeration value="3TrafficLights1"/>
    <xsd:enumeration value="3TrafficLights2"/>
    <xsd:enumeration value="3Signs"/>
    <xsd:enumeration value="3Symbols"/>
    <xsd:enumeration value="3Symbols2"/>
    <xsd:enumeration value="4Arrows"/>
    <xsd:enumeration value="4ArrowsGray"/>
    <xsd:enumeration value="4RedToBlack"/>
    <xsd:enumeration value="4Rating"/>
    <xsd:enumeration value="4TrafficLights"/>
    <xsd:enumeration value="5Arrows"/>
    <xsd:enumeration value="5ArrowsGray"/>
    <xsd:enumeration value="5Rating"/>
    <xsd:enumeration value="5Quarters"/>
    <xsd:enumeration value="3Stars"/>
  </xsd:restriction>
</xsd:simpleType>

```

```

    <xsd:enumeration value="3Triangles"/>
    <xsd:enumeration value="5Boxes"/>
    <xsd:enumeration value="NoIcons"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.11 ST\_PivotEditValueType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT PivotEditValue](#)

A simple type that specifies the type of the modified value in the PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) data area using [PivotTable what-if analysis](#).

Value	Meaning
number	Numerical value
dateTime	Date and time value
string	String value
boolean	Boolean value
error	Error value

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_PivotEditValueType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="dateTime"/>
    <xsd:enumeration value="string"/>
    <xsd:enumeration value="boolean"/>
    <xsd:enumeration value="error"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.12 ST\_AllocationMethod

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT PivotTableDefinition](#), [CT PivotChange](#)

A simple type that specifies the method of allocation for [PivotTable what-if analysis](#).

Value	Meaning
equalAllocation	Equal allocation

Value	Meaning
equalIncrement	Equal increment
weightedAllocation	Weighted allocation
weightedIncrement	Weighted increment

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_AllocationMethod">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="equalAllocation"/>
    <xsd:enumeration value="equalIncrement"/>
    <xsd:enumeration value="weightedAllocation"/>
    <xsd:enumeration value="weightedIncrement"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.13 ST\_SlicerStyleType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_SlicerStyleElement](#)

A simple type that specifies the types of table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements that are specific to [slicers](#). The possible values are listed in the following table.

Value	Meaning
unselectedItemWithData	A <a href="#">slicer item</a> with data that is not <b>selected</b> . Used for slicers only.
selectedItemWithData	A selected slicer item with data. Used for slicers only.
unselectedItemWithNoData	A slicer item with no data that is not selected. Used for slicers only.
selectedItemWithNoData	A selected slicer item with no data. Used for slicers only.
hoveredUnselectedItemWithData	A slicer item with data that is not selected and over which the mouse is paused on. Used for slicers only.
hoveredSelectedItemWithData	A selected slicer item with data and over which the mouse is paused on. Used for slicers only.
hoveredUnselectedItemWithNoData	A slicer item with no data that is not selected and over which the mouse is paused on. Used for slicers only.
hoveredSelectedItemWithNoData	A selected slicer item with no data and over which the mouse is paused on. Used for slicers only.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST SlicerStyleType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="unselectedItemWithData"/>
    <xsd:enumeration value="selectedItemWithData"/>
    <xsd:enumeration value="unselectedItemWithNoData"/>
    <xsd:enumeration value="selectedItemWithNoData"/>
    <xsd:enumeration value="hoveredUnselectedItemWithData"/>
    <xsd:enumeration value="hoveredSelectedItemWithData"/>
    <xsd:enumeration value="hoveredUnselectedItemWithNoData"/>
    <xsd:enumeration value="hoveredSelectedItemWithNoData"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.14 ST\_ObjectType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_FormControlPr](#)

A simple type that specifies the types of form control objects. The possible values are included in the following table.

Value	Meaning
Button	Button control
CheckBox	Check-box control
Drop	Drop-down (combo box) control
GBox	Group box control; this control is used for grouping radio button form controls
Label	Label control
List	List box control
Radio	Radio button control
Scroll	Scroll bar control
Spin	Spin box control
EditBox	Edit box control
Dialog	Dialog control

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST ObjectType">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="Button"/>
    <xsd:enumeration value="CheckBox"/>
    <xsd:enumeration value="Drop"/>
    <xsd:enumeration value="GBox"/>
    <xsd:enumeration value="Label"/>
    <xsd:enumeration value="List"/>
    <xsd:enumeration value="Radio"/>
  </xsd:restriction>
</xsd:simpleType>

```

```

    <xsd:enumeration value="Scroll"/>
    <xsd:enumeration value="Spin"/>
    <xsd:enumeration value="EditBox"/>
    <xsd:enumeration value="Dialog"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.15 ST\_Checked

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_FormControlPr](#)

A simple type that specifies if a check box is selected or if the radio button is selected.

Value	Meaning
Unchecked	Object is unchecked or unselected.
Checked	Object is checked or selected.
Mixed	Mixed selection. Applies only to check boxes. The application can determine whether to consider this option as a check box that is not initialized and it is neither selected nor cleared.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_Checked">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="Unchecked"/>
    <xsd:enumeration value="Checked"/>
    <xsd:enumeration value="Mixed"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.16 ST\_DropStyle

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_FormControlPr](#)

This simple type specifies the style of a drop-down form control. The allowed values are included in the following table.

Value	Meaning
combo	Standard combo box.
comboedit	Editable combo box <a href="#">&lt;27&gt;</a> .
simple	Standard combo box with only the drop-down button visible when the box is not expanded.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_DropStyle">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="combo"/>
    <xsd:enumeration value="comboedit"/>
    <xsd:enumeration value="simple"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.17 ST\_SelType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_FormControlPr](#)

A simple type that specifies the selection type for the list box form control object. The allowed values are included in the following table.

Value	Meaning
single	Only single selection is allowed.
multi	Multiple selection is allowed. Clicking any item on the list will add it to the selection or, if already selected, will remove it from the selection.
extended	Multiple selection is allowed while the CTRL key is pressed.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_SelType">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="single"/>
    <xsd:enumeration value="multi"/>
    <xsd:enumeration value="extended"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.18 ST\_EditValidation

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_FormControlPr](#)

This simple type specifies the type of validation used for data input to the control. If omitted, the value is assumed to be text. If present, the application can proceed to validate the data accordingly. The valid values are included in the following table.

Value	Meaning
text	Edit box contains text.
integer	Edit box contains an integer.
number	Edit box contains a number.
reference	Edit box contains a cell reference ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.17.2.3).
formula	Edit box contains a spreadsheet formula ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.17).

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_EditValidation">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="text"/>
    <xsd:enumeration value="integer"/>
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="reference"/>
    <xsd:enumeration value="formula"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.19 ST\_OlapSlicerCacheSortOrder

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_OlapSlicerCacheLevelData](#)

A simple type that specifies how the [OLAP slicer items](#) are sorted in the [slicer view](#).

Value	Meaning
natural	The OLAP slicer items are sorted in original order as determined by the <a href="#">OLAP slicer source data</a> .
ascending	The OLAP slicer items are sorted in ascending alphabetical order.
descending	The OLAP slicer items are sorted in descending alphabetical order.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_OlapSlicerCacheSortOrder">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="natural"/>
    <xsd:enumeration value="ascending"/>
    <xsd:enumeration value="descending"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.7.20 ST\_TabularSlicerCacheSortOrder

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TableSlicerCache](#), [CT\\_TabularSlicerCache](#)

A simple type that specifies how the [non-OLAP slicer items](#) are sorted in the [slicer view](#).

Value	Meaning
ascending	The non-OLAP slicer items are sorted in ascending alphabetical order.
descending	The non-OLAP slicer items are sorted in descending alphabetical order.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_TabularSlicerCacheSortOrder">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="ascending"/>
    <xsd:enumeration value="descending"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

## 2.7.21 ST\_SlicerCacheCrossFilter

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_TableSlicerCache](#), [CT\\_OlapSlicerCacheLevelData](#), [CT\\_TabularSlicerCache](#)

A simple type that specifies how the [slicer items](#) that are used in [slicer cross filtering](#) are displayed.

Value	Meaning
none	The table style ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.8) element of the <a href="#">slicer style</a> for slicer items with no data is not applied to slicer items with no data, and slicer items with no data are not sorted separately in the list of slicer items in the <a href="#">slicer view</a> .
showItemsWithDataAtTop	The table style ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.8) element of the slicer style for slicer items with no data is applied to slicer items with no data, and slicer items with no data are sorted at the bottom in the list of slicer items in the slicer view.
showItemsWithNoData	The table style ( <a href="#">[ISO/IEC29500-1:2016]</a> section 18.8) element of the slicer style for slicer items with no data is applied to slicer items with no data, and slicer items with no data are not sorted separately in the list of slicer items in the slicer view.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_SlicerCacheCrossFilter">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="none"/>
    <xsd:enumeration value="showItemsWithDataAtTop"/>
    <xsd:enumeration value="showItemsWithNoData"/>
  </xsd:restriction>
</xsd:simpleType>
```



```
</xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.22 ST\_TextHAlign

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_FormControlPr](#)

A simple type that specifies the vertical text alignment for the object. The valid values are included in the following table.

Value	Meaning
left	Left alignment
center	Center alignment
right	Right alignment
justify	Justify alignment
distributed	Distributed alignment

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_TextHAlign">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="left"/>
    <xsd:enumeration value="center"/>
    <xsd:enumeration value="right"/>
    <xsd:enumeration value="justify"/>
    <xsd:enumeration value="distributed"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.23 ST\_TextVAlign

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main>

*Referenced by:* [CT\\_FormControlPr](#)

A simple type that specifies the vertical text alignment for the object. The valid values are included in the following table.

Value	Meaning
top	Top alignment
center	Center alignment

Value	Meaning
bottom	Bottom alignment
justify	Justify alignment
distributed	Distributed alignment

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_TextVAlign">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="top"/>
    <xsd:enumeration value="center"/>
    <xsd:enumeration value="bottom"/>
    <xsd:enumeration value="justify"/>
    <xsd:enumeration value="distributed"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.4](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.24 ST\_TimelineStyleType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_TimelineStyleElement](#)

A simple type that specifies the types of table style ([\[ISO/IEC29500-1:2016\]](#) section 18.8) elements that are specific to [Timelines](#). The possible values are listed in the following table.

Value	Meaning
selectionLabel	Timeline style element that applies to the selection label which is the label that indicates the period that has been selected on the Timeline. Used for Timelines only.
timeLevel	Timeline style element that applies to the time level which is the label that indicates the time granularity of the Timeline. Used for Timelines only.
periodLabel1	Timeline style element that applies to the upper <b>row</b> of the time block labels. Used for Timelines only.
periodLabel2	Timeline style element that applies to the lower row of the time block labels. Used for Timelines only.
selectedTimeBlock	Timeline style element that applies to the selected time blocks which are the segments on the Timeline that have been selected by the user. Used for Timelines only.
unselectedTimeBlock	Timeline style element that applies to the unselected time blocks which are the segments on the Timeline that have not been selected by the user. Used for Timelines only.
selectedTimeBlockSpace	Timeline style element that applies to the area between any two selected time blocks. Used for Timelines only.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_TimelineStyleType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="selectionLabel"/>
    <xsd:enumeration value="timeLevel"/>
    <xsd:enumeration value="periodLabel1"/>
    <xsd:enumeration value="periodLabel2"/>
    <xsd:enumeration value="selectedTimeBlock"/>
    <xsd:enumeration value="unselectedTimeBlock"/>
    <xsd:enumeration value="selectedTimeBlockSpace"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.25 ST\_CalcMemNumberFormat

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_CalculatedMember](#)

An enumeration that specifies the display format for a [CT\\_CalculatedMember](#).

Value	Meaning
default	Specifies that the number will be displayed using its current format.
number	Specifies that the number will be displayed using a comma as a thousands separator.
percent	Specifies that the number will be displayed as a percentage with two decimal places.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_CalcMemNumberFormat">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="default"/>
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="percent"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.26 ST\_SXVCellType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_PivotValueCell](#)

A simple type that specifies the type of a [PivotValueCell](#) element of a PivotTable ([\[ISO/IEC29500-1:2016\]](#) section 18.10) that is specified by a [pivotTableReference](#) element in the extension of a **workbook**.

Value	Meaning
b	The child element <b>v</b> of the CT_PivotValueCell. MUST be interpreted as a <b>Boolean</b> value. MUST be true or false.
n	The child element <b>v</b> of the CT_PivotValueCell. MUST be interpreted as a numeric value.
e	The child element <b>v</b> of the CT_PivotValueCell. MUST be interpreted as an error value. MUST be one of the following: <ul style="list-style-type: none"> <li>▪ #DIV/0!</li> <li>▪ #VALUE!</li> <li>▪ #NUM!</li> <li>▪ #N/A</li> <li>▪ #GETTING_DATA</li> </ul>
str	The child element <b>v</b> of the CT_PivotValueCell. MUST be interpreted as a string value. The string MUST be less than or equal to 65,535 characters in length.
d	The child element <b>v</b> of the CT_PivotValueCell. MUST be interpreted as a <b>dateTime</b> ( <a href="#">[XMLSCHEMA2/2] section 3.2.7</a> ) value.
bl	A blank cell. The child element <b>v</b> of the CT_PivotValueCell. MUST NOT have any value.

The following W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_SXVCellType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="b"/>
    <xsd:enumeration value="n"/>
    <xsd:enumeration value="e"/>
    <xsd:enumeration value="str"/>
    <xsd:enumeration value="d"/>
    <xsd:enumeration value="bl"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\] section 2.1](#)).

### 2.7.27 ST\_QuestionType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_SurveyQuestion](#)

The **ST\_QuestionType** simple type specifies the type of input for the answer to a survey question as specified by the **type** attribute of a **CT\_SurveyQuestion** (section 2.6.144).

Value	Meaning
checkBox	Answer is indicated via checkbox.
choice	Answer is selected from a list of choices.
date	Answer in the form of a date.
time	Answer in the form of a time.
multipleLinesOfText	Answer in the form of multiple lines of text.

Value	Meaning
number	Answer is numerical.
singleLineOfText	Answer in the form of a single line of text.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_QuestionType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="checkBox"/>
    <xsd:enumeration value="choice"/>
    <xsd:enumeration value="date"/>
    <xsd:enumeration value="time"/>
    <xsd:enumeration value="multipleLinesOfText"/>
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="singleLineOfText"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.3](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.28 ST\_QuestionFormat

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_SurveyQuestion](#)

The **ST\_QuestionFormat** simple type specifies the text formatting of the input for the answer to a survey question as specified by the **format** attribute of a **CT\_SurveyQuestion** (section 2.6.144).

Value	Meaning
generalDate	Format answer as a date.
longDate	Format answer as a long form date.
shortDate	Format answer as a short form date.
longTime	Format answer as a long form time.
shortTime	Format answer as a short form time.
generalNumber	Format answer as a number.
standard	Format answer as a number with thousands separators.
fixed	Format answer as a number with a fixed number of digits after the decimal.
percent	Format answer as a percentage.
currency	Format answer as a currency.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST QuestionFormat">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="generalDate"/>
    <xsd:enumeration value="longDate"/>
    <xsd:enumeration value="shortDate"/>
    <xsd:enumeration value="longTime"/>
    <xsd:enumeration value="shortTime"/>
    <xsd:enumeration value="generalNumber"/>
    <xsd:enumeration value="standard"/>
    <xsd:enumeration value="fixed"/>
    <xsd:enumeration value="percent"/>
    <xsd:enumeration value="currency"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.29 ST\_SurveyPosition

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main>

*Referenced by:* [CT\\_SurveyElementPr](#)

The **ST\_SurveyPosition** simple type specifies the type of positioning of an element in a survey, as specified by the **position** attribute of a **CT\_SurveyElementPr** (section 2.6.145). The types correspond to the allowed values for the position property of Cascading Style Sheets 2.1, as defined in [\[CSS-Level2-2009\]](#).

Value	Meaning
absolute	Use absolute positioning.
fixed	Use fixed positioning.
relative	Use relative positioning.
static	Use static positioning.
inherit	Use inherit positioning.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_SurveyPosition">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="absolute"/>
    <xsd:enumeration value="fixed"/>
    <xsd:enumeration value="relative"/>
    <xsd:enumeration value="static"/>
    <xsd:enumeration value="inherit"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.3](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.30 ST\_ModelTimeGroupingContentType

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2014/11/main>

Referenced by: [CT\\_CalculatedTimeColumn](#)

Specifies the grouping content type inside a **calculated column**.

Value	Meaning
years	Years
quarters	Quarters
monthsindex	Months Index
months	Months
daysindex	Days Index
days	Days
hours	Hours
minutes	Minutes
seconds	Seconds

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_ModelTimeGroupingContentType">  
  <xsd:restriction base="x:ST_Xstring">  
    <xsd:enumeration value="years"/>  
    <xsd:enumeration value="quarters"/>  
    <xsd:enumeration value="monthsindex"/>  
    <xsd:enumeration value="months"/>  
    <xsd:enumeration value="daysindex"/>  
    <xsd:enumeration value="days"/>  
    <xsd:enumeration value="hours"/>  
    <xsd:enumeration value="minutes"/>  
    <xsd:enumeration value="seconds"/>  
  </xsd:restriction>  
</xsd:simpleType>
```

See section [5.10](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.31 ST\_Xrevid

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2014/revision>

Referenced by: [CT\\_RevisionPtr](#)

This simple type is used in runtime scenarios for Microsoft Excel, and SHOULD be ignored by all others.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_Xrevid">
  <xsd:restriction base="xsd:unsignedLong"/>
</xsd:simpleType>

```

See section [5.15](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.32 ST\_ArrayValueType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_ArrayValue](#)

This simple type specifies the **data type** of the **rich array** value. The possible values are listed in the following table.

Value	Meaning
d	Indicates rich array value is a real number.
i	Indicates rich array value is an integer.
b	Indicates rich array value is a <b>Boolean</b> .
e	Indicates rich array value is an error.
s	Indicates rich array value is text.
r	Indicates rich array value is a <b>rich value</b> .
a	Indicates rich array value is a rich array.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```

<xsd:simpleType name="ST_ArrayValueType">
  <xsd:restriction base="x:ST_Xstring">
    <xsd:enumeration value="d"/>
    <xsd:enumeration value="i"/>
    <xsd:enumeration value="b"/>
    <xsd:enumeration value="e"/>
    <xsd:enumeration value="s"/>
    <xsd:enumeration value="r"/>
    <xsd:enumeration value="a"/>
  </xsd:restriction>
</xsd:simpleType>

```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.33 ST\_RichFormatPropertyType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_RichFormatProperty](#)

This simple type specifies the **data type** of the value of the property for the **rich value** format.



Value	Meaning
b	Indicates value of the property for the rich value format is a <b>Boolean</b> .
n	Indicates value of the property for the rich value format is a real number.
i	Indicates value of the property for the rich value format is an integer.
s	Indicates value of the property for the rich value format is text.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_RichFormatPropertyType">
  <xsd:restriction base="x:ST_Xstring">
    <xsd:enumeration value="b"/>
    <xsd:enumeration value="n"/>
    <xsd:enumeration value="i"/>
    <xsd:enumeration value="s"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.34 ST\_RichValueFallbackType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

*Referenced by:* [CT\\_RichValueFallback](#)

This simple type specifies the **data type** of the value of the fallback for the **rich value**.

Value	Meaning
b	Indicates fallback value is a <b>Boolean</b> .
n	Indicates fallback value is a real number.
e	Indicates fallback value is an error.
s	Indicates fallback value is text.

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_RichValueFallbackType">
  <xsd:restriction base="x:ST_Xstring">
    <xsd:enumeration value="b"/>
    <xsd:enumeration value="n"/>
    <xsd:enumeration value="e"/>
    <xsd:enumeration value="s"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.35 ST\_RichValueValueType

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata>

Referenced by: [CT\\_Key](#)

This simple type specifies the **data type** of the value of the **key value pair (KVP)**.

Value	Meaning
d	Indicates value is a real number.
i	Indicates value is an integer.
b	Indicates value is a <b>Boolean</b> .
e	Indicates value is an error.
s	Indicates value is text.
r	Indicates value is a <b>rich value</b> .
a	Indicates value is a <b>rich array</b> .
spb	Indicates value is a <b>supporting property bag</b> .

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_RichValueValueType">
  <xsd:restriction base="x:ST_Xstring">
    <xsd:enumeration value="d"/>
    <xsd:enumeration value="i"/>
    <xsd:enumeration value="b"/>
    <xsd:enumeration value="e"/>
    <xsd:enumeration value="s"/>
    <xsd:enumeration value="r"/>
    <xsd:enumeration value="a"/>
    <xsd:enumeration value="spb"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.21](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.36 ST\_SupportingPropertyBagArrayValueType

Target namespace: <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

Referenced by: [CT\\_SupportingPropertyBagArrayValue](#)

This simple type specifies the **data type** of a single value in the **supporting property bag array**

Value	Meaning
d	Indicates value is a real number.
i	Indicates value is an integer.
b	Indicates value is a <b>Boolean</b> .

Value	Meaning
s	Indicates value is text.
spb	Indicates value is a <b>supporting property bag</b> .

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_SupportingPropertyBagArrayValueType">
  <xsd:restriction base="x:ST_Xstring">
    <xsd:enumeration value="d"/>
    <xsd:enumeration value="i"/>
    <xsd:enumeration value="b"/>
    <xsd:enumeration value="s"/>
    <xsd:enumeration value="spb"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.20](#) for the full W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1).

### 2.7.37 ST\_SupportingPropertyBagValueType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT\\_SupportingPropertyBagKey](#)

This simple type specifies the **data type** of a value in the **supporting property bag**.

Value	Meaning
d	Indicates value is a real number.
i	Indicates value is an integer.
b	Indicates value is a <b>Boolean</b> .
s	Indicates value is text.
spb	Indicates value is a supporting property bag.
spba	Indicates value is a <b>supporting property bag array</b> .

The following W3C XML Schema ([\[XMLSCHEMA1/2\]](#) section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_SupportingPropertyBagValueType">
  <xsd:restriction base="x:ST_Xstring">
    <xsd:enumeration value="d"/>
    <xsd:enumeration value="i"/>
    <xsd:enumeration value="b"/>
    <xsd:enumeration value="s"/>
    <xsd:enumeration value="spb"/>
    <xsd:enumeration value="spba"/>
  </xsd:restriction>
</xsd:simpleType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.38 ST\_RichFilterKey

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2>

*Referenced by:* [CT RichFilter](#), [CT RichDateGroupItem](#), [CT RichTop10](#), [CT CustomRichFilter](#), [CT DynamicRichFilter](#)

This simple type extends **ST\_Xstring** ([ISO/IEC29500-1:2016] section 22.9.2.19) and specifies the **rich value key** for which the **filter** is defined. The length of this string MUST be less than or equal to 65,535 characters in length. This simple type MUST conform to one of the following grammars.

Grammar	Example
{ rich-value-key }	"RichFilterKey"
{ ["#" length-of-rich-value-key "#" rich-value-key] }	"#13#RichFilterKey"

- The length-of-rich-value-key MUST be specified with integers and MUST match the count of the characters in the associated rich-value-key.
- The rich-value-key MUST be less than or equal to 255 characters in length.
- If rich-value-key begins with "#" then it MUST use the second grammar.
- The second grammar can be repeated to specify nested rich value keys.

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_RichFilterKey">  
  <xsd:restriction base="x:ST_Xstring"/>  
</xsd:simpleType>
```

See section [5.20](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 2.7.39 ST\_AggregationType

*Target namespace:* <http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation>

*Referenced by:* [CT AggregationInfo](#)

This simple type specifies an **aggregation function** applied to a **PivotTable data field**.

Value	Meaning
distinctCount	The count of unique values in the source <b>PivotTable field</b>
median	The middle value in the source PivotTable field

The following W3C XML Schema ([XMLSCHEMA1/2] section 2.1) fragment specifies the contents of this simple type.

```
<xsd:simpleType name="ST_AggregationType">
```

```
<xsd:restriction base="xsd:string">
  <xsd:enumeration value="distinctCount"/>
  <xsd:enumeration value="median"/>
</xsd:restriction>
</xsd:simpleType>
```

See section [5.40](#) for the full W3C XML Schema ([XMLSCHEMA1/2] section 2.1).

### 3 Structure Examples


This section contains examples of some of the most commonly used data structures in Excel Binary File Format files. The examples are meant to be a starting point for an implementer learning the file format. They are not meant to cover all records in the file format.

In the following sections, the schema definition might differ from the processing rules imposed by the application. The XSD in this specification provides a base description of the file format. The text that introduces the XSD specifies additional restrictions that reflect actual Microsoft product behavior. For example, the schema definition might allow for an element to be empty, null, or not present but the behavior of the application as specified restricts the same elements to being non-empty, not null, and present.

#### 3.1 Slicer

This example shows a [slicer](#) attached to a native PivotTable and its associated [slicer cache](#). The PivotTable has the "State" and "City" **fields** added to the **row** area and the "Population" field added to the data area. The slicer is based on the "State" field, and is currently filtering on "Washington".

The following figure shows a possible implementation of the slicer discussed in this example.

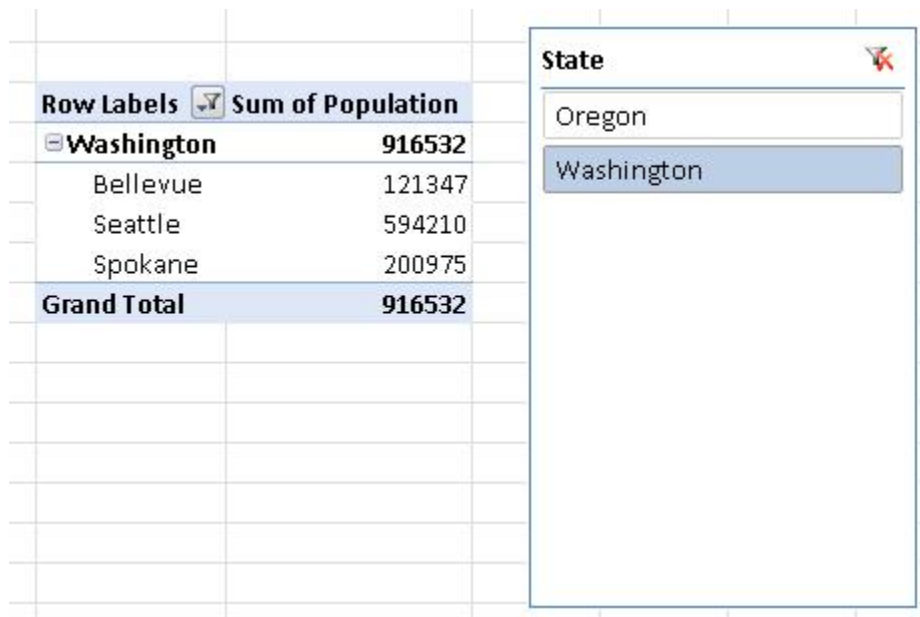

**Figure 1: PivotTable and slicer**

The following figure shows that the **source data** for the PivotTable that the slicer discussed in this example is filtering, as depicted on a possible implementation of a worksheet.

	A	B	C
1	State	City	Population
2	Washington	Seattle	594210
3	Washington	Spokane	200975
4	Washington	Bellevue	121347
5	Oregon	Portland	550396
6	Oregon	Springfield	56666

**Figure 2: Source data for the PivotTable**

This example includes the entire slicer cache and [slicer](#) parts that are used in the specification of a non-**OLAP** slicer.

The `<i>` elements inside the `<items>` element specify the cached [non-OLAP slicer items](#). "Washington" and "Oregon" are the cached non-OLAP slicer items in this example.

### 3.1.1 Slicer Cache Part

The following is an example slicer cache part, as specified in section [2.1.4](#).

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<slicerCacheDefinition xmlns="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
xmlns:mc="http://schemas.openxmlformats.org/markup-compatibility/2006" mc:Ignorable="x"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main" name="Slicer State"
sourceName="State">
  <pivotTables>
    <pivotTable tabId="1" name="PivotTable1"/>
  </pivotTables>
  <data>
    <tabular pivotCacheId="5">
      <items count="2">
        <i x="1"/>
        <i x="0" s="1"/>
      </items>
    </tabular>
  </data>
</slicerCacheDefinition>
```

The following table describes the **slicerCacheDefinition** element used in this example.

Attribute name	Value	Notes
<b>name</b>	Slicer_State	This is the name of the slicer cache.
<b>sourceName</b>	State	This is the name of the associated slicer, as specified in section <a href="#">2.1.5</a> .

The following table describes the **pivotTable** element used in this example.

Attribute name	Value	Notes
<b>tabId</b>	1	This indicates that the associated PivotTable, as specified in <a href="#">[ISO/IEC29500-1:2016]</a> section 18.10, is located on the first <b>sheet</b> .
<b>name</b>	PivotTable1	This is the name of the associated PivotTable.

The following table describes the **tabular** element used in this example.

Attribute name	Value	Notes
<b>pivotCacheId</b>	5	This indicates that the identifier of the associated PivotTable <b>PivotCache</b> is "5".

The following table describes the **items** element used in this example.

Attribute name	Value	Notes
<b>count</b>	2	This indicates that there are two items in the slicer cache.

The following table describes the first **i** (item) element used in this example.

Attribute name	Value	Notes
<b>x</b>	1	This indicates that the first item in the slicer cache is the second item in the PivotTable <b>PivotCache</b> .

The following table describes the second **i** (item) element used in this example.

Attribute name	Value	Notes
<b>x</b>	0	This indicates that the second item in the slicer cache is the first item in the PivotTable <b>PivotCache</b> .
<b>s</b>	1	This indicates that this item is selected in the slicer.

### 3.1.2 Slicer Part

The following is an example slicer part, as specified in section [2.1.5](#).

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<slicers xmlns="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
xmlns:mc="http://schemas.openxmlformats.org/markup-compatibility/2006" mc:Ignorable="x"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <slicer name="State" cache="Slicer_State" caption="State" rowHeight="228600"/>
</slicers>
```

The following table describes the slicer element used in this example.

Attribute name	Value	Notes
<b>name</b>	State	This is the name of the slicer.
<b>cache</b>	Slicer_State	This is the name of the slicer cache, as specified in section <a href="#">2.1.4</a> .
<b>caption</b>	State	This is the caption displayed at the top of the slicer.
<b>rowHeight</b>	228600	This is the height of a <b>row</b> in <b>EMUs</b> , equal to one-fourth of an inch.





## 4 Security Considerations

### 4.1 Security Considerations for Implementers

The password verifier features available in the file format are used to prevent accidental modification, rather than being used as security features. It is possible to remove the passwords by removing the records containing the verifier values.

The translation of passwords from a double-byte **Unicode** string to a new character string in the ANSI code page of the current system converts any Unicode character that cannot be mapped to the ANSI code page of the current system to the 0x3F character in that code page, as described in [\[ISO/IEC29500-1:2016\]](#) section 18.2.29. Replacing these characters with "0x3F" when the **hash** is verified will generate positive hash value matches. In certain **locales**, this can be a significant portion of the everyday **character set**.

Further security considerations regarding the file encryption algorithms are described in [\[MS-OFFCRYPTO\]](#) section 4.1.3.

### 4.2 Index of Security Fields

None.

## 5 Appendix A: Full XML Schema

For ease of implementation, this section provides the full W3C XML schemas for the new elements, attributes, complex types, and simple types specified in the earlier sections. Any schema references to namespaces included in Office Open XML file formats as described in [\[ISO/IEC29500-1:2016\]](#) refer specifically to the transitional schemas as described in [\[ISO/IEC29500-4:2016\]](#).

For ease of implementation, the following sections provide the full XML schema for this protocol.

Schema name	Prefix	Section
<a href="http://schemas.microsoft.com/office/excel/2006/main">http://schemas.microsoft.com/office/excel/2006/main</a>		section <a href="#">5.1</a>
<a href="http://schemas.microsoft.com/office/drawing/2010/slicer">http://schemas.microsoft.com/office/drawing/2010/slicer</a>		section <a href="#">5.2</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2010/11/main">http://schemas.microsoft.com/office/spreadsheetml/2010/11/main</a>		section <a href="#">5.3</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main">http://schemas.microsoft.com/office/spreadsheetml/2009/9/main</a>		section <a href="#">5.4</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac">http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac</a>		section <a href="#">5.5</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2011/1/ac">http://schemas.microsoft.com/office/spreadsheetml/2011/1/ac</a>		section <a href="#">5.6</a>
<a href="http://schemas.microsoft.com/office/drawing/2012/timeslicer">http://schemas.microsoft.com/office/drawing/2012/timeslicer</a>		section <a href="#">5.7</a>
<a href="http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing">http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing</a>		section <a href="#">5.8</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac">http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac</a>		section <a href="#">5.9</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2014/11/main">http://schemas.microsoft.com/office/spreadsheetml/2014/11/main</a>		section <a href="#">5.10</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2015/02/main">http://schemas.microsoft.com/office/spreadsheetml/2015/02/main</a>		section <a href="#">5.11</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10">http://schemas.microsoft.com/office/spreadsheetml/2016/revision10</a>		section <a href="#">5.12</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision9">http://schemas.microsoft.com/office/spreadsheetml/2016/revision9</a>		section <a href="#">5.13</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision6">http://schemas.microsoft.com/office/spreadsheetml/2016/revision6</a>		section <a href="#">5.14</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2014/revision">http://schemas.microsoft.com/office/spreadsheetml/2014/revision</a>		section <a href="#">5.15</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2015/revision2">http://schemas.microsoft.com/office/spreadsheetml/2015/revision2</a>		section <a href="#">5.16</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision3">http://schemas.microsoft.com/office/spreadsheetml/2016/revision3</a>		section <a href="#">5.17</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/revision5">http://schemas.microsoft.com/office/spreadsheetml/2016/revision5</a>		section <a href="#">5.18</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout">http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout</a>		section <a href="#">5.19</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2">http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2</a>		section <a href="#">5.20</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata">http://schemas.microsoft.com/office/spreadsheetml/2017/richdata</a>		section <a href="#">5.21</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures">http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures</a>		section <a href="#">5.22</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments">http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments</a>		section <a href="#">5.23</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2018/08/main">http://schemas.microsoft.com/office/spreadsheetml/2018/08/main</a>		section <a href="#">5.24</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray">http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray</a>		section <a href="#">5.25</a>
<a href="http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews">http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews</a>		section <a href="#">5.26</a>

Schema name	Prefix	Section
http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops		section <a href="#">5.27</a>
http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage		section <a href="#">5.28</a>
http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020		section <a href="#">5.29</a>
http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2		section <a href="#">5.30</a>
http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh		section <a href="#">5.31</a>
http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo		section <a href="#">5.32</a>
http://schemas.microsoft.com/office/spreadsheetml/2022/pivotRichData		section <a href="#">5.33</a>
http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021		section <a href="#">5.34</a>
http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel		section <a href="#">5.35</a>
http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag		section <a href="#">5.36</a>
http://schemas.microsoft.com/office/spreadsheetml/2023/msForms		section <a href="#">5.37</a>
http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService		section <a href="#">5.38</a>
http://schemas.microsoft.com/office/spreadsheetml/2023/python		section <a href="#">5.39</a>
http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation		section <a href="#">5.40</a>

## 5.1 http://schemas.microsoft.com/office/excel/2006/main Schema

```

<xsd:schema xmlns="http://schemas.microsoft.com/office/excel/2006/main"
  elementFormDefault="qualified"
  targetNamespace="http://schemas.microsoft.com/office/excel/2006/main"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlbasictypes.xsd"/>
  <xsd:simpleType name="ST_Ref">
    <xsd:restriction base="xsd:string"/>
  </xsd:simpleType>
  <xsd:complexType name="CT_Ref">
    <xsd:simpleContent>
      <xsd:extension base="ST_Ref">
        <xsd:attribute name="edited" type="xsd:boolean" use="optional"/>
        <xsd:attribute name="adjusted" type="xsd:boolean" use="optional"/>
        <xsd:attribute name="adjust" type="xsd:boolean" use="optional"/>
      </xsd:extension>
    </xsd:simpleContent>
  </xsd:complexType>
  <xsd:simpleType name="ST_Sqref">
    <xsd:list itemType="ST_Ref"/>
  </xsd:simpleType>
  <xsd:complexType name="CT_Sqref">
    <xsd:simpleContent>
      <xsd:extension base="ST_Sqref">
        <xsd:attribute name="edited" type="xsd:boolean" use="optional"/>
        <xsd:attribute name="split" type="xsd:boolean" use="optional"/>
        <xsd:attribute name="adjusted" type="xsd:boolean" use="optional"/>
        <xsd:attribute name="adjust" type="xsd:boolean" use="optional"/>
      </xsd:extension>
    </xsd:simpleContent>
  </xsd:complexType>

```

```

<xsd:element name="f" type="x:ST_Formula"/>
<xsd:element name="ref" type="CT_Ref"/>
<xsd:element name="sqref" type="CT_Sqref"/>
</xsd:schema>

```

## 5.2 <http://schemas.microsoft.com/office/drawing/2010/slicer> Schema

```

<xsd:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/drawing/2010/slicer"
xmlns="http://schemas.microsoft.com/office/drawing/2010/slicer"
xmlns:a="http://schemas.openxmlformats.org/drawingml/2006/main"
xmlns:a14="http://schemas.microsoft.com/office/drawing/2010/main"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:import schemaLocation="oart14docprop.xsd"
namespace="http://schemas.microsoft.com/office/drawing/2010/main"/>
  <xsd:import schemaLocation="oartdocprop.xsd"
namespace="http://schemas.openxmlformats.org/drawingml/2006/main"/>
  <xsd:import schemaLocation="orel.xsd"
namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"/>
  <xsd:complexType name="CT_Slicer">
    <xsd:sequence>
      <xsd:element name="extLst" type="a:CT_OfficeArtExtensionList" minOccurs="0"
maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
  </xsd:complexType>
  <xsd:element name="slicer" type="CT_Slicer"/>
</xsd:schema>

```

## 5.3 <http://schemas.microsoft.com/office/spreadsheetml/2010/11/main> Schema

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x14="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2010/11/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2010/11/main"
elementFormDefault="qualified"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns:xm="http://schemas.microsoft.com/office/excel/2006/main"
xmlns:xr10="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
schemaLocation="xlslicercache.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlworkbook.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/excel/2006/main"
schemaLocation="xlmbasictypes.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlsheet.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlpivot.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlxtconns.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2014/11/main"
schemaLocation="xlpivot16.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10"
schemaLocation="xlrevexignore10.xsd"/>
  <xsd:element name="slicerCaches" type="x14:CT_SlicerCaches"/>
  <xsd:element name="tableSlicerCache" type="CT_TableSlicerCache"/>
  <xsd:complexType name="CT_TableSlicerCache">
    <xsd:sequence>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>

```

```

    </xsd:sequence>
    <xsd:attribute name="tableId" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="column" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="sortOrder" type="x14:ST_TabularSlicerCacheSortOrder" use="optional"
default="ascending"/>
    <xsd:attribute name="customListSort" type="xsd:boolean" use="optional" default="true"/>
    <xsd:attribute name="crossFilter" type="x14:ST_SlicerCacheCrossFilter" use="optional"
default="showItemsWithDataAtTop"/>
  </xsd:complexType>
  <xsd:element name="slicerCacheHideItemsWithNoData" type="CT_SlicerCacheHideNoData"/>
  <xsd:complexType name="CT_SlicerCacheHideNoData">
    <xsd:sequence>
      <xsd:element name="slicerCacheOlapLevelName" type="CT_SlicerCacheOlapLevelName"
minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="optional" default="0"/>
  </xsd:complexType>
  <xsd:complexType name="CT_SlicerCacheOlapLevelName">
    <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="required"/>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
  <xsd:element name="slicerCachePivotTables" type="x14:CT_SlicerCachePivotTables"/>
  <xsd:element name="pivotCaches" type="x:CT_PivotCaches"/>
  <xsd:element name="pivotTableReferences" type="CT_PivotTableReferences"/>
  <xsd:complexType name="CT_PivotTableReferences">
    <xsd:sequence>
      <xsd:element name="pivotTableReference" type="CT_PivotTableReference" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_PivotTableReference">
    <xsd:attribute ref="r:id" use="required"/>
  </xsd:complexType>
  <xsd:element name="queryTable" type="CT_QueryTable"/>
  <xsd:complexType name="CT_QueryTable">
    <xsd:attribute name="clipped" use="optional" default="false" type="xsd:boolean"/>
    <xsd:attribute name="sourceDataName" type="xsd:string" use="optional"/>
    <xsd:attribute name="drillThrough" use="optional" default="false" type="xsd:boolean"/>
  </xsd:complexType>
  <xsd:element name="webExtensions" type="CT_WebExtensions"/>
  <xsd:complexType name="CT_WebExtensions">
    <xsd:sequence>
      <xsd:element name="webExtension" type="CT_WebExtension" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_WebExtension">
    <xsd:sequence>
      <xsd:element ref="xm:f" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="appRef" type="x:ST_Xstring" use="required"/>
  </xsd:complexType>
  <xsd:element name="timelineCacheRefs" type="CT_TimelineCacheRefs"/>
  <xsd:complexType name="CT_TimelineCacheRefs">
    <xsd:sequence>
      <xsd:element name="timelineCacheRef" type="CT_TimelineCacheRef" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_TimelineCacheRef">
    <xsd:attribute ref="r:id" use="required"/>
  </xsd:complexType>
  <xsd:element name="timelineRefs" type="CT_TimelineRefs"/>
  <xsd:complexType name="CT_TimelineRefs">
    <xsd:sequence>
      <xsd:element name="timelineRef" type="CT_TimelineRef" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>

```

```

<xsd:complexType name="CT_TimelineRef">
  <xsd:attribute ref="r:id" use="required"/>
</xsd:complexType>
<xsd:element name="timelineCachePivotCaches" type="x:CT_PivotCaches"/>
<xsd:complexType name="CT_WorkbookPr">
  <xsd:attribute name="chartTrackingRefBase" type="xsd:boolean" default="false"/>
</xsd:complexType>
<xsd:element name="workbookPr" type="CT_WorkbookPr"/>
<xsd:element name="timelineStyles" type="CT_TimelineStyles"/>
<xsd:complexType name="CT_TimelineStyles">
  <xsd:sequence>
    <xsd:element name="timelineStyle" type="CT_TimelineStyle" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="defaultTimelineStyle" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_TimelineStyleElements">
  <xsd:sequence>
    <xsd:element name="timelineStyleElement" type="CT_TimelineStyleElement" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_TimelineStyle">
  <xsd:sequence>
    <xsd:element name="timelineStyleElements" type="CT_TimelineStyleElements" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_TimelineStyleElement">
  <xsd:attribute name="type" type="ST_TimelineStyleType" use="required"/>
  <xsd:attribute name="dxId" type="x:ST_DxId" use="optional"/>
</xsd:complexType>
<xsd:simpleType name="ST_TimelineStyleType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="selectionLabel"/>
    <xsd:enumeration value="timeLevel"/>
    <xsd:enumeration value="periodLabel1"/>
    <xsd:enumeration value="periodLabel2"/>
    <xsd:enumeration value="selectedTimeBlock"/>
    <xsd:enumeration value="unselectedTimeBlock"/>
    <xsd:enumeration value="selectedTimeBlockSpace"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:element name="dxfs" type="x:CT_Dxfs"/>
<xsd:element name="connection" type="CT_Connection"/>
<xsd:complexType name="CT_ModelTextPr">
  <xsd:attribute name="headers" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_RangePr">
  <xsd:attribute name="sourceName" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
<xsd:complexType name="CT_DbTable">
  <xsd:attribute name="name" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
<xsd:complexType name="CT_DbTables">
  <xsd:sequence>
    <xsd:element name="dbTable" minOccurs="1" maxOccurs="unbounded" type="CT_DbTable"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_DbCommand">
  <xsd:attribute name="text" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
<xsd:complexType name="CT_OledbPr">
  <xsd:choice minOccurs="1" maxOccurs="1">
    <xsd:element name="dbTables" type="CT_DbTables"/>
    <xsd:element name="dbCommand" type="CT_DbCommand"/>
  </xsd:choice>
  <xsd:attribute name="connection" use="optional" type="x:ST_Xstring"/>

```

```

</xsd:complexType>
<xsd:complexType name="CT_DataFeedPr">
  <xsd:sequence>
    <xsd:element name="dbTables" type="CT_DbTables" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="connection" use="required" type="x:ST_Xstring"/>
</xsd:complexType>
<xsd:complexType name="CT_Connection">
  <xsd:sequence>
    <xsd:element name="textPr" minOccurs="0" maxOccurs="1" type="x:CT_TextPr"/>
    <xsd:element name="modelTextPr" minOccurs="0" maxOccurs="1" type="CT_ModelTextPr"/>
    <xsd:element name="rangePr" minOccurs="0" maxOccurs="1" type="CT_RangePr"/>
    <xsd:element name="oledbPr" minOccurs="0" maxOccurs="1" type="CT_OledbPr"/>
    <xsd:element name="dataFeedPr" minOccurs="0" maxOccurs="1" type="CT_DataFeedPr"/>
  </xsd:sequence>
  <xsd:attribute name="id" use="required" type="x:ST_Xstring"/>
  <xsd:attribute name="model" type="xsd:boolean" default="false" use="optional"/>
  <xsd:attribute name="excludeFromRefreshAll" type="xsd:boolean" default="false"
use="optional"/>
  <xsd:attribute name="autoDelete" type="xsd:boolean" default="false" use="optional"/>
  <xsd:attribute name="usedByAddin" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
<xsd:simpleType name="ST_CalcMemNumberFormat">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="default"/>
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="percent"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="CT_CalculatedMemberExt">
  <xsd:sequence>
    <xsd:element ref="calculatedMember" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:element name="calculatedMember" type="CT_CalculatedMember"/>
<xsd:complexType name="CT_CalculatedMember">
  <xsd:attribute name="measureGroup" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="numberFormat" type="ST_CalcMemNumberFormat" use="optional"
default="default"/>
  <xsd:attribute name="measure" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:element name="pivotTableUISettings" type="CT_PivotTableUISettings"/>
<xsd:complexType name="CT_PivotTableUISettings">
  <xsd:sequence>
    <xsd:element name="activeTabTopLevelEntity" type="CT_FieldListActiveTabTopLevelEntity"
minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="sourceDataName" type="xsd:string" use="optional"/>
  <xsd:attribute name="relNeededHidden" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:complexType name="CT_FieldListActiveTabTopLevelEntity">
  <xsd:attribute name="name" use="required" type="xsd:string"/>
  <xsd:attribute name="type" use="optional" default="0" type="xsd:unsignedInt"/>
</xsd:complexType>
<xsd:element name="pivotFilter" type="CT_PivotFilter"/>
<xsd:complexType name="CT_PivotFilter">
  <xsd:attribute name="useWholeDay" type="xsd:boolean" use="required"/>
</xsd:complexType>
<xsd:element name="cachedUniqueNames" type="CT_CachedUniqueNames"/>
<xsd:complexType name="CT_CachedUniqueNames">
  <xsd:sequence>
    <xsd:element name="cachedUniqueName" minOccurs="1" maxOccurs="unbounded"
type="CT_CachedUniqueName"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_CachedUniqueName">
  <xsd:attribute name="index" use="required" type="xsd:unsignedInt"/>
  <xsd:attribute name="name" use="required" type="x:ST_Xstring"/>

```



```

</xsd:complexType>
<xsd:complexType name="CT_CacheHierarchy">
  <xsd:attribute name="aggregatedColumn" use="required" type="xsd:int"/>
</xsd:complexType>
<xsd:element name="cacheHierarchy" type="CT_CacheHierarchy"/>
<xsd:element name="timelinePivotCacheDefinition" type="CT_TimelinePivotCacheDefinition"/>
<xsd:complexType name="CT_TimelinePivotCacheDefinition">
  <xsd:attribute name="timelineData" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:element name="pivotCacheIdVersion" type="CT_PivotCacheIdVersion"/>
<xsd:complexType name="CT_PivotCacheIdVersion">
  <xsd:attribute name="cacheIdSupportedVersion" type="xsd:unsignedByte" use="required"/>
  <xsd:attribute name="cacheIdCreatedVersion" type="xsd:unsignedByte" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_ModelTable">
  <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="connection" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_ModelTables">
  <xsd:sequence>
    <xsd:element name="modelTable" minOccurs="1" maxOccurs="unbounded"
type="CT_ModelTable"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_ModelRelationship">
  <xsd:attribute name="fromTable" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="fromColumn" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="toTable" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="toColumn" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_ModelRelationships">
  <xsd:sequence>
    <xsd:element name="modelRelationship" minOccurs="1" maxOccurs="unbounded"
type="CT_ModelRelationship"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_DataModel">
  <xsd:sequence>
    <xsd:element name="modelTables" minOccurs="0" maxOccurs="1" type="CT_ModelTables"/>
    <xsd:element name="modelRelationships" minOccurs="0" maxOccurs="1"
type="CT_ModelRelationships"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="minVersionLoad" type="xsd:unsignedByte" use="optional" default="5"/>
</xsd:complexType>
<xsd:element name="dataModel" type="CT_DataModel"/>
<xsd:element name="pivotTableData" type="CT_PivotTableData"/>
<xsd:complexType name="CT_PivotTableData">
  <xsd:sequence>
    <xsd:element name="pivotRow" type="CT_PivotRow" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="rowCount" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="columnCount" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="cacheId" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_PivotRow">
  <xsd:sequence>
    <xsd:element name="c" type="CT_PivotValueCell" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="r" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_PivotValueCell">
  <xsd:sequence>
    <xsd:element name="v" type="x:ST_Xstring" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="x" type="CT_PivotValueCellExtra" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="i" type="xsd:unsignedInt" use="optional"/>

```

```

    <xsd:attribute name="t" type="ST_SXVCellType" use="optional" default="n"/>
  </xsd:complexType>
  <xsd:complexType name="CT_PivotValueCellExtra">
    <xsd:attribute name="in" type="xsd:unsignedInt" use="optional"/>
    <xsd:attribute name="bc" type="x:ST_UnsignedIntHex" use="optional"/>
    <xsd:attribute name="fc" type="x:ST_UnsignedIntHex" use="optional"/>
    <xsd:attribute name="i" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="un" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="st" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="b" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>
  <xsd:simpleType name="ST_SXVCellType">
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="b"/>
      <xsd:enumeration value="n"/>
      <xsd:enumeration value="e"/>
      <xsd:enumeration value="str"/>
      <xsd:enumeration value="d"/>
      <xsd:enumeration value="bl"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:complexType name="CT_PivotTableServerFormats">
    <xsd:sequence>
      <xsd:element name="serverFormat" type="x:CT_ServerFormat" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="count" use="required" type="xsd:unsignedInt"/>
  </xsd:complexType>
  <xsd:element name="dataField" type="CT_DataField"/>
  <xsd:complexType name="CT_DataField">
    <xsd:attribute name="isCountDistinct" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>
  <xsd:element name="survey" type="CT_Survey"/>
  <xsd:complexType name="CT_Survey">
    <xsd:sequence>
      <xsd:element name="surveyPr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="titlePr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="descriptionPr" type="CT_SurveyElementPr" minOccurs="0"
maxOccurs="1"/>
      <xsd:element name="questions" type="CT_SurveyQuestions" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="id" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="guid" type="x:ST_Guid" use="required"/>
    <xsd:attribute name="title" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="description" type="x:ST_Xstring" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_SurveyQuestions">
    <xsd:sequence>
      <xsd:element name="questionsPr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="question" type="CT_SurveyQuestion" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_SurveyQuestion">
    <xsd:sequence>
      <xsd:element name="questionPr" type="CT_SurveyElementPr" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="binding" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="text" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="type" type="ST_QuestionType" use="optional"/>
    <xsd:attribute name="format" type="ST_QuestionFormat" use="optional"/>
    <xsd:attribute name="helpText" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="required" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="defaultValue" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="decimalPlaces" type="xsd:unsignedInt" use="optional"/>
    <xsd:attribute name="rowSource" type="x:ST_Xstring" use="optional"/>
  </xsd:complexType>

```

```

<xsd:complexType name="CT_SurveyElementPr">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="cssClass" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="bottom" type="xsd:int" use="optional"/>
  <xsd:attribute name="top" type="xsd:int" use="optional"/>
  <xsd:attribute name="left" type="xsd:int" use="optional"/>
  <xsd:attribute name="right" type="xsd:int" use="optional"/>
  <xsd:attribute name="width" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="height" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="position" type="ST_SurveyPosition" use="optional"/>
</xsd:complexType>
<xsd:simpleType name="ST_QuestionType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="checkBox"/>
    <xsd:enumeration value="choice"/>
    <xsd:enumeration value="date"/>
    <xsd:enumeration value="time"/>
    <xsd:enumeration value="multipleLinesOfText"/>
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="singleLineOfText"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_QuestionFormat">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="generalDate"/>
    <xsd:enumeration value="longDate"/>
    <xsd:enumeration value="shortDate"/>
    <xsd:enumeration value="longTime"/>
    <xsd:enumeration value="shortTime"/>
    <xsd:enumeration value="generalNumber"/>
    <xsd:enumeration value="standard"/>
    <xsd:enumeration value="fixed"/>
    <xsd:enumeration value="percent"/>
    <xsd:enumeration value="currency"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_SurveyPosition">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="absolute"/>
    <xsd:enumeration value="fixed"/>
    <xsd:enumeration value="relative"/>
    <xsd:enumeration value="static"/>
    <xsd:enumeration value="inherit"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:element name="timelines" type="CT_Timelines"/>
<xsd:complexType name="CT_Timelines">
  <xsd:sequence>
    <xsd:element name="timeline" type="CT_Timeline" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_Timeline">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute ref="xr10:uid" use="optional"/>
  <xsd:attribute name="cache" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="caption" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="showHeader" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="showSelectionLabel" type="xsd:boolean" use="optional"
default="true"/>
  <xsd:attribute name="showTimeLevel" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="showHorizontalScrollbar" type="xsd:boolean" use="optional"
default="true"/>
  <xsd:attribute name="level" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="selectionLevel" type="xsd:unsignedInt" use="required"/>

```

```

    <xsd:attribute name="scrollTop" type="xsd:dateTime" use="optional"/>
    <xsd:attribute name="style" type="x:ST_Xstring" use="optional"/>
  </xsd:complexType>
  <xsd:element name="timelineCacheDefinition" type="CT_TimelineCacheDefinition"/>
  <xsd:complexType name="CT_TimelineCacheDefinition">
    <xsd:sequence>
      <xsd:element name="pivotTables" type="CT_TimelineCachePivotTables" minOccurs="0"
maxOccurs="1"/>
      <xsd:element name="state" type="CT_TimelineState" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="timelinePivotFilter" minOccurs="0" maxOccurs="1"
type="CT_TimelinePivotFilter"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
    <xsd:attribute ref="xr10:uid" use="optional"/>
    <xsd:attribute name="sourceName" type="x:ST_Xstring" use="required"/>
  </xsd:complexType>
  <xsd:complexType name="CT_TimelineCachePivotTables">
    <xsd:sequence>
      <xsd:element name="pivotTable" type="CT_TimelineCachePivotTable" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_TimelineCachePivotTable">
    <xsd:attribute name="tabId" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  </xsd:complexType>
  <xsd:complexType name="CT_TimelineRange">
    <xsd:attribute name="startDate" type="xsd:dateTime" use="required"/>
    <xsd:attribute name="endDate" type="xsd:dateTime" use="required"/>
  </xsd:complexType>
  <xsd:complexType name="CT_TimelineState">
    <xsd:sequence>
      <xsd:element name="selection" type="CT_TimelineRange" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="bounds" type="CT_TimelineRange" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="singleRangeFilterState" type="xsd:boolean" use="optional"
default="true"/>
    <xsd:attribute name="minimalRefreshVersion" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="lastRefreshVersion" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="filterType" use="required" type="x:ST_PivotFilterType"/>
  </xsd:complexType>
  <xsd:complexType name="CT_TimelinePivotFilter">
    <xsd:sequence>
      <xsd:element name="autoFilter" minOccurs="0" maxOccurs="1" type="x:CT_AutoFilter"/>
    </xsd:sequence>
    <xsd:attribute name="useWholeDay" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="fld" use="required" type="xsd:unsignedInt"/>
    <xsd:attribute name="id" use="required" type="xsd:unsignedInt"/>
    <xsd:attribute name="name" use="optional" type="x:ST_Xstring"/>
    <xsd:attribute name="description" use="optional" type="x:ST_Xstring"/>
  </xsd:complexType>
</xsd:schema>

```

## 5.4 <http://schemas.microsoft.com/office/spreadsheetml/2009/9/main> Schema

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:xr10="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
elementFormDefault="qualified" xmlns:xm="http://schemas.microsoft.com/office/excel/2006/main"
xmlns:xr="http://schemas.microsoft.com/office/spreadsheetml/2014/revision"
xmlns:xr2="http://schemas.microsoft.com/office/spreadsheetml/2015/revision2">

```

```

    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlbasictypes.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlsheet.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
    schemaLocation="orel.xsd"/>
    <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2010/11/main"
    schemaLocation="xl15.xsd"/>
    <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2010/11/main"
    schemaLocation="xlslicercache15.xsd"/>
    <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10"
    schemaLocation="xlrevxignore10.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlpivot.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlworkbook.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlsupbook.xsd"/>
    <xsd:import namespace="http://schemas.microsoft.com/office/excel/2006/main"
    schemaLocation="xlmbasictypes.xsd"/>
    <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2014/revision"
    schemaLocation="xlrevxignore.xsd"/>
    <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2015/revision2"
    schemaLocation="xlrevxignore2.xsd"/>
    <xsd:import schemaLocation="xlsst.xsd"
    namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"/>
    <xsd:element name=" slicerCacheDefinition" type="CT_SlicerCacheDefinition"/>
    <xsd:complexType name="CT_SlicerCacheDefinition">
      <xsd:sequence>
        <xsd:element name="pivotTables" type="CT_SlicerCachePivotTables" minOccurs="0"
        maxOccurs="1"/>
        <xsd:element name="data" type="CT_SlicerCacheData" minOccurs="0" maxOccurs="1"/>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
      </xsd:sequence>
      <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
      <xsd:attribute ref="xr10:uid" use="optional"/>
      <xsd:attribute name="sourceName" type="x:ST_Xstring" use="required"/>
    </xsd:complexType>
    <xsd:simpleType name="ST_OlapSlicerCacheSortOrder">
      <xsd:restriction base="xsd:string">
        <xsd:enumeration value="natural"/>
        <xsd:enumeration value="ascending"/>
        <xsd:enumeration value="descending"/>
      </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="ST_TabularSlicerCacheSortOrder">
      <xsd:restriction base="xsd:string">
        <xsd:enumeration value="ascending"/>
        <xsd:enumeration value="descending"/>
      </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="ST_SlicerCacheCrossFilter">
      <xsd:restriction base="xsd:string">
        <xsd:enumeration value="none"/>
        <xsd:enumeration value="showItemsWithDataAtTop"/>
        <xsd:enumeration value="showItemsWithNoData"/>
      </xsd:restriction>
    </xsd:simpleType>
    <xsd:complexType name="CT_SlicerCacheData">
      <xsd:choice minOccurs="1" maxOccurs="1">
        <xsd:element name="olap" type="CT_OlapSlicerCache" minOccurs="1" maxOccurs="1"/>
        <xsd:element name="tabular" type="CT_TabularSlicerCache" minOccurs="1" maxOccurs="1"/>
      </xsd:choice>
    </xsd:complexType>
    <xsd:complexType name="CT_SlicerCachePivotTables">
      <xsd:sequence>
        <xsd:element name="pivotTable" type="CT_SlicerCachePivotTable" minOccurs="1"
        maxOccurs="unbounded"/>
      </xsd:sequence>

```

```

</xsd:complexType>
<xsd:complexType name="CT_SlicerCachePivotTable">
  <xsd:attribute name="tabId" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheItem">
  <xsd:sequence>
    <xsd:element name="p" type="CT_OlapSlicerCacheItemParent" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="c" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="nd" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheItemParent">
  <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheRange">
  <xsd:sequence>
    <xsd:element name="i" type="CT_OlapSlicerCacheItem" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="startItem" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheRanges">
  <xsd:sequence>
    <xsd:element name="range" type="CT_OlapSlicerCacheRange" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheLevelData">
  <xsd:sequence>
    <xsd:element name="ranges" type="CT_OlapSlicerCacheRanges" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="sourceCaption" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
  <xsd:attribute name="sortOrder" type="ST_OlapSlicerCacheSortOrder" use="optional"
default="natural"/>
  <xsd:attribute name="crossFilter" type="ST_SlicerCacheCrossFilter" use="optional"
default="showItemsWithDataAtTop"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheLevelsData">
  <xsd:sequence>
    <xsd:element name="level" type="CT_OlapSlicerCacheLevelData" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCache">
  <xsd:sequence>
    <xsd:element name="levels" type="CT_OlapSlicerCacheLevelsData" minOccurs="1"
maxOccurs="1"/>
    <xsd:element name="selections" type="CT_OlapSlicerCacheSelections" minOccurs="1"
maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheSelections">
  <xsd:sequence>
    <xsd:element name="selection" type="CT_OlapSlicerCacheSelection" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_OlapSlicerCacheSelection">
  <xsd:sequence>

```

```

        <xsd:element name="p" type="CT_OlapSlicerCacheItemParent" minOccurs="0"
maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_TabularSlicerCache">
    <xsd:sequence>
        <xsd:element name="items" type="CT_TabularSlicerCacheItems" minOccurs="0"
maxOccurs="1"/>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="sortOrder" type="ST_TabularSlicerCacheSortOrder" use="optional"
default="ascending"/>
    <xsd:attribute name="customListSort" type="xsd:boolean" use="optional" default="true"/>
    <xsd:attribute name="showMissing" type="xsd:boolean" use="optional" default="true"/>
    <xsd:attribute name="crossFilter" type="ST_SlicerCacheCrossFilter" use="optional"
default="showItemsWithDataAtTop"/>
</xsd:complexType>
<xsd:complexType name="CT_TabularSlicerCacheItems">
    <xsd:sequence>
        <xsd:element name="i" type="CT_TabularSlicerCacheItem" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_TabularSlicerCacheItem">
    <xsd:attribute name="x" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="s" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="nd" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:element name="conditionalFormattings" type="CT_ConditionalFormattings"/>
<xsd:element name="dataValidations" type="CT_DataValidations"/>
<xsd:element name="sparklineGroups" type="CT_SparklineGroups"/>
<xsd:element name="slicerList" type="CT_SlicerRefs"/>
<xsd:element name="protectedRanges" type="CT_ProtectedRanges"/>
<xsd:element name="ignoredErrors" type="CT_IgnoredErrors"/>
<xsd:complexType name="CT_ConditionalFormattings">
    <xsd:sequence>
        <xsd:element name="conditionalFormatting" type="CT_ConditionalFormatting" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_ConditionalFormatting">
    <xsd:sequence>
        <xsd:element name="cfRule" type="CT_CfRule" minOccurs="0" maxOccurs="unbounded"/>
        <xsd:element ref="xm:sqref" minOccurs="0" maxOccurs="1"/>
        <xsd:element name="extLst" minOccurs="0" type="x:CT_ExtensionList"/>
    </xsd:sequence>
    <xsd:attribute name="pivot" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_DataValidations">
    <xsd:sequence>
        <xsd:element name="dataValidation" type="CT_DataValidation" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
    <xsd:attribute name="disablePrompts" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="xWindow" type="xsd:unsignedInt" use="optional"/>
    <xsd:attribute name="yWindow" type="xsd:unsignedInt" use="optional"/>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_DataValidationFormula">
    <xsd:sequence>
        <xsd:element ref="xm:f" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_DataValidation">
    <xsd:sequence>

```

```

        <xsd:element name="formula1" type="CT_DataValidationFormula" minOccurs="0"
maxOccurs="1"/>
        <xsd:element name="formula2" type="CT_DataValidationFormula" minOccurs="0"
maxOccurs="1"/>
        <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="type" type="x:ST_DataValidationType" use="optional" default="none"/>
    <xsd:attribute name="errorStyle" type="x:ST_DataValidationErrorStyle" use="optional"
default="stop"/>
    <xsd:attribute name="imeMode" type="x:ST_DataValidationImeMode" use="optional"
default="noControl"/>
    <xsd:attribute name="operator" type="x:ST_DataValidationOperator" use="optional"
default="between"/>
    <xsd:attribute name="allowBlank" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="showDropDown" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="showInputMessage" type="xsd:boolean" use="optional"
default="false"/>
    <xsd:attribute name="showErrorMessage" type="xsd:boolean" use="optional"
default="false"/>
    <xsd:attribute name="errorTitle" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="error" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="promptTitle" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="prompt" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute ref="xr:uid"/>
</xsd:complexType>
<xsd:simpleType name="ST_DisplanksAs">
    <xsd:restriction base="xsd:string">
        <xsd:enumeration value="span"/>
        <xsd:enumeration value="gap"/>
        <xsd:enumeration value="zero"/>
    </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_SparklineAxisMinMax">
    <xsd:restriction base="xsd:string">
        <xsd:enumeration value="individual"/>
        <xsd:enumeration value="group"/>
        <xsd:enumeration value="custom"/>
    </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="CT_SparklineGroups">
    <xsd:sequence>
        <xsd:element name="sparklineGroup" type="CT_SparklineGroup" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_SparklineGroup">
    <xsd:sequence>
        <xsd:element name="colorSeries" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element name="colorNegative" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element name="colorAxis" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element name="colorMarkers" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element name="colorFirst" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element name="colorLast" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element name="colorHigh" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element name="colorLow" minOccurs="0" maxOccurs="1" type="x:CT_Color"/>
        <xsd:element ref="xm:f" minOccurs="0" maxOccurs="1"/>
        <xsd:element name="sparklines" type="CT_Sparklines" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="manualMax" type="xsd:double" use="optional"/>
    <xsd:attribute name="manualMin" type="xsd:double" use="optional"/>
    <xsd:attribute name="lineWeight" type="xsd:double" use="optional" default="0.75"/>
    <xsd:attribute name="type" type="ST_SparklineType" use="optional" default="line"/>
    <xsd:attribute name="dateAxis" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="displayEmptyCellsAs" type="ST_DisplanksAs" use="optional"
default="zero"/>
    <xsd:attribute name="markers" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="high" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="low" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="first" type="xsd:boolean" use="optional" default="false"/>

```



```

        <xsd:attribute name="last" type="xsd:boolean" use="optional" default="false"/>
        <xsd:attribute name="negative" type="xsd:boolean" use="optional" default="false"/>
        <xsd:attribute name="displayXAxis" type="xsd:boolean" use="optional" default="false"/>
        <xsd:attribute name="displayHidden" type="xsd:boolean" use="optional" default="false"/>
        <xsd:attribute name="minAxisType" type="ST_SparklineAxisMinMax" use="optional"
default="individual"/>
        <xsd:attribute name="maxAxisType" type="ST_SparklineAxisMinMax" use="optional"
default="individual"/>
        <xsd:attribute name="rightToLeft" type="xsd:boolean" use="optional" default="false"/>
        <xsd:attribute ref="xr2:uid"/>
    </xsd:complexType>
    <xsd:simpleType name="ST_SparklineType">
        <xsd:restriction base="xsd:string">
            <xsd:enumeration value="line"/>
            <xsd:enumeration value="column"/>
            <xsd:enumeration value="stacked"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:complexType name="CT_Sparklines">
        <xsd:sequence>
            <xsd:element name="sparkline" type="CT_Sparkline" minOccurs="1" maxOccurs="unbounded"/>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="CT_Sparkline">
        <xsd:sequence>
            <xsd:element ref="xm:f" minOccurs="0" maxOccurs="1"/>
            <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:element name="pivotCaches" type="x:CT_PivotCaches"/>
    <xsd:element name=" slicerCaches" type="CT_SlicerCaches"/>
    <xsd:element name="workbookPr" type="CT_WorkbookPr"/>
    <xsd:complexType name="CT_WorkbookPr">
        <xsd:attribute name="defaultImageDpi" type="xsd:unsignedInt" default="220"/>
        <xsd:attribute name="discardImageEditData" type="xsd:boolean" default="false"/>
        <xsd:attribute name="accuracyVersion" type="xsd:unsignedInt" default="0"/>
    </xsd:complexType>
    <xsd:complexType name="CT_SlicerRefs">
        <xsd:sequence>
            <xsd:element name="slicer" type="CT_SlicerRef" minOccurs="1" maxOccurs="unbounded"/>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="CT_SlicerRef">
        <xsd:attribute ref="r:id" use="required"/>
    </xsd:complexType>
    <xsd:complexType name="CT_SlicerCaches">
        <xsd:sequence>
            <xsd:element name="slicerCache" type="CT_SlicerCache" minOccurs="1"
maxOccurs="unbounded"/>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="CT_SlicerCache">
        <xsd:attribute ref="r:id" use="required"/>
    </xsd:complexType>
    <xsd:element name="calculatedMember" type="CT_CalculatedMember"/>
    <xsd:complexType name="CT_CalculatedMember">
        <xsd:sequence>
            <xsd:element name="tupleSet" minOccurs="0" maxOccurs="1" type="CT_TupleSet"/>
        </xsd:sequence>
        <xsd:attribute name="displayFolder" type="x:ST_Xstring" use="optional"/>
        <xsd:attribute name="flattenHierarchies" type="xsd:boolean" use="optional"
default="true"/>
        <xsd:attribute name="dynamicSet" type="xsd:boolean" use="optional" default="false"/>
        <xsd:attribute name="hierarchizeDistinct" type="xsd:boolean" use="optional"
default="true"/>
        <xsd:attribute name="mdxLong" type="x:ST_Xstring" use="optional"/>
    </xsd:complexType>
    <xsd:complexType name="CT_TupleSet">
        <xsd:sequence>

```

```

    <xsd:element name="headers" type="CT_TupleSetHeaders" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="rows" type="CT_TupleSetRows" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="rowCount" type="xsd:unsignedInt" use="optional" default="1"/>
  <xsd:attribute name="columnCount" type="xsd:unsignedInt" use="optional" default="1"/>
</xsd:complexType>
<xsd:complexType name="CT_TupleSetHeaders">
  <xsd:sequence>
    <xsd:element name="header" type="CT_TupleSetHeader" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_TupleSetHeader">
  <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="hierarchyName" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_TupleSetRows">
  <xsd:sequence>
    <xsd:element name="row" type="CT_TupleSetRow" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_TupleSetRow">
  <xsd:sequence>
    <xsd:element name="rowItem" type="CT_TupleSetRowItem" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_TupleSetRowItem">
  <xsd:attribute name="u" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="d" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
<xsd:element name="cacheHierarchy" type="CT_CacheHierarchy"/>
<xsd:complexType name="CT_SetLevels">
  <xsd:sequence>
    <xsd:element name="setLevel" minOccurs="1" maxOccurs="unbounded" type="CT_SetLevel"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_SetLevel">
  <xsd:attribute name="hierarchy" use="required" type="xsd:int"/>
</xsd:complexType>
<xsd:complexType name="CT_CacheHierarchy">
  <xsd:sequence>
    <xsd:element name="setLevels" minOccurs="0" maxOccurs="1" type="CT_SetLevels"/>
  </xsd:sequence>
  <xsd:attribute name="flattenHierarchies" type="xsd:boolean" use="optional"
default="true"/>
  <xsd:attribute name="measuresSet" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="hierarchizeDistinct" type="xsd:boolean" use="optional"
default="true"/>
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
<xsd:element name="dataField" type="CT_DataField"/>
<xsd:complexType name="CT_DataField">
  <xsd:attribute name="pivotShowAs" type="ST_PivotShowAs" use="optional"/>
  <xsd:attribute name="sourceField" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="uniqueName" type="x:ST_Xstring" use="optional"/>
</xsd:complexType>
<xsd:simpleType name="ST_PivotShowAs">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="percentOfParent"/>
    <xsd:enumeration value="percentOfParentRow"/>
    <xsd:enumeration value="percentOfParentCol"/>
    <xsd:enumeration value="percentOfRunningTotal"/>
    <xsd:enumeration value="rankAscending"/>
    <xsd:enumeration value="rankDescending"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_DataBarDirection">

```

```

    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="context"/>
      <xsd:enumeration value="leftToRight"/>
      <xsd:enumeration value="rightToLeft"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="ST_DataBarAxisPosition">
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="automatic"/>
      <xsd:enumeration value="middle"/>
      <xsd:enumeration value="none"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:simpleType name="ST_CfvoType">
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="num"/>
      <xsd:enumeration value="percent"/>
      <xsd:enumeration value="max"/>
      <xsd:enumeration value="min"/>
      <xsd:enumeration value="formula"/>
      <xsd:enumeration value="percentile"/>
      <xsd:enumeration value="autoMin"/>
      <xsd:enumeration value="autoMax"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:complexType name="CT_Cfvo">
    <xsd:sequence>
      <xsd:element ref="xm:f" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="type" type="ST_CfvoType" use="required"/>
    <xsd:attribute name="gte" type="xsd:boolean" use="optional" default="true"/>
  </xsd:complexType>
  <xsd:complexType name="CT_CfRule">
    <xsd:sequence>
      <xsd:element ref="xm:f" minOccurs="0" maxOccurs="3"/>
      <xsd:element name="colorScale" type="CT_ColorScale" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="dataBar" type="CT_DataBar" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="iconSet" type="CT_IconSet" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="dxf" type="x:CT_Dxf" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="type" type="x:ST_CfType" use="optional"/>
    <xsd:attribute name="priority" type="xsd:int" use="optional"/>
    <xsd:attribute name="stopIfTrue" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="aboveAverage" type="xsd:boolean" use="optional" default="true"/>
    <xsd:attribute name="percent" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="bottom" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="operator" type="x:ST_ConditionalFormattingOperator" use="optional"/>
    <xsd:attribute name="text" type="xsd:string" use="optional"/>
    <xsd:attribute name="timePeriod" type="x:ST_TimePeriod" use="optional"/>
    <xsd:attribute name="rank" type="xsd:unsignedInt" use="optional"/>
    <xsd:attribute name="stdDev" type="xsd:int" use="optional"/>
    <xsd:attribute name="equalAverage" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="activePresent" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="id" type="x:ST_Guid" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_IconSet">
    <xsd:sequence>
      <xsd:element name="cfvo" type="CT_Cfvo" minOccurs="2" maxOccurs="unbounded"/>
      <xsd:element name="cfIcon" type="CT_CfIcon" minOccurs="0" maxOccurs="5"/>
    </xsd:sequence>
    <xsd:attribute name="iconSet" type="ST_IconSetType" use="optional"
      default="3TrafficLights1"/>
    <xsd:attribute name="showValue" type="xsd:boolean" use="optional" default="true"/>
    <xsd:attribute name="percent" type="xsd:boolean" use="optional" default="true"/>
    <xsd:attribute name="reverse" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="custom" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>

```

```

<xsd:complexType name="CT_ColorScale">
  <xsd:sequence>
    <xsd:element name="cfvo" type="CT_Cfvo" minOccurs="2" maxOccurs="unbounded"/>
    <xsd:element name="color" type="x:CT_Color" minOccurs="2" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_DataBar">
  <xsd:sequence>
    <xsd:element name="cfvo" type="CT_Cfvo" minOccurs="2" maxOccurs="2"/>
    <xsd:element name="fillColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="borderColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="negativeFillColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="negativeBorderColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="axisColor" type="x:CT_Color" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="minLength" type="xsd:unsignedInt" use="optional" default="10"/>
  <xsd:attribute name="maxLength" type="xsd:unsignedInt" use="optional" default="90"/>
  <xsd:attribute name="showValue" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="border" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="gradient" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="direction" type="ST_DataBarDirection" use="optional"
default="context"/>
  <xsd:attribute name="negativeBarColorSameAsPositive" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="negativeBarBorderColorSameAsPositive" type="xsd:boolean"
use="optional" default="true"/>
  <xsd:attribute name="axisPosition" type="ST_DataBarAxisPosition" use="optional"
default="automatic"/>
</xsd:complexType>
<xsd:element name="pivotField" type="CT_PivotField"/>
<xsd:complexType name="CT_PivotField">
  <xsd:attribute name="fillDownLabels" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
<xsd:element name="pivotTableDefinition" type="CT_PivotTableDefinition"/>
<xsd:complexType name="CT_PivotTableDefinition">
  <xsd:sequence>
    <xsd:element name="pivotEdits" type="CT_PivotEdits" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="pivotChanges" type="CT_PivotChanges" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="conditionalFormats" type="CT_ConditionalFormats" minOccurs="0"/>
  </xsd:sequence>
  <xsd:attribute name="fillDownLabelsDefault" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="visualTotalsForSets" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="calculatedMembersInFilters" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="altText" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="altTextSummary" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="enableEdit" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="autoApply" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="allocationMethod" type="ST_AllocationMethod" use="optional"
default="equalAllocation"/>
  <xsd:attribute name="weightExpression" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="hideValuesRow" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:element name="pivotCacheDefinition" type="CT_PivotCacheDefinition"/>
<xsd:complexType name="CT_PivotCacheDefinition">
  <xsd:attribute name="slicerData" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="pivotCacheId" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="supportSubqueryNonVisual" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="supportSubqueryCalcMem" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="supportAddCalcMems" type="xsd:boolean" use="optional"
default="false"/>
</xsd:complexType>
<xsd:element name="connection" type="CT_Connection"/>
<xsd:complexType name="CT_Connection">

```

```

    <xsd:sequence>
      <xsd:element name="calculatedMembers" type="x:CT_CalculatedMembers" minOccurs="0"
maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="culture" use="optional" type="x:ST_Xstring"/>
    <xsd:attribute name="embeddedDataId" use="optional" type="x:ST_Xstring"/>
  </xsd:complexType>
  <xsd:element name="table" type="CT_Table"/>
  <xsd:complexType name="CT_Table">
    <xsd:attribute name="altText" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="altTextSummary" type="x:ST_Xstring" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_CfIcon">
    <xsd:attribute name="iconSet" type="ST_IconSetType" use="required"/>
    <xsd:attribute name="iconId" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
  <xsd:simpleType name="ST_IconSetType">
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="3Arrows"/>
      <xsd:enumeration value="3ArrowsGray"/>
      <xsd:enumeration value="3Flags"/>
      <xsd:enumeration value="3TrafficLights1"/>
      <xsd:enumeration value="3TrafficLights2"/>
      <xsd:enumeration value="3Signs"/>
      <xsd:enumeration value="3Symbols"/>
      <xsd:enumeration value="3Symbols2"/>
      <xsd:enumeration value="4Arrows"/>
      <xsd:enumeration value="4ArrowsGray"/>
      <xsd:enumeration value="4RedToBlack"/>
      <xsd:enumeration value="4Rating"/>
      <xsd:enumeration value="4TrafficLights"/>
      <xsd:enumeration value="5Arrows"/>
      <xsd:enumeration value="5ArrowsGray"/>
      <xsd:enumeration value="5Rating"/>
      <xsd:enumeration value="5Quarters"/>
      <xsd:enumeration value="3Stars"/>
      <xsd:enumeration value="3Triangles"/>
      <xsd:enumeration value="5Boxes"/>
      <xsd:enumeration value="NoIcons"/>
    </xsd:restriction>
  </xsd:simpleType>
  <xsd:complexType name="CT_PivotEdits">
    <xsd:sequence>
      <xsd:element name="pivotEdit" minOccurs="1" maxOccurs="unbounded" type="CT_PivotEdit"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_PivotEdit">
    <xsd:sequence>
      <xsd:element name="userEdit" type="CT_PivotUserEdit" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="tupleItems" type="CT_TupleItems" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="pivotArea" type="x:CT_PivotArea" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_PivotChanges">
    <xsd:sequence>
      <xsd:element name="pivotChange" minOccurs="1" maxOccurs="unbounded"
type="CT_PivotChange"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_PivotChange">
    <xsd:sequence>
      <xsd:element name="editValue" type="CT_PivotEditValue" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="tupleItems" type="CT_TupleItems" minOccurs="1" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="allocationMethod" type="ST_AllocationMethod"
default="equalAllocation"/>
    <xsd:attribute name="weightExpression" type="x:ST_Xstring" use="optional"/>

```

```

</xsd:complexType>
<xsd:complexType name="CT_PivotUserEdit">
  <xsd:choice minOccurs="1" maxOccurs="1">
    <xsd:element ref="xm:f" minOccurs="1" maxOccurs="1"/>
    <xsd:element name="editValue" type="CT_PivotEditValue" minOccurs="1" maxOccurs="1"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="CT_PivotEditValue">
  <xsd:simpleContent>
    <xsd:extension base="x:ST_Xstring">
      <xsd:attribute name="valueType" use="required" type="ST_PivotEditValueType"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:simpleType name="ST_PivotEditValueType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="dateTime"/>
    <xsd:enumeration value="string"/>
    <xsd:enumeration value="boolean"/>
    <xsd:enumeration value="error"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="CT_TupleItems">
  <xsd:sequence>
    <xsd:element name="tupleItem" type="x:ST_Xstring" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:simpleType name="ST_AllocationMethod">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="equalAllocation"/>
    <xsd:enumeration value="equalIncrement"/>
    <xsd:enumeration value="weightedAllocation"/>
    <xsd:enumeration value="weightedIncrement"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="CT_SlicerStyle">
  <xsd:sequence>
    <xsd:element name="slicerStyleElements" type="CT_SlicerStyleElements" minOccurs="0"
maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_SlicerStyleElement">
  <xsd:attribute name="type" type="ST_SlicerStyleType" use="required"/>
  <xsd:attribute name="dxfs" type="x:CT_Dxfs" use="optional"/>
</xsd:complexType>
<xsd:simpleType name="ST_SlicerStyleType">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="unselectedItemWithData"/>
    <xsd:enumeration value="selectedItemWithData"/>
    <xsd:enumeration value="unselectedItemWithNoData"/>
    <xsd:enumeration value="selectedItemWithNoData"/>
    <xsd:enumeration value="hoveredUnselectedItemWithData"/>
    <xsd:enumeration value="hoveredSelectedItemWithData"/>
    <xsd:enumeration value="hoveredUnselectedItemWithNoData"/>
    <xsd:enumeration value="hoveredSelectedItemWithNoData"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:element name="slicerStyles" type="CT_SlicerStyles"/>
<xsd:element name="dxfs" type="x:CT_Dxfs"/>
<xsd:complexType name="CT_OleItem">
  <xsd:sequence>
    <xsd:element name="values" type="x:CT_DdeValues" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="icon" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="advise" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="preferPic" type="xsd:boolean" use="optional" default="false"/>

```

```

</xsd:complexType>
<xsd:element name="oleItem" type="CT_OleItem"/>
<xsd:element name="pivotHierarchy" type="CT_PivotHierarchy"/>
<xsd:complexType name="CT_PivotHierarchy">
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
<xsd:element name="cacheField" type="CT_CacheField"/>
<xsd:complexType name="CT_CacheField">
  <xsd:attribute name="ignore" type="xsd:boolean" default="false" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_ConditionalFormats">
  <xsd:sequence>
    <xsd:element name="conditionalFormat" minOccurs="1" maxOccurs="unbounded"
type="CT_ConditionalFormat"/>
  </xsd:sequence>
  <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_ConditionalFormat">
  <xsd:sequence>
    <xsd:element name="pivotAreas" type="x:CT_PivotAreas" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" minOccurs="0" maxOccurs="1" type="x:CT_ExtensionList"/>
  </xsd:sequence>
  <xsd:attribute name="scope" type="x:ST_Scope" default="selection" use="optional"/>
  <xsd:attribute name="type" type="x:ST_Type" default="none" use="optional"/>
  <xsd:attribute name="priority" use="optional" type="xsd:unsignedInt"/>
  <xsd:attribute name="id" type="x:ST_Guid" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_SlicerStyles">
  <xsd:sequence>
    <xsd:element name="slicerStyle" type="CT_SlicerStyle" minOccurs="0"
maxOccurs="unbounded"/>
  </xsd:sequence>
  <xsd:attribute name="defaultSlicerStyle" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_SlicerStyleElements">
  <xsd:sequence>
    <xsd:element name="slicerStyleElement" type="CT_SlicerStyleElement" minOccurs="1"
maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:element name="id" type="x:ST_Guid"/>
<xsd:complexType name="CT_IgnoredErrors">
  <xsd:sequence>
    <xsd:element name="ignoredError" type="CT_IgnoredError" minOccurs="0"
maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_IgnoredError">
  <xsd:sequence>
    <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="evalError" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="twoDigitTextYear" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="numberStoredAsText" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="formula" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="formulaRange" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="unlockedFormula" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="emptyCellReference" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="listDataValidation" type="xsd:boolean" use="optional"
default="false"/>
  <xsd:attribute name="calculatedColumn" type="xsd:boolean" use="optional"
default="false"/>
</xsd:complexType>
<xsd:complexType name="CT_ProtectedRanges">
  <xsd:sequence>

```

```

        <xsd:element name="protectedRange" type="CT_ProtectedRange" minOccurs="1"
maxOccurs="unbounded"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_ProtectedRange">
    <xsd:sequence maxOccurs="1">
        <xsd:element ref="xm:sqref" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="password" type="x:ST_UnsignedShortHex" use="optional"/>
    <xsd:attribute name="algorithmName" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="hashValue" type="xsd:base64Binary" use="optional"/>
    <xsd:attribute name="saltValue" type="xsd:base64Binary" use="optional"/>
    <xsd:attribute name="spinCount" type="xsd:unsignedInt" use="optional"/>
    <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
    <xsd:attribute name="securityDescriptor" type="xsd:string" use="optional"/>
</xsd:complexType>
<xsd:element name="iconFilter" type="CT_IconFilter"/>
<xsd:complexType name="CT_IconFilter">
    <xsd:attribute name="iconSet" type="ST_IconSetType" use="required"/>
    <xsd:attribute name="iconId" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:element name="filter" type="CT_Filter"/>
<xsd:complexType name="CT_Filter">
    <xsd:attribute name="val" type="x:ST_Xstring"/>
</xsd:complexType>
<xsd:element name="customFilters" type="CT_CustomFilters"/>
<xsd:complexType name="CT_CustomFilters">
    <xsd:sequence>
        <xsd:element name="customFilter" type="CT_CustomFilter" minOccurs="1" maxOccurs="2"/>
    </xsd:sequence>
    <xsd:attribute name="and" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:complexType name="CT_CustomFilter">
    <xsd:attribute name="operator" type="x:ST_FilterOperator" default="equal"
use="optional"/>
    <xsd:attribute name="val" type="x:ST_Xstring"/>
</xsd:complexType>
<xsd:complexType name="CT_SortCondition">
    <xsd:attribute name="descending" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="sortBy" type="x:ST_SortBy" use="optional" default="value"/>
    <xsd:attribute name="ref" type="x:ST_Ref" use="required"/>
    <xsd:attribute name="customList" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="dxId" type="x:ST_DxfId" use="optional"/>
    <xsd:attribute name="iconSet" type="ST_IconSetType" use="optional" default="3Arrows"/>
    <xsd:attribute name="iconId" type="xsd:unsignedInt" use="optional"/>
</xsd:complexType>
<xsd:element name="sortCondition" type="CT_SortCondition"/>
<xsd:complexType name="CT_CacheSourceExt">
    <xsd:sequence>
        <xsd:element ref="sourceConnection" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:element name="sourceConnection" type="CT_SourceConnection"/>
<xsd:complexType name="CT_SourceConnection">
    <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:element name="datastoreItem" type="CT_DatastoreItem"/>
<xsd:complexType name="CT_DatastoreItem">
    <xsd:sequence>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:element name="formControlPr" type="CT_FormControlPr"/>
<xsd:complexType name="CT_ListItem">
    <xsd:attribute name="val" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_ListItems">
    <xsd:sequence>

```



```

    <xsd:element name="item" type="CT_ListItem" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_FormControlPr">
  <xsd:sequence>
    <xsd:element name="itemLst" type="CT_ListItems" minOccurs="0" maxOccurs="1"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="objectType" type="ST_ObjectType" use="optional"/>
  <xsd:attribute name="checked" type="ST_Checked" use="optional"/>
  <xsd:attribute name="colored" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="dropLines" type="xsd:unsignedInt" use="optional" default="8"/>
  <xsd:attribute name="dropStyle" type="ST_DropStyle" use="optional"/>
  <xsd:attribute name="dx" type="xsd:unsignedInt" use="optional" default="80"/>
  <xsd:attribute name="firstButton" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="fmlaGroup" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="fmlaLink" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="fmlaRange" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="fmlaTxbx" type="x:ST_Formula" use="optional"/>
  <xsd:attribute name="horiz" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="inc" type="xsd:unsignedInt" use="optional" default="1"/>
  <xsd:attribute name="justLastX" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="lockText" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="max" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="min" type="xsd:unsignedInt" use="optional" default="0"/>
  <xsd:attribute name="multiSel" type="xsd:string" use="optional"/>
  <xsd:attribute name="noThreeD" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="noThreeD2" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="page" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="sel" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="seltype" type="ST_SelType" use="optional" default="single"/>
  <xsd:attribute name="textHAlign" type="ST_TextHAlign" use="optional" default="left"/>
  <xsd:attribute name="textVAlign" type="ST_TextVAlign" use="optional" default="top"/>
  <xsd:attribute name="val" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="widthMin" type="xsd:unsignedInt" use="optional"/>
  <xsd:attribute name="editVal" type="ST_EditValidation" use="optional"/>
  <xsd:attribute name="multiLine" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="verticalBar" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="passwordEdit" type="xsd:boolean" use="optional" default="false"/>
</xsd:complexType>
<xsd:simpleType name="ST_ObjectType">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="Button"/>
    <xsd:enumeration value="CheckBox"/>
    <xsd:enumeration value="Drop"/>
    <xsd:enumeration value="GBox"/>
    <xsd:enumeration value="Label"/>
    <xsd:enumeration value="List"/>
    <xsd:enumeration value="Radio"/>
    <xsd:enumeration value="Scroll"/>
    <xsd:enumeration value="Spin"/>
    <xsd:enumeration value="EditBox"/>
    <xsd:enumeration value="Dialog"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_Checked">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="Unchecked"/>
    <xsd:enumeration value="Checked"/>
    <xsd:enumeration value="Mixed"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_DropStyle">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="combo"/>
    <xsd:enumeration value="comboedit"/>
    <xsd:enumeration value="simple"/>
  </xsd:restriction>

```

```

</xsd:simpleType>
<xsd:simpleType name="ST_SelType">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="single"/>
    <xsd:enumeration value="multi"/>
    <xsd:enumeration value="extended"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_TextHAlign">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="left"/>
    <xsd:enumeration value="center"/>
    <xsd:enumeration value="right"/>
    <xsd:enumeration value="justify"/>
    <xsd:enumeration value="distributed"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_TextVAlign">
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="top"/>
    <xsd:enumeration value="center"/>
    <xsd:enumeration value="bottom"/>
    <xsd:enumeration value="justify"/>
    <xsd:enumeration value="distributed"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ST_EditValidation">
  <xsd:restriction base="xsd:token">
    <xsd:enumeration value="text"/>
    <xsd:enumeration value="integer"/>
    <xsd:enumeration value="number"/>
    <xsd:enumeration value="reference"/>
    <xsd:enumeration value="formula"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:element name="slicers" type="CT_Slicers"/>
<xsd:complexType name="CT_Slicers">
  <xsd:sequence>
    <xsd:element name="slicer" type="CT_Slicer" minOccurs="1" maxOccurs="unbounded"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_Slicer">
  <xsd:sequence>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="x:ST_Xstring" use="required"/>
  <xsd:attribute ref="xr10:uid" use="optional"/>
  <xsd:attribute name="cache" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="caption" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="startItem" type="xsd:unsignedInt" use="optional" default="0"/>
  <xsd:attribute name="columnCount" type="xsd:unsignedInt" use="optional" default="1"/>
  <xsd:attribute name="showCaption" type="xsd:boolean" use="optional" default="true"/>
  <xsd:attribute name="level" type="xsd:unsignedInt" use="optional" default="0"/>
  <xsd:attribute name="style" type="x:ST_Xstring" use="optional"/>
  <xsd:attribute name="lockedPosition" type="xsd:boolean" use="optional" default="false"/>
  <xsd:attribute name="rowHeight" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
</xsd:schema>

```

## 5.5 <http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac> Schema

```

<xsd:schema targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac"
  elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
  xmlns="http://schemas.microsoft.com/office/spreadsheetml/2009/9/ac">
  <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
    schemaLocation="orel.xsd"/>

```

```

    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
    <xsd:attribute name="dyDescent" type="xsd:double"/>
    <xsd:attribute name="knownFonts" type="xsd:boolean"/>
</xsd:schema>

```

## 5.6 <http://schemas.microsoft.com/office/spreadsheetml/2011/1/ac> Schema

```

<xsd:schema targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2011/1/ac"
elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main" xmlns="x112AcSchemaUri">
    <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
    <xsd:element name="list" type="x:ST_Xstring"/>
</xsd:schema>

```

## 5.7 <http://schemas.microsoft.com/office/drawing/2012/timeslicer> Schema

```

<xsd:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/drawing/2012/timeslicer"
xmlns="http://schemas.microsoft.com/office/drawing/2012/timeslicer"
xmlns:a="http://schemas.openxmlformats.org/drawingml/2006/main"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:import namespace="http://schemas.openxmlformats.org/drawingml/2006/main"
schemaLocation="oartdocprop.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
    <xsd:complexType name="CT_Timeline">
        <xsd:sequence>
            <xsd:element name="extLst" type="a:CT_OfficeArtExtensionList" minOccurs="0"
maxOccurs="1"/>
        </xsd:sequence>
        <xsd:attribute name="name" type="xsd:string" use="required"/>
    </xsd:complexType>
    <xsd:element name="timeslicer" type="CT_Timeline"/>
</xsd:schema>

```

## 5.8 <http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing> Schema

```

<xsd:schema elementFormDefault="qualified"
targetNamespace="http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing"
xmlns="http://schemas.microsoft.com/office/excel/2010/spreadsheetDrawing"
xmlns:xdr="http://schemas.openxmlformats.org/drawingml/2006/spreadsheetDrawing"
xmlns:xdr14="http://xldr14SchemaUri"
xmlns:a="http://schemas.openxmlformats.org/drawingml/2006/main"
xmlns:a14="http://schemas.microsoft.com/office/drawing/2010/main"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:import schemaLocation="oart14docprop.xsd"
namespace="http://schemas.microsoft.com/office/drawing/2010/main"/>
    <xsd:import schemaLocation="oartdocprop.xsd"
namespace="http://schemas.openxmlformats.org/drawingml/2006/main"/>
    <xsd:import schemaLocation="orel.xsd"
namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"/>
    <xsd:complexType name="CT_ApplicationNonVisualDrawingProps">
        <xsd:attribute name="macro" type="xsd:string" use="optional"/>
        <xsd:attribute name="fPublished" type="xsd:boolean" use="optional" default="false"/>
    </xsd:complexType>
    <xsd:complexType name="CT_ContentPartNonVisual">
        <xsd:sequence>

```

```

        <xsd:element name="cNvPr" type="a:CT_NonVisualDrawingProps" minOccurs="1"
maxOccurs="1"/>
        <xsd:element name="cNvContentPartPr" type="a14:CT_NonVisualInkContentPartProperties"
minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_ContentPart">
    <xsd:sequence>
        <xsd:element name="nvContentPartPr" type="CT_ContentPartNonVisual" minOccurs="0"
maxOccurs="1"/>
        <xsd:element name="nvPr" type="CT_ApplicationNonVisualDrawingProps" minOccurs="0"
maxOccurs="1"/>
        <xsd:element name="xfrm" type="a:CT_Transform2D" minOccurs="0" maxOccurs="1"/>
        <xsd:element name="extLst" type="a:CT_OfficeArtExtensionList" minOccurs="0"
maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute ref="r:id" use="required"/>
    <xsd:attribute name="bwMode" type="a:ST_BlackWhiteMode" use="optional" default="auto"/>
</xsd:complexType>
<xsd:element name="contentPart" type="CT_ContentPart"/>
</xsd:schema>

```

## 5.9 <http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac> Schema

```

<xsd:schema targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac"
elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2010/11/ac">
    <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
    <xsd:complexType name="CT_AbsolutePath">
        <xsd:attribute name="url" use="required" type="x:ST_Xstring"/>
    </xsd:complexType>
    <xsd:element name="absPath" type="CT_AbsolutePath"/>
</xsd:schema>

```

## 5.10 <http://schemas.microsoft.com/office/spreadsheetml/2014/11/main> Schema

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2014/11/main"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2014/11/main"
elementFormDefault="qualified">
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlworkbook.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlsheet.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlpivot.xsd"/>
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlxtconns.xsd"/>
    <xsd:complexType name="CT_ModelTimeGroupings">
        <xsd:sequence>
            <xsd:element name="modelTimeGrouping" minOccurs="1" maxOccurs="unbounded"
type="CT_ModelTimeGrouping"/>
        </xsd:sequence>
    </xsd:complexType>

```

```

<xsd:element name="modelTimeGroupings" type="CT_ModelTimeGroupings"/>
<xsd:complexType name="CT_ModelTimeGrouping">
  <xsd:sequence>
    <xsd:element name="calculatedTimeColumn" minOccurs="1" maxOccurs="unbounded"
type="CT_CalculatedTimeColumn"/>
  </xsd:sequence>
  <xsd:attribute name="tableName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="columnName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="columnId" type="x:ST_Xstring" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_CalculatedTimeColumn">
  <xsd:attribute name="columnName" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="columnId" type="x:ST_Xstring" use="required"/>
  <xsd:attribute name="contentType" type="ST_ModelTimeGroupingContentType" use="required"/>
  <xsd:attribute name="isSelected" type="xsd:boolean" use="required"/>
</xsd:complexType>
<xsd:simpleType name="ST_ModelTimeGroupingContentType">
  <xsd:restriction base="x:ST_Xstring">
    <xsd:enumeration value="years"/>
    <xsd:enumeration value="quarters"/>
    <xsd:enumeration value="monthsindex"/>
    <xsd:enumeration value="months"/>
    <xsd:enumeration value="daysindex"/>
    <xsd:enumeration value="days"/>
    <xsd:enumeration value="hours"/>
    <xsd:enumeration value="minutes"/>
    <xsd:enumeration value="seconds"/>
  </xsd:restriction>
</xsd:simpleType>
</xsd:schema>

```

### 5.11 <http://schemas.microsoft.com/office/spreadsheetml/2015/02/main> Schema

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2015/02/main"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2015/02/main"
elementFormDefault="qualified">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:attribute name="formatCode16" type="x:ST_Xstring"/>
</xsd:schema>

```

### 5.12 <http://schemas.microsoft.com/office/spreadsheetml/2016/revision10> Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:attribute name="uid" type="x:ST_Guid"/>
  <xsd:attribute name="uidLastSave" type="x:ST_Guid"/>
</xsd:schema>

```

### 5.13 <http://schemas.microsoft.com/office/spreadsheetml/2016/revision9> Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision9"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2016/revision9"

```

```

xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
  schemaLocation="xlbasictypes.xsd"/>
  <xsd:attribute name="uid" type="x:ST_Guid"/>
</xsd:schema>

```

## 5.14 http://schemas.microsoft.com/office/spreadsheetml/2016/revision6 Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision6"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2016/revision6"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
  schemaLocation="xlbasictypes.xsd"/>
  <xsd:attribute name="uid" type="x:ST_Guid"/>
  <xsd:attribute name="coauthVersionLast" type="xsd:unsignedInt"/>
  <xsd:attribute name="coauthVersionMax" type="xsd:unsignedInt"/>
</xsd:schema>

```

## 5.15 http://schemas.microsoft.com/office/spreadsheetml/2014/revision Schema

```

<xsd:schema targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2014/revision"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2014/revision"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:xr6="http://schemas.microsoft.com/office/spreadsheetml/2016/revision6"
xmlns:xr10="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
  schemaLocation="xlbasictypes.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
  schemaLocation="xlstyles.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision6"
  schemaLocation="xlrevexignore6.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision10"
  schemaLocation="xlrevexignore10.xsd"/>
  <xsd:simpleType name="ST_Xrevid">
    <xsd:restriction base="xsd:unsignedLong"/>
  </xsd:simpleType>
  <xsd:complexType name="CT_RevisionPtr">
    <xsd:attribute name="revIDLastSave" type="ST_Xrevid" use="required"/>
    <xsd:attribute name="documentId" type="x:ST_Xstring" use="required"/>
    <xsd:attribute ref="xr6:coauthVersionLast" use="optional" default="0"/>
    <xsd:attribute ref="xr6:coauthVersionMax" use="optional" default="0"/>
    <xsd:attribute ref="xr10:uidLastSave" use="optional"/>
  </xsd:complexType>
  <xsd:attribute name="uid" type="x:ST_Guid"/>
  <xsd:element name="revisionPtr" type="CT_RevisionPtr"/>
</xsd:schema>

```

## 5.16 http://schemas.microsoft.com/office/spreadsheetml/2015/revision2 Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2015/revision2"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2015/revision2"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
  schemaLocation="xlbasictypes.xsd"/>
  <xsd:attribute name="uid" type="x:ST_Guid"/>

```

```
</xsd:schema>
```

## 5.17 <http://schemas.microsoft.com/office/spreadsheetml/2016/revision3> Schema

```
<xsd:schema
  targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision3"
  elementFormDefault="qualified"
  xmlns="http://schemas.microsoft.com/office/spreadsheetml/2016/revision3"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlbasictypes.xsd"/>
  <xsd:attribute name="uid" type="x:ST_Guid"/>
</xsd:schema>
```

## 5.18 <http://schemas.microsoft.com/office/spreadsheetml/2016/revision5> Schema

```
<xsd:schema
  targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2016/revision5"
  elementFormDefault="qualified"
  xmlns="http://schemas.microsoft.com/office/spreadsheetml/2016/revision5"
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlstyles.xsd"/>
</xsd:schema>
```

## 5.19 <http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout> Schema

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
  xmlns="http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout"
  xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
  targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2016/pivotdefaultlayout"
  elementFormDefault="qualified">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlbasictypes.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
    schemaLocation="orel.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlworkbook.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlsheet.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlpivot.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
    schemaLocation="xlxtconns.xsd"/>
  <xsd:element name="pivotTableDefinition16" type="CT_PivotTableDefinition16"/>
  <xsd:complexType name="CT_PivotTableDefinition16">
    <xsd:attribute name="EnabledSubtotalsDefault" type="xsd:boolean" use="optional"
      default="true"/>
    <xsd:attribute name="SubtotalsOnTopDefault" type="xsd:boolean" use="optional"
      default="true"/>
    <xsd:attribute name="InsertBlankRowDefault" type="xsd:boolean" use="optional"
      default="false"/>
  </xsd:complexType>
</xsd:schema>
```

## 5.20 http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2 Schema

```
<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2"
elementFormDefault="qualified"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:x2="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
schemaLocation="xl14.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlsheet.xsd"/>
  <xsd:import
namespace="http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh"
schemaLocation="xlrichvaluerefresh.xsd"/>
  <xsd:element name="filterColumn" type="CT_RichFilterColumn"/>
  <xsd:complexType name="CT_RichFilterColumn">
    <xsd:choice minOccurs="0" maxOccurs="1">
      <xsd:element name="filters" type="CT_RichFilters"/>
      <xsd:element name="top10" type="CT_RichTop10"/>
      <xsd:element name="customFilters" type="CT_CustomRichFilters"/>
      <xsd:element name="dynamicFilter" type="CT_DynamicRichFilter"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList"/>
    </xsd:choice>
  </xsd:complexType>
  <xsd:complexType name="CT_RichFilters">
    <xsd:sequence>
      <xsd:element name="filter" type="CT_RichFilter" minOccurs="0" maxOccurs="unbounded"/>
      <xsd:element name="dateGroupItem" type="CT_RichDateGroupItem" minOccurs="0"
maxOccurs="unbounded"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_RichFilter">
    <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
    <xsd:attribute name="val" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="blank" type="xsd:boolean" use="optional"/>
    <xsd:attribute name="nodata" type="xsd:boolean" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_CustomRichFilters">
    <xsd:sequence>
      <xsd:choice minOccurs="1" maxOccurs="2">
        <xsd:element name="customFilter" minOccurs="0" maxOccurs="1"
type="CT_CustomRichFilter"/>
        <xsd:element name="extLst" minOccurs="0" maxOccurs="1" type="x:CT_ExtensionList"/>
      </xsd:choice>
    </xsd:sequence>
    <xsd:attribute name="and" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>
  <xsd:complexType name="CT_CustomRichFilter">
    <xsd:complexContent>
      <xsd:extension base="x:CT_CustomFilter">
        <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="CT_RichTop10">
    <xsd:complexContent>
      <xsd:extension base="x:CT_Top10">
        <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>
  <xsd:complexType name="CT_DynamicRichFilter">
    <xsd:complexContent>
      <xsd:extension base="x:CT_DynamicFilter">

```



```

        <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
    </xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="CT_RichDateGroupItem">
    <xsd:complexContent>
        <xsd:extension base="x:CT_DateGroupItem">
            <xsd:attribute name="key" type="ST_RichFilterKey" use="optional"/>
        </xsd:extension>
    </xsd:complexContent>
</xsd:complexType>
<xsd:simpleType name="ST_RichFilterKey">
    <xsd:restriction base="x:ST_Xstring"/>
</xsd:simpleType>
<xsd:element name="richSortCondition" type="CT_RichSortCondition"/>
<xsd:complexType name="CT_RichSortCondition">
    <xsd:complexContent>
        <xsd:extension base="x2:CT_SortCondition">
            <xsd:attribute name="richSortKey" type="x:ST_Xstring" use="optional"/>
        </xsd:extension>
    </xsd:complexContent>
</xsd:complexType>
<xsd:element name="supportingPropertyBags" type="CT_SupportingPropertyBags"/>
<xsd:complexType name="CT_SupportingPropertyBags">
    <xsd:sequence>
        <xsd:element name="spbArrays" minOccurs="0" maxOccurs="1"
type="CT_SupportingPropertyBagArrayData"/>
        <xsd:element name="spbData" minOccurs="1" maxOccurs="1"
type="CT_SupportingPropertyBagData"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_SupportingPropertyBagData">
    <xsd:sequence>
        <xsd:element name="spb" minOccurs="0" maxOccurs="unbounded"
type="CT_SupportingPropertyBag"/>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_SupportingPropertyBag">
    <xsd:sequence>
        <xsd:element name="v" minOccurs="1" maxOccurs="unbounded"
type="CT_SupportingPropertyBagValue"/>
    </xsd:sequence>
    <xsd:attribute name="s" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_SupportingPropertyBagValue">
    <xsd:simpleContent>
        <xsd:extension base="x:ST_Xstring"/>
    </xsd:simpleContent>
</xsd:complexType>
<xsd:element name="spbStructures" type="CT_SupportingPropertyBagStructures"/>
<xsd:complexType name="CT_SupportingPropertyBagStructures">
    <xsd:sequence>
        <xsd:element name="s" minOccurs="0" maxOccurs="unbounded"
type="CT_SupportingPropertyBagStructure"/>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_SupportingPropertyBagStructure">
    <xsd:sequence>
        <xsd:element name="k" minOccurs="1" maxOccurs="unbounded"
type="CT_SupportingPropertyBagKey"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_SupportingPropertyBagKey">
    <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>

```

```

        <xsd:attribute name="t" type="ST_SupportingPropertyBagValueType" use="optional"
default="d"/>
    </xsd:complexType>
    <xsd:simpleType name="ST_SupportingPropertyBagValueType">
        <xsd:restriction base="x:ST_Xstring">
            <xsd:enumeration value="d"/>
            <xsd:enumeration value="i"/>
            <xsd:enumeration value="b"/>
            <xsd:enumeration value="s"/>
            <xsd:enumeration value="spb"/>
            <xsd:enumeration value="spba"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:complexType name="CT_SupportingPropertyBagArrayData">
        <xsd:sequence>
            <xsd:element name="a" minOccurs="0" maxOccurs="unbounded"
type="CT_SupportingPropertyBagArray"/>
            <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
        </xsd:sequence>
        <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
    </xsd:complexType>
    <xsd:complexType name="CT_SupportingPropertyBagArray">
        <xsd:sequence>
            <xsd:element name="v" minOccurs="1" maxOccurs="unbounded"
type="CT_SupportingPropertyBagArrayValue"/>
        </xsd:sequence>
        <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
    </xsd:complexType>
    <xsd:complexType name="CT_SupportingPropertyBagArrayValue">
        <xsd:simpleContent>
            <xsd:extension base="x:ST_Xstring">
                <xsd:attribute name="t" type="ST_SupportingPropertyBagArrayValueType" use="optional"
default="d"/>
            </xsd:extension>
        </xsd:simpleContent>
    </xsd:complexType>
    <xsd:simpleType name="ST_SupportingPropertyBagArrayValueType">
        <xsd:restriction base="x:ST_Xstring">
            <xsd:enumeration value="d"/>
            <xsd:enumeration value="i"/>
            <xsd:enumeration value="b"/>
            <xsd:enumeration value="s"/>
            <xsd:enumeration value="spb"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:element name="arrayData" type="CT_ArrayData"/>
    <xsd:complexType name="CT_ArrayData">
        <xsd:sequence>
            <xsd:element name="a" minOccurs="0" maxOccurs="unbounded" type="CT_Array"/>
            <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
        </xsd:sequence>
        <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
    </xsd:complexType>
    <xsd:complexType name="CT_Array">
        <xsd:sequence>
            <xsd:element name="v" minOccurs="1" maxOccurs="unbounded" type="CT_ArrayValue"/>
        </xsd:sequence>
        <xsd:attribute name="r" type="xsd:unsignedInt" use="required"/>
        <xsd:attribute name="c" type="xsd:unsignedInt" use="optional" default="1"/>
    </xsd:complexType>
    <xsd:complexType name="CT_ArrayValue">
        <xsd:simpleContent>
            <xsd:extension base="x:ST_Xstring">
                <xsd:attribute name="t" type="ST_ArrayValueType" use="optional" default="d"/>
            </xsd:extension>
        </xsd:simpleContent>
    </xsd:complexType>
    <xsd:simpleType name="ST_ArrayValueType">
        <xsd:restriction base="x:ST_Xstring">

```

```

        <xsd:enumeration value="d"/>
        <xsd:enumeration value="i"/>
        <xsd:enumeration value="b"/>
        <xsd:enumeration value="e"/>
        <xsd:enumeration value="s"/>
        <xsd:enumeration value="r"/>
        <xsd:enumeration value="a"/>
    </xsd:restriction>
</xsd:simpleType>
<xsd:element name="richStyleSheet" type="CT_RichStylesheet"/>
<xsd:complexType name="CT_RichStylesheet">
    <xsd:sequence>
        <xsd:element name="dxfs" type="x:CT_Dxfs" minOccurs="0" maxOccurs="1"/>
        <xsd:element name="richProperties" type="CT_RichFormatProperties" minOccurs="0"
maxOccurs="1"/>
        <xsd:element name="richStyles" type="CT_RichStyles" minOccurs="0" maxOccurs="1"/>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_RichFormatProperties">
    <xsd:sequence>
        <xsd:element name="rPr" minOccurs="1" maxOccurs="unbounded"
type="CT_RichFormatProperty"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_RichFormatProperty">
    <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
    <xsd:attribute name="t" type="ST_RichFormatPropertyType" use="required"/>
</xsd:complexType>
<xsd:simpleType name="ST_RichFormatPropertyType">
    <xsd:restriction base="x:ST_Xstring">
        <xsd:enumeration value="b"/>
        <xsd:enumeration value="n"/>
        <xsd:enumeration value="i"/>
        <xsd:enumeration value="s"/>
    </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="CT_RichStyles">
    <xsd:sequence>
        <xsd:element name="rSty" minOccurs="1" maxOccurs="unbounded" type="CT_RichStyle"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_RichStyle">
    <xsd:sequence>
        <xsd:element name="rvp" minOccurs="0" maxOccurs="unbounded"
type="CT_RichStylePropertyValue"/>
    </xsd:sequence>
    <xsd:attribute name="dxfid" type="x:ST_DxfId" use="optional"/>
</xsd:complexType>
<xsd:complexType name="CT_RichStylePropertyValue">
    <xsd:simpleContent>
        <xsd:extension base="xsd:string">
            <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
        </xsd:extension>
    </xsd:simpleContent>
</xsd:complexType>
<xsd:element name="rvTypesInfo" type="CT_RichValueTypesInfo"/>
<xsd:complexType name="CT_RichValueTypesInfo">
    <xsd:sequence>
        <xsd:element name="global" minOccurs="0" maxOccurs="1" type="CT_RichValueGlobalType"/>
        <xsd:element name="types" minOccurs="0" maxOccurs="1" type="CT_RichValueTypes"/>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_RichValueTypes">
    <xsd:sequence>
        <xsd:element name="type" minOccurs="0" maxOccurs="unbounded" type="CT_RichValueType"/>
    </xsd:sequence>
</xsd:complexType>

```

```

<xsd:complexType name="CT_RichValueGlobalType">
  <xsd:sequence>
    <xsd:element name="keyFlags" minOccurs="0" maxOccurs="1"
type="CT_RichValueTypeKeyFlags"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_RichValueType">
  <xsd:sequence>
    <xsd:element name="keyFlags" minOccurs="0" maxOccurs="1"
type="CT_RichValueTypeKeyFlags"/>
    <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_RichValueTypeKeyFlags">
  <xsd:sequence>
    <xsd:element name="key" minOccurs="1" maxOccurs="unbounded"
type="CT_RichValueTypeReservedKey"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="CT_RichValueTypeReservedKey">
  <xsd:sequence>
    <xsd:element name="flag" minOccurs="1" maxOccurs="unbounded"
type="CT_RichValueTypeReservedKeyFlag"/>
  </xsd:sequence>
  <xsd:attribute name="name" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_RichValueTypeReservedKeyFlag">
  <xsd:attribute name="name" type="xsd:string" use="required"/>
  <xsd:attribute name="value" type="xsd:boolean" use="required"/>
</xsd:complexType>
</xsd:schema>

```

## 5.21 <http://schemas.microsoft.com/office/spreadsheetml/2017/richdata> Schema

```

<xsd:schema targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata"
elementFormDefault="qualified"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="rvData" type="CT_RichValueData"/>
  <xsd:complexType name="CT_RichValueData">
    <xsd:sequence>
      <xsd:element name="rv" minOccurs="0" maxOccurs="unbounded" type="CT_RichValue"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
  <xsd:complexType name="CT_RichValue">
    <xsd:sequence>
      <xsd:element name="fb" minOccurs="0" maxOccurs="1" type="CT_RichValueFallback"/>
      <xsd:element name="v" minOccurs="1" maxOccurs="unbounded" type="CT_Value"/>
    </xsd:sequence>
    <xsd:attribute name="s" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
  <xsd:complexType name="CT_Value">
    <xsd:simpleContent>
      <xsd:extension base="x:ST_Xstring"/>
    </xsd:simpleContent>
  </xsd:complexType>
  <xsd:element name="rvStructures" type="CT_RichValueStructures"/>
  <xsd:complexType name="CT_RichValueFallback">
    <xsd:simpleContent>
      <xsd:extension base="xsd:string">

```

```

        <xsd:attribute name="t" type="ST_RichValueFallbackType" use="optional" default="n"/>
    </xsd:extension>
</xsd:simpleContent>
</xsd:complexType>
</xsd:schema>
<xsd:simpleType name="ST_RichValueFallbackType">
    <xsd:restriction base="x:ST_Xstring">
        <xsd:enumeration value="b"/>
        <xsd:enumeration value="n"/>
        <xsd:enumeration value="e"/>
        <xsd:enumeration value="s"/>
    </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="CT_RichValueStructures">
    <xsd:sequence>
        <xsd:element name="s" minOccurs="0" maxOccurs="unbounded"
type="CT_RichValueStructure"/>
        <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_RichValueStructure">
    <xsd:sequence>
        <xsd:element name="k" minOccurs="1" maxOccurs="unbounded" type="CT_Key"/>
    </xsd:sequence>
    <xsd:attribute name="t" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_Key">
    <xsd:attribute name="n" type="x:ST_Xstring" use="required"/>
    <xsd:attribute name="t" type="ST_RichValueValueType" use="optional" default="d"/>
</xsd:complexType>
<xsd:simpleType name="ST_RichValueValueType">
    <xsd:restriction base="x:ST_Xstring">
        <xsd:enumeration value="d"/>
        <xsd:enumeration value="i"/>
        <xsd:enumeration value="b"/>
        <xsd:enumeration value="e"/>
        <xsd:enumeration value="s"/>
        <xsd:enumeration value="r"/>
        <xsd:enumeration value="a"/>
        <xsd:enumeration value="spb"/>
    </xsd:restriction>
</xsd:simpleType>
<xsd:element name="rvb" type="CT_RichValueBlock"/>
<xsd:complexType name="CT_RichValueBlock">
    <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
</xsd:schema>

```

## 5.22 <http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures> Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures"
elementFormDefault="qualified"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2018/calcfeatures"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
    <xsd:element name="calcFeatures" type="CT_CalcFeatures"/>
    <xsd:complexType name="CT_CalcFeatures">
        <xsd:sequence>
            <xsd:element name="feature" minOccurs="1" maxOccurs="unbounded" type="CT_CalcFeature"/>
        </xsd:sequence>
    </xsd:complexType>
    <xsd:complexType name="CT_CalcFeature">
        <xsd:attribute name="name" type="xsd:string" use="required"/>
    </xsd:complexType>

```

```
</xsd:complexType>
</xsd:schema>
```

## 5.23 <http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments> Schema

```
<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments"
elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2018/threadedcomments">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlst.xsd"/>
  <xsd:import
namespace="http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2"
schemaLocation="xlThreadedComments2.xsd"/>
  <xsd:element name="personList" type="CT_PersonList"/>
  <xsd:complexType name="CT_PersonList">
    <xsd:sequence>
      <xsd:element name="person" type="CT_Person" minOccurs="0" maxOccurs="unbounded"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_Person">
    <xsd:sequence>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="displayName" type="x:ST_Xstring" use="required"/>
    <xsd:attribute name="id" type="x:ST_Guid" use="required"/>
    <xsd:attribute name="userId" type="x:ST_Xstring" use="optional"/>
    <xsd:attribute name="providerId" type="x:ST_Xstring" use="optional"/>
  </xsd:complexType>
  <xsd:element name="ThreadedComments" type="CT_ThreadedComments"/>
  <xsd:complexType name="CT_ThreadedComments">
    <xsd:sequence>
      <xsd:element name="threadedComment" type="CT_ThreadedComment" minOccurs="0"
maxOccurs="unbounded"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_ThreadedComment">
    <xsd:sequence>
      <xsd:element name="text" type="x:ST_Xstring" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="mentions" type="CT_ThreadedCommentMentions" minOccurs="0"
maxOccurs="1"/>
      <xsd:element name="extLst" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="ref" type="x:ST_Ref" use="optional"/>
    <xsd:attribute name="dT" type="xsd:dateTime" use="optional"/>
    <xsd:attribute name="personId" type="x:ST_Guid" use="required"/>
    <xsd:attribute name="id" type="x:ST_Guid" use="required"/>
    <xsd:attribute name="parentId" type="x:ST_Guid" use="optional"/>
    <xsd:attribute name="done" type="xsd:boolean" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_ThreadedCommentMentions">
    <xsd:sequence>
      <xsd:element name="mention" type="CT_Mention" minOccurs="0" maxOccurs="unbounded"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_Mention">
    <xsd:attribute name="mentionpersonId" type="x:ST_Guid" use="required"/>
    <xsd:attribute name="mentionId" type="x:ST_Guid" use="required"/>
    <xsd:attribute name="startIndex" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="length" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
```

```
</xsd:schema>
```

## 5.24 <http://schemas.microsoft.com/office/spreadsheetml/2018/08/main> Schema

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2018/08/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2018/08/main"
elementFormDefault="qualified">
  <xsd:attribute name="misleadingFormat" type="xsd:boolean"/>
</xsd:schema>
```

## 5.25 <http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray> Schema

```
<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray"
elementFormDefault="qualified"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2017/dynamicarray"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="dynamicArrayProperties" type="CT_DynamicArrayProperties"/>
  <xsd:complexType name="CT_DynamicArrayProperties">
    <xsd:sequence>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="fDynamic" type="xsd:boolean" use="optional"/>
    <xsd:attribute name="fCollapsed" type="xsd:boolean" use="optional"/>
  </xsd:complexType>
</xsd:schema>
```

## 5.26 <http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews> Schema

```
<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews"
elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:xl4="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
xmlns:xlrd2="http://schemas.microsoft.com/office/spreadsheetml/2017/richdata2"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2019/namedsheetviews">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlautofilter.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:import namespace="http://schemas.microsoft.com/office/spreadsheetml/2009/9/main"
schemaLocation="xl14.xsd"/>
  <xsd:element name="namedSheetViews" type="CT_NamedSheetViews"/>
  <xsd:complexType name="CT_NamedSheetViews">
    <xsd:sequence>
      <xsd:element name="namedSheetView" type="CT_NamedSheetView" minOccurs="0"
maxOccurs="unbounded"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_NamedSheetView">
    <xsd:sequence>
      <xsd:element name="nsvFilter" type="CT_NsvFilter" minOccurs="0" maxOccurs="unbounded"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="name" type="xsd:string" use="required"/>
  </xsd:complexType>
</xsd:schema>
```

```

    <xsd:attribute name="id" type="x:ST_Guid" use="required"/>
  </xsd:complexType>
  <xsd:complexType name="CT_NsvFilter">
    <xsd:sequence>
      <xsd:element name="columnFilter" minOccurs="0" maxOccurs="unbounded"
type="CT_ColumnFilter"/>
      <xsd:element name="sortRules" minOccurs="0" maxOccurs="1" type="CT_SortRules"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="filterId" type="x:ST_Guid" use="required"/>
    <xsd:attribute name="ref" type="x:ST_Ref" use="optional"/>
    <xsd:attribute name="tableId" type="xsd:unsignedInt" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_ColumnFilter">
    <xsd:sequence>
      <xsd:element name="dxfl" type="x:CT_Dxfl" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="filter" minOccurs="0" maxOccurs="unbounded"
type="x:CT_FilterColumn"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attributeGroup ref="AG_ColumnId"/>
  </xsd:complexType>
  <xsd:complexType name="CT_SortRules">
    <xsd:sequence>
      <xsd:element name="sortRule" minOccurs="0" maxOccurs="64" type="CT_SortRule"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="sortMethod" type="x:ST_SortMethod" use="optional" default="none"/>
    <xsd:attribute name="caseSensitive" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>
  <xsd:complexType name="CT_SortRule">
    <xsd:sequence>
      <xsd:element name="dxfl" type="x:CT_Dxfl" minOccurs="0" maxOccurs="1"/>
      <xsd:choice minOccurs="0" maxOccurs="1">
        <xsd:element name="sortCondition" minOccurs="0" maxOccurs="1"
type="xl4:CT_SortCondition"/>
        <xsd:element name="richSortCondition" minOccurs="0" maxOccurs="1"
type="xlrd2:CT_RichSortCondition"/>
      </xsd:choice>
    </xsd:sequence>
    <xsd:attributeGroup ref="AG_ColumnId"/>
  </xsd:complexType>
  <xsd:attributeGroup name="AG_ColumnId">
    <xsd:attribute name="colId" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="id" type="x:ST_Guid" use="optional"/>
  </xsd:attributeGroup>
</xsd:schema>

```

## 5.27 <http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops> Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops"
elementFormDefault="qualified"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2019/extlinksprops"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:element name="externalLinksPr" type="CT_ExternalLinksPr"/>
  <xsd:complexType name="CT_ExternalLinksPr">
    <xsd:attribute name="autoRefresh" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>
</xsd:schema>

```



## 5.28 <http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage> Schema

```
<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2020/richdatawebimage"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="webImagesSrd" type="CT_WebImagesSupportingRichData"/>
  <xsd:complexType name="CT_WebImagesSupportingRichData">
    <xsd:sequence>
      <xsd:element name="webImageSrd" minOccurs="0" maxOccurs="unbounded"
type="CT_WebImageSupportingRichData"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_WebImageSupportingRichData">
    <xsd:sequence>
      <xsd:element name="address" minOccurs="1" maxOccurs="1"
type="CT_WebImageSupportingRichDataRelationship"/>
      <xsd:element name="moreImagesAddress" minOccurs="0" maxOccurs="1"
type="CT_WebImageSupportingRichDataRelationship"/>
      <xsd:element name="blip" minOccurs="0" maxOccurs="1"
type="CT_WebImageSupportingRichDataRelationship"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_WebImageSupportingRichDataRelationship">
    <xsd:attribute ref="r:id" use="required"/>
  </xsd:complexType>
</xsd:schema>
```

## 5.29 <http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020> Schema

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2020/pivotNov2020"
elementFormDefault="qualified">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="implicitMeasureSupport" type="xsd:boolean"/>
  <xsd:element name="ignorableAfterVersion" type="CT_Ignorable"/>
  <xsd:complexType name="CT_Ignorable">
    <xsd:attribute name="version" type="xsd:unsignedByte" use="required"/>
  </xsd:complexType>
  <xsd:element name="dataFieldFutureData" type="CT_DataFieldFutureData"/>
  <xsd:complexType name="CT_DataFieldFutureData">
    <xsd:attribute name="version" type="xsd:unsignedByte" use="required"/>
    <xsd:attribute name="sourceField" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
</xsd:schema>
```

## 5.30 <http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2> Schema

```
<xsd:schema xmlns="http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2020/threadedcomments2"
elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:xm="http://schemas.microsoft.com/office/excel/2006/main">
  <xsd:import namespace="http://schemas.microsoft.com/office/excel/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:complexType name="CT_ThreadedComments2Ext">
    <xsd:sequence>
      <xsd:element name="checksum" type="xsd:unsignedInt" minOccurs="1" maxOccurs="1"/>
      <xsd:sequence>
        <xsd:element name="hyperlink" type="CT CommentHyperlink" minOccurs="0"
maxOccurs="unbounded"/>
      </xsd:sequence>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_CommentHyperlink">
    <xsd:sequence>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="startIndex" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="length" type="xsd:unsignedInt" use="required"/>
    <xsd:attribute name="url" type="x:ST_Xstring" use="required"/>
  </xsd:complexType>
</xsd:schema>
```

## 5.31 <http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh> Schema

```
<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh"
elementFormDefault="qualified"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2020/richvaluerefresh"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:element name="refreshIntervals" type="CT RichValueRefreshIntervals"/>
  <xsd:complexType name="CT_RichValueRefreshIntervals">
    <xsd:sequence>
      <xsd:element name="refreshInterval" minOccurs="1" maxOccurs="unbounded"
type="CT_RichValueRefreshInterval"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_RichValueRefreshInterval">
    <xsd:attribute name="resourceIdInt" type="xsd:int" use="optional"/>
    <xsd:attribute name="resourceIdStr" type="xsd:string" use="optional"/>
    <xsd:attribute name="interval" type="xsd:int" use="required"/>
  </xsd:complexType>
</xsd:schema>
```

## 5.32 <http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo> Schema

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2022/pivotVersionInfo"
elementFormDefault="qualified">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="cacheVersionInfo" type="CT_CacheVersionInfo"/>
```

```

<xsd:complexType name="CT_CacheVersionInfo">
  <xsd:sequence>
    <xsd:element name="requiredFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
    <xsd:element name="lastRefreshFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:element name="pivotVersionInfo" type="CT_PivotVersionInfo"/>
<xsd:complexType name="CT_PivotVersionInfo">
  <xsd:sequence>
    <xsd:element name="requiredFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
    <xsd:element name="lastUpdateFeature" minOccurs="0" maxOccurs="unbounded"
type="xsd:string"/>
  </xsd:sequence>
</xsd:complexType>
</xsd:schema>

```

### 5.33 <http://schemas.microsoft.com/office/spreadsheetml/2022/pivotRichData> Schema

```

<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2022/pivotRichData"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2022/pivotRichData"
elementFormDefault="qualified">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
</xsd:schema>

```

### 5.34 <http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021> Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2021/extlinks2021"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships">
  <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
  <xsd:complexType name="CT_ExternalBookAlternateUrls">
    <xsd:sequence>
      <xsd:element name="absoluteUrl" type="CT_AlternateUrl" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="relativeUrl" type="CT_AlternateUrl" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="driveId" use="optional" type="xsd:string"/>
    <xsd:attribute name="itemId" use="optional" type="xsd:string"/>
  </xsd:complexType>
  <xsd:complexType name="CT_AlternateUrl">
    <xsd:attribute ref="r:id" use="required"/>
  </xsd:complexType>
  <xsd:element name="alternateUrls" type="CT_ExternalBookAlternateUrls"/>
</xsd:schema>

```

### 5.35 <http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel> Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluerel"

```

```

elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2022/richvaluereel"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="richValueReIs" type="CT_RichValueReIs"/>
  <xsd:complexType name="CT_RichValueReIs">
    <xsd:sequence>
      <xsd:element name="rel" minOccurs="0" maxOccurs="unbounded"
type="CT_RichValueRelRelationship"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_RichValueRelRelationship">
    <xsd:attribute ref="r:id" use="required"/>
  </xsd:complexType>
</xsd:schema>

```

### 5.36 http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag"
elementFormDefault="qualified"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2022/featurepropertybag"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
  <xsd:import namespace="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
schemaLocation="orel.xsd"/>
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="FeaturePropertyBags" type="CT_FeaturePropertyBags"/>
  <xsd:complexType name="CT_FeaturePropertyBags">
    <xsd:sequence>
      <xsd:element name="bagExt" type="CT_BagExtensions" minOccurs="0"
maxOccurs="unbounded"/>
      <xsd:element name="bag" type="CT_FeaturePropertyBag" minOccurs="0"
maxOccurs="unbounded"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="count" type="xsd:unsignedInt" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_BagExtensions">
    <xsd:sequence>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_FeaturePropertyBag">
    <xsd:choice minOccurs="0" maxOccurs="unbounded">
      <xsd:element name="a" type="CT_ArrayFeatureProperty"/>
      <xsd:element name="bagId" type="CT_BagFeatureProperty"/>
      <xsd:element name="i" type="CT_IntFeatureProperty"/>
      <xsd:element name="s" type="CT_StringFeatureProperty"/>
      <xsd:element name="b" type="CT_BoolFeatureProperty"/>
      <xsd:element name="d" type="CT_DecimalFeatureProperty"/>
      <xsd:element name="rel" type="CT_RelFeatureProperty"/>
    </xsd:choice>
    <xsd:attribute name="type" type="xsd:string" use="required"/>
    <xsd:attribute name="extRef" type="xsd:string" use="optional"/>
    <xsd:attribute name="bagExtId" type="xsd:unsignedInt" use="optional"/>
    <xsd:attribute name="att" type="xsd:string" use="optional"/>
  </xsd:complexType>

```

```

<xsd:complexType name="CT_BagFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:unsignedInt">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="CT_IntFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:integer">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="CT_StringFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:string">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="CT_BoolFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:boolean">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="CT_DecimalFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="xsd:double">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="CT_RelFeatureProperty">
  <xsd:simpleContent>
    <xsd:extension base="r:ST_RelationshipId">
      <xsd:attribute name="k" type="xsd:string" use="required"/>
    </xsd:extension>
  </xsd:simpleContent>
</xsd:complexType>
<xsd:complexType name="CT_ArrayFeatureProperty">
  <xsd:choice minOccurs="0" maxOccurs="unbounded">
    <xsd:element name="bagId" type="xsd:unsignedInt"/>
    <xsd:element name="i" type="xsd:integer"/>
    <xsd:element name="s" type="xsd:string"/>
    <xsd:element name="b" type="xsd:boolean"/>
    <xsd:element name="d" type="xsd:double"/>
    <xsd:element name="rel" type="r:ST_RelationshipId"/>
  </xsd:choice>
  <xsd:attribute name="k" type="xsd:string" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_XfComplementExt">
  <xsd:sequence>
    <xsd:element ref="xfComplement" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:element name="xfComplement" type="CT_XfComplement"/>
<xsd:complexType name="CT_XfComplement">
  <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
</xsd:complexType>
<xsd:complexType name="CT_DXFComplementExt">
  <xsd:sequence>
    <xsd:element ref="DXFComplement" minOccurs="1" maxOccurs="1"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:element name="DXFComplement" type="CT_DXFComplement"/>
<xsd:complexType name="CT_DXFComplement">

```

```

    <xsd:attribute name="i" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
</xsd:schema>

```

### 5.37 <http://schemas.microsoft.com/office/spreadsheetml/2023/msForms> Schema

```

<xsd:schema targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2023/msForms"
elementFormDefault="qualified" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2023/msForms">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:complexType name="CT_MsFormsExt">
    <xsd:sequence>
      <xsd:element name="msForm" type="CT_MsForm" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_QuestionExt">
    <xsd:sequence>
      <xsd:element name="question" type="CT_Question" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_MsForm">
    <xsd:sequence>
      <xsd:element name="syncedQuestionId" type="x:ST_Xstring" minOccurs="0"
maxOccurs="unbounded"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
    <xsd:attribute name="isFormConnected" type="xsd:boolean" use="optional" default="false"/>
    <xsd:attribute name="maxResponseId" type="xsd:int" use="optional"/>
    <xsd:attribute name="latestEventMarker" type="x:ST_Xstring" use="optional"/>
  </xsd:complexType>
  <xsd:complexType name="CT_Question">
    <xsd:sequence>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="id" type="x:ST_Xstring" use="required"/>
  </xsd:complexType>
</xsd:schema>

```

### 5.38 <http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService> Schema

```

<xsd:schema
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService"
xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <xsd:complexType name="CT_ExternalCodeServiceExt">
    <xsd:sequence>
      <xsd:element ref="externalCodeService" minOccurs="1" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:element name="externalCodeService" type="CT_ExternalCodeService"/>
  <xsd:complexType name="CT_ExternalCodeService">
    <xsd:attribute name="autoShow" type="xsd:unsignedInt" default="1"/>
    <xsd:attribute name="timeout" type="xsd:unsignedInt"/>
  </xsd:complexType>
</xsd:schema>

```

## 5.39 http://schemas.microsoft.com/office/spreadsheetml/2023/python Schema

```
<xsd:schema targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2023/python"
elementFormDefault="qualified"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2023/python"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="python" type="CT_Python"/>
  <xsd:complexType name="CT_Python">
    <xsd:sequence>
      <xsd:element name="environmentDefinition" minOccurs="0" maxOccurs="1"
type="CT_PythonEnvironmentDefinition"/>
      <xsd:element name="pythonScripts" minOccurs="0" maxOccurs="1" type="CT_PythonScripts"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_PythonScripts">
    <xsd:sequence minOccurs="1" maxOccurs="unbounded">
      <xsd:element name="pythonScript" type="CT_PythonScript"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_PythonScript">
    <xsd:sequence>
      <xsd:element name="code" type="x:ST_Xstring" minOccurs="0" maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
  </xsd:complexType>
  <xsd:complexType name="CT_PythonEnvironmentDefinition">
    <xsd:sequence>
      <xsd:element name="initialization" type="CT_PythonInitialization" minOccurs="0"
maxOccurs="1"/>
      <xsd:element name="extLst" type="x:CT_ExtensionList" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="id" type="x:ST_Guid"/>
  </xsd:complexType>
  <xsd:complexType name="CT_PythonInitialization">
    <xsd:sequence>
      <xsd:element name="code" type="x:ST_Xstring" minOccurs="0" maxOccurs="1"/>
    </xsd:sequence>
    <xsd:attribute name="userModified" type="xsd:boolean" use="optional" default="false"/>
  </xsd:complexType>
</xsd:schema>
```

## 5.40 http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation Schema

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:r="http://schemas.openxmlformats.org/officeDocument/2006/relationships"
xmlns="http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation"
xmlns:x="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
targetNamespace="http://schemas.microsoft.com/office/spreadsheetml/2023/pivot2023Calculation"
elementFormDefault="qualified">
  <xsd:import namespace="http://schemas.openxmlformats.org/spreadsheetml/2006/main"
schemaLocation="xlbasictypes.xsd"/>
  <xsd:element name="aggregationInfo" type="CT_AggregationInfo"/>
  <xsd:complexType name="CT_AggregationInfo">
    <xsd:attribute name="aggregationType" type="ST_AggregationType" use="required"/>
    <xsd:attribute name="sourceField" type="xsd:unsignedInt" use="required"/>
  </xsd:complexType>
  <xsd:simpleType name="ST_AggregationType">
    <xsd:restriction base="xsd:string">
      <xsd:enumeration value="distinctCount"/>
      <xsd:enumeration value="median"/>
    </xsd:restriction>
  </xsd:simpleType>
```

```
<xsd:element name="featureSupportInfo" type="CT_FeatureSupport"/>
<xsd:complexType name="CT_FeatureSupport">
  <xsd:attribute name="featureName" type="xsd:string" use="required"/>
</xsd:complexType>
</xsd:schema>
```



## 6 Appendix B: Product Behavior

The information in this specification is applicable to the following Microsoft products or supplemental software. References to product versions include updates to those products.

- Microsoft Office Excel 2007
- Microsoft Excel 2010
- Microsoft Excel 2013
- Microsoft Excel 2016
- Microsoft Excel 2019
- Microsoft Excel 2021

Exceptions, if any, are noted in this section. If an update version, service pack or Knowledge Base (KB) number appears with a product name, the behavior changed in that update. The new behavior also applies to subsequent updates unless otherwise specified. If a product edition appears with the product version, behavior is different in that product edition.

Unless otherwise specified, any statement of optional behavior in this specification that is prescribed using the terms "SHOULD" or "SHOULD NOT" implies product behavior in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term "MAY" implies that the product does not follow the prescription.

[<1> Section 2.2](#): This namespace was introduced in Excel 2013.

[<2> Section 2.2](#): This namespace was introduced in Excel 2010.

[<3> Section 2.2](#): This namespace was introduced in Excel 2010.

[<4> Section 2.2](#): This namespace was introduced in Excel 2013.

[<5> Section 2.2](#): This namespace was introduced in Excel 2013.

[<6> Section 2.4.104](#): Excel versions prior to Microsoft Excel 2024 will not ignore this.

[<7> Section 2.4.105](#): Excel versions prior to Excel 2024 will not ignore this.

[<8> Section 2.5.4](#): This attribute is available only in Excel 2016.

[<9> Section 2.6.3](#): Office Excel 2007, Excel 2010, and Excel 2013 do not write the correct value into this **field** sometimes. Although the value of this field is validated on load, it is not used at run time.

[<10> Section 2.6.3](#): Office Excel 2007, Excel 2010, and Excel 2013 do not write the correct value into this field sometimes. Although the value of this field is validated on load, it is not used at run time.

[<11> Section 2.6.10](#): The following table shows the different versions of function accuracy that Excel 2010 and Excel 2013 supports.

Value	Meaning
0	Functions are calculated using the current application's algorithms.
1	Functions are calculated using algorithms implemented in Office Excel 2007.
2	Functions are calculated using algorithms implemented in Excel 2010.

<12> [Section 2.6.24](#): Office Excel 2007 does not support multiple uses of the same **OLAP measure** in one cache hierarchy, and does not discard the associated cache hierarchy when **ignore** is TRUE.

<13> [Section 2.6.25](#): Office Excel 2007 will not ignore the **fld** attribute of the ancestor **CT\_DataField** ([\[ISO/IEC29500-4:2016\]](#) section A.2).

<14> [Section 2.6.30](#): Office Excel 2007 does not ignore these complex types.

<15> [Section 2.6.31](#): Office Excel 2007 does not support multiple uses of the same OLAP measure in one PivotTable view, and does not ignore this pivot field when **ignore** is TRUE.

<16> [Section 2.6.34](#): The 2007 Microsoft Office system does not load a file in which this field contains a value that it does not recognize, or is not recognized by the underlying operating system. The 2007 Office system recognizes the following language tags.

Language	Locale	Language tag
Afrikaans	South Africa	af-ZA
Albanian	Albania	sq-AL
Alsatian	France	gsw-FR
Amharic	Ethiopia	am-ET
Arabic	Algeria	ar-DZ
Arabic	Kingdom of Bahrain	ar-BH
Arabic	Egypt	ar-EG
Arabic	Iraq	ar-IQ
Arabic	Jordan	ar-JO
Arabic	Kuwait	ar-KW
Arabic	Lebanon	ar-LB
Arabic	Libya	ar-LY
Arabic	Morocco	ar-MA
Arabic	Oman	ar-OM
Arabic	Qatar	ar-QA
Arabic	Saudi Arabia	ar-SA
Arabic	Syria	ar-SY
Arabic	Tunisia	ar-TN
Arabic	U.A.E.	ar-AE
Arabic	Yemen	ar-YE
Armenian	Armenia	hy-AM

Language	Locale	Language tag
Assamese	India	as-IN
Azerbaijani (Cyrillic)	Azerbaijan	az-AZ-Cyrl
Azerbaijani (Latin)	Azerbaijan	az-AZ-Latn
Bangla	Bangladesh	bn-BD
Bangla (Bangla Script)	India	bn-IN
Bashkir	Russia	ba-RU
Basque	Basque (Basque)	eu-ES
Belarusian	Belarus	be-BY
Bhutanese	Bhutan	bo-BT
Bosnian (Cyrillic)	Bosnia and Herzegovina	bs-BA-Cyrl
Bosnian (Latin)	Bosnia and Herzegovina	bs-BA-Latn
Breton	France	br-FR
Bulgarian	Bulgaria	bg-BG
Catalan	Catalan	ca-ES
Chinese	Hong Kong SAR	zh-HK
Chinese	Macao SAR	zh-MO
Chinese	PRC	zh-CN
Chinese	Singapore	zh-SG
Chinese	Taiwan	zh-TW
Corsican	France	co-FR
Croatian	Croatia	hr-HR
Croatian (Latin)	Bosnia and Herzegovina	hr-BA-Latn
Czech	Czech Republic	cs-CZ
Danish	Denmark	da-DK
Dari	Afghanistan	prs-AF
Divehi	Maldives	div-MV
Dutch	Belgium	nl-BE
Dutch	Netherlands	nl-NL

Language	Locale	Language tag
English	Australia	en-AU
English	Belize	en-BZ
English	Canada	en-CA
English	Caribbean	en-CB
English	India	en-IN
English	Ireland	en-IE
English	Jamaica	en-JM
English	Malaysia	en-MY
English	New Zealand	en-NZ
English	Philippines	en-PH
English	South Africa	en-ZA
English	Trinidad	en-TT
English	United Kingdom	en-GB
English	United States	en-US
English	Zimbabwe	en-ZW
Estonian	Estonia	et-EE
Faroese	Faroe Islands	fo-FO
Filipino	Philippines	fil-PH
Finnish	Finland	fi-FI
French	Belgium	fr-BE
French	Canada	fr-CA
French	France	fr-FR
French	Luxembourg	fr-LU
French	Monaco	fr-MC
French	Switzerland	fr-CH
Frisian	Netherlands	fy-NL
Galician	Galicia	gl-ES
Georgian	Georgia	ka-GE

Language	Locale	Language tag
German	Austria	de-AT
German	Germany	de-DE
German	Liechtenstein	de-LI
German	Luxembourg	de-LU
German	Switzerland	de-CH
Greek	Greece	el-GR
Greenlandic	Greenland	kl-GL
Gujarati (Gujarati Script)	India	gu-IN
Hausa (Latin)	Nigeria	ha-NG-Latn
Hebrew	Israel	he-IL
Hindi	India	hi-IN
Hungarian	Hungary	hu-HU
Icelandic	Iceland	is-IS
Igbo	Nigeria	ig-NG
Inari Sami	Finland	smn-FI
Indonesian	Indonesia	id-ID
Inuktitut (Latin)	Canada	iu-CA-Latn
Inuktitut (Syllabics)	Canada	iu-CA-Cans
Irish	Ireland	ga-IE
isiXhosa / Xhosa	South Africa	xh-ZA
isiZulu / Zulu	South Africa	zu-ZA
Italian	Italy	it-IT
Italian	Switzerland	it-CH
Japanese	Japan	ja-JP
Kannada (Kannada Script)	India	kn-IN
Kazakh	Kazakhstan	kk-KZ
Khmer	Cambodia	kh-KH
K'iche	Guatemala	qut-GT

Language	Locale	Language tag
Kinyarwanda	Rwanda	rw-RW
Konkani	India	kok-IN
Korean	Korea	ko-KR
Kyrgyz	Kyrgyzstan	ky-KG
Lao	Lao PDR	lo-LA
Latvian	Latvia	lv-LV
Lithuanian	Lithuania	lt-LT
Lower Sorbian	Germany	wee-DE
Lule Sami	Norway	smj-NO
Lule Sami	Sweden	smj-SE
Luxembourgish	Luxembourg	lb-LU
Macedonian (Macedonia, FYRO)	Macedonia, former Yugoslav Republic of	mk-MK
Malay	Brunei	ms-BN
Malay	Malaysia	ms-MY
Malayalam (Malayalam Script)	India	ml-IN
Maltese	Malta	mt-MT
Maori	New Zealand	mi-NZ
Mapudungun	Chile	arn-CL
Marathi	India	mr-IN
Mohawk	Mohawk	moh-CA
Mongolian (Cyrillic)	Mongolia	mn-MN
Mongolian (Mongolian)	PRC	mn-CN-Mong
Nepali	Federal Democratic Republic of Nepal	ne-NP
Northern Sami	Finland	se-FI
Northern Sami	Norway	se-NO
Northern Sami	Sweden	se-SE
Norwegian (Bokmål)	Norway	nb-NO
Norwegian (Nynorsk)	Norway	nn-NO

Language	Locale	Language tag
Occitan	France	oc-FR
Odia (Odia Script)	India	or-IN
Pashto	Afghanistan	ps-AF
Persian	Iran	fa-IR
Polish	Poland	pl-PL
Portuguese	Brazil	pt-BR
Portuguese	Portugal	pt-PT
Punjabi (Gurmukhi Script)	India	pa-IN
Quechua	Bolivia	quz-BO
Quechua	Ecuador	quz-EC
Quechua	Peru	quz-PE
Romanian	Romania	ro-RO
Romansh	Switzerland	rm-CH
Russian	Russia	ru-RU
Sakha	Russia	sah-RU
Sanskrit	India	sa-IN
Serbian (Cyrillic)	Bosnia and Herzegovina	sr-BA-Cyrl
Serbian (Cyrillic)	Serbia	sr-SP-Cyrl
Serbian (Latin)	Bosnia and Herzegovina	sr-BA-Latn
Serbian (Latin)	Serbia	sr-SP-Latn
Sesotho sa Leboa / Northern Sotho	South Africa	ns-ZA
Setswana / Tswana	South Africa	tn-ZA
Sinhala	Sri Lanka	si-LK
Skolt Sami	Finland	sms-FI
Slovak	Slovakia	sk-SK
Slovenian	Slovenia	sl-SI
Southern Sami	Norway	sma-NO
Southern Sami	Sweden	sma-SE

Language	Locale	Language tag
Spanish	Argentina	es-AR
Spanish	Bolivia	es-BO
Spanish	Chile	es-CL
Spanish	Columbia	es-CO
Spanish	Costa Rica	es-CR
Spanish	Dominican Republic	es-DO
Spanish	Ecuador	es-EC
Spanish	El Salvador	es-SV
Spanish	Guatemala	es-GT
Spanish	Honduras	es-HN
Spanish	Mexico	es-MX
Spanish	Nicaragua	es-NI
Spanish	Panama	es-PA
Spanish	Paraguay	es-PY
Spanish	Peru	es-PE
Spanish	Commonwealth of Puerto Rico	es-PR
Spanish	Spain	es-ES
Spanish	United States	es-US
Spanish	Uruguay	es-UY
Spanish	Venezuela	es-VE
Swahili	Kenya	sw-KE
Swedish	Finland	sv-FI
Swedish	Sweden	sv-SE
Syriac	Syria	syr-SY
Tajik (Cyrillic)	Tajikistan	tg-TJ-Cyrl
Tamazight (Latin)	Algeria	tmz-DZ-Latn
Tamil	India	ta-IN
Tatar	Russia	tt-RU



Language	Locale	Language tag
Telugu (Telugu Script)	India	te-IN
Thai	Thailand	th-TH
Tibetan	PRC	bo-CN
Turkish	Turkey	tr-TR
Turkmen	Turkmenistan	tk-TM
Uighur	PRC	ug-CN
Ukrainian	Ukraine	uk-UA
Upper Sorbian	Germany	wen-DE
Urdu	Pakistan	ur-PK
Uzbek (Cyrillic)	Uzbekistan	uz-UZ-Cyrl
Uzbek (Latin)	Uzbekistan	uz-UZ-Latn
Vietnamese	Viet Nam	vi-VN
Welsh	United Kingdom	cy-GB
Wolof	Senegal	wo-SN
Yi	PRC	ii-CN
Yoruba	Nigeria	yo-NG

<17> [Section 2.6.47](#): Office Excel 2007 does not ignore the ancestor **CT\_PivotHierarchy** element.

<18> [Section 2.6.48](#): Office Excel 2007 does not ignore the ancestor **CT\_CacheField** element.

<19> [Section 2.6.63](#): Excel 2010 and Excel 2013 requires that the corresponding **ListItem** ([ISO/IEC29500-4:2016] section 14.4.2.36) be present.

<20> [Section 2.6.65](#): Excel 2010 loads and roundtrips this value for scroll bars and spin boxes, but it does not support its functionality.

<21> [Section 2.6.65](#): Excel 2010 requires that the corresponding **FmlaRange** ([ISO/IEC29500-4:2016] section 14.4.2.29) be present.

<22> [Section 2.6.65](#): Excel 2010 and Excel 2013 ignore this attribute. This attribute is being deprecated.

<23> [Section 2.6.65](#): This attribute is being deprecated in Excel 2010. Its functionality will be replaced with attribute **noThreeD**.

<24> [Section 2.6.65](#): Excel 2010 loads and roundtrips this value, but it only supports its functionality for scroll bar form controls when run in a dialog box .

<25> [Section 2.6.65](#): Excel 2010 does not support this attribute.

<26> [Section 2.6.65](#): Excel 2010 does not support this attribute.

<27> [Section 2.7.16](#): Excel 2010 uses this value only when the drop-down control is run in a dialog box, in all other cases the drop-down control behaves as a standard combo box.

## 7 Change Tracking

This section identifies changes that were made to this document since the last release. Changes are classified as Major, Minor, or None.

The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements.
- A document revision that captures changes to protocol functionality.

The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.

The revision class **None** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the relevant technical content is identical to the last released version.

The changes made to this document are listed in the following table. For more information, please contact [dochelp@microsoft.com](mailto:dochelp@microsoft.com).

Section	Description	Revision class
<a href="#">2.1.23</a> Python	Added new section for Python.	Major
<a href="#">2.2.2.5</a> Name Formulas	Added rule for py-params.	Major
<a href="#">2.2.4.9</a> Styles	Added descriptions for the extLst child element of the dxf element.	Major
<a href="#">2.3.6.1.3.9</a> TimeOut Error Type	Added new section for TimeOut Error Type.	Major
<a href="#">2.3.6.1.3.10</a> External Error Type	Added new section for External Error Type.	Major
<a href="#">2.3.6.1.11</a> Web Image Type	Updated "may" to "MAY" of "ImageSizing".	Minor
<a href="#">2.3.6.1.12</a> ExternalCodeServiceObject Type	Added new section for ExternalCodeServiceObject Type.	Major
<a href="#">2.3.9.5</a> DXFComplements	Added new section for DXFComplements of Feature Property Bag.	Major
<a href="#">2.3.10</a> Python in Excel	Added new section for Python in Excel.	Major
<a href="#">2.3.10.1</a> Python environment	Added new section for Python environment.	Major
<a href="#">2.3.10.2</a> Python Function	Added new section for Python Function.	Major
<a href="#">2.3.10.3</a> Python Script	Added new section for Python in Excel.	Major

Section	Description	Revision class
<a href="#">2.3.10.4</a> Parameter reference encoding	Added new section for Python parameter reference encoding.	Major
<a href="#">2.4.101</a> externalCodeService	Added new section for externalCodeService.	Major
<a href="#">2.4.102</a> python	Added new section for global element Python.	Major
<a href="#">2.4.103</a> DXFComplement	Added new section for global element DXFComplement.	Major
<a href="#">2.4.104</a> aggregationInfo	Added new section for global element aggregationInfo.	Major
<a href="#">2.4.105</a> featureSupportInfo	Added new section for global element featureSupportInfo.	Major
<a href="#">2.6.56</a> CT_ProtectedRange	Updated "[ISO/IEC29500-4:2016] section 15.7.2" to "[ISO/IEC29500-4:2016] section 15.8.2" for ST_UnsignedShortHex. Updated "[ISO/IEC29500-1:2016] section 18.2.29" to "[ISO/IEC29500-4:2016] section 15.3.3" for revisionsPassword attribute.	Minor
<a href="#">2.6.126</a> CT_CachedUniqueNames	Updated "[ISO/IEC29500-1:2016] section 2.6.91" to "[ISO/IEC29500-1:2016] section 18.13.1" for CT_Connection element.	Minor
<a href="#">2.6.139</a> CT_Timeline	Updated "[ISO/IEC29500-4:2016] section A.4.1" to "[ISO/IEC29500-4:2016] section A.5.1" for CT_OfficeArtExtensionList element.	Minor
<a href="#">2.6.213</a> CT_SortRule	Updated "A CT_Dxf ()" to "A CT_Dxf ([ISO/IEC29500-1:2016] section A.2)" for dxf.	Minor
<a href="#">2.6.238</a> CT_XfComplement	Added new section for complex type CT_XfComplement.	Major
<a href="#">2.6.243</a> CT_MsForm	Added new section for complex type CT_MsForm.	Major
<a href="#">2.6.244</a> CT_MsFormsExt	Added new section for complex type CT_MsFormsExt.	Major

Section	Description	Revision class
<a href="#">2.6.245</a> CT_QuestionExt	Added new section for complex type CT_QuestionExt.	Major
<a href="#">2.6.246</a> CT_Question	Added new section for complex type CT_Question.	Major
<a href="#">2.6.247</a> CT_ExternalCodeService	Added new section for CT_ExternalCodeService.	Major
<a href="#">2.6.248</a> CT_ExternalCodeServiceExt	Added new section for CT_ExternalCodeServiceExt.	Major
<a href="#">2.6.249</a> CT_Python	Added new section for complex type CT_Python.	Major
<a href="#">2.6.250</a> CT_PythonEnvironmentDefinition	Added new section for complex type CT_PythonEnvironmentDefinition.	Major
<a href="#">2.6.251</a> CT_PythonInitialization	Added new section for complex type CT_PythonInitialization.	Major
<a href="#">2.6.252</a> CT_PythonScript	Added new section for complex type CT_PythonScript.	Major
<a href="#">2.6.253</a> CT_PythonScripts	Added new section for complex type CT_PythonScripts.	Major
<a href="#">2.6.254</a> CT_DXFComplementExt	Added new section for complex type CT_DXFComplementExt.	Major
<a href="#">2.6.255</a> CT_DXFComplement	Added new section for complex type CT_DXFComplement.	Major
<a href="#">2.6.256</a> CT_AggregationInfo	Added new section for complex type CT_AggregationInfo.	Major
<a href="#">2.6.257</a> CT_FeatureSupport	Added new section for complex type CT_FeatureSupport.	Major
<a href="#">2.7.39</a> ST_AggregationType	Added new section for simple type ST_AggregationType.	Major
<a href="#">5.37</a> <a href="http://schemas.microsoft.com/office/spreadsheetml/2023/msForms Schema">http://schemas.microsoft.com/office/spreadsheetml/2023/msForms Schema</a>	Added msForms schema.	Major
<a href="#">5.38</a> <a href="http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService Schema">http://schemas.microsoft.com/office/spreadsheetml/2023/externalCodeService Schema</a>	Added externalCodeService schema.	Major
<a href="#">5.39</a>	Added python schema.	Major

<b>Section</b>	<b>Description</b>	<b>Revision class</b>
http://schemas.microsoft.com/office/spreadsheetml/2023/python Schema		

## 8 Index

"

"External workbook references  
[extensions by part](#) 70

### A

[Applicability](#) 24

### B

[BrtBeginECTxtWiz](#) 221

### C

[cachedUniqueNames element](#) 123

[cacheField element](#) 113

cacheHierarchy element ([section 2.4.16](#) 110, [section 2.4.52](#) 120)

calculatedMember element ([section 2.4.15](#) 109, [section 2.4.44](#) 118)

[Change tracking](#) 411

[Common data types and fields](#) 25

Complex types

[CT\\_CachedUniqueName](#) 247

[CT\\_CachedUniqueNames](#) 246

[CT\\_CacheField](#) 186

[CT\\_CacheHierarchy](#) ([section 2.6.24](#) 158, [section 2.6.102](#) 230)

[CT\\_CalculatedMember](#) ([section 2.6.15](#) 153, [section 2.6.93](#) 224)

[CT\\_CalculatedMemberExt](#) 223

[CT\\_CfIcon](#) 178

[CT\\_CfRule](#) 164

[CT\\_Cfvo](#) 163

[CT\\_ColorScale](#) 169

[CT\\_ConditionalFormat](#) 188

[CT\\_ConditionalFormats](#) 188

[CT\\_ConditionalFormatting](#) 140

[CT\\_ConditionalFormattings](#) 140

[CT\\_Connection](#) ([section 2.6.34](#) 177, [section 2.6.91](#) 221)

[CT\\_CustomFilter](#) 197

[CT\\_CustomFilters](#) 196

[CT\\_DataBar](#) 170

[CT\\_DataFeedPr](#) 246

[CT\\_DataField](#) ([section 2.6.25](#) 162, [section 2.6.141](#) 255, [section 2.6.256](#) 322)

[CT\\_DataModel](#) 249

[CT\\_DatastoreItem](#) 204

[CT\\_DataValidation](#) 143

[CT\\_DataValidationFormula](#) 142

[CT\\_DataValidations](#) 141

[CT\\_DbCommand](#) 245

[CT\\_DbTable](#) 244

[CT\\_DbTables](#) 244

[CT\\_FieldListActiveTabTopLevelEntity](#) 224

[CT\\_Filter](#) 196

[CT\\_FormControlPr](#) 200

[CT\\_IconFilter](#) 195

[CT\\_IconSet](#) 168

[CT\\_IgnoredError](#) 190

[CT\\_IgnoredErrors](#) 190

[CT\\_ListItem](#) 199

[CT\\_ListItems](#) 199

[CT\\_ModelRelationship](#) 248

[CT\\_ModelRelationships](#) 249

[CT\\_ModelTable](#) 247

[CT\\_ModelTables](#) 248

[CT\\_ModelTextPr](#) 243

[CT\\_OlapSlicerCache](#) 214

[CT\\_OlapSlicerCacheItem](#) 210

[CT\\_OlapSlicerCacheItemParent](#) 211

[CT\\_OlapSlicerCacheLevelData](#) 212

[CT\\_OlapSlicerCacheLevelsData](#) 213

[CT\\_OlapSlicerCacheRange](#) 211

[CT\\_OlapSlicerCacheRanges](#) 212

[CT\\_OlapSlicerCacheSelection](#) 215

[CT\\_OlapSlicerCacheSelections](#) 215

[CT\\_OledbPr](#) 245

[CT\\_OleItem](#) 184

[CT\\_PivotCacheDefinition](#) 176

[CT\\_PivotCacheIdVersion](#) 254

[CT\\_PivotChange](#) 180

[CT\\_PivotChanges](#) 180

[CT\\_PivotEdit](#) 179

[CT\\_PivotEdits](#) 179

[CT\\_PivotEditValue](#) 182

[CT\\_PivotField](#) 172

[CT\\_PivotFilter](#) 225

[CT\\_PivotHierarchy](#) 185

[CT\\_PivotRow](#) 251

[CT\\_PivotTableData](#) 250

[CT\\_PivotTableDefinition](#) ([section 2.6.32](#) 174, [section 2.6.156](#) 265)

[CT\\_PivotTableReference](#) 219

[CT\\_PivotTableReferences](#) 218

[CT\\_PivotTableServerFormats](#) 253

[CT\\_PivotTableUISettings](#) 227

[CT\\_PivotUserEdit](#) 181

[CT\\_PivotValueCell](#) 251

[CT\\_PivotValueCellExtra](#) 252

[CT\\_ProtectedRange](#) 193

[CT\\_ProtectedRanges](#) 193

[CT\\_QueryTable](#) 220

[CT\\_RangePr](#) 243

[CT\\_SetLevel](#) 158

[CT\\_SetLevels](#) 157

[CT\\_Slicer](#) ([section 2.6.68](#) 205, [section 2.6.69](#) 207)

[CT\\_SlicerCache](#) 152

[CT\\_SlicerCacheData](#) 209

[CT\\_SlicerCacheDefinition](#) 207

[CT\\_SlicerCacheHideNoData](#) 231

[CT\\_SlicerCacheOlapLevelName](#) 231

[CT\\_SlicerCachePivotTable](#) 210

[CT\\_SlicerCachePivotTables](#) 209

[CT\\_SlicerCaches](#) 152

[CT\\_SlicerRef](#) 151

[CT\\_SlicerRefs](#) 151

[CT\\_Slicers](#) 204

[CT\\_SlicerStyle](#) 183

[CT\\_SlicerStyleElement](#) 183

[CT\\_SlicerStyleElements](#) 189

[CT\\_SlicerStyles](#) 189  
[CT\\_SortCondition](#) 197  
[CT\\_SourceConnection](#) 198  
[CT\\_Sparkline](#) 150  
[CT\\_SparklineGroup](#) 146  
[CT\\_SparklineGroups](#) 145  
[CT\\_Sparklines](#) 149  
[CT\\_Table](#) 178  
[CT\\_TableSlicerCache](#) 227  
[CT\\_TabularSlicerCache](#) 216  
[CT\\_TabularSlicerCacheItem](#) 218  
[CT\\_TabularSlicerCacheItems](#) 217  
[CT\\_Timeline](#) 235  
[CT\\_TimelineCacheDefinition](#) 237  
[CT\\_TimelineCachePivotTable](#) 239  
[CT\\_TimelineCachePivotTables](#) 239  
[CT\\_TimelineCacheRef](#) 229  
[CT\\_TimelineCacheRefs](#) 228  
[CT\\_TimelinePivotCacheDefinition](#) 234  
[CT\\_TimelinePivotFilter](#) 242  
[CT\\_TimelineRange](#) 240  
[CT\\_TimelineRef](#) 230  
[CT\\_TimelineRefs](#) 229  
[CT\\_Timelines](#) 234  
[CT\\_TimelineState](#) 240  
[CT\\_TimelineStyle](#) 233  
[CT\\_TimelineStyleElement](#) 233  
[CT\\_TimelineStyleElements](#) 232  
[CT\\_TimelineStyles](#) 232  
[CT\\_TupleSet](#) 154  
[CT\\_TupleSetHeader](#) 155  
[CT\\_TupleSetHeaders](#) 155  
[CT\\_TupleSetRow](#) 156  
[CT\\_TupleSetRowItem](#) 157  
[CT\\_TupleSetRows](#) 156  
[CT\\_TypeItems](#) 182  
[CT\\_WebExtension](#) 221  
[CT\\_WebExtensions](#) 220  
[CT\\_WorkbookPr](#) ([section 2.6.10](#) 150, [section 2.6.117](#) 241)  
 Conceptual overview  
   [structures](#) 79  
[conditionalFormattings element](#) 107  
 connection element ([section 2.4.21](#) 111, [section 2.4.43](#) 118)  
 Connections  
   [extensions by part](#) 69  
 Control properties  
   [part enumerations](#) 25  
[CT\\_CachedUniqueName complex type](#) 247  
[CT\\_CachedUniqueNames complex type](#) 246  
[CT\\_CacheField complex type](#) 186  
[CT\\_CacheHierarchy complex type](#) ([section 2.6.24](#) 158, [section 2.6.102](#) 230)  
[CT\\_CalculatedMember complex type](#) ([section 2.6.15](#) 153, [section 2.6.93](#) 224)  
[CT\\_CalculatedMemberExt complex type](#) 223  
[CT\\_CfIcon complex type](#) 178  
[CT\\_CfRule complex type](#) 164  
[CT\\_Cfvo complex type](#) 163  
[CT\\_ColorScale complex type](#) 169  
[CT\\_ConditionalFormat complex type](#) 188  
[CT\\_ConditionalFormats complex type](#) 188  
[CT\\_ConditionalFormatting complex type](#) 140  
[CT\\_ConditionalFormattings complex type](#) 140  
[CT\\_Connection complex type](#) ([section 2.6.34](#) 177, [section 2.6.91](#) 221)  
[CT\\_CustomFilter complex type](#) 197  
[CT\\_CustomFilters complex type](#) 196  
[CT\\_DataBar complex type](#) 170  
[CT\\_DataFeedPr complex type](#) 246  
[CT\\_DataField complex type](#) ([section 2.6.25](#) 162, [section 2.6.141](#) 255, [section 2.6.256](#) 322)  
[CT\\_DataModel complex type](#) 249  
[CT\\_DatastoreItem complex type](#) 204  
[CT\\_DataValidation complex type](#) 143  
[CT\\_DataValidationFormula complex type](#) 142  
[CT\\_DataValidations complex type](#) 141  
[CT\\_DbCommand complex type](#) 245  
[CT\\_DbTable complex type](#) 244  
[CT\\_DbTables complex type](#) 244  
[CT\\_FieldListActiveTabTopLevelEntity complex type](#) 224  
[CT\\_Filter complex type](#) 196  
[CT\\_FormControlPr complex type](#) 200  
[CT\\_IconFilter complex type](#) 195  
[CT\\_IconSet complex type](#) 168  
[CT\\_IgnoredError complex type](#) 190  
[CT\\_IgnoredErrors complex type](#) 190  
[CT\\_ListItem complex type](#) 199  
[CT\\_ListItems complex type](#) 199  
[CT\\_ModelRelationship complex type](#) 248  
[CT\\_ModelRelationships complex type](#) 249  
[CT\\_ModelTable complex type](#) 247  
[CT\\_ModelTables complex type](#) 248  
[CT\\_ModelTextPr complex type](#) 243  
[CT\\_OlapSlicerCache complex type](#) 214  
[CT\\_OlapSlicerCacheItem complex type](#) 210  
[CT\\_OlapSlicerCacheItemParent complex type](#) 211  
[CT\\_OlapSlicerCacheLevelData complex type](#) 212  
[CT\\_OlapSlicerCacheLevelsData complex type](#) 213  
[CT\\_OlapSlicerCacheRange complex type](#) 211  
[CT\\_OlapSlicerCacheRanges complex type](#) 212  
[CT\\_OlapSlicerCacheSelection complex type](#) 215  
[CT\\_OlapSlicerCacheSelections complex type](#) 215  
[CT\\_OleDbPr complex type](#) 245  
[CT\\_OleItem complex type](#) 184  
[CT\\_PivotCacheDefinition complex type](#) 176  
[CT\\_PivotCacheIdVersion complex type](#) 254  
[CT\\_PivotChange complex type](#) 180  
[CT\\_PivotChanges complex type](#) 180  
[CT\\_PivotEdit complex type](#) 179  
[CT\\_PivotEdits complex type](#) 179  
[CT\\_PivotEditValue complex type](#) 182  
[CT\\_PivotField complex type](#) 172  
[CT\\_PivotFilter complex type](#) 225  
[CT\\_PivotHierarchy complex type](#) 185  
[CT\\_PivotRow complex type](#) 251  
[CT\\_PivotTableData complex type](#) 250  
[CT\\_PivotTableDefinition complex type](#) ([section 2.6.32](#) 174, [section 2.6.156](#) 265)  
[CT\\_PivotTableReference complex type](#) 219  
[CT\\_PivotTableReferences complex type](#) 218  
[CT\\_PivotTableServerFormats complex type](#) 253  
[CT\\_PivotTableUISettings complex type](#) 227  
[CT\\_PivotUserEdit complex type](#) 181  
[CT\\_PivotValueCell complex type](#) 251  
[CT\\_PivotValueCellExtra complex type](#) 252  
[CT\\_ProtectedRange complex type](#) 193  
[CT\\_ProtectedRanges complex type](#) 193



[CT\\_QueryTable complex type](#) 220  
[CT\\_RangePr complex type](#) 243  
[CT\\_SetLevel complex type](#) 158  
[CT\\_SetLevels complex type](#) 157  
[CT\\_Slicer complex type](#) ([section 2.6.68](#) 205, [section 2.6.69](#) 207)  
[CT\\_SlicerCache complex type](#) 152  
[CT\\_SlicerCacheData complex type](#) 209  
[CT\\_SlicerCacheDefinition complex type](#) 207  
[CT\\_SlicerCacheHideNoData complex type](#) 231  
[CT\\_SlicerCacheOlapLevelName complex type](#) 231  
[CT\\_SlicerCachePivotTable complex type](#) 210  
[CT\\_SlicerCachePivotTables complex type](#) 209  
[CT\\_SlicerCaches complex type](#) 152  
[CT\\_SlicerRef complex type](#) 151  
[CT\\_SlicerRefs complex type](#) 151  
[CT\\_Slicers complex type](#) 204  
[CT\\_SlicerStyle complex type](#) 183  
[CT\\_SlicerStyleElement complex type](#) 183  
[CT\\_SlicerStyleElements complex type](#) 189  
[CT\\_SlicerStyles complex type](#) 189  
[CT\\_SortCondition complex type](#) 197  
[CT\\_SourceConnection complex type](#) 198  
[CT\\_Sparkline complex type](#) 150  
[CT\\_SparklineGroup complex type](#) 146  
[CT\\_SparklineGroups complex type](#) 145  
[CT\\_Sparklines complex type](#) 149  
[CT\\_Table complex type](#) 178  
[CT\\_TableSlicerCache complex type](#) 227  
[CT\\_TabularSlicerCache complex type](#) 216  
[CT\\_TabularSlicerCacheItem complex type](#) 218  
[CT\\_TabularSlicerCacheItems complex type](#) 217  
[CT\\_Timeline complex type](#) 235  
[CT\\_TimelineCacheDefinition complex type](#) 237  
[CT\\_TimelineCachePivotTable complex type](#) 239  
[CT\\_TimelineCachePivotTables complex type](#) 239  
[CT\\_TimelineCacheRef complex type](#) 229  
[CT\\_TimelineCacheRefs complex type](#) 228  
[CT\\_TimelinePivotCacheDefinition complex type](#) 234  
[CT\\_TimelinePivotFilter complex type](#) 242  
[CT\\_TimelineRange complex type](#) 240  
[CT\\_TimelineRef complex type](#) 230  
[CT\\_TimelineRefs complex type](#) 229  
[CT\\_Timelines complex type](#) 234  
[CT\\_TimelineState complex type](#) 240  
[CT\\_TimelineStyle complex type](#) 233  
[CT\\_TimelineStyleElement complex type](#) 233  
[CT\\_TimelineStyleElements complex type](#) 232  
[CT\\_TimelineStyles complex type](#) 232  
[CT\\_TupleItems complex type](#) 182  
[CT\\_TupleSet complex type](#) 154  
[CT\\_TupleSetHeader complex type](#) 155  
[CT\\_TupleSetHeaders complex type](#) 155  
[CT\\_TupleSetRow complex type](#) 156  
[CT\\_TupleSetRowItem complex type](#) 157  
[CT\\_TupleSetRows complex type](#) 156  
[CT\\_WebExtension complex type](#) 221  
[CT\\_WebExtensions complex type](#) 220  
[CT\\_WorkbookPr complex type](#) ([section 2.6.10](#) 150, [section 2.6.117](#) 241)  
 Custom data  
     [part enumerations](#) 25  
 Custom data properties  
     [part enumerations](#) 26  
[customFilters element](#) 114

## D

Data model  
     [part enumerations](#) 27  
     [Data types and fields - common](#) 25  
 dataField element ([section 2.4.17](#) 110, [section 2.4.68](#) 125)  
 dataModel element 123  
 dataStoreItem element 115  
 dataValidations element 107  
 Details  
     [BrtBeginECTxtWiz record](#) 221  
     [common data types and fields](#) 25  
 Drawing  
     [extensions by part](#) 69  
 dxfs element ([section 2.4.24](#) 112, [section 2.4.55](#) 121)  
[dyDescent attribute](#) 136

## E

[Examples](#) 350  
     [Slicer](#) 350  
         [slicer cache part](#) 351  
         [slicer part](#) 352  
 Extensions  
     [formulas](#) 35  
         [cell formulas](#) 61  
         [conditional formatting formulas](#) 61  
         [data validation formulas](#) 62  
         [external name formulas](#) 62  
         [name formulas](#) 62  
         [pivot field formulas](#) 62  
         [pivot item formulas](#) 63  
     [functions](#) 63  
     [SpreadsheetML extensibility elements](#) 35  
     [structures](#) 35  
 Extensions by part  
     [connections](#) 69  
     [drawing](#) 69  
     [external workbook references](#) 70  
     [part enumerations](#) 69  
     [pivot table](#) 70  
     pivot table cache definition ([section 2.2.4.6](#) 72, [section 2.2.4.7](#) 73)  
     [query table](#) 73  
     [slicer cache](#) 74  
     [styles](#) 74  
     [table definition](#) 75  
     [workbook](#) 76  
     [worksheet](#) 77

## F

[f element](#) 105  
[Fields - vendor-extensible](#) 24  
[filter element](#) 114  
[formatCode16 attribute](#) 136  
[formControlPr element](#) 115  
 Formulas  
     [extensions](#) 35  
         [cell formulas](#) 61  
         [conditional formatting formulas](#) 61  
         [data validation formulas](#) 62

- [external name formulas](#) 62
- [name formulas](#) 62
- [pivot field formulas](#) 62
- [pivot item formulas](#) 63
- [Full XML schema](#) 355
- Functions
  - [extensions](#) 63

**G**

- Global attributes
  - [dyDescent](#) 136
  - [formatCode16](#) 136
  - [knownFonts](#) 137
- Global elements
  - [cachedUniqueNames](#) 123
  - [cacheField](#) 113
  - cacheHierarchy ([section 2.4.16](#) 110, [section 2.4.52](#) 120)
  - calculatedMember ([section 2.4.15](#) 109, [section 2.4.44](#) 118)
  - [conditionalFormattings](#) 107
  - connection ([section 2.4.21](#) 111, [section 2.4.43](#) 118)
  - [customFilters](#) 114
  - dataField ([section 2.4.17](#) 110, [section 2.4.68](#) 125)
  - [dataModel](#) 123
  - [datastoreItem](#) 115
  - [dataValidations](#) 107
  - dxfs ([section 2.4.24](#) 112, [section 2.4.55](#) 121)
  - f 105
  - [filter](#) 114
  - [formControlPr](#) 115
  - [iconFilter](#) 113
  - id 113
  - [ignoredErrors](#) 108
  - [oleItem](#) 112
  - [pivotCacheDefinition](#) 111
  - [pivotCacheIdVersion](#) 124
  - pivotCaches ([section 2.4.12](#) 108, [section 2.4.39](#) 116)
  - [pivotField](#) 110
  - [pivotFilter](#) 118
  - [pivotHierarchy](#) 113
  - [pivotTableData](#) 123
  - pivotTableDefinition ([section 2.4.19](#) 110, [section 2.4.73](#) 126)
  - pivotTableReferences ([section 2.4.1](#) 105, [section 2.4.40](#) 117)
  - [pivotTableServerFormats](#) 105
  - [pivotTableUISettings](#) 118
  - [protectedRanges](#) 108
  - [queryTable](#) 117
  - ref 106
  - slicer ([section 2.4.37](#) 116, [section 2.4.65](#) 124)
  - [slicerCacheDefinition](#) 116
  - [slicerCacheHideItemsWithNoData](#) 120
  - [slicerCachePivotTables](#) 122
  - slicerCaches ([section 2.4.13](#) 109, [section 2.4.47](#) 119)
  - [slicerList](#) 107
  - [slicers](#) 115
  - [slicerStyles](#) 112
  - [sortCondition](#) 114
  - [sortConnection](#) 115
  - [sparklineGroups](#) 107
  - [sqref](#) 106
  - table 111
  - [tableSlicerCache](#) 119
  - [timelineCacheDefinition](#) 122
  - [timelineCachePivotCaches](#) 120
  - [timelineCacheRefs](#) 119
  - [timelinePivotCacheDefinition](#) 121
  - [timelineRefs](#) 119
  - [timelines](#) 122
  - [timelineStyles](#) 121
  - [webExtensions](#) 117
  - workbookPr ([section 2.4.14](#) 109, [section 2.4.59](#) 122)
- [Glossary](#) 15

**I**

- [iconFilter element](#) 113
- [id element](#) 113
- [ignoredErrors element](#) 108
- [Implementer - security considerations](#) 354
- [Informative references](#) 23
- [Introduction](#) 15

**K**

- [knownFonts attribute](#) 137

**L**

- [Localization](#) 24

**N**

- Non-worksheet pivot table
  - [overview](#) 84
- [Normative references](#) 22

**O**

- [oleItem element](#) 112
- [Overview \(synopsis\)](#) 23

**P**

- Part enumerations
  - [control properties](#) 25
  - [custom data](#) 25
  - [custom data properties](#) 26
  - [data model](#) 27
  - [extensions by part](#) 69
  - [slicer cache](#) 26
  - [slicers](#) 26
  - [structures](#) 25
  - [timeline cache](#) 28
  - timelines ([section 2.1.8](#) 29, [section 2.1.9](#) 29, [section 2.1.22](#) 34)
- Pivot table
  - [extensions by part](#) 70
- Pivot table cache definition
  - extensions by part ([section 2.2.4.6](#) 72, [section 2.2.4.7](#) 73)
- [pivotCacheDefinition element](#) 111

[pivotCacheIdVersion element](#) 124  
[pivotCaches element](#) ([section 2.4.12](#) 108, [section 2.4.39](#) 116)  
[pivotField element](#) 110  
[pivotFilter element](#) 118  
[pivotHierarchy element](#) 113  
PivotTable what-if analysis  
  [overview](#) 79  
[pivotTableData element](#) 123  
[pivotTableDefinition element](#) ([section 2.4.19](#) 110, [section 2.4.73](#) 126)  
[pivotTableReferences element](#) ([section 2.4.1](#) 105, [section 2.4.40](#) 117)  
[pivotTableServerFormats element](#) 105  
[pivotTableUISettings element](#) 118  
PivotValues  
  [overview](#) 85  
[Product behavior](#) 401  
[protectedRanges element](#) 108

## Q

Query table  
  [extensions by part](#) 73  
  [queryTable element](#) 117

## R

Records  
  [BrtBeginECTxtWiz](#) 221  
  [ref element](#) 106  
  [References](#) 22  
    [informative](#) 23  
    [normative](#) 22  
  [Relationship to protocols and other structures](#) 23

## S

Security  
  [implementer considerations](#) 354  
  [index of security fields](#) 354  
Simple types  
  [ST\\_AllocationMethod simple type](#) 330  
  [ST\\_CalcMemNumberFormat simple type](#) 339  
  [ST\\_CfvoType simple type](#) 327  
  [ST\\_Checked simple type](#) 333  
  [ST\\_DataBarAxisPosition simple type](#) 326  
  [ST\\_DataBarDirection simple type](#) 326  
  [ST\\_DisbBlanksAs simple type](#) 323  
  [ST\\_DropStyle simple type](#) 333  
  [ST\\_EditValidation simple type](#) 334  
  [ST\\_IconSetType simple type](#) 328  
  [ST\\_ObjectType simple type](#) 332  
  [ST\\_OlapSlicerCacheSortOrder simple type](#) 335  
  [ST\\_PivotEditValueType simple type](#) 330  
  [ST\\_PivotShowAs simple type](#) 325  
  [ST\\_Ref simple type](#) 322  
  [ST\\_SelType simple type](#) 334  
  [ST\\_SlicerCacheCrossFilter simple type](#) 336  
  [ST\\_SlicerStyleType simple type](#) 331  
  [ST\\_SparklineAxisMinMax simple type](#) 324  
  [ST\\_SparklineType simple type](#) 325  
  [ST\\_Sqref simple type](#) 323  
  [ST\\_SXVCellType simple type](#) 339  
  [ST\\_TabularSlicerCacheSortOrder simple type](#) 336

[ST\\_TextHAlign simple type](#) 337  
  [ST\\_TextVAlign simple type](#) 337  
  [ST\\_TimelineStyleType simple type](#) 338  
Slicer cache  
  [extensions by part](#) 74  
  [overview](#) 80  
  [part enumerations](#) 26  
[Slicer cache part example](#) 351  
slicer element ([section 2.4.37](#) 116, [section 2.4.65](#) 124)  
[Slicer example](#) 350  
  [slicer cache part](#) 351  
  [slicer part](#) 352  
[Slicer part example](#) 352  
Slicer styles  
  [overview](#) 84  
Slicer view  
  [overview](#) 83  
  [slicerCacheDefinition element](#) 116  
  [slicerCacheHideItemsWithNoData element](#) 120  
  [slicerCachePivotTables element](#) 122  
  slicerCaches element ([section 2.4.13](#) 109, [section 2.4.47](#) 119)  
  [slicerList element](#) 107  
Slicers  
  [overview](#) 79  
  [part enumerations](#) 26  
  [slicer cache](#) 80  
  [slicer styles](#) 84  
  [slicer view](#) 83  
  [slicers and cube functions](#) 84  
Slicers and cube functions  
  [overview](#) 84  
  [slicers element](#) 115  
  [slicerStyles element](#) 112  
  [sortCondition element](#) 114  
  [sortConnection element](#) 115  
  [sparklineGroups element](#) 107  
SpreadsheetML extensibility elements  
  [extensions](#) 35  
  [sqref element](#) 106  
  [ST\\_AllocationMethod simple type](#) 330  
  [ST\\_CalcMemNumberFormat simple type](#) 339  
  [ST\\_CfvoType simple type](#) 327  
  [ST\\_Checked simple type](#) 333  
  [ST\\_DataBarAxisPosition simple type](#) 326  
  [ST\\_DataBarDirection simple type](#) 326  
  [ST\\_DisbBlanksAs simple type](#) 323  
  [ST\\_DropStyle simple type](#) 333  
  [ST\\_EditValidation simple type](#) 334  
  [ST\\_IconSetType simple type](#) 328  
  [ST\\_ObjectType simple type](#) 332  
  [ST\\_OlapSlicerCacheSortOrder simple type](#) 335  
  [ST\\_PivotEditValueType simple type](#) 330  
  [ST\\_PivotShowAs simple type](#) 325  
  [ST\\_Ref simple type](#) 322  
  [ST\\_SelType simple type](#) 334  
  [ST\\_SlicerCacheCrossFilter simple type](#) 336  
  [ST\\_SlicerStyleType simple type](#) 331  
  [ST\\_SparklineAxisMinMax simple type](#) 324  
  [ST\\_SparklineType simple type](#) 325  
  [ST\\_Sqref simple type](#) 323  
  [ST\\_SXVCellType simple type](#) 339  
  [ST\\_TabularSlicerCacheSortOrder simple type](#) 336  
  [ST\\_TextHAlign simple type](#) 337

[ST\\_TextVAlign simple type](#) 337  
[ST\\_TimelineStyleType simple type](#) 338

## Structures

### complex types

[CT\\_CachedUniqueName](#) 247  
[CT\\_CachedUniqueNames](#) 246  
[CT\\_CacheField](#) 186  
[CT\\_CacheHierarchy](#) ([section 2.6.24](#) 158, [section 2.6.102](#) 230)  
[CT\\_CalculatedMember](#) ([section 2.6.15](#) 153, [section 2.6.93](#) 224)  
[CT\\_CalculatedMemberExt](#) 223  
[CT\\_CfIcon](#) 178  
[CT\\_CfRule](#) 164  
[CT\\_Cfvo](#) 163  
[CT\\_ColorScale](#) 169  
[CT\\_ConditionalFormat](#) 188  
[CT\\_ConditionalFormats](#) 188  
[CT\\_ConditionalFormatting](#) 140  
[CT\\_ConditionalFormattings](#) 140  
[CT\\_Connection](#) ([section 2.6.34](#) 177, [section 2.6.91](#) 221)  
[CT\\_CustomFilter](#) 197  
[CT\\_CustomFilters](#) 196  
[CT\\_DataBar](#) 170  
[CT\\_DataFeedPr](#) 246  
[CT\\_DataField](#) ([section 2.6.25](#) 162, [section 2.6.141](#) 255, [section 2.6.256](#) 322)  
[CT\\_DataModel](#) 249  
[CT\\_DatastoreItem](#) 204  
[CT\\_DataValidation](#) 143  
[CT\\_DataValidationFormula](#) 142  
[CT\\_DataValidations](#) 141  
[CT\\_DbCommand](#) 245  
[CT\\_DbTable](#) 244  
[CT\\_DbTables](#) 244  
[CT\\_FieldListActiveTabTopLevelEntity](#) 224  
[CT\\_Filter](#) 196  
[CT\\_FormControlPr](#) 200  
[CT\\_IconFilter](#) 195  
[CT\\_IconSet](#) 168  
[CT\\_IgnoredError](#) 190  
[CT\\_IgnoredErrors](#) 190  
[CT\\_ListItem](#) 199  
[CT\\_ListItems](#) 199  
[CT\\_ModelRelationship](#) 248  
[CT\\_ModelRelationships](#) 249  
[CT\\_ModelTable](#) 247  
[CT\\_ModelTables](#) 248  
[CT\\_ModelTextPr](#) 243  
[CT\\_OlapSlicerCache](#) 214  
[CT\\_OlapSlicerCacheItem](#) 210  
[CT\\_OlapSlicercacheItemParent](#) 211  
[CT\\_OlapslicerCacheLevelData](#) 212  
[CT\\_OlapSlicerCacheLevelsData](#) 213  
[CT\\_OlapSlicerCacheRange](#) 211  
[CT\\_OlapSlicerCacheRanges](#) 212  
[CT\\_OlapSlicerCacheSelection](#) 215  
[CT\\_OlapSlicerCacheSelections](#) 215  
[CT\\_OledbPr](#) 245  
[CT\\_OleItem](#) 184  
[CT\\_PivotCacheDefinition](#) 176  
[CT\\_PivotCacheIdVersion](#) 254  
[CT\\_PivotChange](#) 180  
[CT\\_PivotChanges](#) 180

[CT\\_PivotEdit](#) 179  
[CT\\_PivotEdits](#) 179  
[CT\\_PivotEditValue](#) 182  
[CT\\_PivotField](#) 172  
[CT\\_PivotFilter](#) 225  
[CT\\_PivotHierarchy](#) 185  
[CT\\_PivotRow](#) 251  
[CT\\_PivotTableData](#) 250  
[CT\\_PivotTableDefinition](#) ([section 2.6.32](#) 174, [section 2.6.156](#) 265)  
[CT\\_PivotTableReference](#) 219  
[CT\\_PivotTableReferences](#) 218  
[CT\\_PivotTableServerFormats](#) 253  
[CT\\_PivotTableUISettings](#) 227  
[CT\\_PivotUserEdit](#) 181  
[CT\\_PivotValueCell](#) 251  
[CT\\_PivotValueCellExtra](#) 252  
[CT\\_ProtectedRange](#) 193  
[CT\\_ProtectedRanges](#) 193  
[CT\\_QueryTable](#) 220  
[CT\\_RangePr](#) 243  
[CT\\_SetLevel](#) 158  
[CT\\_SetLevels](#) 157  
[CT\\_Slicer](#) ([section 2.6.68](#) 205, [section 2.6.69](#) 207)  
[CT\\_SlicerCache](#) 152  
[CT\\_SlicerCacheData](#) 209  
[CT\\_SlicerCacheDefinition](#) 207  
[CT\\_SlicerCacheHideNoData](#) 231  
[CT\\_SlicerCacheOlapLevelName](#) 231  
[CT\\_SlicerCachePivotTable](#) 210  
[CT\\_SlicerCachePivotTables](#) 209  
[CT\\_SlicerCaches](#) 152  
[CT\\_SlicerRef](#) 151  
[CT\\_SlicerRefs](#) 151  
[CT\\_Slicers](#) 204  
[CT\\_SlicerStyle](#) 183  
[CT\\_SlicerStyleElement](#) 183  
[CT\\_SlicerStyleElements](#) 189  
[CT\\_SlicerStyles](#) 189  
[CT\\_SortCondition](#) 197  
[CT\\_SourceConnection](#) 198  
[CT\\_Sparkline](#) 150  
[CT\\_SparklineGroup](#) 146  
[CT\\_SparklineGroups](#) 145  
[CT\\_Sparklines](#) 149  
[CT\\_Table](#) 178  
[CT\\_TableSlicerCache](#) 227  
[CT\\_TabularSlicerCache](#) 216  
[CT\\_TabularSlicerCacheItem](#) 218  
[CT\\_TabularSlicerCacheItems](#) 217  
[CT\\_Timeline](#) 235  
[CT\\_TimelineCacheDefinition](#) 237  
[CT\\_TimelineCachePivotTable](#) 239  
[CT\\_TimelineCachePivotTables](#) 239  
[CT\\_TimelineCacheRef](#) 229  
[CT\\_TimelineCacheRefs](#) 228  
[CT\\_TimelinePivotCacheDefinition](#) 234  
[CT\\_TimelinePivotFilter](#) 242  
[CT\\_TimelineRange](#) 240  
[CT\\_TimelineRef](#) 230  
[CT\\_TimelineRefs](#) 229  
[CT\\_Timelines](#) 234  
[CT\\_TimelineState](#) 240  
[CT\\_TimelineStyle](#) 233

- [CT\\_TimelineStyleElement](#) 233
- [CT\\_TimelineStyleElements](#) 232
- [CT\\_TimelineStyles](#) 232
- [CT\\_TupleItems](#) 182
- [CT\\_TupleSet](#) 154
- [CT\\_TupleSetHeader](#) 155
- [CT\\_TupleSetHeaders](#) 155
- [CT\\_TupleSetRow](#) 156
- [CT\\_TupleSetRowItem](#) 157
- [CT\\_TupleSetRows](#) 156
- [CT\\_WebExtension](#) 221
- [CT\\_WebExtensions](#) 220
- [CT\\_WorkbookPr](#) ([section 2.6.10](#) 150, [section 2.6.117](#) 241)
- [conceptual overview](#) 79
  - [non-worksheet pivot table](#) 84
  - [PivotTable what-if analysis](#) 79
  - [PivotValues](#) 85
  - [slicers](#) 79
    - [slicer cache](#) 80
    - [slicer styles](#) 84
    - [slicer view](#) 83
    - [slicers and cube functions](#) 84
    - [timeline cache](#) 85
  - timeline
    - [timeline styles](#) 87
    - [timeline view](#) 86
  - [timelines](#) 85
    - [timelines and cube functions](#) 87
- [extensions](#) 35
- global attributes
  - [dyDescent](#) 136
  - [formatCode16](#) 136
  - [knownFonts](#) 137
- global elements
  - [cachedUniqueNames](#) 123
  - [cacheField](#) 113
  - [cacheHierarchy](#) ([section 2.4.16](#) 110, [section 2.4.52](#) 120)
  - [calculatedMember](#) ([section 2.4.15](#) 109, [section 2.4.44](#) 118)
  - [conditionalFormattings](#) 107
  - [connection](#) ([section 2.4.21](#) 111, [section 2.4.43](#) 118)
  - [customFilters](#) 114
  - [dataField](#) ([section 2.4.17](#) 110, [section 2.4.68](#) 125)
  - [dataModel](#) 123
  - [datastoreItem](#) 115
  - [dataValidations](#) 107
  - [dxfs](#) ([section 2.4.24](#) 112, [section 2.4.55](#) 121)
  - [f](#) 105
  - [filter](#) 114
  - [formControlPr](#) 115
  - [iconFilter](#) 113
  - [id](#) 113
  - [ignoreerrors](#) 108
  - [oleItem](#) 112
  - [pivotCacheDefinition](#) 111
  - [pivotCacheIdVersion](#) 124
  - [pivotCaches](#) ([section 2.4.12](#) 108, [section 2.4.39](#) 116)
  - [pivotField](#) 110
  - [pivotFilter](#) 118
  - [pivotHierarchy](#) 113
  - [pivotTableData](#) 123
  - [pivotTableDefinition](#) ([section 2.4.19](#) 110, [section 2.4.73](#) 126)
  - [pivotTableReference](#) 105
  - [pivotTableReferences](#) 117
  - [pivotTableServerFormats](#) 105
  - [pivotTableUISettings](#) 118
  - [protectedRanges](#) 108
  - [queryTable](#) 117
  - [ref](#) 106
  - [slicer](#) ([section 2.4.37](#) 116, [section 2.4.65](#) 124)
  - [slicerCacheDefinition](#) 116
  - [slicerCacheHideItemsWithNoData](#) 120
  - [slicerCachePivotTables](#) 122
  - [slicerCaches](#) ([section 2.4.13](#) 109, [section 2.4.47](#) 119)
  - [slicerList](#) 107
  - [slicers](#) 115
  - [slicerStyles](#) 112
  - [sortCondition](#) 114
  - [sortConnection](#) 115
  - [sparklineGroups](#) 107
  - [sqref](#) 106
  - [table](#) 111
  - [tableSlicerCache](#) 119
  - [timelineCacheDefinition](#) 122
  - [timelineCachePivotCaches](#) 120
  - [timelineCacheRefs](#) 119
  - [timelinePivotCacheDefinition](#) 121
  - [timelineRefs](#) 119
  - [timelines](#) 122
  - [timelineStyles](#) 121
  - [webExtensions](#) 117
  - [workbookPr](#) ([section 2.4.14](#) 109, [section 2.4.59](#) 122)
  - [overview](#) 25
  - [part enumerations](#) 25
  - simple types
    - [ST\\_AllocationMethod](#) 330
    - [ST\\_CfvoType](#) 327
    - [ST\\_Checked](#) 333
    - [ST\\_DataBarAxisPosition](#) 326
    - [ST\\_DataBarDirection](#) 326
    - [ST\\_DispBlanksAs](#) 323
    - [ST\\_DropStyle](#) 333
    - [ST\\_EditValidation](#) 334
    - [ST\\_IconSetType](#) 328
    - [ST\\_ObjectType](#) 332
    - [ST\\_OlapSlicerCacheSortOrder](#) 335
    - [ST\\_PivotEditValueType](#) 330
    - [ST\\_PivotShowAs](#) 325
    - [ST\\_Ref](#) 322
    - [ST\\_SelectType](#) 334
    - [ST\\_SlicerCacheCrossFilter](#) 336
    - [ST\\_SlicerStyleType](#) 331
    - [ST\\_SparklineAxisMinMax](#) 324
    - [ST\\_SparklineType](#) 325
    - [ST\\_Sqref](#) 323
    - [ST\\_SXVCellType](#) 339
    - [ST\\_TabularSlicerCacheSortOrder](#) 336
  - Structures – simple types
    - [ST\\_CalcMemNumberFormat](#) 339
    - [ST\\_TextHAlign](#) 337
    - [ST\\_TextVAlign](#) 337
    - [ST\\_TimelineStyleType](#) 338

Structures/	
/complex types /	
/CT_AbsolutePath	
Complex types/	
/ <a href="#">/CT_AbsolutePath</a>	255
/complex types/	
/CT_CacheSourceExt	
Complex types/	
/ <a href="#">/CT_CacheSourceExt</a>	261
/CT_ApplicationNonVisualDrawingProps	
Complex types/	
/ <a href="#">/CT_ApplicationNonVisualDrawingProps</a>	261
/CT_CalculatedTimeColumn	
Complex types/	
/ <a href="#">/CT_CalculatedTimeColumn</a>	263
/CT_ContentPart	
Complex types/	
/ <a href="#">/CT_ContentPart</a>	261
/CT_ContentPartNonVisual	
Complex types/	
/ <a href="#">/CT_ContentPartNonVisual</a>	262
/CT_ModelTimeGrouping	
Complex types/	
/ <a href="#">/CT_ModelTimeGrouping</a>	263
/CT_ModelTimeGroupings	
Complex types/	
/ <a href="#">/CT_ModelTimeGroupings</a>	264
/CT_Ref	
Complex types/	
/ <a href="#">/CT_Ref</a>	259
/CT_Sqref	
Complex types/	
/ <a href="#">/CT_Sqref</a>	260
/CT_Survey	
Complex types/	
/ <a href="#">/CT_Survey</a>	255
/CT_SurveyElementPr	
Complex types/	
/ <a href="#">/CT_SurveyElementPr</a>	258
/CT_SurveyQuestion	
Complex types/	
/ <a href="#">/CT_SurveyQuestion</a>	257
/CT_SurveyQuestions	
Complex types/	
/ <a href="#">/CT_SurveyQuestions</a>	256
/CT_Timeline	
Complex types/	
/ <a href="#">/CT_Timeline</a>	254
/global elements/	
/absPath	
Global elements/	
/ <a href="#">/absPath</a>	125
/contentPart	
Global elements/	
/ <a href="#">/contentPart</a>	125
/list	
Global elements/	
/ <a href="#">/list</a>	124
/modelTimeGroupings	
Global elements/	
/ <a href="#">/modelTimeGroupings</a>	126
/survey	
Global elements/	
/ <a href="#">/survey</a>	125
/simple types/	
/ST_ModelTimeGroupingContentType	
Simple types/	
/ <a href="#">/ST_ModelTimeGroupingContentType</a>	343
/ST_QuestionFormat	
Simple types/	
/ <a href="#">/ST_QuestionFormat</a>	341
/ST_QuestionType	
Simple types/	
/ <a href="#">/ST_QuestionType" \t "</a>	340
/ST_SurveyPosition	
Simple types/	
/ <a href="#">/ST_SurveyPosition</a>	342
Styles	
<a href="#">extensions by part</a>	74
<b>T</b>	
Table definition	
<a href="#">extensions by part</a>	75
<a href="#">table element</a>	111
<a href="#">tableSlicerCache element</a>	119
Timeline cache	
<a href="#">overview</a>	85
<a href="#">part enumerations</a>	28
Timeline styles	
<a href="#">overview</a>	87
Timeline view	
<a href="#">overview</a>	86
<a href="#">timelineCacheDefinition element</a>	122
<a href="#">timelineCachePivotCaches element</a>	120
<a href="#">timelineCacheRefs element</a>	119
<a href="#">timelinePivotCacheDefinition element</a>	121
<a href="#">timelineRefs element</a>	119
Timelines	
<a href="#">overview</a>	85
part enumerations ( <a href="#">section 2.1.8</a> 29, <a href="#">section 2.1.9</a> 29, <a href="#">section 2.1.22</a> 34)	
<a href="#">timeline cache</a>	85
<a href="#">timeline styles</a>	87
<a href="#">timeline view</a>	86
<a href="#">timelines and cube functions</a>	87
Timelines and cube functions	
<a href="#">overview</a>	87
<a href="#">timelines element</a>	122
<a href="#">timelineStyles element</a>	121
<a href="#">Tracking changes</a>	411
<b>V</b>	
<a href="#">Vendor-extensible fields</a>	24
<a href="#">Versioning</a>	24
<b>W</b>	
<a href="#">webExtensions element</a>	117
Workbook	
<a href="#">extensions by part</a>	76
workbookPr element ( <a href="#">section 2.4.14</a> 109, <a href="#">section 2.4.59</a> 122)	
Worksheet	
<a href="#">extensions by part</a>	77
<b>X</b>	
<a href="#">XML schema</a>	355

